Bureau of Energy Efficiency
Ministry of Power, Government of India
4th Floor, Sewa Bhawan
R. K. Puram,
New Delhi- 110066

Subject: Energy Audit Report of Andhra Pradesh Central Power Distribution Corporation Limited (APCPDCL).

Dear Sir,

Please find herewith the Energy Audit Report of **Andhra Pradesh Central Power Distribution Corporation Limited (APCPDCL)** prepared as per the Bureau of Energy Efficiency regulations for Manner and Intervals for Conduct of Energy Audit in electricity distribution companies (vide Bureau of Energy Efficiency notification dated 6th October 2021).

The Energy Audit Report is for the financial year 2022-2023.

G. Srinivasa Rao
Accredited Energy Auditor (A0251)
East Coast Sustainable Pvt. Ltd.,
6-80/1, Priya Gardens,
P. O. Simhachalam,
Visakhapatnam,
Andhra Pradesh- 530028

East Coast Sustainable Pvt. Ltd.

G. Srinivasa Rao, MIE
Accredited Energy Auditor (BEE)
CEA-1574, AEA-0251

Smt.D.Victoria Krupa Danamma,
Chief General Manager,
RAC, APCPDCL.
Dr. Y.S.R Vidyuth Soudha,
Corporate office
Besides Govt. Polytechnic
College, ITIRoad
Vijayawada-520 008

Annual Energy Audit Report (FY2022-23)

సదా మీసేవలో...

Andhra Pradesh Central Power Distribution Corporation Limited (APCPDCL)

Dr.YSR Vidyuth Soudha,
Corporate office Beside Govt. Polytechnic College,
ITI Road, Vijayawada-520008

Conducted By

M/s EAST COAST SUSTAINABLE (P) LTD

6-80/1,Priya Gardens, P.O.-Simhachalam, Visakhapatnam,
Andhra Pradesh – 530028
CIN: U74999AP2018PTC108807
www.eastcoast.net.in

ACKNOWLEDGEMENT

East Coast Sustainable Pvt Limited (ECSPL) places on records its deep gratitude to the progressive management of **Andhra Pradesh Central Power Distribution Corporation Limited (APCPDCL), Vijayawada** for entrusting the work of Annual Energy Audit for FY 2022-23 as per BEE regulations.

ECSPL wishes to thank the following officials for their kind support extended during Annual Energy Audit.

- Mr. V.Ravi, CGM/O&M(**Retired on 30.06.23**)
- Mr.K.Venkateswarlu, CGM/Revenue &Finance
- Mr. P. Yhoganand, GM/IT
- Mr. R. Sai Srinivas, Dy.EE/IPC &RAC
- Mr. K.S.Parabrahmam GM/LMC,CSC&EA
- Mr. K.J.Thomas EE/LMC,CSC&EA
- Mr. V.Sai Vijay, Dy.EE/EA
- Mrs. T.Srilatha, AEE/EA

ECSPL also wishes to thank all other executives and staff of APCPDCL for their excellent cooperation and support for successful completion of Annual Energy audit.

ANNUAL ENERGY AUDIT TEAM
EAST COAST SUSTAINABLE PRIVATE LIMITED
VISAKHAPATNAM

STUDY TEAM

Team-1: Energy Audit Cell of DISCOM

Sr. No	Name	Designation	Wing	Email ID	Contact Number
Nodal Officer					
1	*Mrs. D.Victoria Krupa Danamma	CGM/RAC	RAC	cgm-rac@apcpdcl.in	8332999200
Energy Manager					
2	Mr. R. Sai Srinivas	Dy.EE/IPC &RAC/APCPDCL	IPC&RAC	eeipcapcpdcl@gmail.com	9440843079
Information Technology Manager					
3	Mr. P. Yhoganand	GM/IT	IT	gmit-sap@apcpdcl.in	9490618834
Financial Manager					
4	Mr.K.Venkateswarlu	CGM/Revenue& Finance	Revenue& Finance	cgm-finance@apcpdcl.in	9440812333
Other Member of Energy Cell					
5	Mr. K.S.Parabrahmam	GM/LMC,CSC&EA	Energy Audit	gmeaapcpdcl@gmail.com	8331094199
6	Mr. K.J.Thomas	EE/LMC,CSC&EA	Energy Audit	gmeaapcpdcl@gmail.com	9440831870
7	Mr. V.Sai Vijay	Dy.EE/EA	Energy Audit	gmeaapcpdcl@gmail.com	7382624494
8	Mrs. T.Srilatha	AEE/EA	Energy Audit	gmeaapcpdcl@gmail.com	9440817565

***Mr.V.Ravi CGM/O&M retired on 30.06.2023 &Smt.D.Victoria Krupa Danamma was nominated as nodal officer of Energy audit cell**

Team-2: Energy Audit Team of EmAEA

Sr. No	Name	Qualification	EmAEA/AEA/EA/EM Registration No.	Experience in years	Sector
Team Leader					
1	Mr. G. Srinivasa Rao	B. Tech Mechanical, PGD Energy, Management MS (Environmental Management and Policy)	AEA-0251	22	All
Team Head/Sector Expert					
2	Mr. S. Janardhana Rao	MBA, Finance, AU, PGDM, Energy Management, B. Tech (E.E.E)	EA-8801	33	DISCOM
Certified Energy Auditor					
3	Mr. P. V. Ramprasad	B. Tech Mechanical, PGD Energy Management, M. B. A, Certified Energy Auditor.	CEA - 1573	28	All
Team Member					
4	Mr. K. Lokeswara Rao	M. Tech (Mechanical)	-	2	-
5	Ms. J. Sai Sowmya	B. Tech (Electrical)	-	1	-

TABLE OF CONTENTS

ACKNOWLEDGEMENT ..... **iii**
STUDY TEAM ..... **ii**
TABLE OF CONTENTS ..... **iv**
1. EXECUTIVE SUMMARY **1**
1.1 ENERGY ACCOUNTS AND PERFORMANCE FOR FY 2022-23 1
1.1.1 DISCOM WIDE ENERGY ACCOUNTING 1
1.2 ENERGY CONSERVATION MEASURES ALREADY TAKEN AND PROPOSED FOR FUTURE 4
1.3 BEFORE AND AFTER STATUS OF LOSSES IN TOWNS - RAPDRP/ IPDS 6
2. SUMMARY OF CRITICAL ANALYSIS OF ENERGY AUDITOR AND MANAGEMENT ANALYSIS **7**
2.1 CRITICAL ANALYSIS BY ENERGY AUDITOR 7
2.2 SUMMARY OF DISCOM MANAGEMENT ANALYSIS 9
3. BACKGROUND **12**
3.1 EXTANT REGULTIONS AND ROLE OF BEE 12
3.2 PURPOSE OF AUDIT AND ACCOUNTING REPORT 15
3.3 PERIOD OF ENERGY AUDITING AND ACCOUNTING 15
4. INTRODUCTION OF DISCOM **16**
4.1 NAME AND ADDRESS OF DESIGNATED CONSUMER 16
4.2 NAME AND DETAILS OF ENERGY MANAGER AND AUTHORISED SIGNATORY OF DC 16
4.3 SUMMARY PROFILE OF DC 16
4.3.1 ASSETS 16
4.3.2 ENERGY FLOW 17
4.3.3 COMSUMER BASE 18
4.3.4 SALIENT FEATURES 20
5. DISCUSSION AND ANALYSIS **21**
5.1 ENERGY ACCOUNTS FOR PREVIOUS YEARS 21
5.2 ENERGY ACCOUNTS AND PERFORMANCE OF FY 2022-23 22
5.2.1 DISCOM WIDE ENERGY ACCOUNTING 22
5.2.2 DIVISION WISE LOSSES 25
5.2.3 VOLTAGE WISE INPUT AND LOSSES 27
5.3 PEAK LOAD 27

5.4 ENERGY CONSERVATION MEASURES ALREADY TAKEN AND PROPOSED FOR FUTURE 27
5.5 CRITICAL ANALYSIS BY ENERGY AUDITOR 30
5.5.1 STATUS OF COMPLIANCE TO BEE REGULATIONS 30
5.5.2 AGRICULTURAL CONSUMPTION 39
5.5.3 11KV FEEDER METERING AND ENERGY AUDIT 39
5.5.4 CATEGORY WISE SUBSIDY FOR FY 2022-23 39
5.5.5 ANALYSIS ON T&D LOSS AND AT&C LOSS 39
5.6 INCLUSION AND EXCLUSIONS 41
6. NOTES OF THE EA/EM ALONG WITH QUERIES AND REPLIES TO DATA GAPS 42
6.1 Query by EA, response by EM and Notes by EA 42
7. ANNEXURES 43
7.1 INTRODUCTION OF VERIFICATION FIRM: 43
7.2 MINUTES OF MEETING WITH THE DISCOM TEAM 43
7.3 CHECK LIST PREPARED BY AUDITING FIRM 44
7.4 BRIEF APPROACH, SCOPE & METHODOLOGY FOR AUDIT 44
7.5 INFRASTRUCTURE DETAILS 45
7.6 ELECTRICAL DISTRIBUTION SYSTEM 45
7.7 POWER PURCHASE DETAILS 46
7.8 LINE DIAGRAM (SLD) 46
7.9 CATEGORY OF SERVICE DETAILS (WITH CONSUMER AND VOLTAGE-WISE) 47
7.10 LIST OF DOCUMENTS VERIFIED WITH EACH PARAMETER: 47
7.11 BRIEF DESCRIPTION OF UNIT 48
7.12 LIST OF PARAMETERS ARRIVED THROUGH CALCULATION OR FORMULAE WITH LIST OF DOCUMENTS AS SOURCE OF DATA 48
8. FORMATS 49
8.1 GENERAL INFORMATION 49
8.2 PERFORMANCE SUMMARY OF ELECTRICITY DISTRIBUTION COMPANY 49
8.3 DETAILS OF INPUT INFRASTRUCTURE 49
8.4 INPUT ENERGY: A. SUMMARY OF ENERGY INPUT AND INFRASTRUCTURE 49
8.5 DETAILS OF INPUT ENERGY SOURCES 49
8.6 DIVISION-WISE LOSSES 49

8.7 DETAILS OF FEEDER-WISE LOSSES 49
8.8 DETAILS OF SUBSIDY CLAIMED AND RECEIVED 50
8.9 DETAILS OF DT METERING 50
8.10 DT WISE LOSSES TO THE EXTENT DT METERS ARE EXISTING 50
9. FIELD VERIFICATION DATA AS PER S.O.P 51

List of Tables

Table- 1Abstract of Solar Roof Top Net Metering Applications Received So Far in APCPDCL as on 01.04.2022..... **Error! Bookmark not defined.**
Table- 2Details of Energy Manager and Authorized Signatory of DC.....16
Table- 3 Infrastructure Details.....17
Table- 4 Energy Flow of APCPDCL.....17
Table- 5 Category wise Consumer Details.....18
Table- 6 Metering Status at different Voltage Levels.....19
Table- 7 Net Energy Input to APCPDCL.....22
Table- 8Summary of Losses of APCPDCL.....22
Table- 9Category wise Energy Account of APCPDCL.....23
Table- 10 Division wise Performance.....25
Table- 11Voltage wise Input, Sale and Loss.....27
Table- 12Abstract of Solar Roof Top Net Metering Applications Received So Far in APCPDCL as on 01.04.2022..... **Error! Bookmark not defined.**
Table- 13Status of Compliance to BEE Regulation.....30
Table- 14Category wise division wise subsidy of APCPDCL.....39
Table- 15Range of Technical and AT&C losses.....40
Table- 16Divisions with High T&D loss.....40
Table- 17Divisions with Low Collection Efficiency.....41
Table- 18Category wise Collection Efficiency.....41
Table- 19Query EA by and response by EM.....42

1. EXECUTIVE SUMMARY

Bureau of Energy Efficiency (BEE) notified the Bureau of Energy Efficiency (Manner and Intervals for Conduct of Energy Audit (Accounting) in Electricity Distribution Companies) Regulations, 2021 on 6th October 2021. As per the regulation, all Electricity Distribution Companies are mandated to conduct annual energy audit and periodic energy accounting on quarterly basis.

Owing to the impact of energy auditing on the entire distribution and retail supply business and absence of an existing framework with dedicated focus on the same, it was imperative to develop a set of comprehensive guidelines that all Distribution utilities across India can follow and adhere to.

1.1 ENERGY ACCOUNTS AND PERFORMANCE FOR FY 2022-23

1.1.1 DISCOM WIDE ENERGY ACCOUNTING

The net energy input to the DISCOM for FY 2022-23 is estimated and presented in the following table:

S.No	Parameters	Period From 2022 To 2023
1	Input Energy purchased (MU)	15808.79
2	Transmission loss (%)	2.73%
3	Transmission loss (MU)	432.14
4	Energy sold outside the periphery (MU)	300.73
5	Open access sale (MU)	474.65
6	EHT sale	915.02
7	Net input energy (received at DISCOM periphery or at distribution point)-(MU)	15075.92

The technical losses and AT & C losses for FY 2022-2023 are estimated and presented in the following table:

	T&D Loss		Collection Efficiency (%)	AT& C Loss (%)
	T&D Loss (MU)	T&D Loss (%)		
Total Losses	1209.51	8.02%	95.95%	11.75%

The total sales (metered and assessed) for various consumer categories are presented in the following table:

S.No	Type of Consumers	Category of Consumers (EHT/HT/LT/Others)	Voltage Level (In Voltage)	No of Consumers	Total Consumption (In MU)
1	Domestic	LT	Lt Cat-1	4041825	5314.383915
2	Hor. & Nur. & Coffee/Tea & Rubber (Metered)	LT	Lt-VA V	4243	3.470219
3	Mixed Load	LT	LT VA (i),(ii),(iii)	2641	8.658782
4	IP Sets	LT	Lt-VA II	422102	1914.4786
5	Commercial	LT	Lt Cat-II	462717	1065.685482
6	Industrial (Small)	LT	LT IIIB,D	1873	10.698727
7	Industrial (Medium)	LT	LT IIIA	17525	458.780101
8	Hor. & Nur. & Coffee/Tea & Rubber (Flat)	HT	11KV		0
9	Heating and Motive Power	HT	11KV	2	1.036
10	HT Water Supply	HT	11KV	96	79.125
11	HT Industrial	HT	11kv	2168	878.124
12	HT Commercial	HT	11kv	1364	376.472
13	Applicable to Government Hospitals & Hospitals	HT	11kv	101	42.314
14	Lift Irrigation Schemes/Lift Irrigation Societies	HT	11kv	271	33.026
15	HT Res. Apartments Applicable to all areas	HT	11KV	32	11.528
16	Function Halls/Auditoria	HT	11KV	144	9.991
17	Startup power	HT	11KV	1	0.014
18	Religious Places	HT	11KV	8	1.778
19	Railway Traction	EHT	132KV	12	458.431
20	Aqua culture&Animal Husbandry	HT	11KV	45	15.934
21	HT Industrial	HT	33kv	205	1216.835
22	HT Industrial	EHT	132kv	10	455.608
23	HT Commercial	HT	33kv	31	93.524

S.No	Type of Consumers	Category of Consumers (EHT/HT/LT/Others)	Voltage Level (In Voltage)	No of Consumers	Total Consumption (In MU)
24	Applicable to Government Hospitals & Hospitals	HT	33kv	6	23.825
25	Lift Irrigation Schemes/Lift Irrigation Societies	HT	33kv	16	23.942
26	Lift Irrigation Schemes/Lift Irrigation Societies	EHT	132kv	1	0.754
27	HT Res. Apartments Applicable to all areas	HT	33KV	5	2.030
28	Startup power	HT	33KV	38	1.019
29	Startup power	EHT	132KV	1	0.222
30	Electric Vehicles/Charging Stations	HT	11KV	1	0.081
31	Energy Intensive Industries(Ferro Alloy Indu, PV ingots)	HT	33KV	1	1.618
32	Others-5 (if any, specify in remarks)	LT	LT IV B	29213	67.750775
33	Others-5 (if any, specify in remarks)	LT	LT IVA	32640	237.204495
34	Others-5 (if any, specify in remarks)	LT	5(A)(iv)	11	0.001781
35	Others-5 (if any, specify in remarks)	LT	Lt 4(c)(i)	11542	15.966008
36	Others-5 (if any, specify in remarks)	LT	Lt 5(B)	22880	1039.301015
37	Others-5 (if any, specify in remarks)	LT	Lt 5(A)(vi)	13	0.312028
38	Others-5 (if any, specify in remarks)	LT	Lt 4(A)	267	1.68638
39	Others-5 (if any, specify in remarks)	LT	LT 5D	140	0.5919
40	Others-5 (if any, specify in remarks)	LT		2	0.206943
			Total	**5054193**	**13866.409**

1.2 ENERGY CONSERVATION MEASURES ALREADY TAKEN AND PROPOSED FOR FUTURE

Realizing the need for energy conservation of energy and its efficient use, Government of AP has constituted state energy conservation mission (SECM), which was registered as a society under the AP Societies registration Act and designated as state designated agency (SDA) to coordinate, regulate and enforce the provisions of the energy conservation Act 2001, with in the state of AP.

As a part of energy conservation APCPDCL has formed energy conservation cell at corporate office level and circle level to implement the provisions of energy conservation Act, 2001. APCPDCL has given highest priority for promotion of efficient use of energy and its conservation.

Energy conservation and energy efficiency measures help to avoid wasteful usage of energy with very less investment and it is also the easiest solution to bridge the gap between demand and supply. There is rise in energy consumption year on year because of economic growth. Energy efficiency is aimed at reduction in greenhouse gas emission and there by address global climate change.

AP state has pioneered implementation of energy efficiency projects in lighting, ceiling fans and Agriculture pump sets. The schemes are expected to result in reduced government subsidies and quality day time power for Agriculture. They are likely to reduce tail end distribution losses as well.

AP started off-grid solar pump scheme in which new agriculture consumers are provided with off-grid solar pumps. The use of solar pumps is going to relieve APCPDCL from supplying power to the formers during day.

APCPDCL has implemented DELP Program as a part of energy conservation.

APCPDCL is also implemented Distribution of energy efficient fans Program and Energy efficient pump sets (EEPS) scheme.

Apart from these measures APCPDCL followed DSM measures (Demand Side Management) while releasing of new agricultural services duly ensuring proofs of purchase of 5 star rated pump sets with smart control panel having capacitor.

Awareness programs are organized on energy conservation throughout the year regularly apart from National Conservation week during the period from 14th December to 20th December, exhibiting posters, distributing pamphlets for promoting star rated / modern appliances with the support of APSECM (Nodal Agency).

The following programs are conducting during the energy conservation week.

Energy conservation rallies at district headquarters

Conducting of painting competition on significance of energy conservation

Conducting essay writing computations on need of energy conservation

Erection of hoardings and Distribution of pamphlets on energy efficiency

Energy conservation awareness programs in rural areas for spreading energy conservation messages

Prize distribution to the meritorious students participated in the computations.

Internet of Things (IOT) device installation in MSME sector:

Internet of Things (IOT) can aid conservation of energy and make industrial operations more energy efficient. It consists of network of smart devices connected over the internet with access to a much larger network including the sensors, smart phones, data management, report system and more. In a plant an operator receives alerts from the hardware installed and delivers live data on errors, mall functions and deviations.

Any failure of automatic power factor controllers (APFC) will be noticed at real time and if average power factor falls because of failure of capacitor banks, messages will be sent to the unique owner. This will help them to avoid excessive bills and equivalent energy savings were save on the same day, otherwise would have delayed for more than a month. Also, the over compensation will result in damage of the motor due to excessive voltage and is not encouraged. The excess voltage will also affect the life of the equipment. The same will be informed to corresponding unit member and necessary action will be taken.

Internet of Things (IOT) benefits include increase in production rate due to reduction in stoppage time, reduction in technical losses in the system and reduction in carbon emission ultimately protecting the environment.

Solar roof top scheme:

In solar rooftop scheme all consumers of APCPDCL are eligible for setting solar rooftop projects (SRP) for sale of electricity to Discom/Captive use or for self-consumption

APCPDCL is paying the energy charges for the consumers who were injecting energy into the grid.

On bill finance:

In coordination with APSEEDCO, it has proposed for large scale promotion and distribution of super energy efficient appliances initially through a pilot project with project implementation models.

(a) On bill finance model (EMI)

(b) Upfront cost

The proposed implementation of pilot project will result in energy savings by replacement of conventional tube lights with LED tube lights, ceiling fans with super-efficient BLDC fans and use of 5 Star rated air conditioners.

Consumers will get benefit in reduced electricity monthly bills, discounted price when compared to make price on upfront cost purchase and No cost EMI for on bill finance scheme from this project.

The following works are proposed under RDSS scheme for network strengthening.

Abstract of Cost Savings from proposal

S. No.	Work Proposal	Cost of Work	Estimated Annual Savings (MU)	Estimated Annual Savings	Pay Back Period
		(Rs Cr)		(Rs Cr	Yrs Month
1	New 33 KV Feeder	126.67	67.43	49.22	2Y 6M
2	New 11 KV feeder	203.39	85.86	62.67	3Y 2M
3	Replacement of old conductor of 33 KV Feeder	6.64	0.67	0.49	13Y 4M
4	Replacement of old conductor of 11 KV Feeder	34.19	6.03	4.4	7Y 7M
5	Replacement of old LT conductor	59.17	10.66	7.78	7Y 5M
6	Feeder separation 11 KV conductors	683.19	54.7	39.93	17Y 1M
7	Feeder Separation DTR	87.83	14.25	10.4	8Y 2M
8	Feeder Separation LT conductor	216.44	19.64	14.33	15Y
9	Feeder Separation AB cable	14	9.05	6.612	2Y 1M
	TOTAL Cost of work	**1431.52**	**268.29**	**195.832**	

1.3 BEFORE AND AFTER STATUS OF LOSSES IN TOWNS - RAPDRP/ IPDS

RAPDRP/IPDS projects were implemented in combined APSPDCL (Till FY 2019-20, APCPDCL was part of APSPDCL)."Before and after status of losses in all the Towns pertains to APCPDCL which were covered under RAPDRP/IPDS are enclosed as **Annexure-1.**

2. SUMMARY OF CRITICAL ANALYSIS OF ENERGY AUDITOR AND MANAGEMENT ANALYSIS

2.1 CRITICAL ANALYSIS BY ENERGY AUDITOR

COMPLIANCE TO BEE REGULATION:

The DISCOM has been submitting quarterly periodic energy accounts as per BEE regulations as well as posting the details on its website. The DISCOM also constructed Energy Audit Cell as per the regulations

AGRICULTURAL CONSUMPTION:

Consumption towards Agricultural consumers is mostly assessed. The DC uses methodology of Indian Statistical Institute (ISI) for this purpose. The assessed agricultural consumption of Vijayawada circle based on sample DTR readings is enclosed as **Annexure-2.**

11KV FEEDER METERING AND ENERGY AUDIT:

All 3462 no. of 11kv feeders are communicable with AMR. The sample 11kV feeder wise energy audit is presented as **Annexure-3**.

CATEGORY WISE SUBSIDY FOR FY 2022-23:

The total approved subsidy amount isRs.2037.90Crfor FY 2022-23. Out of 2037.90Cr booked Rs. 2218.30 Cr. has been received.
category wise division wise subsidy details enclosed as **Annexure-4**.

ANALYSIS ON T&D LOSS AND AT&C LOSS:

- **% Losses –Division wise**:
  The range of T&D losses, collection efficiency and AT&C losses among the divisions is tabulated below:

Table: Range of Technical and AT&C losses

Description	Data
T&D loss	8.02%
T&D loss Range	5.25% to 10.70%
Division With highest T&D loss	NUZVIDU
Division With lowest T&D loss	VJA TOWN
Collection Efficiency	95.95%
Collection Efficiency Range	89.02% to 100.00%
AT & C loss (%)	11.75%
AT & C loss Range	7.39% to 18.41%
Division With highest AT&C loss	NUZVIDU
Division With lowest AT&C loss	GUNTUR-TOWN1

The following divisions of the DISCOM are having T&D losses more than the average value and requires special attention

Table: Divisions with High T&D loss

S No	Average T&D Loss	Divisions with More than Average T&D loss	T&D Loss %
1	8.02%	AMARAVATHI	8.10%
2		KANDUKUR	8.16%
3		ADDANKI	8.30%
4		DARSI	8.72%
5		MACHILIPATNAM	8.99%
6		KANIGIRI	9.20%
7		GUDIWADA	9.53%
8		VUYYURU	9.57%
9		MARKAPURAM	9.77%
10		MACHERLA	9.99%
11		NARASARAOPET	10.30%
12		NUZVIDU	10.70%

The following divisions of the DISCOM are having Collection Efficiency less than the average value and require special attention:

Divisions with Low Collection Efficiency

S No	Average Collection Efficiency	Divisions with Less than Average Collection Efficiency	Collection Efficiency %
1	95.95%	VIJAYAWADA RURAL	89.02%
2		NUZVIDU	91.37%
3		MACHERLA	92.38%
4		CHIRALA	92.94%
5		ADDANKI	93.12%
6		KANDUKUR	93.58%
7		MARKAPURAM	93.64%
8		GUNTUR-TOWN2	93.72%
9		BAPATLA	94.65%
10		DARSI	94.91%

CATEGORY WISE LOSSES:

Category wise input energy cannot be estimated on account of mixed feeders. Accordingly, T&D Losses and AT&C Losses for consumer categories could not be provided. However, collection efficiencies of various consumer categories are tabulated below:

Category wise Collection Efficiency

Sl. No.	Category	Collection Efficiency
1	Residential	97.47%
2	Agricultural	100.00%
3	Commercial/Industrial-LT	97.74%
4	Commercial/Industrial-HT	94.82%
5	Others	75.87%
Overall		**95.95%**

2.2 SUMMARY OF DISCOM MANAGEMENT ANALYSIS

It is to inform that APCPDCL was incorporated to undertake the Retail supply and distribution business in Krishna, Guntur and Prakasam districts of Andhra Pradesh state with effect from 1-4-2020.

To comply with the Regulation under the Energy conservation act 2001, called Bureau of Energy Efficiency (Manner and Intervals for Conduct of Energy Audit in electricity distribution companies) Regulations, 2021, centralized energy accounting and audit cell was created with chief general manager (O&M) as nodal officer and General Manager/IT, CGM/Finance, Dy.EE/IPC as members for reporting annual & periodic energy accounting as per notification issued by BEE and same was informed to BEE vide ref Lr.No:GM/LMC/CSC & EA/Dy.EE/ EA/F.No./D. No:679 /21,Dt:16 .12.21.On account of retirement of CGM/O&M on 30.06.2023, CGM/RAC has been nominated as nodal officer to centralized energy accounting and audit cell.

AGRICULTURAL CONSUMPTION:

APCPDCL is following the Indian Statistical Institute (ISI) methodology for assessing the free agricultural consumption. In this methodology, per Hp consumption is being arrived from the meters fixed on the LV side of the sampled Agl DTRs in different areas and the total agricultural consumption is extrapolated from the per HP consumption.
The estimated agricultural consumption per KVA per DTR depends on the total connected load, type of crop raised, seasonal variation, geographical conditions and water table. Therefore, per KVA consumption of sample DTR varies from capacity to capacity and area to area.
APCPDCL has taken initiative as per the GOAP directives to provide meters to unmetered agriculture consumer to implement DBT in the state.

11KV FEEDER METERING AND ENERGY AUDIT:

There are 3462 11KV feeders existed in the Jurisdiction of APCPDCL at the end of the FY 2022-23. Energy audit dashboard was incorporated to monitor and to take the corrective measures for reducing the 11KV& LT feeder losses. In energy audit dash board, sales data will be fetched automatically from Centralized Billing System (CBS) data base. However at present 11KV feeder inputs are being entered manually. Since some of the modems are either defective or not integrated. Works for replacement of defective modems, rectification and erection of new modems where not provided either is in progress for 11KV feeders for automatic fetching of energy input data.

SUBSIDY FOR FY-2022-23:

Andhra Pradesh Electricity Regulatory Commission had determined subsidy amounts under sec.65 of the electricity act 2003, and subsidy requirement estimated to Rs.2037.90 Cr to extend tariff concession / free power to certain class of consumers as per the various govt orders. Out of Rs.2037.90 Cr subsidy determined by the APERCRs.2218.30 Cr received.

Direct Benefit Transfer (DBT) policy will be adopted for various subsidy schemes for the payment of energy bill. Under the DBT scheme, the government shall deposit the entire amount towards electricity bills in the accounts of the agricultural consumer. The consumers will then pay the energy bill to APCPDCL.

DBT will be beneficial for the State governments because it will ensure that the subsidy reaches the entitled and genuine consumers who are entitled. It will benefit the distribution company by making sure that the subsidy dues are received within time.

ANALYSIS OF T&D LOSS AND AT&C LOSS:

Distribution loss of APCPDCL is estimated to be 8.02% for the FY 2022-23. APCPDL is undertaking various works for system strengthening and to reduce technical & commercial losses.

The following works were proposed in APCPDCL to reduce technical losses further.

a. New 33KV Feeder
b. New 11KV feeder
c. Replacement of old conductor of 33KV Feeder
d. Replacement of old conductor of 11KV Feeder
e. Replacement of old LT conductor
f. Replacement of LT conductor by AB Cable
g. Replacement of old DTRs
h. Augmentation of PTRs
i. Conversion of LT line from 1-Phase to 3-Phase where ever required.

The following measures were under taken in APCPDCL to reduce commercial losses.

j. Conducting intensive inspections on regular basis in theft prone areas by DPE wing in coordination with operation wings.
k. Laying of AB cable to prevent direct tapping cases.
l. Improvement of IRDA Scan Percentage.
m. Attending the exceptional list properly.
n. Regularizing the water works, Street light services.

Collection efficiency: The prepaid metering works are proposed under RDSS scheme for covering 100% Govt. Offices to avoid filling of arrears. It is also proposed for providing prepaid metering for some other category of consumers as per the BEE regulation to ensure 100% recovery, that too before the (Meter reading, Billing, collection(MBC) cycle, which would help in increasing the collection efficiency.

For the defaulters, who are not paying the bills on time, the prepaid smart meters are a good solution, as the habit of late payment will be changed by this mode of payment.

With the installation of Prepaid Meters, the O&M / A&G Expenditures would reduce, as the expenses related to Meter Reading, Revenue Collection, Bill printing &Distribution will no longer be needed.

% OF LOSSES VOLTAGE WISE:

Presently there is no accurate mechanism to separate the 11KV & LT losses as 100% DTR metering is not completed. However, DTR meters will be installed under RDSS scheme as per the time line given in the regulation.

% LOSSES& COLLECTION EFFICIENCY DIVISION WISE:

Macherla, Narasaraopeta divisions in Guntur circle and Kanigiri, Markapur, Addanki, Kandukuru & Darsi divisions in Ongole circle and Nuzvidu & Vijayawada Rural divisions in Vijayawada circles are agricultural predominant areas, where cultivation is based on underground water. Supply of water is majorly through water pump sets only. In some of the division areas ground water level depleted and farmers are using high-capacity motors and rewound motors for cultivation causing high technical losses.

Machilipatnam, Gudivada & Vuyyuru divisions are also having more Aqua culture services. In these areas raids are conducting by DPE wing along with operation wing to regularize the additional loads if any and to curb the theft of energy.

The villages in the above divisions are located bit scattered and because of that length of lines is high compared to other rural areas. Hence there are more distribution losses in these areas.

However, APCPDCL is taking all necessary measures to minimise the technical & commercial losses. APTs police stations and DPE squad were established in each circle to prevent the theft of energy.

Some of the divisions like Markapur, Macherla & Nuzvidu divisions in the jurisdiction of APCPDCL are under-developed and majority of the population migrates to other places for livelihood. Hence regular payments will not be done in these areas. Apart from this there are arrears from govt, Grama Panchayati services which include govt offices, street light services, HODs, lift irrigation services etc. The prepaid metering works proposed under RDSS scheme for covering 100% Govt. Offices for clearance of govt arrears. There are pending cases in the hon'ble High court against the rise of electricity duty to certain class of consumers which led to arrears to some extent.

However APCPDCL is striving to improve collection efficiency by operating defaulters list effectively.

These divisions are as predominantly agriculture area and Industrial consumption is less. On account of more agricultural consumption, collection efficiency is less compared with other divisions. The demand raised on govt services and subsidised consumers are not realised fully.

APCPDCL is taking necessary measures by Introducing smart prepaid meters & Direct Benefit Transfer (DBT) scheme to improve the collection efficiency further.

CATEGORY WISE COLLECTION EFFICIENCY*:*

The collection efficiency of APCPDCL for the FY 2022-23 is 95.95%. The collection efficiency of others category is 75.87% only. This category includes Govt offices, Street light services, water work services & Aqua services etc. However the collection efficiency for Agricultural category is 100%. Prepaid metering works are proposed under RDSS scheme for improving collection efficiency.

3. BACKGROUND

3.1 EXTANT REGULTIONS AND ROLE OF BEE

Bureau of Energy Efficiency (BEE) notified the Bureau of Energy Efficiency (Manner and Intervals for Conduct of Energy Audit (Accounting) in Electricity Distribution Companies) Regulations, 2021on 6th October 2021. As per the regulation, all Electricity Distribution Companies are mandated to conduct annual energy audit and periodic energy accounting on quarterly basis.

Owing to the impact of energy auditing on the entire distribution and retail supply business and absence of an existing framework with dedicated focus on the same, it was imperative to develop a set of comprehensive guidelines that all Distribution utilities across India can follow and adhere to.

These Regulations for Energy audit in Electricity Distribution Companies provides broad framework for conduct of Annual Energy Audit though and Quarterly Periodic Energy Accounting with necessary Pre-requisites and reporting requirements to be met.

The extant regulations relevant or reproduced as under,

A. Pre-requisites for annual energy audit and periodic energy accounting: every electricity distribution company shall undertake all actions as may be required for the annual energy audit and periodic energy accounting before the start of the relevant financial year, including the following actions, namely: —

i. The identification and mapping of all of the electrical network assets;
ii. The identification and mapping of high tension and low-tension consumers;
iii. The development and implementation of information technology enabled energy accounting and audit system, including associated software;
iv. The electricity distribution company shall ensure the installation of functional meters for all consumers, transformers and feeders: Provided that meter installation may be done in a phased manner within a period of three financial years from the date of the commencement of these regulations in accordance with the trajectory Set out in the First Schedule;
v. All distribution transformers (other than high voltage distribution system up to 25KVA and other distribution system below 25 KVA) shall be metered with communicable meters. And existing non-communicable distribution transformer meters shall be replaced with communicable meters and integrated with advanced metering infrastructure;
vi. The electricity distribution company shall establish an information technology enabled system to create energy accounting reports without any manual interference: Provided that such system may be established—
(i) Within a period of three years from the date of the commencement of these regulations in case of urban and priority area consumers; and
(ii) Within five years from the date of the commencement of these regulations in case of rural consumers;

(g) The electricity distribution company shall create a centralized energy accounting and audit cellcomprising of—

- a nodal officer, an energy manager and an information technology manager, having professional experience of not less than five years; and
- a financial manager having professional experience of not less than five years;

(h) Any other requisite that Bureau may direct for energy audit and accounting purpose.

B. Reporting requirements for annual energy audit and periodic energy accounting:

i. Every electricity distribution company shall designate a nodal officer, who shall be a full-time employee of the electricity distribution company in the rank of the Chief Engineer or above, for the purpose of reporting of the annual energy audit and periodic energy accounting and communicate the same to the Bureau. Every electricity distribution company shall ensure that the energy accounting data is generated from a metering system or till such time the metering system is not in place, by an agreed method of assumption as may be prescribed by the State Commission.

ii. Metering of distribution transformers at High Voltage Distribution System up to 25KVA can be done on cluster meter installed by each electricity distribution company.

iii. The energy accounting and audit system and software shall be developed to create monthly, quarterly and yearly energy accounting reports.

iv. Every electricity distribution company shall provide the details of the information technology system in place as specified in clause (f) of regulation 5 that ensures minimal manual intervention in creating the energy accounting reports and any manual intervention of any nature, in respect of the period specified therein, shall be clearly indicated in the periodic energy accounting report.

C. Manner of annual energy audit and periodic energy accounting:

i. Every annual energy audit and periodic energy accounting under these regulations shall be conducted in the following manner, namely: —

ii. Verification of existing pattern of energy distribution across periphery of electricity distribution company; and

iii. Verification of accounted energy flow submitted by electricity distribution company at all applicable voltage levels of the distribution network:

- Energy flow between transmission and 66kV/33kV/11kV incoming distribution feeders;
- Energy flow between 66kV/33kV outgoing and 11kV/6.6kV incoming feeders;
- Energy flow between 11 kV/6.6kV feeders and distribution transformers, or high voltage distribution system;
- Energy flow between distribution transformer, or high voltage distribution system to end consumer, including ring main system;
- Energy flow between Feeder to end-consumer; and
- Energy flow between 66/33/11 kV directly to consumer.

iv. The accredited energy auditor, in consultation with the nodal officer of the electricity distribution company shall:
- Develop a scope of work for the conduct of energy audit required under these regulations;
- Agree on best practice procedures on accounting of energy distributed across the network; and
- Collect data on energy received, and distributed, covered within the scope of energy audit.

v. The accredited energy auditor shall:
- Verify the accuracy of the data collected in consultation with the nodal officer of the electricity distribution companies as per standard practice to assess the validity of the data collected; and
- Analyse and process the data with respect to:
  - ✓ Consistency of data monitoring compared to the collected data;
  - ✓ Recommendations to facilitate energy accounting and improve energy efficiency.
  - ✓ With respect to the purpose of energy accounting in reducing losses for the electricity distribution company.

D. Prioritization and preparation of action plan:

i. The annual energy audit report submitted by accredited energy auditor in consultation with the nodal officer and periodic energy accounting report submitted by energy manager of the electricity distribution company shall include following activities, namely:

ii. data collection and verification of energy distribution:
- Monthly energy consumption data of consumers and system metering from electricity distribution company at following voltage levels:
  - 33/66/132 kV levels, including 33/66/132kV feeder and Sub-station;
  - 11/22 kV levels, including 11/22 kV feeder and Distribution Sub-station;
  - 440/230V level, including Distribution Transformer and low-tension consumer;

iii. Input energy details for all metered input points;
- Boundary meter details;
- Source of energy supply (e.g., electricity from grid or self-generation), including generation from renewables.
- Review of the current consumption practices in order to identify the energy loss in the system;

iv. Data verification, validation and correction—
- A monitoring and verification protocol to quantify on annual basis the impact of each measure with respect to energy conservation and cost reduction for reporting to Bureau and the concerned State designated agency;
- Verification and correction of input energy, taking into account the following—
  - ✓ Recorded system meter reading by metering agency;

- ✓ All the input points of transmission system;
- ✓ Details provided by the transmission unit;
- ✓ Relevant records at each electricity test division for each month;
- ✓ Recorded meter reading at all export points (where energy sent outside the State is from the distribution system); and
- ✓ System loading and corresponding infrastructure;

- Energy supplied to Open Access Consumers which is directly purchased by Open Access Consumers from any supplier other than electricity distribution company; and
- Verify and validate the system metering data provided by metering agency through random field visit (particularly for data irregularity).

3.2 PURPOSE OF AUDIT AND ACCOUNTING REPORT

Energy Accounting means accounting of all energy inflows at various voltage levels in the distribution periphery of the network, including renewable energy generation and open access consumers, and energy consumption by the end consumers. Energy accounting and a consequent annual energy audit would help to identify areas of high loss and pilferage, and thereafter focus efforts to take corrective action.

3.3 PERIOD OF ENERGY AUDITING AND ACCOUNTING

The present Annual Energy Audit and accounting is for the period FY 2022-23 and is the third Annual Audit under BEE regulations 2021.

4. INTRODUCTION OF DISCOM

4.1 NAME AND ADDRESS OF DESIGNATED CONSUMER

Name of the Designated Consumer: APCPDCL
Andhra Pradesh Central Power Distribution Corporation Limited

Address:
Dr.YSR Vidyuth Soudha, Corporate office
Beside Govt. Polytechnic college, ITI road
Vijayawada-520008.

4.2 NAME AND DETAILS OF ENERGY MANAGER AND AUTHORISED SIGNATORY OF DC

Table- 1Details of Energy Manager and Authorized Signatory of DC

Details of Authorized Signatory	Details of Energy Manager
Smt. D.Victoria Krupa Danamma CGM/RAC, Nodal Officer Mobile No: 8332999200	Mr. R. Sai Srinivas Dy.EE/IPC /APCPDCL, Energy Auditor Mobile No: 9440843079 Email: eeipcapcpdcl@gmail.com

4.3 SUMMARY PROFILE OF DC

4.3.1 ASSETS

Andhra Pradesh Central Power Distribution Corporation Limited (APCPDCL), Vijayawada was established with effect from 01.04.2020 to cater the electricity needs of three districts in Andhra Pradesh state, viz. Distribution – Bifurcation of Andhra Pradesh Southern Power Distribution Company Limited, as Andhra Pradesh Southern Power Distribution Company Limited and Andhra Pradesh Central Power Distribution Corporation Limited.

APCPDCL has a vast infrastructure facility in its operating area with the following infrastructure details:

Table- 2 Infrastructure Details

Sl. No.	Particulars	As on 31st March 2021	As on 31st March 2022	As on 31st March 2023
1	Number of circles	3	3	3
2	Number of divisions	20	21	21
3	Number of sub-divisions	67	68	68
4	Number of feeders	3,701	3,846	3,904
5	No of 33/11 KV Substations	865	871	890
6	Length of 33 KV line (KM)	7,456.96	7,658.01	7,994.95
7	Length of 11 KV line (KM)	73,411.33	77,462.585	84,101.723
8	Length of Low-tension line (KM)	73,479.78	73,947.47	46,369.860
9	Length of Aerial Bunched Cables	23,908.64	30,629.41	33,569.290
10	Length of Underground Cables	49.25	63.455	80.025
11	Number of Distribution Transformers	2,41,287	2,59,587	2,81,356
12	Connected load (MW)	11,436.13	12,129.55	12831.92

4.3.2 ENERGY FLOW

APCPDCL is responsible for purchase of power, power distribution and retail supply of electricity to its consumers. APCPDCL is supplying power to consumers through its EHT, 33KV, 11KV and LT network.

Networks of 33kV and below 33kV level are maintained by APCPDCL whereas higher voltage level power systems are maintained by Transmission Corporation of Andhra Pradesh (APTRANSCO).

The energy flow of APCPDCL is presented in the following table:

Table- 3 Energy Flow of APCPDCL

Sl. No.	Energy Flow Details	Unit	Value (2022-23)
1	Input Energy Purchase (From Generation Source)	MU	15808.79
2	Net input energy (at DISCOM Periphery after adjusting the transmission losses and energy traded)	MU	15075.92
3	Total Energy billed (is the Net energy billed, adjusted for energy traded))	MU	13866.41
4	Transmission and Distribution (T&D) loss Details	MU	1209.51
		%	8.02%
5	Collection Efficiency	%	95.95%
6	Aggregate Technical & Commercial Loss	%	11.75%

The energy purchase statements from generating companies are presented as **Annexure-5**for the FY 2022-23 and monthly statements energy exchange between Transmission Company and APCPDCL is presented as **Annexure-6.**

4.3.3 COMSUMER BASE

APCPDCL is supplying power to50,54,193 number of consumers as on 31st March 2023. The details of category wise consumers are presented in the following table:

Table- 4 Category wise Consumer Details

Category	Number of Consumers as on 31st March 2021	Number of Consumers as on 31st March 2022	Number of Consumers as on 31st March 2023
Residential	38,50,421	39,58,711	40,41,825
Agricultural	3,94,801	4,07,541	4,29,131
Commercial/Industrial-LT	4,26,225	4,59,302	4,82,115
Commercial/Industrial-HT	4,079	4,221	4,559
Others	90,403	93,542	96,563
Total	**47,65,929**	**49,23,317**	**50,54,193**

Voltage wise consumers

Voltage level	Number of consumers as on 31st March 2021	Number of Consumers as on 31st March 2022	Number of Consumers as on 31st March 2023
LT	47,61,850	49,19,096	50,49,634
11KV	3,762	3,898	4,233
33KV	292	297	302
132KV	25	26	24
Total	**47,65,929**	**49,23,317**	**50,54,193**

The detailed category wise consumers list is presented as **Annexure-7**.

The metering status at different voltage levels of APCPDCL consumers is presented below:

Table- 5 Metering Status at different Voltage Levels

Sl. No.	Parameters	66kV and above (2020-21)	66kV and above (2021-22)	66kV and above (2021-22)	33kV (2020-21)	33kV (2021-22)	33kV (2021-22)	11/22kV (2020-21)	11/22kV (2021-22)	11/22kV (2021-22)	LT (2020-21)	LT (2021-22)	LT (2021-22)
1	Number of conventional metered consumers	25	26	24	292	297	302	3,762	3,898	4,233	43,75,534	45,19,702	46,27,532
2	Number of consumers with 'smart' meters	–	–	–	–	–	–	–	–	–	–	–	–
3	Number of consumers with 'smart prepaid' meters	–	–	–	–	–	–	–	–	–	–	–	–
4	Number of consumers with 'AMR' meters	–	–	–	–	–	–	–	–	–	–	–	–
5	Number of consumers with 'non-smart prepaid' meters	–	–	–	–	–	–	–	–	–	–	–	–
6	Number of unmetered consumers	–	–	–		–	–	–	–	–	3,86,316	3,99,394	4,22,102
	Number of total consumers	**25**	**26**	**24**	**292**	**297**	**302**	**3,762**	**3,898**	**4,233**	**47,61,850**	**49,19,096**	**50,49,634**

4.3.4 SALIENT FEATURES

a. APCPDCL is an electricity distribution company to undertake electricity distribution and retail supply business in the 3 districts of Andhra Pradesh catering the power requirements of 5.049 million consumers.

b. APCPDCL has been providing 24X7 power supply to all categories of consumers.

c. The energy supplied to agricultural sector constitutes 13.93 % of total energy input in F.Y.2022-23. Assessment of agricultural energy is being done by ISI methodology approved by State Electricity Regulatory Commission (SERC).

d. Information technology-based energy auditing system has been developed by the DC in which information from CBS is fetched automatically for energy accounting and auditing circle-wise, division-wise. All meter recorded energy inputs are manually fed and output/ sales are fetched automatically for creating reports in energy auditing system. Modems are installed to 11KV feeders for automatic fetching of input data.

e. APCPDCL has been implementing a system called Monitoring and Tracking System (MATS) for recording inspection reports of field surveys.

f. A number of new initiatives for conservation of energy were introduced by APCPDCL such as:
   - Conducting consumer awareness activities
   - Solar roof top Scheme
   - On bill financing
   - Internet of things (IOT) in MSME sector

g. APCPDCL is looking forward to meet many challenges with promise to deliver quality customer services through innovative programmes.

5. DISCUSSION AND ANALYSIS

5.1 ENERGY ACCOUNTS FOR PREVIOUS YEARS

The net energy input to the DISCOM for FY 2020-21 and FY 2021-22 is estimated and presented in the following table.

Table: Net Energy Input to APCPDCL

Sl.No	Parameters	FY 2020 To 21	FY 2021 To 22
1	Input Energy purchased (MU)	14099.93	15591.84
2	Transmission loss (%)	1.67%	2.16%
3	Transmission loss (MU)	235.67	336.67
4	Energy sold outside the periphery (MU)	0	18.73
5	Open access sale (MU)	347.901	345.303
6	EHT sale	538.21	899.41
7	Net input energy (received at DISCOM periphery or at distribution point)-(MU)	13864.26	15236.434
8	Net Energy sold (MU)	12715.08	14010.434
9	Distribution Loss (MU)	1149.18	1226.00
10	Distribution Loss(%)	8.29%	8.05%

5.2 ENERGY ACCOUNTS AND PERFORMANCE OF FY 2022-23

5.2.1 DISCOM WIDE ENERGY ACCOUNTING

The net energy input to the DISCOM for FY 2022-23 is estimated and presented in the following table.

Table- 6 Net Energy Input to APCPDCL

S.No.	Parameters	FY 2022 To 23
1	Input Energy purchased (MU)	15808.79
2	Transmission loss (%)	2.73%
3	Transmission loss (MU)	432.14
4	Energy sold outside the periphery (MU)	300.73
5	Open access sale (MU)	474.65
6	EHT sale	915.015
7	Net input energy (received at DISCOM periphery or at distribution point)-(MU)	15075.91

The technical losses and AT & C losses for FY 2022-23 are estimated and presented in the following table:

Table- 7Summary of Losses of APCPDCL

	T&D Loss		Collection Efficiency (%)	AT& C Loss (%)
	T&D Loss (MU)	T&D Loss (%)		
Total Losses	1209.51	8.02%	95.95%	11.75%

The total sales (metered and assessed) for various consumer categories are presented in the following table:

Table- 8Category wise Energy Account of APCPDCL

S.No	Type of Consumers	Category of Consumers (EHT/HT/LT/Others)	Voltage Level (In Voltage)	No of Consumers	Total Consumption (In MU)
1	Domestic	LT	Lt Cat-1	4041825	5314.383915
2	Hor. & Nur. & Coffee/Tea & Rubber (Metered)	LT	Lt-VA V	4243	3.470219
3	Mixed Load	LT	LT VA (i),(ii),(iii)	2641	8.658782
4	IP Sets	LT	Lt-VA II	422102	1914.4786
5	Commercial	LT	Lt Cat-II	462717	1065.685482
6	Industrial (Small)	LT	LT IIIB,D	1873	10.698727
7	Industrial (Medium)	LT	LT IIIA	17525	458.780101
8	Hor. & Nur. & Coffee/Tea & Rubber (Flat)	HT	11KV		0
9	Heating and Motive Power	HT	11KV	2	1.036
10	HT Water Supply	HT	11KV	96	79.125
11	HT Industrial	HT	11kv	2168	878.124
12	HT Commercial	HT	11kv	1364	376.472
13	Applicable to Government Hospitals & Hospitals	HT	11kv	101	42.314
14	Lift Irrigation Schemes/Lift Irrigation Societies	HT	11kv	271	33.026
15	HT Res. Apartments Applicable to all areas	HT	11KV	32	11.528
16	Function Halls/Auditoria	HT	11KV	144	9.991
17	Startup power	HT	11KV	1	0.014
18	Religious Places	HT	11KV	8	1.778
19	Railway Traction	EHT	132KV	12	458.431
20	Aqua culture&Animal Husbandry	HT	11KV	45	15.934
21	HT Industrial	HT	33kv	205	1216.835

S.No	Type of Consumers	Category of Consumers (EHT/HT/LT/Others)	Voltage Level (In Voltage)	No of Consumers	Total Consumption (In MU)
22	HT Industrial	EHT	132kv	10	455.608
23	HT Commercial	HT	33kv	31	93.524
24	Applicable to Government Hospitals & Hospitals	HT	33kv	6	23.825
25	Lift Irrigation Schemes/Lift Irrigation Societies	HT	33kv	16	23.942
26	Lift Irrigation Schemes/Lift Irrigation Societies	EHT	132kv	1	0.754
27	HT Res. Apartments Applicable to all areas	HT	33KV	5	2.030
28	Startup power	HT	33KV	38	1.019
29	Startup power	EHT	132KV	1	0.222
30	Electric Vehicles/Charging Stations	HT	11KV	1	0.081
31	Energy Intensive Industries(Ferro Alloy Indu, PV ingots)	HT	33KV	1	1.618
32	Others-5 (if any, specify in remarks)	LT	LT IV B	29213	67.750775
33	Others-5 (if any, specify in remarks)	LT	LT IVA	32640	237.204495
34	Others-5 (if any, specify in remarks)	LT	5(A)(iv)	11	0.001781
35	Others-5 (if any, specify in remarks)	LT	Lt 4(c)(i)	11542	15.966008
36	Others-5 (if any, specify in remarks)	LT	Lt 5(B)	22880	1039.301015
37	Others-5 (if any, specify in remarks)	LT	Lt 5(A)(vi)	13	0.312028
38	Others-5 (if any, specify in remarks)	LT	Lt 4(A)	267	1.68638
39	Others-5 (if any, specify in remarks)	LT	LT 5D	140	0.5919
40	Others-5 (if any, specify in remarks)	LT		2	0.206943
			Total	**5054193**	**13866.409**

5.2.2 DIVISION WISE LOSSES

The following **Table- 9** presents the division wise T&D and AT&C losses for FY 2022-23. The monthly division wise energy input, sales and losses are presented as **Annexure-8**.

Table- 9 Division wise Performance

Sl.No.	Name of Division	Energy parameters				Losses		Commercial Parameter			AT & C loss (%)
			Billed energy (MU)								
		Input energy (MU)	Metered energy	Unmetered/assessment energy	Total energy	T&D loss (MU)	T&D loss (%)	Billed Amount in Rs. Crore	Collected Amount in Rs. Crore	Collection Efficiency	
1	Vijayawada Town	996.38	944.07	0.00	944.07	52.31	5.25%	695.52	669.76	96.30%	**8.76%**
2	Gunadala	1027.94	932.99	32.87	965.86	62.07	6.04%	733.42	707.59	96.48%	**9.35%**
3	Gudiwada	1425.63	1223.98	65.78	1289.76	135.87	9.53%	803.18	858.47	100.00%	**9.53%**
4	Vijayawada Rural	898.58	745.56	89.19	834.75	63.82	7.10%	653.63	581.85	89.02%	**17.31%**
5	Machilipatnam	626.12	558.77	11.06	569.83	56.28	8.99%	325.14	317.64	97.69%	**11.09%**
6	Nuzvidu	821.79	367.96	365.87	733.83	87.96	10.70%	537.37	491.00	91.37%	**18.41%**
7	Vuyyuru	316.18	250.20	35.72	285.92	30.26	9.57%	167.25	161.96	96.83%	**12.43%**
8	Guntur-Town1	1123.23	1058.15	0.24	1058.39	64.84	5.77%	771.28	758.01	98.28%	**7.39%**
9	Tenali	713.98	624.71	39.21	663.92	50.06	7.01%	447.50	431.23	96.36%	**10.39%**
10	Narasaraopet	809.56	536.07	190.12	726.19	83.37	10.30%	504.30	488.64	96.89%	**13.08%**
11	Macherla	965.81	614.24	255.06	869.30	96.50	9.99%	670.24	619.14	92.38%	**16.85%**
12	Bapatla	546.80	475.01	28.76	503.77	43.03	7.87%	313.69	296.91	94.65%	**12.80%**

Sl.No.	Name of Divisi...	Energy parameters				Losses		Commercial Parameter			AT & C l...
13	Guntur-Town2	682.71	621.21	13.45	634.66	48.05	7.04%	558.91	523.80	93.72%	**12.88%**
14	Amaravathi	646.28	577.39	16.54	593.93	52.35	8.10%	407.77	402.50	98.71%	**9.29%**
15	Kanigiri	183.74	91.70	75.13	166.84	16.90	9.20%	116.35	112.61	96.78%	**12.12%**
16	Markapuram	736.93	296.56	368.35	664.91	72.02	9.77%	491.86	460.56	93.64%	**15.52%**
17	Ongole	762.91	688.26	27.44	715.71	47.21	6.19%	497.08	485.72	97.72%	**8.33%**
18	Chirala	368.86	332.86	9.49	342.35	26.51	7.19%	205.85	191.32	92.94%	**13.74%**
19	Kandukur	336.66	264.68	44.52	309.20	27.46	8.16%	207.11	193.81	93.58%	**14.06%**
20	Addanki	497.70	409.87	46.52	456.39	41.31	8.30%	349.62	325.57	93.12%	**14.61%**
21	Darsi	588.14	337.68	199.15	536.83	51.31	8.72%	405.97	385.31	94.91%	**13.37%**
Total		**15075.92**	**11951.93**	**1914.48**	**13866.41**	**1209.51**	**8.02%**	**9863.04**	**9463.39**	**95.95%**	**11.75%**

5.2.3 VOLTAGE WISE INPUT AND LOSSES

DC has provided energy input and sales/ consumption for various voltages of supply and the estimated losses are presented in the following table:

Table- 10Voltage wise Input, Sale and Loss

S. No	Voltage	Input			Output			Loss (MU)	Loss (%)
		Input from higher voltage	Injection at voltage level	Total input	Sales (Including wheeling to DOA)	Input to lower voltage	Total		
1	> 33 kV	986.19		986.19	986.19		986.19	0.00	0.00%
2	33 kV	14206.80	357.572	14564.38	1755.75	12352.69	14108.44	455.94	3.13%
3	11 kV	12352.69		12352.69	1459.94	10500.94	11960.88	391.81	3.17%
4	LT	10500.94		10500.94	10139.18		10139.18	361.76	3.45%

Presently there is no accurate mechanism to separate the 11KV & LT losses as there is 100% DTR metering is not completed. However, DTR meters will be installed under RDSS scheme as per the time line given in the regulation

5.3 PEAK LOAD

APCPDCL Peak demand was observed on 4th June 2022 (2816 MW) and the max consumption of day was observed on 4th June 2022 (54.045 MU).The following works proposed for system strengthening over loaded segments under RDSS is presented as **Annexure-9**.

The total connected load is 12831.92MW, total capacity of DTR's 9316.261MVA, total capacity of PTR's :7396.4MVA.

5.4 ENERGY CONSERVATION MEASURES ALREADY TAKEN AND PROPOSED FOR FUTURE

Realizing the need for energy conservation of energy and its efficient use, Government of AP has constituted state energy conservation mission (SECM), which was registered as a society under the AP Societies registration Act and designated as state designated agency (SDA) to coordinate, regulate and enforce the provisions of the energy conservation Act 2001, with in the state of AP.

As a part of energy conservation APCPDCL has formed energy conservation cell at corporate office level and circle level to implement the provisions of energy conservation Act, 2001. APCPDCL has given highest priority for promotion of efficient use of energy and its conservation.
Energy conservation and energy efficiency measures help to avoid wasteful usage of energy with very less investment and it is also the easiest solution to bridge the gap between demand and supply.

AP state has pioneered implementation of energy efficiency projects in lighting, ceiling fans and Agriculture pump sets. The schemes are expected to result in reduced government subsidies and quality day time power for Agriculture. They are likely to reduce tail end distribution losses as well.

- **Off-grid Solar pump set Scheme:**

AP started off-grid solar pump scheme in which new agriculture consumers are provided with off-grid solar pumps. The use of solar pumps is going to relieve APCPDCL from supplying power to the formers during day.

Energy Conservation

APCPDCL is taking many initiatives to create awareness and to promote efficient use of energy and its conservation. Energy efficiency across all sectors of economy is essential, while ensuring the energy service demands are met. There is rise in energy consumption year on year because of economic growth. Energy efficiency is aimed at reduction in greenhouse gas emission and there by address global climate change.

Consumer Awareness activities:

APCPDCL is organizing energy conservation week in the month of December in coordination with AP State Energy Conservation Mission which is a state designated agency.

The following programs are conducting during the energy conservation week.

Energy conservation rallies at district headquarters

Conducting of painting competition on significance of energy conservation

Conducting essay writing competition on need of energy conservation

Erection of hoardings and Distribution of pamphlets on energy efficiency

Energy conservation awareness programs in rural areas for spreading energy conservation messages

Prize distribution to the meritorious students participated in the computations.

Internet of Things(IOT) device installation in MSME sector:

Internet of Things (IOT) can aid conservation of energy and make industrial operations more energy efficient. It consists of network of smart devices connected over the internet with access to a much larger network including the sensors, smart phones, data management, report system and more. In a plant an operator receives alerts from the hardware installed and delivers live data on errors, mall functions and deviations.

Any failure of automatic power factor controllers (APFC) will be noticed at real time and if average power factor falls because of failure of capacitor banks, messages will be sent to the unique owner. This will help them to avoid excessive bills and equivalent energy savings were save on the same day, otherwise would have delayed for more than a month. Also the over compensation will result in damage of the motor due to excessive voltage and is not encouraged. The excess voltage will also affect the life of the equipment. The same will be informed to corresponding unit member and necessary action will be taken.

Internet of Things (IOT) benefits include increase in production rate due to reduction in stoppage time, reduction in technical losses in the system and reduction in carbon emission ultimately protecting the environment.

Solar roof top scheme:

In solar rooftop scheme all consumers of APCPDCL are eligible for setting solar rooftop projects (SRP) for sale of electricity to Discom/Captive use or for self-consumption as per the AP Solar policy.

APCPDCL is paying the energy charges for the consumers who were injecting energy into the grid as per the tariff applicable.

On bill finance:

In coordination with APSEEDCO, it has proposed for large scale promotion and distribution of super energy efficient appliances initially through a pilot project with project implementation models.

(c) On bill finance model(EMI)

(d) Upfront cost

The proposed implementation of pilot project will result in energy savings by replacement of conventional tube lights with LED tube lights, ceiling fans with superefficient BLDC fans and use of 5 Star rated air conditioners.

Consumers will get benefit in reduced electricity monthly bills, discounted price when compared to make price on upfront cost purchase and No cost EMI for on bill finance scheme from this project.

APCDPCL is undertaking various works for network system strengthening works and for enhancing the reliability of the supply to the consumers.

Abstract of Cost Savings from proposal

S. No.	Work Proposal	Cost of Work	Estimated Annual Savings (MU)	Estimated Annual Savings	Pay Back Period
		(Rs Cr)		(Rs Cr)	Yrs Month
1	New 33 KV Feeder	126.67	67.43	49.22	2Y 6M
2	New 11 KV feeder	203.39	85.86	62.67	3Y 2M
3	Replacement of old conductor of 33 KV Feeder	6.64	0.67	0.49	13Y 4M
4	Replacement of old conductor of 11 KV Feeder	34.19	6.03	4.4	7Y 7M
5	Replacement of old LT conductor	59.17	10.66	7.78	7Y 5M
6	Feeder separation 11 KV conductors	683.19	54.7	39.93	17Y 1M
7	Feeder separation DTR	87.83	14.25	10.4	8Y 2M
8	Feeder separation LT conductor	216.44	19.64	14.33	15Y
9	Feeder separation AB cable	14	9.05	6.612	2Y 1M
	TOTAL Cost of work	**1431.52**	**268.29**	**195.832**	

5.5 CRITICAL ANALYSIS BY ENERGY AUDITOR

5.5.1 STATUS OF COMPLIANCE TO BEE REGULATIONS

The status and progress in compliance to prerequisites to energy accounting and Management Analysis as per the Regulations is presented below:

Table- 11Status of Compliance to BEE Regulation

Clause No	Clause Details	Sub Clause Number	Sub clause Details	Present Status
3	Intervals of time for conduct of annual energy audit	a	Conducted an annual energy audit for every financial year and submitted the annual energy audit report to the Bureau and respective State Designated Agency and also made available on the website of the electricity distribution company within a period of four months from the expiry of the relevant financial year	Annual energy audit for FY 2021-2022 was conducted. Report was submitted to BEE and SDA. Report is also uploaded onto APCPDCL website.
4	Intervals of time for conduct of periodic energy accounting.	a	All feeder wise, circle wise and division wise periodic energy accounting is conducted by the energy manager of the electricity distribution company for each quarter of the financial year.	Periodic energy accounting reports for Q1,Q2, Q3 and Q4 for FY22-23 have been prepared by the DC and submitted to BEE, SDA and as per the BEE regulation and also posted the details on the APCPDCL website.

Clause No	Clause Details	Sub Clause Number	Sub clause Details	Present Status
		b	Submitted the periodic energy accounting report to the Bureau and respective State Designated Agency and also made available on the website of electricity distribution company within forty-five days from the date of the periodic energy accounting.	Periodic energy accounting reports for Q1,Q2, Q3 and Q4 for FY22-23 have been prepared by the DC and submitted to BEE, SDA and as per the BEE regulation and also posted the details on the APCPDCL website.
		c	Electricity distribution company conducted its first periodic energy accounting, for the last quarter of the financial year immediately preceding the date of such commencement (i.e. 6th October 2021).	Periodic energy accounting reports for Q1,Q2, Q3 and Q4 for FY22-23 have been prepared by the DC and submitted to BEE, SDA and as per the BEE regulation and also posted the details on the APCPDCL website.
		d	Electricity distribution company conducted its subsequent periodic energy accounting for each quarter of the financial year for a period of two financial years from the date of such commencement, and submit the periodic energy accounting report within sixty days from the date of periodic energy accounting.	Periodic energy accounting reports for Q1,Q2, Q3 and Q4 for FY22-23 have been prepared by the DC and submitted to BEE, SDA and as per the BEE regulation and also posted the details on the APCPDCL website.
5	Pre-requisites for annual energy audit	a	Identification and mapping of all of the electrical network assets	All the electrical assets are mapped into CPDCL Dashboard. Billing data is stored in CBS (Centralized Billing System) software.

Clause No	Clause Details	Sub Clause Number	Sub clause Details	Present Status
	and periodic energy accounting	b	Identification and mapping of high tension and low-tension consumers	All the HT and LT consumers have been mapped.
		c	Development and implementation of information technology enabled energy accounting and audit system, including associated software	DC has developed energy accounting and audit system including associated software as part of Energy audit dashboard.
	Pre-requisites for annual energy audit and periodic energy accounting	d	Electricity distribution company ensures the installation of functional meters for all consumers, transformers and feeders. Meter installation is done in a phased manner within a period of three financial years from the date of the commencement of these regulations in accordance with the trajectory set out in the First Schedule	All feeders up to 11 kV have been metered. All consumers have been metered except consumers under agriculture category. DTRs where meters/ modems were provided under RAPDRP/ IPDS are either not functional or erratic. Hence, Energy Audit of DTRs is not being done. DC informed that sanction for implementation of smart meters for all DTRs above 25KVA (except agricultural DTRs) has been received and work has been awarded under RDSS. Number of DTRs consider for smart metering is for 1,13,650 under phase-I RDSS.
			d.1. 100% Communicable Feeder Metering integrated with AMI, by 31st December 2022 along with replacement of existing non-communicable feeder meters.	d.1. All **11 kV feeders** are communicable with AMR (3462 Nos as on date). Communicable meters with AMI has been sanctioned under RDSS for a total of 3726 feeders (11 kV - 3332 Nos and 33 kV- 394 Nos)

Clause No	Clause Details	Sub Clause Number	Sub clause Details	Present Status
5		d	d.2. All **Distribution Transformers** (other than HVDS DT up to 25kVA and other DTs below 25 kVA) shall be metered with communicable meters. Communicable DT Metering for the following areas/ consumers to be completed by March 2023 and in balance areas by December 2023: d.2.1. All Electricity Divisions of 500 AMRUT cities, with AT&C Losses > 15% d.2.2. All Union Territories (for areas with technical difficulty, non-communicable meters may be installed) d.2.3. All Industrial and Commercial consumers d.2.4. All Government offices at Block level and above d.2.5. Other high loss areas i.e. rural areas with losses more than 25% and urban areas with losses more than 15%	d.2.1. DC intends to install communicable meters to DTRs with AMI for **AMRUT cities** (Amaravati, Chilakaluripet, Gudivada, Guntur, Machilipatnam, Narasaraopet, Ongole, Tenali and VIjayawada) under Revamped Distribution Sector Scheme (RDSS). LOA issued for installation of AMI meters for DTRs capacity > 25 KVA (except agricultural DTRs) d.2.2. Not Relevant for DC. d.2.3. DC intends to install communicable meters with AMI for **commercial and industrial consumers** under Revamped Distribution Sector Scheme (RDSS). LOA issued. d.2.4. DC intends to install communicable meters with AMI for **Government offices at Block level(Mandal) and above** under Revamped Distribution Sector Scheme (RDSS). LOA issued. d.2.5. DC intends to install communicable meters with AMI for **other high loss areas** i.e. rural areas with losses more than 25% and urban areas with losses more than 15% under Revamped Distribution Sector Scheme (RDSS). LOA issued

Clause No	Clause Details	Sub Clause Number	Sub clause Details	Present Status
	Pre-requisites for annual energy audit and periodic energy accounting		d.3. **Prepaid Smart Consumer Metering** to be completed for all directly connected meters and AMR in case of other meters, by December 2023 in the following areas: d.3.1. All Electricity Divisions of 500 AMRUT cities, with AT&C Losses > 15%; d.3.2. All Union Territories (for areas with technical difficulty, prepaid meters to be installed); d.3.3. All Industrial and Commercial consumers; d.3.4. All Government offices at Block level and above; d.3.5. Other high loss areas i.e. rural areas with losses more than 25% and urban areas with losses more than 15%.	d.3.1. DC intends to install Prepaid Smart Consumer metering for AMRUT cities (Amaravati, Chilakaluripet, Gudivada, Guntur, Machilipatnam, Narasaraopet, Ongole, Tenali, VIjayawada) under Revamped Distribution Sector Scheme (RDSS). AMRUT cities are covered under Phase-I. d.3.2. Not Relevant for DC. d.3.3. DC intends to install consumer meters with AMI for **commercial and industrial consumers** covered under Phase-I of Revamped Distribution Sector Scheme (RDSS). d.3.4. DC intends to install consumer meters with AMI for **Government offices at Block level(Mandal) are covered under Phase-I of Revamped Distribution Sector Scheme (RDSS).** d.3.5. DC intends to install consumer meters with AMI for **other high loss areas** i.e. rural areas with losses more than 25% and urban areas with losses more than 15% are covered under Phase-I of Revamped Distribution Sector Scheme (RDSS).

Clause No	Clause Details	Sub Clause Number	Sub clause Details	Present Status
			d.4. Consumer Metering: 98% by FY 2022-23 99% by FY 2023-24	Consumer Metering is completed except the agricultural services.
			d.5. Targets for functional meters— Meter FY 22-23 FY 23-24 FY24-25 Feeder metering 98.5% 99.5% 99.5% DT metering 90% 95% 98% Consumer metering 93% 96% 98	Feeder Metering is 100% completed for 11kV feeder level. DC informed that sanctioned for implementation of smart meters for all DTRs above 25KVA (except agricultural DTRs) has been received and work has been awarded under RDSS. Number of DTRs consider for smart metering is for 1,13,650 under phase-I RDSS. Consumer metering is 100% available except for agricultural consumers.
5	Pre-requisites for annual energy audit and periodic energy accounting	e	e.1. All distribution transformers (other than high voltage distribution system up to 25kVA and other distribution system below 25 kVA) is metered with communicable meters and existing non communicable distribution transformer meters is replaced with communicable meters and integrated with advanced metering infrastructure.	DC informed that sanctioned for implementation of smart meters for all DTRs above 25KVA (except agricultural DTRs) has been received and work has been awarded under RDSS. Number of DTRs consider for smart metering is for 1,13,650 under phase-I RDSS.

Clause No	Clause Details	Sub Clause Number	Sub clause Details	Present Status
		f	Electricity distribution company has established an information technology enabled system to create energy accounting reports without any manual interference and such systems may be within a period of three years from the date of the commencement of these regulations in case of urban and priority area consumers; and within five years from the date of the commencement of these regulations in case of rural consumers	Information technology-based energy auditing system has been developed by the DC in which information is fetched automatically for energy accounting and auditing of circle-wise, division-wise. All energy inputs and output/ sales are fetched automatically for creating reports in energy auditing system. However, energy consumption towards agriculture category is estimated as per ISI methodology approved by SERC. This data of input energy is manually fed into energy audit system. Further all input energy at 11 kV level are read manually.
		g	Electricity distribution company has a centralized energy accounting and audit cell comprising of— (i) a nodal officer, an energy manager and an information technology manager, having professional experience of not less than five years; and (ii) a financial manager having professional experience of not less than five years	The DC has energy audit cell with the following staff 1. A nodal officer- CGM-RAC 2. Designated energy manager who is a qualified energy auditor- Dy.EE/IPC /APCPDCL 3. A qualified information technology manager- GM/IT 4. A qualified financial manager- CGM Finance &Revenue

Clause No	Clause Details	Sub Clause Number	Sub clause Details	Present Status
6	Reporting requirements for annual energy audit and periodic energy accounting	a	Electricity distribution company has a nodal officer, who is a full time employee of the electricity distribution company in the rank of the Chief Engineer or above, for the purpose of reporting of the annual energy audit and periodic energy accounting and communicate the same to the Bureau.	The DC is complying with this requirement
		b	Electricity distribution company ensures that the energy accounting data is generated from a metering system or till such time the metering system is not in place, by an agreed method of assumption as may be prescribed by the State Commission	Information technology-based energy auditing system has been developed by the DC in which information is fetched automatically for energy accounting and auditing of circle-wise, division-wise and voltage-wise. All energy inputs and output/ sales are fetched automatically for creating reports in energy auditing system. However, energy consumption towards agriculture category is estimated as per ISI methodology approved by SERC. This data of input energy is manually fed into energy audit system. Further all input energy at 11 kV level are read manually. Modems are installed to 11Kv feeders for automatically fetching input data.

Clause No	Clause Details	Sub Clause Number	Sub clause Details	Present Status
	Reporting requirements for annual energy audit and periodic energy accounting	c	Metering of distribution transformers at High Voltage Distribution System up to 25KVA is done on cluster meter installed by the electricity distribution company	Smart meters have been sanctioned under RDSS to install to Agl. Consumers for implementation of DBT scheme. LOA issued in this regard. MoP (PFC) has sanctioned the segregation of feeders with more than 30% Agl. Consumption and providing meters at feeder level.
		d	The energy accounting and audit system and software is developed to create monthly, quarterly and yearly energy accounting reports.	The DC has developed an energy accounting and audit system and software which is having the capability to create monthly, yearly energy accounting reports.
6		e	Electricity distribution company has provided the details of the information technology system in place as specified in clause (f) of regulation 5 that ensures minimal manual intervention in creating the energy accounting reports and any manual intervention of any nature, in respect of the period specified therein, shall be clearly indicated in the periodic energy accounting report	Information technology-based energy auditing system has been developed by the DC in which information is fetched automatically for energy accounting and auditing of circle-wise, division-wise. All energy inputs and output/ sales are fetched automatically for creating reports in energy auditing system. However, energy consumption towards agriculture category is estimated as per ISI methodology approved by SERC. This data of input energy is manually fed into energy audit system.

5.5.2 AGRICULTURAL CONSUMPTION

Consumption towards Agricultural consumers is mostly assessed. The DC uses methodology of Indian Statistical Institute (ISI) for this purpose. The division wise agricultural consumption is presented as **Annexure-2**.

5.5.3 11KV FEEDER METERING AND ENERGY AUDIT

All 3462 no. of 11kv feeders are communicable with AMR. The sample 11kV feeder wise energy audit is presented as **Annexure-4**.

5.5.4 CATEGORY WISE SUBSIDY FOR FY 2022-23

The details of subsidy provided to various consumer categories are tabulated below.

Table- 12Category wise subsidy of APCPDCL

Particulars	FY 2022-23
Approved Tariff Subsidy:	**In Crs**
Agriculture	1392.20
Domestic	372.88
Aqua and others	272.82
Total	**2037.90**

Thetotal approved subsidy amount is Rs.2037.90Cr, for FY 2022-23. Out ofRs.2037.90Cr booked Rs. 2218.30Cr has been received.
category wise division wise subsidy details enclosed as **Annexure-3**.

5.5.5 ANALYSIS ON T&D LOSS AND AT&C LOSS

- **% Losses – Aggregate**:

  The overall Technical Loss (T&D Loss) is 8.02% and overall AT&C Loss is 11.75% for FY 2022-23. This reflects an overall collection efficiency of 95.95%.

- **% Losses –Voltage Wise**:

  The overall losses for LT voltage level are3.45%, 11kV voltage level is 3.17% and 33kV level is 3.13% for FY 2022-23.

- **% Losses –Division wise**:

  The range of T&D losses, collection efficiency and AT&C losses among the divisions is tabulated below:

Table- 13Range of Technical and AT&C losses

Description	Data
T&D loss	8.02%
T&D loss Range	5.25% to 10.70%
Division With highest T&D loss	NUZVIDU
Division With lowest T&D loss	VJA TOWN
Collection Efficiency	95.95%
Collection Efficiency Range	89.02% to 100.00%
AT & C loss (%)	11.75%
AT & C loss Range	7.39% to 18.41%
Division With highest AT&C loss	NUZVIDU
Division With lowest AT&C loss	GUNTUR-TOWN1

The following divisions of the DISCOM are having T&D losses more than the average value and requires special attention

Table- 14Divisions with High T&D loss

S No	Average T&D Loss	Divisions with More than Average T&D loss	T&D Loss %
1	8.02%	AMARAVATHI	8.10%
2		KANDUKUR	8.16%
3		ADDANKI	8.30%
4		DARSI	8.72%
5		MACHILIPATNAM	8.99%
6		KANIGIRI	9.20%
7		GUDIVADA	9.53%
8		VUYYURU	9.57%
9		MARKAPURAM	9.77%
10		MACHERLA	9.99%
11		NARASARAOPET	10.30%
12		NUZVIDU	10.70%

The following divisions of the DISCOM are having collection efficiency less than the average value and require special attention:

Table- 15Divisions with Low Collection Efficiency

S No	Average Collection Efficiency	Divisions with Less than Average Collection Efficiency	Collection Efficiency %
1	95.95%	VIJAYAWADA RURAL	89.02%
2		NUZVIDU	91.37%
3		MACHERLA	92.38%
4		CHIRALA	92.94%
5		ADDANKI	93.12%
6		KANDUKUR	93.58%
7		MARKAPURAM	93.64%
8		GUNTUR-TOWN2	93.72%
9		BAPATLA	94.65%
10		DARSI	94.91%

- **Category wise Losses**:

  Category wise input energy cannot be estimated on account of mixed feeders. Accordingly, T&D Losses and AT&C Losses for consumer categories could not be provided. However collection efficiencies of various consumer categories are tabulated below:

Table- 16Category wise Collection Efficiency

Sl. No.	Category	Collection Efficiency
1	Residential	97.47%
2	Agricultural	100.00%
3	Commercial/Industrial-LT	97.74%
4	Commercial/Industrial-HT	94.82%
5	Others	75.87%
Overall		**95.95%**

5.6 INCLUSION AND EXCLUSIONS

- EHT sales included and Open Access sales are excluded in the estimation of losses.
- Subsidy received from the government has been considered for estimation Collection Efficiency and AT&C losses
- category wise division wise subsidy details enclosed as **Annexure-3.**

6. NOTES OF THE EA/EM ALONG WITH QUERIES AND REPLIES TO DATA GAPS

6.1 Query by EA, response by EM and Notes by EA

Table- 17Query EA by and response by EM

Sl. No	Query by EA	Response by EM of DISCOM	Notes by EA
1	Why DT wise losses details are not provided in Pro-forma	Work has awarded under RDSS scheme for installation of smart meters for all DTRs above 25KVA(except agricultural DTRs). DT wise losses details will be provided after completion of the work. Meters fixed under RAPDRP are not communicable with APCPDCL database.	Noted. DC intends to install 1,13,650 number of DTRs for smart meters under RDSS in phase-1.
2	AT & C losses are increased in FY 2022-23 compared to FY 2021-22 and what are the action plans were taken to reduce the losses	The distribution losses of APCPDCL have been reduced from 8.05% in FY 2021-22 to 8.02% in FY 2022-23. AT&C losses are increased from 10.01% in FY 2021-22 to 11.75% in FY 2022-23. On account of decrease in collection efficiency of other categories which includes Govt services, Street light services, water work services and Aqua services.	Noted.

7. ANNEXURES

7.1 INTRODUCTION OF VERIFICATION FIRM:

East Coast Sustainable Pvt Limited is registered as an Empanelled Accredited Energy Auditing Firm with Bureau of Energy Efficiency (BEE) bearing Registration No. EmAEA –067

East Coast Sustainable Private Limited (East Coast) was founded by highly qualified and experienced technocrats, who have a deep understanding of energy efficiency, renewable energy, environment conservation and climate change. The team has experience of conducting more than 700 projects in these areas for various sectors of the economy. Complete range of services being undertaken by East Coast Sustainable includes the following.

- Energy Efficiency
- Perform, Achieve and Trade (PAT) Scheme
- Renewable Energy
- Environmental Management
- Development of International Standards Organization (ISO) Management System
- Safety Audits
- Water Audit and Water Balance
- Project Management
- Demand Side Management (DSM)
- Sustainability Reporting.

7.2 MINUTES OF MEETING WITH THE DISCOM TEAM

The Annual Energy Audit team from East Coast Sustainable Private Limited, Visakhapatnam visited APCPDCL, on 26th – 27thJune 2023 and introduced the audit team and explained the purpose to the DISCOM personnel. The team checked supporting documents and entered the data in the pro-forma. The Audit Proceedings was signed by both parties (DC and Em AEA). The Audit proceedings /minutes are placed at **Annexure -10**.

7.3 CHECK LIST PREPARED BY AUDITING FIRM

The check list prepared for Annual Energy Audit is presented in the following table:

1	Monthly energy consumption data of consumers and system metering from electricity distribution company at different voltage levels
2	Input energy details for all metered input points
3	Boundary meter details
4	Source of energy supply (e.g., electricity from grid or self-generation), including generation from renewable.
5	Review of the current consumption practices
6	Monitoring and verification protocol to quantify on annual basis the impact of each measure with respect to energy conservation and cost reduction for reporting to Bureau and the concerned State designated agency
7	Verification and correction of input energy
8	System loading and corresponding infrastructure
9	Energy supplied to Open Access Consumers
10	Verify and validate the system metering data through a random field visit

7.4 BRIEF APPROACH, SCOPE & METHODOLOGY FOR AUDIT

The methodology adopted for conducting the Annual Energy Audit is as follows

- Verification of existing pattern of energy distribution across periphery of electricity distribution company
- Verification of accounted energy flow submitted by electricity distribution company at all applicable voltage levels of the distribution network
- Collection of data on energy received, and distributed, covered within the scope of energy audit
- Analyse the consistency of data monitoring compared to the collected data
- Recommendations to facilitate energy accounting and improve energy efficiency
- Analyse the data with respect to the purpose of energy accounting in reducing losses for the electricity distribution company


7.5 INFRASTRUCTURE DETAILS

APCPDCL has a vast infrastructure facility in its operating area with the following infrastructure details:

Sl. No.	Particulars	As on 31st March 2021
1	Number of districts	3
2	Number of circles	3
3	Number of divisions	21
4	Number of sub-divisions	68
5	Number of feeders	3,904
6	No of 33/11 KV Substations	890
7	Length of 33 KV line (KM)	7,994.95
8	Length of 11 KV line (KM)	84,101.723
9	Length of Low-tension line (KM)	46,369.860
10	Length of Aerial Bunched Cables	33,569.290
11	Length of Underground Cables	80.025
12	Number of Distribution Transformers	2,81,356
13	Connected load (MW)	12831.92

7.6 ELECTRICAL DISTRIBUTION SYSTEM

Andhra Pradesh Central Power Distribution Corporation Limited (APCPDCL), Vijayawada was established, effected from01.04.2020 to cater the electricity needs of three districts in Andhra Pradesh state, around 5.049 million consumers viz. Distribution – Bifurcation of Andhra Pradesh Southern Power Distribution Company Limited, as Andhra Pradesh Southern Power Distribution Company Limited and Andhra Pradesh Central Power Distribution Corporation Limited.

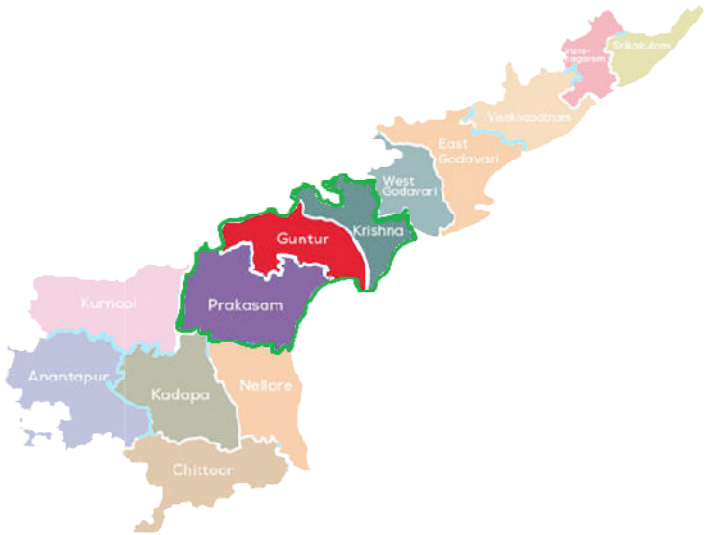


7.7 POWER PURCHASE DETAILS

TheAndhra Pradesh Power coordination committee(APPCC) was established as an institutional arrangement for smooth transaction of power purchase functions and to have co-ordination among the three DISCOMs (i.e., APSPDCL, APEPDCL, APCPDCL) as per the G.O.Ms.No.59,Dated 07-06-2005 (APSPDCL was demerged into APSPDCL & APCPDCL w.e.f 01-04-2020). The cost of purchase is finalized at APPCC level. The power purchases and its accounting are being carried out by the Andhra Pradesh Power coordination committee (APPCC), and are sent to the distribution companies. Quantitative details of purchase of energy and cost of power purchase for the FY2022-23 are presented as **Annexure-5**.

7.8 LINE DIAGRAM (SLD)

The electricity grid map of APCPDCL is presented as **Annexure-11**

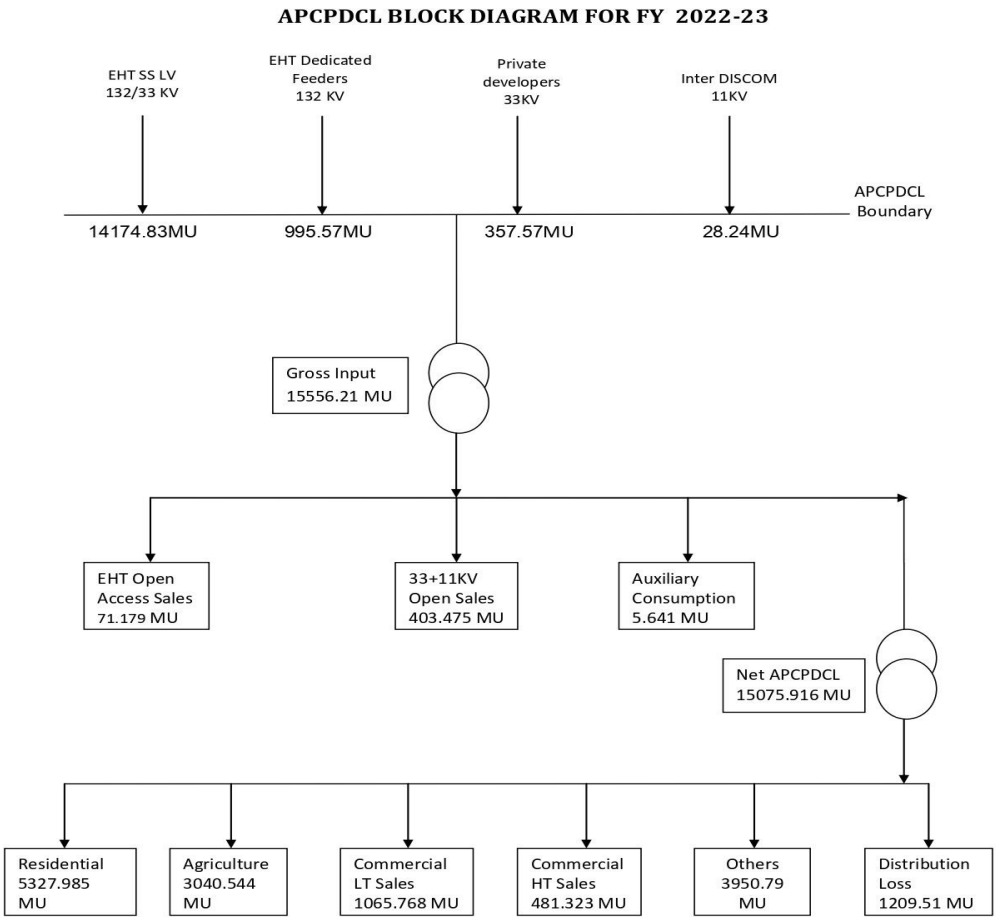

7.9 CATEGORY OF SERVICE DETAILS (WITH CONSUMER AND VOLTAGE-WISE)

APCPDCL is supplying power to 50,54,193 number of consumers as on 31st March 2023. The details of category wise consumers are presented in the following table:

Category	Number of Consumers as on 31st March 2023
Residential	40,41,825
Agricultural	4,29,131
Commercial/Industrial-LT	4,82,115
Commercial/Industrial-HT	4,559
Others	96,563
Total	**50,54,193**

Voltage-Wise Consumers

Voltage level	Number of Consumers as on 31st March 2023
LT	50,49,634
11KV	4,233
33KV	302
132KV	24
Total	**50,54,193**

The detailed category wise consumers list is presented as Annexure-7

7.10LIST OF DOCUMENTS VERIFIED WITH EACH PARAMETER:

The following are the documents verified during Annual Energy Audit:

S. No	Parameter	Supporting Document
1	Input Energy	a. Monthly Abstract of Energy Exchange between TRANSCO and APCPDCL for FY 2022-23
2	Billed Energy	a. Division wise Monthly Energy from CBS data base. b. Division wise Monthly Unmetered energy as per ISI methodology c. Consumer Profile
3	Technical and AT&C Loss	a. Division wise Monthly input Energy and sales. b. Sample 11 kV Feeder energy audit

7.11 BRIEF DESCRIPTION OF UNIT

APCPDCL is an AP State Government fully owned utility and was formed vide G.O.MS. No. 41, Dt: 05.12.2019 duly bifurcating APSPDCL. The APCPDCL has jurisdiction in Krishna, Guntur and Prakasam Districts covering an area of 37,744 Sq. Km with a population of 1.3 Crs.

The Corporation has been providing 24 X 7 uninterrupted services to the consumers while ensuring safety & protection in the 3 (three) Districts i.e., Krishna, Guntur & Prakasam of Andhra Pradesh. The corporation is using all latest technology & equipment's to minimize the Aggregated Technical & Commercial (AT &C) losses. The Corporation is using latest IT solutions i.e., SAP (ISU) etc., for extending better services to the consumers.

7.12 LIST OF PARAMETERS ARRIVED THROUGH CALCULATION OR FORMULAE WITH LIST OF DOCUMENTS AS SOURCE OF DATA

Calculation of % T&D Loss

The %T&D Loss of the DISCOM is calculated, taking EHT sales into consideration & excluding Open Access Energy. The % T&D Loss of the DISCOM is arrived at as per the following formula:

% T&D Loss = (Input Energy (MU) – Billed Energy (MU)) / Input Energy (MU)*100

Calculation of % AT&C Loss

The **% AT&C** Loss of the DISCOM is calculated, including subsidies in both billed amount and collected amount. The **% AT&C** Loss ofthe DISCOM is arrived at as per the following formula.

% AT&C Loss =(1-(Billing Efficiency X Collection Efficiency)) X 100

8. FORMATS

8.1 GENERAL INFORMATION

Included in the pro-forma

8.2 PERFORMANCE SUMMARY OF ELECTRICITY DISTRIBUTION COMPANY

Included in the pro-forma

8.3 DETAILS OF INPUT INFRASTRUCTURE

Included in the pro-forma with all the available data

Voltage-wise losses

S. No	Voltage	Input			Output			Loss (MU)	Loss (%)
		Input from higher voltage	Injection at voltage level	Total input	Sales (Including wheeling to DOA)	Input to lower voltage	Total		
1	> 33 kV	986.19		986.19	986.19		986.19	0.00	0.00%
2	33 kV	14206.80	357.572	14564.38	1755.75	12352.69	14108.44	455.94	3.13%
3	11 kV	12352.69		12352.69	1459.94	10500.94	11960.88	391.81	3.17%
4	LT	10500.94		10500.94	10139.18		10139.18	361.76	3.45%

8.4 INPUT ENERGY: A. SUMMARY OF ENERGY INPUT AND INFRASTRUCTURE

Included in the pro-forma

INPUT ENERGY: B. METER READING OF INPUT ENERGY AT INJECTION POINTS,

The total Input energy is 15075.916MU .There is also the swapping energy of 113.89 MU and exchange sale of 414.62MU. The net energy sold outside the periphery is 300.73MU.

8.5 DETAILS OF INPUT ENERGY SOURCES

Included in the pro-forma

8.6 DIVISION-WISE LOSSES

Included in the pro-forma

8.7 DETAILS OF FEEDER-WISE LOSSES

Details are updated in the Pro-forma.

8.8 DETAILS OF SUBSIDY CLAIMED AND RECEIVED

category wisedivision wise subsidy brake up is enclosed as **Annexure-3**.

8.9 DETAILS OF DT METERING

DTRs where meters/ modems were provided under RAPDRP/ IPDS are either not functional or erratic. Hence, Energy Audit of DTRs is not being done. DC informed that sanction for implementation of smart meters for all DTRs above 25KVA (except agricultural DTRs) has been received and work has been awarded under RDSS.

Number of DTRs consider for smart metering is for 1,13,650 under phase-I RDSS

8.10DT WISE LOSSES TO THE EXTENT DT METERS ARE EXISTING

DTRs where meters/ modems were provided under RAPDRP/ IPDS are either not functional or erratic. Hence, Energy Audit of DTRs is not being done. DC informed that sanction for implementation of smart meters for all DTRs above 25KVA (except agricultural DTRs) has been received and work has been awarded under RDSS.

Number of DTRs consider for smart metering is for 1,13,650 under phase-I RDSS

9. FIELD VERIFICATION DATA AS PER S.O.P

The required data as per S.O.P issued by Ministry of Power:

Clause Details		Sub-clause Details	Present Status
Validation through sample data checks and field visits:	a. Validation of feeder data:	Based on data available in 11 kV Feeder meter at substation for a sample size of 10% for which documentary evidence to be captured in the audit report.	DC has provided feeder wise technical losses and AT & C losses.
	b. Validation of energy flow data and losses:	Min. 10 or 1% (whichever is higher) of DISCOM's input energy metering points between Transmission and 66kV/33kV/11kV distribution feeders by checking functional and communication status of meters etc.	DC has provided details for 10 Nos of input energy metering points (LV's). APCPDCL is considering 132/ 33 kV LV's as TRANSCO-DISCOM boundary points.
	For all Divisions with AT&C losses greater than 25% or at-least 1/3 of the total Divisions of DISCOM	Total of min. 10 or 1% of metering points (whichever is higher) between 220-132-110- 66 /33 kV outgoing and 22kV-11kV-6.6kV-3kV incoming feeders/ direct end-consumer by checking functional and communication status of meters.	DC has provided details for 10 Nos of outgoing feeder.
		In an Urban High Loss Division, check 5 or 1% of Metering points (whichever is higher) at DTs where communicable meters were already installed under other	DTRs where meters/ modems were provided under RAPDRP/ IPDS are either not functional or erratic. Hence,

		schemes such as R-APDRP and IPDS.	Energy Audit of DTRs is not being done.
		Total of min. of 10 or 1% of metering points (whichever is higher) between 11kV/6.6kV feeders and DTs by checking functional and Communication status of meters.	There are no divisions with AT&C losses more than 25%. However, all metering points at 11 kV feeders are having functional meters. In respect of DTRs, installation of metering is in the process under RDSS.
Validation through sample data checks and field visits:	For all Divisions with AT&C losses greater than 25% or at-least 1/3 of the total Divisions of DISCOM	Foot survey of feeder to check for thefts/ hooking etc.	DC has system of recording inspection reports of field surveys in Monitoring And Tracking System (MATS). DC has provided model LT inspection report generated from MATS.
		Verify metering and connection status of min. of 10 or 2% consumers of the Division (whichever is higher) of the following category of consumers – Agriculture (Metered and Un-metered), Govt. category connection (ULB, RLB etc.), and LT Industrial.	Connection status/ metering status of consumers is available in Central Billing System (CBS). DC has provided the details for 2% of Govt. category connection (ULB, RLB etc.), and LT Industrial.i.e1500 No's Govt.services & 400No's LT industrial services.

Sample size of field verification data as per the S.O.P issued by Ministry of Power of the above activities areincluded as an **annexure – 12**.

Detailed formats which have to submit along with Energy audit report are attached as follows:

Final Pro-forma of APCPDCL Energy Accounting for the FY 2022-23is presented as**annexure – 13**

Energy drawls of APCPDCL certified by APSLDC/ EBCare presented as **annexure – 14**

Details of POE cases booked in APCPDCL for the FY 2022-23are presented as **annexure – 15**

Sample HT meter test reports are presented as **annexure – 16**

Computation of distribution losses of APCPDCL for the FY 2022-23is presented as **annexure – 17**

Progress of HVDS works of APCPDCLis presented as **annexure – 18**

ANNEXURE – 1

(Before and After status
of RAPDRP Towns
AT&C losses)

Before and After status of RAPDRP Towns

Sl. No	Town	Date of Completion of work	% of AT & C loss as per the DPR submitted (Base lline loss)	Year wise % of AT & C losses after formation of APCPDCL		
				2020-21	2021-22	2022-23
1	BAPATLA	29.02.2016	24.71	3.07	4.93	3.38
2	CHILAKALURIPET	30.07.2016	22.66	3.62	7.67	2.93
3	CHIRALA	31.03.2014	18.76	6.30	4.58	3.17
4	GUDIVADA	30.07.2016	17.62	8.28	7.90	4.51
5	JAGGAIAHPET	31.03.2014	23.13	2.61	8.92	6.48
6	KANDUKURU	31.03.2014	23.72	7.61	9.54	9.84
7	MACHERLA	29.02.2016	34.05	21.15	14.66	13.31
8	MACHILIPATNAM	31.03.2014	23.21	7.92	12.15	7.91
9	NUZVID	30.07.2016	27.97	6.12	8.86	8.60
10	ONGOLE	01.02.2016	20.54	8.41	9.70	5.78
11	REPALLE	30.07.2016	18.14	5.90	7.10	4.93
12	SATTENAPALLI	30.07.2016	17.19	2.86	8.19	5.93
13	VINUKONDA	30.07.2016	29.03	7.14	7.42	8.37

ANNEXURE – 2

(Assessed AGL consumption based on ISI methodology)

Assessed AGL consumption of Vijayawada circle based on ISI methodology

ISI DTR Readings for the month of APR-22 TO MAR-23

1	Population of AGL DTRs in Circle	:	35899
2	No. of ISI AGL sample DTRs	:	249
3	No. of ISI AGL sample valid DTRs Readings	:	143
4	Detailed analysis of DTRs with difective readings	:	106
5	Detailed analysis of DTRs with difective readings		

Sl.No.	No. of Defective DTRs	Type of Defective	Recorded Energy	Assessed Energy	Method of Assessment Adopted
1	69	No Display Stuck up Meter Damaged	1500.00	1612697	Computed Consumption adopted as per tong tester reading
2	2	NH WORK	0.00	0	
3	0	DISMANTLED SERVICE	0.00	0	
4	35	Meter burnt	0	1059886	Computed Consumption adopted as per tong tester reading
Total	**106**		**1500.00**	**2672582.76**	

6	Energy recorded in DTRs with valid readings	: E1	180799.702		
7	Energy assessed in DTRs with difective readings	:E2	2672582.76		
8	Total Energy for the ISI DTRs	:E=E1+E2	2853382.46		
9	Total Energy extra polated for total population of ISI AGL DTRs in the Vijayawada Circle	:		**600485469.4**	**600.485** MU
10	Energy for the Division for the FY year of 2022-23 as per filed in ARR	:			
11	Energy for the Division for the FY year 2022-23 as Approved by APERC	:			

Assessed Agriculture consumption of Vijayawada circle for the FY 2022-23 is 600.485 MU

FORMAT -A

Abstract Capacity wise ISI Sample Total DTRs consumption for the month of APR-22 TO MAR-23

S.No	Description	Formula		Capacity wise No.of Agl Sample DTRs Exisitng (KVA)										
		A	15	16	25	30	40	50	60	63	75	90	100	160	Total
Total Sample DTRs in the Circel	No of Sample DTRs existing	B	0	33	79	0	0	8	0	37	8		84	0	**249**
	No of Sample Valid DTRs	C	0	15	49	0	0	7	0	22	6	0	44	0	**143**
	Consumption of Valid Sample DTRs in KWH	D	0	16182.62	16695.78	0.00	0.00	40078.11	0.00	12290.07	54554.40	0.00	40998.72	0.00	**180799.7016**
	Total KVA of Sample DTRs	E=(CxA)	0	240.00	1225.00	0.00	0.00	350.00	0.00	1386.00	450.00	0	4400.00	0.00	**8051**
	Consumption per KVA of sample DTRs	F=(D/E)	0	67.43	13.63	0.00	0.00	114.51		8.87	121.23	0.00	9.32	0.00	**334.9828715**
	Consumption per DTR of sample DTRs	G=(D/C)	0	1078.84	340.73	0	0	5725.44	0	558.64	9092.40	0	931.79	0.00	**17727.84433**
Circle Consumption	Total Agl.DTRs existing as on 31.03.23	H	626	7550	25838	0	0	77	0	825	38	0	935	10	**35899**
	Total KVA in the Circle as on 31.03.23	I=(HXA)	9390	120800	645950	0	0	3850	0	51975	2850	0	93500	1600	**929915**
	Total Circle consumption for 31.03.23	J=(IXF)	0	8145253.69	8803788.77	0	0	440859.20	0	460877.44	345511.20	0	871222.83	0.00	**19067513.13**

FORMAT -B

Abstract Capacity wise ISI Sample Total DTRs consumption for the month of APR-22 TO MAR-23

S.No	Description	Formula		Capacity wise No.of Agl Sample DTRs Exisitng (KVA)											
		A	15	16	25	30	40	50	60	63	75	90	100	160	Total
Total Sample DTRs in the Circle	No of Sample DTRs existing	B	0	33	79	0	0	8	0	37	8	0	84	0	**249**
	No of Sample Valid DTRs	C	0	33	79	0	0	8	0	37	8	0	84	0	**249**
	Consumption of Valid Sample DTRs in KWH	D	0.00	534026.57	1302271.10	0.00	0.00	320624.87	0.00	418862.21	436435.20	0.00	3403393.88	0.00	**6415613.83**
	Total KVA of Sample DTRs	E=(CxA)	0.00	528.00	1975.00	0	0	400.00	0	2331.00	600.00	0	8400.00	0.00	**14234**
	Consumption per KVA of sample DTRs	F=(D/E)		1011.41	659.38	0	0	801.56	0	179.69	727.39	0	405.17		**3784.603904**
	Consumption per DTR of sample DTRs	G=(D/C)		16182.62	16484.44	0	0	40078.11	0	11320.60	54554.40	0	40516.59		**179136.7702**
Circle Consumption	Total Agl.DTRs existing as on 31.03.23	H	626	7550	25838	0	0	77	0	825	38	0	935	10	**35899**
	Total KVA in the Circle as on 31.03.23	I=(HXA)	9390	120800	645950	0	0	3850	0	51975	2850	0	93500	1600	**929915**
	Total Circle consumption for 31.03.23	J=(IXF)	0.00	122178805.35	425925071.94	0	0	3086014.39	0	9339495.28	2073067.19	0	37883015.24	0.00	**600485469.4**

Division wise Agl DTRs as on 31.03.2023															
S. No	**Division**			**Capacity wise No.of Agl Sample DTRs Exisitng (KVA)**											
		15	**16**	**25**	**30**	**40**	**45**	**50**	**60**	**63**	**75**	**90**	**100**	**160**	**Total**
1	Gunadala	0	96	1097	0	0	0	5	0	253	5	0	269	6	**1731**
2	Vijayawada Rural	0	930	4749	0	0	0	36	0	143	10	0	166	2	**6036**
3	Gudivada	0	1072	2848	0	0	0	0	0	65	0	0	96	1	**4082**
4	Nuzividu	625	5174	12792	0	0	0	15	0	123	2	0	163	0	**18894**
5	Machilipatnam	0	153	1352	0	0	0	10	0	95	2	0	85	0	**1697**
6	Vuyyuru	1	125	3000	0	0	0	11	0	146	19	0	156	1	**3459**
	Total	**626**	**7550**	**25838**	**0**	**0**	**0**	**77**	**0**	**825**	**38**	**0**	**935**	**10**	**35899**

Robust																												
SL NO	Division	Subdivision	Section	Location	DTR Capacity	Meter particulars	Meter No	Capacity	Class	Remarks	Remarks 2	Date	Intial reading	Date	Final reading	No of Days	Diff	Consumption =(Diff/No of	Assessed consumption	Total consumption	Currents			Votages			Remarks	
																					R	Y	B	R	Y	B		
3	Gunadala	Gunadala	Nunna	Pathapadu SS-19	25	HPL	530996	200/5	0.5	NO DISPLAY	4	5-May-22	0	5-Apr-23		335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
4	Gunadala	Gunadala	Gannavaram	Budddavaram - 24	25	HPL	528660	200/5	0.5	This service was dismantled	1	5-May-22		5-Apr-23		335	0	0		0	0	0	0	0	0	0	This service was dismantled	1
5	Gunadala	Gunadala	Gannavaram	V.P.Gudem-4	100	HPL	5022810	200/5	0.5	WORKING	9	5-May-22	123906	5-Apr-23	137911	335	14005	15260		15260	10	12	12	240	238	240	WORKING	9
9	Gunadala	Gunadala	Gannavaram	Kondapavuluru-15	16	HPL	528491	200/5	0.5	WORKING	9	5-May-22	163898	5-Apr-23	183904	335	20006	21798		21798	12	14	16	240	138	240	WORKING	9
14	Gunadala	Kanuru	Kankipadu	Ch.V. Palem SS-9	63	HPL	580158	200/5	0.5	NHWORK	1	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NHWORK	1
22	Gunadala	Kanuru	Penamaluru	Poranki GAS COMPAN	16	HPL	529318	200/5	0.5	Meter Damage	7	5-May-22	89256	5-Apr-23	96451	335	7195	7839		7839	0	0	0	248	248	250	Meter Damage	7
23	Gunadala	Kanuru	Penamaluru	Kodudonka near hand	25	HPL	A0043933	200/5	0.5	WORKING	9	5-May-22	41909	5-Apr-23	46427	335	4518	4923		4923	22	26	28	244	248	246	WORKING	9
32	RURAL VJA	JAGGAYYAPETA	VATSAVAI	VATSAVAI	100	HPL	5284312	200/5	0.5	WORKING	9	5-May-22	58957	5-Apr-23	64812	335	5855	6379	0	6379	16	15	15	239	246	245	WORKING	9
33	RURAL VJA	JAGGAYYAPETA	VATSAVAI	POLAMPALLI	63	HPL	528560	200/5	0.5	WORKING	9	5-May-22	77484	5-Apr-23	92445	335	14961	16301	0	16301	32	33	31	241	238	238	WORKING	9
36	RURAL VJA	JAGGAYYAPETA	VATSAVAI	KAHAMBAMPADU	25	HPL	528611	200/5	0.5	Meter Damage	7	5-May-22	0	5-Apr-23	0	335	0	0	0	0	0	0	0	0	0	0	Meter Damage	7
42	RURAL VJA	Nandigama	Nandigama Rural	T.G.Padu SS8	16	HPL	529283	200/5	0.5	WORKING	9	5-May-22	5404	5-Apr-23	8233	335	2829	3083	0	3083	8	9	9	241	242	271	WORKING	9
43	RURAL VJA	Nandigama	Nandigama Rural	Magalluss26	25	HPL	529308	200/5	0.5	WORKING	9	5-May-22	3374	5-Apr-23	7963	335	4589	5000	0	5000	4	6	5	259	273	274	WORKING	9
44	RURAL VJA	Nandigama	Nandigama Rural	Pallagiri SS5	63	HPL	584276	200/5	0.5	WORKING	9	5-May-22	72850	5-Apr-23	84969	335	12119	13205	0	13205	42	41	44	262	265	258	WORKING	9
45	RURAL VJA	Nandigama	Nandigama Rural	K.M.Kuru SS2	75	HPL	529336	200/5	0.5	WORKING	9	5-May-22	25266	5-Apr-23	34669	335	9403	10245	0.0	10245	0	0	0	301	295	315	WORKING	9
46	RURAL VJA	Nandigama	Nandigama Rural	Peddavaramss1	100	HPL	529368	200/5	0.5	WORKING	9	5-May-22	265449	5-Apr-23	292534	335	27085	29511	0	29511	0	0	0	299	297	269	WORKING	9
47	RURAL VJA	Nandigama	Nandigama Rural	Magalluss6	75	HPL	529353	200/5	0.5	WORKING	9	5-May-22	252351	5-Apr-23	278016	335	25665	27964	0.00	27964	0	0	0	254	258	257	WORKING	9
48	RURAL VJA	Nandigama	Chandralapadu	Turlapadu SS-21	16	HPL	529367	200/5	0.5	WORKING	9	5-May-22	27008	5-Apr-23	30557	335	3549	3867	0	3867	9.6	9.55	9	230	225	187	WORKING	9
49	RURAL VJA	Nandigama	Chandralapadu	Chinthalapadu SS-37	25	Secure	X0686473	200/5	0.5	WORKING	9	5-May-22	3834	5-Apr-23	6313	335	2479	2701	0	2701	21	18	19	245	250	245	WORKING	9
50	RURAL VJA	Nandigama	Chandralapadu	Turlapadu SS-5	63	Secure	X0686468	200/5	0.5	WORKING	9	5-May-22	18162	5-Apr-23	22519	335	4357	4747	0	4747	10.10	12.00	13.00	235	234	235	WORKING	9
51	RURAL VJA	Nandigama	Chandralapadu	Gudimetla SS-6	63	Secure	X0686511	200/5	0.5	WORKING	9	5-May-22	55953	5-Apr-23	63973	335	8020	8738	0	8738	16	12	13	250	245	259	WORKING	9
52	RURAL VJA	Nandigama	Chandralapadu	Chinthalapadu SS-4	100	HPL	365207	200/5	0.5	WORKING	9	5-May-22	111009	5-Apr-23	125780	335	14771	16094	0	16094	24	22	20	254	255	256	WORKING	9
53	RURAL VJA	Nandigama	Chandralapadu	Thotaravulapdu -SS8	100	Secure	X0686471	200/5	0.5	BURNT	5	5-May-22		5-Apr-23	0	335	0	0	500	500							BURNT	5
54	RURAL VJA	Nandigama	Chandralapadu	Eturu SS-3	100	HPL	584131	200/5	0.5	WORKING	9	5-May-22	77396	5-Apr-23	91353	335	13957	15207	0	15207	28	29	32	256	252	273	WORKING	9
55	RURAL VJA	Nandigama	Kanchikacherla	Kunikanapadu SS-16	25	HPL	528485	200/5	0.5	WORKING	9	5-May-22	28992	5-Apr-23	34150	335	5158	5620	0	5620	19.1	18.2	20.1	240	234	231	WORKING	9
56	RURAL VJA	Nandigama	Kanchikacherla	Munnaluru SS-1	63	HPL	528486	200/5	0.5	STRUCK UP	2	5-May-22		5-Apr-23	0	335	0	0	500	500							STRUCK UP	2
57	RURAL VJA	Nandigama	Kanchikacherla	Kunikanapadu SS-1,	63	HPL	528647	200/5	0.5	WORKING	9	5-May-22	40439	5-Apr-23	44573	335	4134	4504	0	4504							WORKING	9
58	RURAL VJA	Nandigama	Kanchikacherla	Chevitikallu SS -1	100	HPL	528534	200/5	0.5	WORKING	9	5-May-22	216210	5-Apr-23	235552	335	19342	21074	0	21074							WORKING	9
59	RURAL VJA	Nandigama	Alluru	Jayanthi SS-25	25	HPL	528515	200/5	0.5	WORKING	9	1-Apr-20	105876	31-Mar-21	120971	364	15095	15136	0	15136	0	0	0	245	253	243	WORKING	9
60	RURAL VJA	Nandigama	Alluru	Chowtapalli SS1	50	HPL	528587	200/5	0.5	WORKING	9	5-May-22	140837	5-Apr-23	156980	335	16143	17588	0	17588	22	18	20	245	243	244	WORKING	9
61	RURAL VJA	Nandigama	Alluru	Peddapuram SS6	63	HPL	584247	200/5	0.5	STRUCK UP	2	5-May-22		5-Apr-23	0	335	0	0	500	500							STRUCK UP	2
62	RURAL VJA	Nandigama	Alluru	D.D.Padu SS5	100	HPL	520803	200/5	0.5	WORKING	9	5-May-22	82015	5-Apr-23	95297	335	13282	14471	0	14471	14	16	12	241	242	241	WORKING	9
63	RURAL VJA	Nandigama	Alluru	Rangapuram SS1	100	HPL	402949	200/5	0.5	BURNT	5	5-May-22		5-Apr-23	0	335	0	0	500	500							BURNT	5
64	RURAL VJA	Nandigama	Alluru	CH.R.Palem SS5	100	HPL	528519	200/5	0.5	STRUCK UP	2	5-May-22		5-Apr-23	0	335	0	0	500	500							STRUCK UP	2

SL NO	Division	Subdivision	Section	Location	DTR Capacity	Meter particulars	Meter No	Capacity	Class	Remarks	Remarks 2	Date	Intial reading	Date	Final reading	No of Days	Diff	Consumption =(Diff/No of	Assessed consumption	Total consumption	Currents			Votages			Remarks	
																					R	Y	B	R	Y	B		
65	RURAL VJA	Ibrahimpatnam	Ibrahimpatnam	IbrahimpatnamSS-85	25	HPL	528529	200/5	0.5	WORKING	9	5-May-22	133751	5-Apr-23	231896	335	98145	106934	0	106934	11.5	12.8	12.6	250	245	229	WORKING	9
66	RURAL VJA	Ibrahimpatnam	Ibrahimpatnam	Kotikalapudi SS-01	100	GVR	A0043513	200/5	0.5	WORKING	9	5-May-22	9782	5-Apr-23	33235	335	23453	25553	0	25553	7.25	6.64	6.93	357	183	228	WORKING	9
67	RURAL VJA	Ibrahimpatnam	Mylavaram	Mylavaram SS-36	100	HPL	585453	200/5	0.5	WORKING	9	5-May-22	46612	5-Apr-23	55379	335	8767	9552	0	9552							WORKING	9
68	RURAL VJA	Ibrahimpatnam	Mylavaram	Ananthavaram SS-01	100	HPL	529214	200/5	0.5	WORKING	9	5-May-22	9919	5-Apr-23	235552	335	225633	245839	0	245839	22.8	21.68	21.24	237	238	236	WORKING	9
69	RURAL VJA	Ibrahimpatnam	Mylavaram	Chandragudem SS-6	100	HPL	A0043996	200/5	0.5	WORKING	9	5-May-22	15371	5-Apr-23	178515	335	163144	177754	0	177754	11.1	12.2	11.3	241	235	226	WORKING	9
70	RURAL VJA	Ibrahimpatnam	Mylavaram	Morusumilli SS-07	75	HPL	A0043994	200/5	0.5	WORKING	9	5-May-22	20727	5-Apr-23	23898	335	3171	3455	0	3455	0	0	0	352.35	181.33	225.9	WORKING	9
71	RURAL VJA	Ibrahimpatnam	Mylavaram	Pondugala SS-01	63	HPL	529388	200/5	0.5	WORKING	9	5-May-22	7625	5-Apr-23	8276	335	651	710	0	710	5	6	7	242	241	241	WORKING	9
72	RURAL VJA	Ibrahimpatnam	Mylavaram	Dasullapalem SS-27	25	HPL	529402	200/5	0.5	WORKING	9	5-May-22	27101	5-Apr-23	43185	335	16084	17525	0	17525	22.8	21.68	21.24	237	238	236	WORKING	9
73	RURAL VJA	Ibrahimpatnam	Mylavaram	Pulluru SS-46	16	HPL	529213	200/5	0.5	WORKING	9	5-May-22	5855	5-Apr-23	6605	335	750	817	0	817	6.2	6.1	6.1	242	242	241	WORKING	9
74	RURAL VJA	Ibrahimpatnam	G Konduru	Telladevarapadu SS-1	25	HPL	A0043592	200/5	0.5	WORKING	9	5-May-22	41550	5-Apr-23	47215	335	5665	6172	0	6172	6	7	8	249	250	251	WORKING	9
75	RURAL VJA	Ibrahimpatnam	G Konduru	Gaddamanugu SS-06	25	HPL	A0043535	200/5	0.5	WORKING	9	5-May-22	57896	5-Apr-23	64676	335	6780	7388	0	7388	11	10	12	253	252	250	WORKING	9
76	RURAL VJA	Ibrahimpatnam	G Konduru	Kandulapadu SS-04	100	HPL	531008	200/5	0.5	WORKING	9	5-May-22	219736	5-Apr-23	238924	335	19188	20907	0	20907	8	9	8	245	244	246	WORKING	9
77	RURAL VJA	Ibrahimpatnam	G Konduru	CheruvuMadhavaram	25	L&G	A0043600	200/5	0.5	WORKING	9	5-May-22	28685	5-Apr-23	32697	335	4012	4371	0	4371	8	7	8	252	253	254	WORKING	9
78	RURAL VJA	Ibrahimpatnam	G Konduru	Gaddamanugu SS-03	100	HPL	585442	200/5	0.5	WORKING	9	5-May-22	3916	5-Apr-23	5725	335	1809	1971	0	1971	5	6	5	255	256	255	WORKING	9
79	RURAL VJA	Ibrahimpatnam	G Konduru	Gurrajupalem SS-02	100	HPL	531695	200/5	0.5	WORKING	9	5-May-22	254896	5-Apr-23	277497	335	22601	24625	0	24625	11	10	11	252	251	252	WORKING	9
80	RURAL VJA	Ibrahimpatnam	G Konduru	Kuntamukkala SS-04	25	HPL	530952	200/5	0.5	WORKING	9	5-May-22	143214	5-Apr-23	156799	335	13585	14802	0	14802	12	11	12	244	243	242	WORKING	9
81	Gudivada	H.Junction	H.Junction	Bapulapadu SS-01	100		531128			WORKING	9	5-May-22	752840	5-Apr-23	1001250	335	248410	270656		270656	8	8	8	226	228	235	WORKING	9
82	Gudivada	H.Junction	H.Junction	Bapulapadu SS-02	100		A0043493			NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
83	Gudivada	H.Junction	H.Junction	Bapulapadu SS-03	100		531589			BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	BURNT	5
84	Gudivada	H.Junction	H.Junction	Bapulapadu SS-36	100		531106			NO DISPLAY	4	5-May-22	7583	5-Apr-23	8194	335	611	666		666	0	0	0	0	0	0	NO DISPLAY	4
85	Gudivada	H.Junction	H.Junction	Bapulapadu SS-14	100		531733			BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	BURNT	5
86	Gudivada	H.Junction	H.Junction	Bapulapadu SS-17	100		531005			BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	BURNT	5
87	Gudivada	H.Junction	H.Junction	Bapulapadu SS-06	75		A0043496			WORKING	9	5-May-22	716162	5-Apr-23	930171	335	214009	233174		233174	8	8	8	241	245	243	WORKING	9
88	Gudivada	H.Junction	H.Junction	Koyyuru SS-27	63		531621			WORKING	9	5-May-22	277112	5-Apr-23	309427	335	32315	35209		35209	6	6	6	239	238	241	WORKING	9
89	Gudivada	H.Junction	H.Junction	Koyyuru SS-29	63		531081			NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
90	Gudivada	H.Junction	H.Junction	KoyyuruSS-39	63		531657			WORKING	9	5-May-22	195281	5-Apr-23	230719	335	35438	38612		38612	6	6	6	244	245	244	WORKING	9
91	Gudivada	H.Junction	H.Junction	Bapulapadu SS-39	50		A0043658			WORKING	9	5-May-22	366872	5-Apr-23	570452	335	203580	221812		221812	7	7	7	249	251	254	WORKING	9
92	Gudivada	H.Junction	H.Junction	Bapulapadu SS-76	16		X0686556			NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
93	Gudivada	H.Junction	H.Junction	Bapulapadu SS-48	16		530969			WORKING	9	5-May-22	172751	5-Apr-23	196369	335	23618	25733		25733	3	3	3	248	251	250	WORKING	9
94	Gudivada	H.Junction	H.Junction	Bapulapadu SS-50	16		531688			NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
95	Gudivada	H.Junction	H.Junction	Bapulapadu SS-62	16		531112			NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
96	Gudivada	H.Junction	H.Junction	Bapulapadu SS-64	25		531587			BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	BURNT	5
97	Gudivada	H.Junction	Veeravalli	Ampapuram SS-2	100		A0043656			NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
98	Gudivada	H.Junction	Veeravalli	Ampapuram SS-3	100		A0043661			WORKING	9	5-May-22	135521	5-Apr-23	228206	335	92685	100985		100985	9	8.5	9	245	245	239	WORKING	9

SL NO	Division	Subdivision	Section	Location	DTR Capacity	Meter particulars	Meter No	Capacity	Class	Remarks	Remarks 2	Date	Intial reading	Date	Final reading	No of Days	Diff	Consumption =(Diff/No of	Assessed consumption	Total consumption	Currents			Votages			Remarks	
																					R	Y	B	R	Y	B		
99	Gudivada	H.Junction	Veeravalli	Veeravalli SS-2	25		531047			NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	0	NO DISPLAY	4
100	Gudivada	H.Junction	Veeravalli	Veeravalli SS-6	25		531116			NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	0	NO DISPLAY	4
101	Gudivada	H.Junction	Veeravalli	S.B.N Puram SS5	100		A0043666			WORKING	9	5-May-22	242744	5-Apr-23	456917	335	214173	233353		233353	10	9.8	10.2	228	235	240	WORKING	9
102	Gudivada	H.Junction	Veeravalli	S.B.N Puram SS9	100		531623			WORKING	9	5-May-22	250084	5-Apr-23	453563	335	203479	221701		221701	9.5	9.7	9.8	241	245	243	WORKING	9
103	Gudivada	H.Junction	Veeravalli	Veeravalli SS-4	100		A0043477			WORKING	9	5-May-22	157955	5-Apr-23	304050	335	146095	159179		159179	9	9	9	244	245	244	WORKING	9
104	Gudivada	H.Junction	Veeravalli	S.B.N Puram SS2	63		X0686583			WORKING	9	5-May-22	109155	5-Apr-23	172911	335	63756	69466		69466	8	8	8	249	251	254	WORKING	9
105	Gudivada	H.Junction	Veeravalli	S.B.N Puram SS1	63		A0043476			NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	0	NO DISPLAY	4
106	Gudivada	H.Junction	Veeravalli	Remalle SS-92	25		531138			WORKING	9	5-May-22	17537	5-Apr-23	26959	335	9422	10266		10266	8	8	8	259	261	263	WORKING	9
107	Gudivada	H.Junction	Veeravalli	Remalle SS-91	25		531707			WORKING	9	5-May-22	171790	5-Apr-23	195651	335	23861	25998		25998	4	4.2	4	242	252	260	WORKING	9
108	Gudivada	H.Junction	Veeravalli	Remalle SS-90	16		531003			WORKING	9	5-May-22	126510	5-Apr-23	145570	335	19060	20766		20766	3.5	3.5	3.5	249	252	252	WORKING	9
109	Gudivada	H.Junction	Veeravalli	Rangannagudem SS-1	16		531011			WORKING	9	5-May-22	223306	5-Apr-23	248006	335	24700	26912		26912	3.4	3.4	3.4	242	243	243	WORKING	9
110	Gudivada	H.Junction	Unguturu	Manikonda SS-17	100					BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	BURNT	5
111	Gudivada	H.Junction	Unguturu	Manikonda SS-06	100		529362			WORKING	9	5-May-22	14101	5-Apr-23	24464	335	10363	11291		11291	0	0	0	246	245	248	WORKING	9
112	Gudivada	H.Junction	Unguturu	Manikonda SS-10	100		529307			WORKING	9	5-May-22	705	5-Apr-23	897	335	192	209		209	1.1	1.2	1.4	245	245	239	WORKING	9
113	Gudivada	H.Junction	Unguturu	Manikonda SS-12	100		0			WORKING	9	5-May-22	1123	5-Apr-23	1214	335	91	99		99	0	0	0	251	252	250	WORKING	9
114	Gudivada	H.Junction	Unguturu	Manikonda SS-01	100		529280			Meter Damage	7	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	245	245	239	Meter Damage	7
115	Gudivada	H.Junction	Unguturu	Nandamuru SS-2	75		529302			WORKING	9	5-May-22	75201	5-Apr-23	116457	335	41256	44951		44951	4	4	4	228	235	240	WORKING	9
116	Gudivada	H.Junction	Unguturu	Indupalli SS-8	63		529216			BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	BURNT	5
117	Gudivada	H.Junction	Unguturu	Indupalli SS-5	63		529319			WORKING	9	5-May-22	68174	5-Apr-23	73669	335	5495	5987		5987	0	0	0	245	245	239	WORKING	9
118	Gudivada	H.Junction	Unguturu	Bokinala SS-2	50		529237			WORKING	9	5-May-22	70415	5-Apr-23	77006	335	6591	7181		7181	4.5	4.5	4.7	251	252	250	WORKING	9
119	Gudivada	H.Junction	Unguturu	Chikinala SS-4	25		529300			WORKING	9	5-May-22	69150	5-Apr-23	167027	335	97877	106642		106642	2.6	2.6	2.8	245	245	239	WORKING	9
120	Gudivada	H.Junction	Unguturu	Chikinala SS-5	25		529405			WORKING	9	5-May-22	63591	5-Apr-23	153770	335	90179	98255		98255	3	3	3	248	251	250	WORKING	9
121	Gudivada	H.Junction	Unguturu	Chikinala SS-12	16		529331			WORKING	9	5-May-22	40689	5-Apr-23	71120	335	30431	33156		33156	2.1	2.2	2.2	249	250	249	WORKING	9
122	Gudivada	H.Junction	Unguturu	Chikinala SS-10	16		529404			WORKING	9	5-May-22	66424	5-Apr-23	130138	335	63714	69419		69419	2.5	2.5	2.5	251	253	253	WORKING	9
123	Gudivada	H.Junction	Telaprolu	Telaprolu SS-04	25		X0386381			WORKING	9	5-May-22	71611	5-Apr-23	87358	335	15747	17158		17158	3.2	3.2	3.2	260	258	257	WORKING	9
124	Gudivada	H.Junction	Telaprolu	Telaprolu SS-05	100		529330			Meter Damage	7	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	Meter Damage	7
125	Gudivada	H.Junction	Telaprolu	Telaprolu SS-26	100		529312			WORKING	9	5-May-22	108935	5-Apr-23	127774	335	18839	20526		20526	0	0	0	0	0	0	WORKING	9
126	Gudivada	H.Junction	Telaprolu	Telaprolu SS-28	25		529422			WORKING	9	5-May-22	139587	5-Apr-23	161399	335	21812	23766		23766	4	4	4	260	258	257	WORKING	9
127	Gudivada	H.Junction	Telaprolu	Telaprolu SS-69	63		529338			WORKING	9	5-May-22	22433	5-Apr-23	28406	335	5973	6508		6508	0	0	0	259	251	261	WORKING	9
128	Gudivada	H.Junction	Telaprolu	Atkuru SS-19	16		529304			NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
129	Gudivada	H.Junction	Telaprolu	Atkuru SS-38	25		529321			NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
130	Gudivada	H.Junction	Telaprolu	Atkuru SS-39	25		529218			WORKING	9	5-May-22	72508	5-Apr-23	83771	335	11263	12271		12271	1.2	1.3	1.2	249	252	252	WORKING	9
131	Gudivada	H.Junction	Telaprolu	Atkuru SS-40	100		529253			WORKING	9	5-May-22	139237	5-Apr-23	160362	335	21125	23017		23017	0	0	0	242	243	243	WORKING	9
132	Gudivada	Rural Gudivada	Mudinepalli	KG Palem SS - 1	100	HPL	X0686557	200/5A	0.5	Meter Damage	7	5-May-22	0	5-Apr-23	0	335	0	0		0	0	0	0	238	241	237	Meter Damage	7

SL NO	Division	Subdivision	Section	Location	DTR Capacity	Meter particulars	Meter No	Capacity	Class	Remarks	Remarks 2	Date	Intial reading	Date	Final reading	No of Days	Diff	Consumption =(Diff/No of	Assessed consumption	Total consumption	Currents			Votages			Remarks	
																					R	Y	B	R	Y	B		
133	Gudivada	Rural Gudivada	Mudinepalli	Dakaram SS - 1	100	HPL	X0686555	200/5A	0.5	WORKING	9	5-May-22	34669	5-Apr-23	55093	335	20424	22253		22253	8.2	9.2	8.5	258	260	262	WORKING	9
134	Gudivada	Rural Gudivada	Kowthavaram	Angaluru - 40	63	SECURE	X0686380	200/5	0.5	Meter Damage	7	5-May-22	10982	5-Apr-23	11867	335	885	965		965	0.00	0.00	0.00	232	239	238	Meter Damage	7
135	Gudivada	Rural Gudivada	Kowthavaram	Angaluru - 41	25	SECURE	X0686585	200/5	0.5	WORKING	9	5-May-22	2159	5-Apr-23	2603	335	444	484		484	0.00	0.00	0.00	236	237	239	WORKING	9
136	Gudivada	Rural Gudivada	Kowthavaram	KV Cheruvu SS-1	100	HPL	529335	200/5	0.5	Meter Damage	7	5-May-22	39268.6	5-Apr-23	42434	335	3165	3449		3449	0.00	0.00	0.00	239	241	242	Meter Damage	7
137	Gudivada	Rural Gudivada	Pedaparupudi	EduramaddalI SS-9	16	HPL	529294	200/5	0.5	WORKING	9	5-May-22	56836	5-Apr-23	69165	335	12329	13433		13433	0	0	0	253	256	255	WORKING	9
138	Gudivada	Rural Gudivada	Pedaparupudi	ChakalipalemSS-3	25	HPL	529359	200/5	0.5	WORKING	9	5-May-22	186822	5-Apr-23	203774	335	16952	18470		18470	0	0	0	241	239	234	WORKING	9
139	Gudivada	Rural Gudivada	Pedaparupudi	Chinaparupudi SS-10	25	HPL	529293	200/5	0.5	WORKING	9	5-May-22	164825	5-Apr-23	184888	335	20063	21859		21859	0	0	0	0	0	0	WORKING	9
140	Gudivada	Rural Gudivada	Pedaparupudi	Juvvanapudi SS-2	63	SECURE	X0686382	200/5	0.5	WORKING	9	5-May-22	12620	5-Apr-23	17931	335	5311	5786		5786	0	0	0	254	110	78	WORKING	9
141	Gudivada	Rural Gudivada	Pedaparupudi	Zamidintakuru SS-21	25	HPL	584382	200/5	0.5	NO DISPLAY	4	5-May-22	0	5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
142	Gudivada	Rural Gudivada	Pedaparupudi	Dosapadu SS-4	100	HPL	529395	200/5	0.5	WORKING	9	5-May-22	64589	5-Apr-23	69819	335	5230	5698		5698	0	0	0	238	240	238	WORKING	9
143	Gudivada	Rural Gudivada	Pedaparupudi	Sivapuram SS-4	63	HPL	584361	200/5	0.5	Meter Damage	7	5-May-22	0	5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	Meter Damage	7
144	Gudivada	Rural Gudivada	Pedaparupudi	Ventrapragada SS-3	25	HPL	529309	200/5	0.5	NO DISPLAY	4	5-May-22	0	5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
145	Gudivada	Rural Gudivada	Pedaparupudi	Ventrapragada SS-44	16	HPL	529313	200/5	0.5	WORKING	9	5-May-22	8177	5-Apr-23	9354	335	1177	1282		1282	0	0	0	244	242	188	WORKING	9
146	Gudivada	Rural Gudivada	Pedaparupudi	Pedaparupudi SS-18	25	HPL	529252	200/5	0.5	Meter Damage	7	5-May-22	441	5-Apr-23	477	335	36	39		39	0	0	0	246	242	248	Meter Damage	7
147	Gudivada	Rural Gudivada	Pedaparupudi	Tammlampadu SS-5	25	HPL	531715	200/5	0.5	WORKING	9	5-May-22	13150	5-Apr-23	14243	335	1093	1191		1191	0	0	0	0	0	0	WORKING	9
148	Gudivada	Rural Gudivada	Pedaparupudi	Sivapuram SS-5	25	SECURE	X0686379	200/5	0.5	WORKING	9	5-May-22	20149	5-Apr-23	23043	335	2894	3153		3153	0	0	0	249	248	201	WORKING	9
149	Gudivada	Rural Gudivada	Pedaparupudi	Vanapamula SS-1	100	HPL	531686	200/5	0.5	BURNT	5	5-May-22	0	5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	BURNT	5
150	Gudivada	Rural Gudivada	Pedaparupudi	DosapaduSS-1	100	HPL	580088	200/5	0.5	WORKING	9	5-May-22	123808	5-Apr-23	138561	335	14753	16074		16074	0	0	0	266	259	248	WORKING	9
151	Gudivada	Rural Gudivada	Pedaparupudi	Elamarru SS3	100	LG	A0026588	200/5	0.5	WORKING	9	5-May-22	327736	5-Apr-23	354848	335	27112	29539		29539	0	0	0	235	213	234	WORKING	9
152	Gudivada	Rural Gudivada	Pedaparupudi	VentrapragadaSS-6	25	HPL	A0026620	200/5	0.5	WORKING	9	5-May-22	68457	5-Apr-23	89137	335	20680	22532		22532	0	0	0	236	236	232	WORKING	9
153	Gudivada	Rural Gudivada	Pedaparupudi	ChakalipalemSS-1	63	HPL	580187	200/5	0.5	WORKING	9	5-May-22	210153	5-Apr-23	237064	335	26911	29321		29321	0	0	0	243	237	237	WORKING	9
154	Gudivada	Rural Gudivada	Pedaparupudi	VentrapragadaSS-7	25	LG	A0026386	200/5	0.5	WORKING	9	5-May-22	50310	5-Apr-23	63772	335	13462	14668		14668	0	0	0	157	226	228	WORKING	9
155	Gudivada	Rural Gudivada	Pedaparupudi	GuruvindaguntaSS-I	50	HPL	584332	200/5	0.5	WORKING	9	5-May-22	7698	5-Apr-23	13697	335	5999	6536		6536	0.04	0.03	0.03	247	246	258	WORKING	9
156	Gudivada	Rural Gudivada	Pedaparupudi	Nagapuram SS8	16	HPL	580186	200/5	0.5	Meter Damage	7	5-May-22	0	5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	Meter Damage	7
157	Gudivada	Gudivada Town	Nandiwada	Puttagunta SS-1	100		528544			NO DISPLAY	4	5-May-22	0	5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
158	Gudivada	Gudivada Town	Nandiwada	Puttagunta SS-6	100		528682			NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
159	Gudivada	Gudivada Town	Nandiwada	K V Palem SS-1	63		X0686587			WORKING	9	5-May-22	0	5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	WORKING	9
160	Gudivada	Gudivada Town	Gudivada Rural	Dondapadu SS-2	100	HPL	528619			NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
161	Gudivada	Gudivada Town	Gudivada Rural	Nuzela SS-1	100	528649	528649			NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
162	Nuzividu	Nuzividu Town	Nuzividu Rural	Pothureddypalli ss-16	25	HPL	531126	200/5	0.5	BURNT	5	5-May-22	0	5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	BURNT	5
163	Nuzividu	Nuzividu Town	Nuzividu Rural	Venkataypalem SS-4	25	HPL	531190	200/5	0.5	BURNT	5	5-May-22	0	5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	BURNT	5
164	Nuzividu	Nuzividu Town	Nuzividu Rural	Venkatadripuram SS-07	63	HPL	531059	200/5	0.5	BURNT	5	5-May-22	0	5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	BURNT	5
165	Nuzividu	Nuzividu Town	Nuzividu Rural	Yanamadala SS-02	100	HPL	531258	200/5	0.5	BURNT	5	5-May-22	4188	5-Apr-23	4526	335	338	368		368	0	0	0	0	0	0	BURNT	5
166	Nuzividu	Nuzividu Town	Nuzividu Rural	Ramanagudem SS-34	16	HPL	531744	200/5	0.5	BURNT	5	5-May-22	129845	5-Apr-23	140311	335	10466	11404		11404	0	0	0	0	0	0	BURNT	5

SL NO	Division	Subdivision	Section	Location	DTR Capacity	Meter particulars	Meter No	Capacity	Class	Remarks	Remarks 2	Date	Intial reading	Date	Final reading	No of Days	Diff	Consumption =(Diff/No of	Assessed consumption	Total consumption	Currents			Votages			Remarks	
																					R	Y	B	R	Y	B		
167	Nuzividu	Nuzividu Town	Meerjapuram	Seetharampuram SS - 27	25	HPL	5022730	200/5	0.5	WORKING	9	5-May-22	57281	5-Apr-23	74952	335	17671	19253		19253	14	16	20	248	251	260	WORKING	9
168	Nuzividu	Nuzividu Town	Meerjapuram	Gollapalli SS - 01	25	SECURE	X0686392	200/5	0.5	WORKING	9	5-May-22	51539	5-Apr-23	68499	335	16960	18478		18478	21	22	20	248	249	253	WORKING	9
169	Nuzividu	Nuzividu Town	Meerjapuram	Gollapalli SS - 22	25	SECURE	X0686536	200/5	0.5	WORKING	9	5-May-22	87168	5-Apr-23	108372	335	21204	23103		23103	13	12	15	251	254	251	WORKING	9
170	Nuzividu	Nuzividu Town	Meerjapuram	Morsapudi SS - 10	25	SECURE	X0686389	200/5	0.5	WORKING	9	5-May-22	56110	5-Apr-23	74097	335	17987	19598		19598	18	19	17	248	250	248	WORKING	9
171	Nuzividu	Nuzividu Town	Meerjapuram	Tukkuluru SS - 10	25	SECURE	X0686537	200/5	0.5	WORKING	9	5-May-22	83849	5-Apr-23	103056	335	19207	20927		20927	20	21	22	251	249	260	WORKING	9
172	Nuzividu	Nuzividu Rural	Adavinekkalam	Adavinekkalam SS-67	25	HPL	530989	200/5	0.5	WORKING	9	5-May-22	159956	5-Apr-23	174514	335	14558	15861		15861	30	29	30	231	230	229	WORKING	9
173	Nuzividu	Nuzividu Rural	Adavinekkalam	Kanasanapalli SS-09	63	HPL	531593	200/5	0.5	BURNT	5	5-May-22	0	5-Apr-23	0	335	0	0		0							BURNT	5
174	Nuzividu	Nuzividu Rural	Adavinekkalam	Rajavaram SS-02	63	HPL	531714	200/5	0.5	BURNT	5	5-May-22	0	5-Apr-23	0	335	0	0		0							BURNT	5
175	Nuzividu	Nuzividu Rural	Adavinekkalam	Adavinekkalam SS-2	100	L&G	A0043587	200/5	0.5	NO DISPLAY	4	5-May-22	0	5-Apr-23	0	335	0	0		0							NO DISPLAY	4
176	Nuzividu	Nuzividu Rural	Adavinekkalam	Kotha Edara SS-12	100	HPL	531727	200/5	0.5	WORKING	9	5-May-22	62465	5-Apr-23	69212	335	6747	7351		7351	15	15	15	230	232	230	WORKING	9
177	Nuzividu	Nuzividu Rural	Agiripalli	Vattigudipadu SS -22 (NEAR MOHAN	16	L&G	A0044016	200/5	0.5	BURNT	5	5-May-22	90046	5-Apr-23	97304	335	7258	7908		7908							BURNT	5
178	Nuzividu	Nuzividu Rural	Agiripalli	Vattigudipadu SS - 3 (MALAPALLI WATER	16	SECURE	X0686508	200/5	0.5	WORKING	9	5-May-22	106961	5-Apr-23	116917	335	9956	10848		10848	13	13	13	236	238	236	WORKING	9
179	Nuzividu	Nuzividu Rural	Agiripalli	Vattigudipadu SS -24 (RAVICHERLA ROAD)	50	HPL	531683	200/5	0.5	WORKING	9	5-May-22	71686	5-Apr-23	80230	335	8544	9309		9309	26	20	22	232	236	234	WORKING	9
180	Nuzividu	Nuzividu Rural	Agiripalli	Vadlamanu SS-1	100	HPL	530975	200/5	0.5	BURNT	5	5-May-22	0	5-Apr-23	0	335	0	0		0							BURNT	5
181	Nuzividu	Nuzividu Rural	Agiripalli	Vadlamanu SS-18	25	HPL	531685	200/5	0.5	NO DISPLAY	4	5-May-22	0	5-Apr-23	0	335	0	0		0							NO DISPLAY	4
182	Nuzividu	Nuzividu Rural	Agiripalli	N.S.Palem SS-12	25	HPL	531690	200/5	0.5	NO DISPLAY	4	5-May-22	41405	5-Apr-23	44743	335	3338	3636		3636							NO DISPLAY	4
183	Nuzividu	Nuzividu Rural	Musunuru	Chinthalavalli SS-21	63	HPL	531617	200/5	0.5	NO DISPLAY	4	5-May-22	0	5-Apr-23	0	335	0	0		0							NO DISPLAY	4
184	Nuzividu	Nuzividu Rural	Musunuru	Gogulampadu SS-10	100	HPL	531659	200/5	0.5	WORKING	9	5-May-22	205800	5-Apr-23	223053	335	17253	18799		18799	15	15	14	226	232	245	WORKING	9
185	Nuzividu	Nuzividu Rural	Musunuru	Gogulampadu SS-21	100	HPL	531697	200/5	0.5	WORKING	9	5-May-22	71851	5-Apr-23	78252	335	6401	6974		6974	15	14	15	221	235	244	WORKING	9
186	Nuzividu	Nuzividu Rural	Musunuru	Katrenipadu SS -1	100	HPL	531746	200/5	0.5	NO DISPLAY	4	5-May-22	6098	5-Apr-23	6590	335	492	536		536							NO DISPLAY	4
187	Nuzividu	Nuzividu Rural	Musunuru	Katrenipadu SS -5	100	HPL	531240	200/5	0.5	NO DISPLAY	4	5-May-22	0	5-Apr-23	0	335	0	0		0							NO DISPLAY	4
188	Nuzividu	Nuzividu Rural	Musunuru	Tallavali SS -2	75	HPL	531614	200/5	0.5	BURNT	5	5-May-22	0	5-Apr-23	0	335	0	0		0							BURNT	5
189	Nuzividu	Nuzividu Rural	Musunuru	Chillaboinapalli SS -26	25	HPL	531233	200/5	0.5	NO DISPLAY	4	5-May-22	82095	5-Apr-23	88712	335	6617	7210		7210							NO DISPLAY	4
190	Nuzividu	Nuzividu Rural	Musunuru	Chinthalavalli SS-70	16	HPL	531721	200/5	0.5	BURNT	5	5-May-22	0	5-Apr-23	0	335	0	0		0							BURNT	5
191	Nuzividu	Nuzividu Rural	Ramanakkapeta	Akkireddygudem SS-26B	25	HPL	531264	200/5	0.5	WORKING	9	5-May-22	138601	5-Apr-23	149842	335	11241	12248		12248							WORKING	9
192	Nuzividu	Nuzividu Rural	Ramanakkapeta	Akkireddygudem SS-48	50	HPL	531009	200/5	0.5	WORKING	9	5-May-22	131754	5-Apr-23	147234	335	15480	16866		16866	28	20	19	234	235	236	WORKING	9
193	Nuzividu	Nuzividu Rural	Ramanakkapeta	Chekkapalli SS - 72	63	HPL	530942	200/5	0.5	BURNT	5	5-May-22	311550	5-Apr-23	336663	335	25113	27362		27362							BURNT	5
194	Nuzividu	Nuzividu Rural	Ramanakkapeta	Chekkapalli SS- 27	75	HPL	531034	200/5	0.5	Meter Damage	7	5-May-22	0	5-Apr-23	0	335	0	0		0							Meter Damage	7
195	Nuzividu	Nuzividu Rural	Ramanakkapeta	Chekkapalli SS- 26	100	HPL	531313	200/5	0.5	BURNT	5	5-May-22	84370	5-Apr-23	91171	335	6801	7410		7410							BURNT	5
196	Nuzividu	Nuzividu Rural	Ramanakkapeta	ChekkapalliSS- 31	100	HPL	531217	200/5	0.5	WORKING	9	5-May-22	66988	5-Apr-23	73530	335	6542	7128		7128	15	14	15	239	245	248	WORKING	9
197	Nuzividu	Nuzividu Rural	Adavinekkalam	Boddanapalli SS-17	16	HPL	531023	200/5	0.5	Meter Damage	7	5-May-22	0	5-Apr-23	0	335	0	0		0							Meter Damage	7
200	Nuzividu	Tiruvuru	Tiruvuru Town	Mallela SS-18	25	HPL	529247	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0							NO DISPLAY	4
201	Nuzividu	Tiruvuru	Tiruvuru Rural	Manukolla SS-17	16	HPL	529328	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0							NO DISPLAY	4
202	Nuzividu	Tiruvuru	Tiruvuru Rural	Anjaneyapuram SS-02	25	HPL	529287	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4

SL NO	Division	Subdivision	Section	Location	DTR Capacity	Meter particulars	Meter No	Capacity	Class	Remarks	Remarks 2	Date	Intial reading	Date	Final reading	No of Days	Diff	Consumption =(Diff/No of	Assessed consumption	Total consumption	Currents			Votages			Remarks	
																					R	Y	B	R	Y	B		
203	Nuzividu	Tiruvuru	Tiruvuru Rural	Akkapalem SS-01	25	HPL	529242	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
204	Nuzividu	Tiruvuru	Tiruvuru Rural	Chintalapadu SS-01	25	HPL	529400	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
205	Nuzividu	Tiruvuru	Tiruvuru Rural	Chowtapalli SS-04	16	HPL	529412	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
206	Nuzividu	Tiruvuru	Khambhampadu	Krishnarao Palem ss-17	16	HPL	531115	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
207	Nuzividu	Tiruvuru	Khambhampadu	Koduru ss-10	25	HPL	531080	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
214	Nuzividu	Tiruvuru	Gampalagudem	Penugolanu SS-36	16	HPL	531703	200/5	0.5	WORKING	9	5-May-22	49516	5-Apr-23	56649	335	7133	7771		7771	10.3	11	13	245	222	215	WORKING	9
215	Nuzividu	Tiruvuru	Gampalagudem	Gullapudi SS-11	25	HPL	531679	200/5	0.5	WORKING	9	5-May-22	88512	5-Apr-23	99287	335	10775	11740		11740	16.1	17	16	241	221	205	WORKING	9
216	Nuzividu	Tiruvuru	Gampalagudem	Lingala SS-9	25	HPL	531611	200/5	0.5	WORKING	9	5-May-22	87056	5-Apr-23	97317	335	10261	11180		11180	12.3	14	15	232	205	227	WORKING	9
217	Nuzividu	Tiruvuru	Gampalagudem	kanumuru SS-24	25	HPL	531056	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
218	Nuzividu	Tiruvuru	Gampalagudem	Vutukuru SS-7	25	HPL	531702	200/5	0.5	WORKING	9	5-May-22	203753	5-Apr-23	223401	335	19648	21408		21408	12.4	11.4	10.8	251	248	241	WORKING	9
219	Nuzividu	Tiruvuru	Gampalagudem	Gampalagudem SS-5	25	HPL	531748	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
220	Nuzividu	Tiruvuru	Gampalagudem	Konijerla SS-8	25	HPL	531038	200/5	0.5	WORKING	9	5-May-22	7661	5-Apr-23	11843	335	4182	4557		4557	10.4	225	23.4	215	205	218	WORKING	9
221	Nuzividu	Tiruvuru	Gampalagudem	Ramakrishnapuram SS-1	25	HPL	531030	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
222	Nuzividu	Tiruvuru	Gampalagudem	Challagundlavaripalem SS-1	25	HPL	531694	200/5	0.5	WORKING	9	5-May-22	52759	5-Apr-23	60103	335	7344	8002		8002	11.5	22.5	11.5	245	205	241	WORKING	9
223	Nuzividu	Tiruvuru	Gampalagudem	Gadevarigudem SS-2	25	HPL	531007	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
224	Nuzividu	Vissannapeta	Vissannapeta	Korlamanda SS-1	100	HPL	529268	200/5	0.5	BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0							BURNT	5
225	Nuzividu	Vissannapeta	Vissannapeta	Korlamanda SS-2	100	HPL	529357	200/5	0.5	BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0							BURNT	5
226	Nuzividu	Vissannapeta	Vissannapeta	K L Puram SS-15	16	HPL	529371	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0							NO DISPLAY	4
227	Nuzividu	Vissannapeta	Vissannapeta	Kalagara SS-33	25	HPL	529354	200/5	0.5	WORKING	9	5-May-22	297878	5-Apr-23	322801	335	24923	27155		27155	25.48	26.26	27.62	224.00	228.00	226.00	WORKING	9
228	Nuzividu	Vissannapeta	Vissannapeta	Maremanda SS-3	100	HPL	529344	200/5	0.5	BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0							BURNT	5
229	Nuzividu	Vissannapeta	Vissannapeta	Chandrupatla SS-15	16	HPL	529260	200/5	0.5	BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0							BURNT	5
230	Nuzividu	Vissannapeta	Vissannapeta	V R Palli SS-14	100	HPL	529385	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0							NO DISPLAY	4
231	Nuzividu	Vissannapeta	Vissannapeta	V R Palli SS-2	63	HPL	529296	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0							NO DISPLAY	4
232	Nuzividu	Vissannapeta	Vissannapeta	Narasapuram SS-3	63	HPL	529282	200/5	0.5	WORKING	9	5-May-22	196459	5-Apr-23	213389	335	16930	18446		18446	28.26	29.16	30.10	221.00	218.00	216.00	WORKING	9
233	Nuzividu	Vissannapeta	Chatrai	Burugudem Diary Forum	25	HPL	529394	200/5	0.5	BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0							BURNT	5
234	Nuzividu	Vissannapeta	Chatrai	Burugudem Raghupathi Reddy	25	HPL	529381	200/5	0.5	WORKING	9	5-May-22	93448	5-Apr-23	101806	335	8358	9107		9107	13.8	12.9	13.2	228	231	230	WORKING	9
235	Nuzividu	Vissannapeta	Chatrai	A.G.Peta Near SS-1	25	HPL	529349	200/5	0.5	WORKING	9	5-May-22	128825	5-Apr-23	140084	335	11259	12268		12268	11.40	10.30	10.10	229	230	229	WORKING	9
236	Nuzividu	Vissannapeta	Chatrai	J.N.Varam SS- 7	25	HPL	581502	200/5	0.5	BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0							BURNT	5
241	Nuzividu	Vissannapeta	Reddy Gudem	K Reddygudem SS-1	100	HPL	529386	200/5	0.5	BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0							BURNT	5
242	Nuzividu	Vissannapeta	Reddy Gudem	Maddulaparva SS-2	100	HPL	580092	200/5	0.5	BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0							BURNT	5
243	Nuzividu	Vissannapeta	Reddy Gudem	Maddulaparva SS-3	100	HPL	529204	200/5	0.5	BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0							BURNT	5
244	Nuzividu	Vissannapeta	Reddy Gudem	Maddulaparva SS-1	25	HPL	580062	200/5	0.5	BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0							BURNT	5
245	Nuzividu	Vissannapeta	Reddy Gudem	Anneraopeta SS-5	100	HPL	529375	200/5	0.5	BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0							BURNT	5
246	Nuzividu	Vissannapeta	Reddy Gudem	Raghavapuram SS-1	100	HPL	529347	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0							NO DISPLAY	4

SL NO	Division	Subdivision	Section	Location	DTR Capacity	Meter particulars	Meter No	Capacity	Class	Remarks	Remarks 2	Date	Intial reading	Date	Final reading	No of Days	Diff	Consumption =(Diff/No of	Assessed consumption	Total consumption	Currents			Votages			Remarks	
																					R	Y	B	R	Y	B		
247	Nuzividu	Vissannapeta	Reddy Gudem	Muchinapalli	16	HPL	585817	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0							NO DISPLAY	4
249	Machilipatna	Pamarru	Pamididimukkala	Veeranki Lock SS-11	16	HPL	529290	200/5	0.5	WORKING	9	5-May-22	7734	5-Apr-23	9605	335	1871	2039		2039	0	0	0	245	243	245	WORKING	9
250	Machilipatna	Pamarru	Pamididimukkala	Hanumanthapuram S	25	HPL	529240	200/5	0.5	WORKING	9	5-May-22	11580	5-Apr-23	13688	335	2108	2297		2297	4	4	4	250	253	251	WORKING	9
251	Machilipatna	Pamarru	Pamididimukkala	Velpuru SS-5	25	HPL	529401	200/5	0.5	WORKING	9	5-May-22	3091	5-Apr-23	4457	335	1366	1488		1488	9	10	10	245	246	251	WORKING	9
252	Machilipatna	Pamarru	Pamididimukkala	Mantada SS-25	25	HPL	529245	200/5	0.5	WORKING	9	5-May-22	11193	5-Apr-23	13130	335	1937	2110		2110	15	14	15	237	239	238	WORKING	9
253	Machilipatna	Pamarru	Pamididimukkala	Kapileswara Puram S	50	HPL	529398	200/5	0.5	WORKING	9	5-May-22	3313	5-Apr-23	4465	335	1152	1255		1255	48	46	48	267	266	260	WORKING	9
254	Machilipatna	Pamarru	Pamididimukkala	Ameenapuram SS-2	63	HPL	529301	200/5	0.5	WORKING	9	5-May-22	2254	5-Apr-23	2994	335	740	806		806	36	34	38	256	260	259	WORKING	9
255	Machilipatna	Pamarru	Pamididimukkala	Choragudi SS-2	63	HPL	529269	200/5	0.5	WORKING	9	5-May-22	8066	5-Apr-23	9331	335	1265	1378		1378	32	30	28	259	261	260	WORKING	9
256	Machilipatna	Pamarru	Pamididimukkala	Kapileswara Puram S	100	HPL	529288	200/5	0.5	WORKING	9	5-May-22	11462	5-Apr-23	13533	335	2071	2257		2257	101	103	100	261	262	259	WORKING	9
257	Machilipatna	Pamarru	Pamididimukkala	Krishnapuram SS-1	100	HPL	529320	200/5	0.5	WORKING	9	5-May-22	11574	5-Apr-23	13668	335	2094	2282		2282	15	15	16	234	251	253	WORKING	9
258	Machilipatna	Pamarru	Pamididimukkala	Gowdapalem SS-1	100	HPL	529411	200/5	0.5	WORKING	9	5-May-22	7299	5-Apr-23	8531	335	1232	1343		1343	28	30	32	232	248	252	WORKING	9
259	Machilipatna	Pamarru	Movva	SS-2, Kosuru	100	HPL	529408	200/5	0.5	WORKING	9	5-May-22	2892	5-Apr-23	3658	335	766	834		834	26	28	30	242	246	250	WORKING	9
260	Machilipatna	Pamarru	Movva	SS-1, Kondavaram	100	HPL	529217	200/5	0.5	WORKING	9	5-May-22	11535	5-Apr-23	13399	335	1864	2031		2031	51	54	52	174	174	163	WORKING	9
261	Machilipatna	Pamarru	Movva	SS-1, Moolapalem	100	HPL	529270	200/5	0.5	WORKING	9	5-May-22	11205	5-Apr-23	13186	335	1981	2158		2158	22	2	76	52	244	231	WORKING	9
262	Machilipatna	Pamarru	Movva	SS-3, Movva	100	HPL	529384	200/5	0.5	WORKING	9	5-May-22	11710	5-Apr-23	13718	335	2008	2187		2187	8	2	11	200	202	246	WORKING	9
263	Machilipatna	Pamarru	Movva	SS-1, Movvapalem	100	HPL	529390	200/5	0.5	WORKING	9	5-May-22	9355	5-Apr-23	10782	335	1427	1555		1555	22	2	76	236	244	200	WORKING	9
264	Machilipatna	Pamarru	Movva	SS-3, Movvapalem	63	HPL	529223	200/5	0.5	WORKING	9	5-May-22	11251	5-Apr-23	13390	335	2139	2331		2331	13	13	13	246	250	239	WORKING	9
265	Machilipatna	Pamarru	Movva	SS-23, Movva	25	HPL	529396	200/5	0.5	WORKING	9	5-May-22	10028	5-Apr-23	12090	335	2062	2247		2247	13	13	13	239	240	239	WORKING	9
266	Machilipatna	Pamarru	Movva	SS-22, Movva	25	HPL	529222	200/5	0.5	WORKING	9	5-May-22	11718	5-Apr-23	13926	335	2208	2406		2406	19	19	19	240	241	239	WORKING	9
267	Machilipatna	Pamarru	Movva	SS-52, Kosuru	25	HPL	529205	200/5	0.5	WORKING	9	5-May-22	11075	5-Apr-23	13252	335	2177	2372		2372	7	6	8	242	236	239	WORKING	9
268	Machilipatna	Pamarru	Pamarru	Kurumaddali SS - 12	100	HPL	529261	200/5	0.5	WORKING	9	5-May-22	12340	5-Apr-23	14771	335	2431	2649		2649	9	8	9	254	255	258	WORKING	9
269	Machilipatna	Pamarru	Pamarru	Uruturu SS - 1	100	HPL	529212	200/5	0.5	WORKING	9	5-May-22	6498	5-Apr-23	7946	335	1448	1578		1578	10	11	12	252	253	254	WORKING	9

SL NO	Division	Subdivision	Section	Location	DTR Capacity	Meter particulars	Meter No	Capacity	Class	Remarks	Remarks 2	Date	Intial reading	Date	Final reading	No of Days	Diff	Consumption =(Diff/No of	Assessed consumption	Total consumption	Currents			Votages			Remarks	
																					R	Y	B	R	Y	B		
270	Machilipatna	Pamarru	Pamarru	Kanumuru SS - 3	100	HPL	529410	200/5	0.5	WORKING	9	5-May-22	8703	5-Apr-23	10624	335	1921	2093		2093	22.1	41.9	48.2	241	227	247	WORKING	9
271	Machilipatna	Pamarru	Pamarru	Kanumuru SS - 16	63	HPL	529425	200/5	0.5	WORKING	9	5-May-22	9265	5-Apr-23	11232	335	1967	2144		2144	43.1	41.9	48.2	242	242	243	WORKING	9
272	Machilipatna	Pamarru	Pamarru	Kanumuru SS - 17	63	HPL	529220	200/5	0.5	WORKING	9	5-May-22	4753	5-Apr-23	6405	335	1652	1800		1800	66.48	65.12	67.6	248	241	251	WORKING	9
273	Machilipatna	Pamarru	Pamarru	Pedamaddali SS - 33	25	HPL	529370	200/5	0.5	WORKING	9	5-May-22	4490	5-Apr-23	5953	335	1463	1594		1594	22.56	21.88	22.48	238	236	237	WORKING	9
274	Machilipatna	Pamarru	Pamarru	Pedamaddali SS - 34	25	HPL	529259	200/5	0.5	WORKING	9	5-May-22	2889	5-Apr-23	3911	335	1022	1114		1114	21	22	22	240	241	241	WORKING	9
275	Machilipatna	Pamarru	Pamarru	Zamigolvepalli SS -3	16	HPL	529231	200/5	0.5	WORKING	9	5-May-22	4083	5-Apr-23	5749	335	1666	1815		1815	8	8	7	234	237	236	WORKING	9
276	Machilipatna	Pedana	Pedana	Konkepudi SS-1	100	L&G	A0017585	200/5	0.5	BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0							BURNT	5
277	Machilipatna	Pedana	Pedana	Singarayapalem SS-1	63	HPL	528588	200/5	0.5	WORKING	9	5-May-22	45041	5-Apr-23	48842	335	3801	4142		4142	2	2	1	236	238	235	WORKING	9
278	Vuyyuru	Avanigadda	Avanigadda	Puligadda SS-20	16	HPL	529278	200/5	0.5	NO DISPLAY	4	5-May-22	4574.6	5-Apr-23	4943	335	369	402		402	0	0	0	0	0	0	NO DISPLAY	4
279	Vuyyuru	Avanigadda	Avanigadda	S.Ch.Lanka SS-18	25	HPL	529285	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0							NO DISPLAY	4
280	Vuyyuru	Avanigadda	Avanigadda	Puligadda SS-1	100	HPL	529228	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
281	Vuyyuru	Avanigadda	Avanigadda	Puligadda SS-05	100	HPL	529275	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0							NO DISPLAY	4
283	Vuyyuru	Challapalli	Laxmipuram	Chintalamada SS-08	63	HPL	529372	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0							NO DISPLAY	4
289	Vuyyuru	Challapalli	Ghantasala	Chitturpu SS-17	16	HPL	529345	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
290	Vuyyuru	Challapalli	Ghantasala	ChinaKallepalli SS-12	25	HPL	529332	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0							NO DISPLAY	4
291	Vuyyuru	Challapalli	Ghantasala	Chitturpu SS-19	25	HPL	529305	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0	0	0	0	0	0	0	NO DISPLAY	4
295	Vuyyuru	Challapalli	Mopidevi	Bobbarlanka SS-17	25	HPL	5022845	200/5	0.5	WORKING	9	5-May-22	1276	5-Apr-23	1544	335	268	292		292							WORKING	9
296	Vuyyuru	Challapalli	Mopidevi	Merakanapalli SS-01	50	HPL	529243	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0							NO DISPLAY	4
297	Vuyyuru	Challapalli	Mopidevi	K.Kothapalem SS-02	63	HPL	5022774	200/5	0.5	WORKING	9	5-May-22	1063	5-Apr-23	1285	335	222	242		242							WORKING	9
298	Vuyyuru	Challapalli	Mopidevi	N.Ch.Lanka SS-02	75	HPL	43855	200/5	0.5	WORKING	9	5-May-22	82298	5-Apr-23	89216	335	6918	7538		7538							WORKING	9
299	Vuyyuru	Challapalli	Mopidevi	Mopidevi lanka SS-01	100	HPL	529249	200/5	0.5	BURNT	5	5-May-22		5-Apr-23	0	335	0	0		0							BURNT	5
300	Vuyyuru	Challapalli	Mopidevi	Nagayatippa SS-01	100	HPL	529256	200/5	0.5	NO DISPLAY	4	5-May-22		5-Apr-23	0	335	0	0		0							NO DISPLAY	4
301	Vuyyuru	Challapalli	Mopidevi	Ayodhya SS-01	100	HPL	5022788	200/5	0.5	WORKING	9	5-May-22	40824	5-Apr-23	44448	335	3624	3948		3948							WORKING	9
302	Vuyyuru	Vuyyuru	Vuyyuru Town	Gandigunta SS-1	100	HPL	529263	200/5	0.5	Meter Damage	7	5-May-22		5-Apr-23	0	335	0	0		0							Meter Damage	7

		16	25	30	45	50	60	63	75	90	100	TOTAL
	Format A	15	49	0	0	7	0	22	6	0	44	**143**
	Consumption	242739.348	818093.38	0	0	280546.76	0	270381.4316	327326.3977	0	1803943.745	**3743031**
120800		**16182.62**	**16695.78**	**0.00**	**0.00**	**40078.11**	**0.00**	**12290.07**	**54554.40**	**0.00**	**40998.72**	**180799.70**
6	Count of ABS No	0	0	0	0	0	0	0	0	0	0	**0**
	Sum of Assessed consumption	0	0	0	0	0	0	0	0	0	0	**0**
	Sum of Total consumption	0	0	0	0	0	0	0	0	0	0	**0**
1	Count of ABS No	0	1	0	0	0	0	1	0	0	0	**2**
	Sum of Assessed consumption	0	0	0	0	0	0	0	0	0	0	**0**
	Sum of Total consumption	0	0	0	0	0	0	0	0	0	0	**0**
2	Count of ABS No	0	0	0	0	0	0	2	0	0	1	**3**
	Sum of Assessed consumption	0	0	0	0	0	0	1000	0	0	500	**1500**
	Sum of Total consumption	0	0	0	0	0	0	1000	0	0	500	**1500**
3	Count of ABS No	0	0	0	0	0	0	0	0	0	0	**0**
	Sum of Assessed consumption	0	0	0	0	0	0	0	0	0	0	**0**
4	Count of ABS No	11	21	0	0	1	0	5	0	0	15	**53**
	Sum of Assessed consumption	178009	350611	0	0	40078	0	61450	0	0	614981	**1245130**
5	Count of ABS No	4	6	0	0	0	0	5	1	0	19	**35**
	Sum of Assessed consumption	64730	100175	0	0	0	0	61450	54554	0	778976	**1059886**
7	Count of ABS No	3	2	0	0	0	0	2	1	0	5	**13**
	Sum of Assessed consumption	48548	33392	0	0	0	0	24580	54554	0	204994	**366068**
10	Count of ABS No	2	5	0	0	1	0	16	0	0	29	**53**
	Sum of Assessed consumption	0	0	0	0	0	0	0	0	0	0	**0**
		35	**84**	**0**	**0**	**9**	**0**	**53**	**8**	**0**	**113**	**302**
		534027	**1302271**	**0**	**0**	**320625**	**0**	**418862**	**436435**	**0**	**3403394**	**6415614**

ANNEXURE – 3

(Sample 11 kV feeders

Energy Audit)

Feeder wise AT&C losses of 350 no's 11KV feeders

Sl No.	Received at Circle (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/Rural)	Type of feeder meter (AMI/AMR/Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses
1	GUNTUR	GUNTUR-TOWN4(AUTO NAGAR)	33/11 KV Suddapallidonka SS	302131140303	11 KV PRIYANKA GARDENS	Urban	AMR	7.060	6.746	7.060	4.444	5.007
2	VIJAYAWADA	HANUMAN JUNCTION	33/11KV Hanumanjunction SubStation	301131140201	11KV Indl Feeder	INDL	AMR	2.963	2.914	2.963	1.648	5.015
3	VIJAYAWADA	VIJAYAWADA C AND O D3	33/11KV chuttagunta SubStation	301422140103	11KV CHUTTUGUNTA FEEDER	Urban	AMR	6.859	6.703	6.859	2.283	5.015
4	CRDA	MANGALAGIRI	33/11KV Kunchanapalli Sub-Station	309141440103	11KV PRATHURU	Mixed	AMR	1.145	1.090	1.145	4.836	5.021
5	ONGOLE	ONGOLETOWN	33/11KV GADDALAGUNTA SS (TANK SS1)	303311240705	11KV GADDALAGUNTA	Urban	AMR	4.719	4.564	4.719	3.291	5.026
6	VIJAYAWADA	AVANIGADDA	33/11KV Mandapakala SS	301721240202	11KV MANDAPAKALA TOWN	Rural	AMR	1.305	1.204	1.305	7.751	5.031
7	GUNTUR	GUNTUR-TOWN4(AUTO NAGAR)	33/11KV Maanasa sarovaram Sub-Station	302131140105	11KV Water Works	Urban	AMR	0.187	0.177	0.187	5.033	5.033
8	VIJAYAWADA	MTM_RURAL	33/11KV Jewellery Park SubStation	301211440202	11KV Industrial Estate-II	Urban	AMR	2.759	2.568	2.759	6.930	5.044
9	GUNTUR	GUNTUR-TOWN2	33/11KV Dwaraka Nagar SS Sub-Station	302121340102	11KV Lam Jonnalagadda	Urban	AMR	6.264	5.989	6.264	4.402	5.045
10	VIJAYAWADA	DISTRIBUTION II	33/11KV ALANKAR GAS INS. SEMI INDOOR SS	301421240205	11KV APSARA	Urban	AMR	4.557	4.401	4.557	3.419	5.050
11	GUNTUR	PONNUR	33/11KV Ponnuru SS1 Sub-Station	302721140201	11KV Ponnuru Town - I	Urban	AMR	4.325	4.182	4.325	3.308	5.054
12	ONGOLE	SINGARAYAKONDA	33/11 KV Karedu Sub Station	303521340202	11KV INDUSTRIAL	Rural	AMR	2.029	1.867	2.029	7.963	5.055
13	VIJAYAWADA	CHILLAKALLU	33/11KV Lingala SubStation	301331440103	11KV Polampalli	Mixed	AMR	3.461	3.216	3.461	7.079	5.055
14	GUNTUR	VINUKONDA	33/11KV Nuzendla Sub-Station	302332340103	11KV RWS	Rural	AMR	1.521	1.426	1.521	6.259	5.056
15	GUNTUR	PONNUR	33/11KV Ponnuru SS1 Sub-Station	302721140205	11KV Rural Express	INDL	AMR	2.014	1.912	2.014	5.088	5.057
16	ONGOLE	DARSI	33/11 KV Darsi Sub Station	303121140102	11KV DARSITOWN II	Urban	AMR	5.695	5.445	5.695	4.383	5.059
17	CRDA	MANGALAGIRI	33/11KV Mangalagiri SS-1 Sub-Station	309141140104	11KV MGL TOWN	Urban	AMR	4.904	4.753	4.904	3.079	5.071
18	GUNTUR	REPALLE	33/11KV Potumeraka Sub-Station	302421240101	11KV Pothumeraka SHQ	Rural	AMR	0.639	0.615	0.639	3.790	5.074
19	GUNTUR	MACHERLA	33/11 KV Adigoppala SS	302211440503	11KV Industrial	Rural	AMR	0.291	0.274	0.291	5.762	5.074
20	VIJAYAWADA	DISTRIBUTION IV	33/11KV Vambay Colony SS	301421440202	11KV DISENY LAND	Urban	AMR	3.402	3.268	3.402	3.941	5.077
21	GUNTUR	TENALI-RURAL2	33/11KV Vadlamudi Sub-Station	302412240205	11KV Sekuru LI Scheme	Rural	AMR	0.777	0.765	0.777	1.615	5.078
22	VIJAYAWADA	VIJAYAWADA C AND O D3	33/11KV Darsipeta SS	301522340103	11KV KRISHNAVENI ROAD	Urban	AMR	1.804	1.733	1.804	3.902	5.079
23	VIJAYAWADA	GUNADALA	33/11KV Prasadampadu semi Indoor SubStat	301511440303	11KV RAJULA BAZAR	Rural	AMR	8.363	8.078	8.363	3.408	5.082
24	GUNTUR	VINUKONDA	33/11KV Nuzendla Sub-Station	302332340102	11KV Ravvaram	Mixed	AMR	1.842	1.732	1.842	5.959	5.084
25	ONGOLE	ONGOLERURAL I	33/11 KV Maddipadu Sub Station	303321340102	11KV INDUSTRIAL	Rural	AMR	6.200	6.003	6.200	3.170	5.086
26	GUNTUR	BAPATLA	33/11KV Nandirajuthota Sub-Station	302711140204	11KV Water Works	Urban	AMR	1.752	1.708	1.752	2.479	5.089
27	GUNTUR	NARASARAOPET	33/11 KV Narasaraopet-5(Prakashnagar) SS	302311140401	11KV Palanadu	Urban	AMR	5.107	4.874	5.107	4.563	5.094
28	GUNTUR	GURAZALA	33/11KV JANGAMAHESWARAPURAM SS	302221140501	11KV JMPURAM	Mixed	AMR	2.104	1.984	2.104	5.716	5.097
29	VIJAYAWADA	GUNADALA	33/11KV Gudavalli Sub Station	301511140203	11KV Enadu	Rural	AMR	5.153	4.912	5.153	4.671	5.098
30	VIJAYAWADA	KAIKALURU	33/11KV PULAPARRU SS	301141340402	11KV Pulaparru	Rural	AMR	7.266	6.864	7.266	5.536	5.101
31	GUNTUR	SATTENAPALLI	33/11 KV STPL Semi Indoor(NirmalNagar)SS	302321140303	11KV SAI KRISHNA FEEDER	Urban	AMR	3.496	3.286	3.496	6.007	5.112
32	CRDA	CHILAKALURI PET	33/11KV Chilakaluripeta Sub-Station	309231240104	11KV Highway	Urban	AMR	4.561	4.395	4.561	3.628	5.117
33	VIJAYAWADA	D1OLD TOWN	33/11KV PUNNAMI SS	301411340301	11KV GANDHIBOMMA	Urban	AMR	5.328	5.169	5.328	2.979	5.118
34	CRDA	CHILAKALURI PET	33/11KV Pasumarru Sub-Station	309231140303	11KV Yeddanapudi	Rural	AMR	0.003	0.003	0.003	5.047	5.126

Sl No.	Received at Circle (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/Rural)	Type of feeder meter (AMI/AMR/Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses
35	VIJAYAWADA	PAMARRU	33/11KV Ayyanki SubStation	301231140404	11KV RWS WORKS	Rural	AMR	0.520	0.493	0.520	5.132	5.132
36	ONGOLE	ADDANKI	33/11 KV KUNKUPADU SS	303451240103	11KV KUNKUPADU INDUSTRIAL	INDL	AMR	0.523	0.493	0.523	5.604	5.139
37	VIJAYAWADA	DISTRIBUTION IV	33/11KV A.S.NAGAR SubStation	301421440101	11KV LUNA CENTER	Urban	AMR	5.487	5.303	5.487	3.361	5.140
38	GUNTUR	PONNUR	33/11KV Nidubrolu SS Sub-Station	302721140101	11KV Nidubrolu-I	Urban	AMR	2.490	2.414	2.490	3.038	5.142
39	ONGOLE	ONGOLERURAL II	33/11 KV Rayavaripalem Sub Station	303322540403	11KV PASUPUKUDURU	Rural	AMR	10.479	10.399	10.479	0.769	5.153
40	GUNTUR	BAPATLA	33/11KV Nandirajuthota Sub-Station	302711140202	11KV Railpet	Urban	AMR	0.459	0.442	0.459	3.711	5.163
41	GUNTUR	NARASARAOPET	33/11KV SS-I Narasaraopet Sub-Station	302311140104	11 KV Jonnalagadda	Rural	AMR	4.316	3.995	4.316	7.438	5.172
42	CRDA	MANGALAGIRI	33/11KV Mangalagiri SS-1 Sub-Station	309141140101	11KV P V PUDI	Rural	AMR	8.172	7.805	8.172	4.492	5.173
43	VIJAYAWADA	CHILLAKALLU	33/11KV CHILAKALLU SS (APIIC) SS	301331240501	11KV Gandrai Industrial	Rural	AMR	0.633	0.600	0.633	5.151	5.173
44	ONGOLE	CHIRALA	33/11 KV Chirala Town Sub Station	303441140101	11KV RAILWAYSTATION	Urban	AMR	4.694	4.487	4.694	4.411	5.174
45	VIJAYAWADA	DISTRIBUTION II	33/11KV ALANKAR GAS INS. SEMI INDOOR SS	301421240202	11KV GANDHINAGAR	Urban	AMR	6.390	6.072	6.390	4.974	5.177
46	CRDA	MANGALAGIRI	33/11KV Mallempudi SS	309141440304	11KV Kothapalem	Urban	AMR	2.094	2.011	2.094	3.975	5.178
47	GUNTUR	GUNTUR-TOWN2	33/11 KV EPF Office New SS	302121440401	11KV EPF OFFICE FEEDER	Urban	AMR	1.641	1.579	1.641	3.796	5.181
48	GUNTUR	NARASARAOPET-RURAL	33/11 KV Subbaiahpalem SS	302312340302	11KV Subbaihapalem	Mixed	AMR	0.645	0.587	0.645	8.950	5.187
49	ONGOLE	MARTUR	33/11 KV Marturu Sub Station	303411140102	11KV MARTURNORTH	Rural	AMR	7.800	7.615	7.800	2.366	5.191
50	GUNTUR	NARASARAOPET-RURAL	33/11KV Nekarikallu Sub-Station	302312440102	11KV Nakarikallu	Rural	AMR	5.830	5.091	5.830	12.665	5.201
51	VIJAYAWADA	IBRAHIMPATNAM	33/11KV Ibrahimpatnam SubStation	301311140205	11KV East IBPM-I	Urban	AMR	4.681	4.427	4.681	5.442	5.203
52	CRDA	CHILAKALURI PET	33/11KV Polireddy Palem Sub-Station	309231340201	11KV Polireddy Palem	Urban	AMR	1.236	1.185	1.236	4.081	5.205
53	ONGOLE	ONGOLETOWN	33/11KV Govt Office Compound SS	303311240504	11KV CLOUGHPET FEEDER	Urban	AMR	5.386	5.228	5.386	2.940	5.212
54	CRDA	MANGALAGIRI	33/11KV Tadepalli SS-III Sub-Station	309141540402	11KV HI Way feeder	Urban	AMR	5.200	4.957	5.200	4.676	5.213
55	VIJAYAWADA	D1OLD TOWN	33/11KV Bhavanipuram SubStation	301411340101	11KV Bhavanipuram	Urban	AMR	7.192	6.936	7.192	3.562	5.217
56	ONGOLE	ONGOLETOWN	33/11 KV SS MILK DAIRY	303311340503	11KV PEERLAMANYAM	Urban	AMR	5.983	5.756	5.983	3.807	5.218
57	GUNTUR	GUNTUR-TOWN3	33/11KV Dasaripalem Sub-Station	302112340204	11KV APHC-I	Urban	AMR	2.680	2.573	2.680	3.988	5.221
58	GUNTUR	GUNTUR-TOWN3	33/11KV Etukuru Road SS Sub-Station	302112140101	11KV BY PASS ROAD	Urban	AMR	3.267	3.183	3.267	2.563	5.224
59	ONGOLE	CHIMAKURTHY	33/11 KV Chimakurthy Sub Station	303321240104	11KV SURYA NAGAR	Urban	AMR	11.014	10.559	11.014	4.134	5.227
60	VIJAYAWADA	GUNADALA	33/11KV Enikepadu SubStation	301511440103	11KV SER FEEDER	Rural	AMR	4.549	4.356	4.549	4.247	5.228
61	VIJAYAWADA	KAIKALURU	33/11KV POTHUMARRU SS	301141240404	11KV KONDURU	Rural	AMR	12.438	12.086	12.438	2.829	5.237
62	ONGOLE	ONGOLERURAL II	33/11 KV Karavadi SS	303322440601	11KV KARAVADI TOWN	Rural	AMR	3.494	3.572	3.494	-2.250	5.239
63	ONGOLE	ONGOLETOWN	33/11KV GADDALAGUNTA SS (TANK SS1)	303311240704	11KV MAMIDIPALEM	Urban	AMR	2.209	2.103	2.209	4.780	5.245
64	GUNTUR	CHERUKUPALLI	33/11KV Cherukupalli Sub-Station	302731240102	11KV Rambotlavari Palem	Mixed	AMR	5.362	5.064	5.362	5.558	5.246
65	VIJAYAWADA	GUDIVADA RURALS	33/11KV Chigurukota SS	301122140402	11KV Pedakamanapudi	Rural	AMR	9.810	9.389	9.810	4.287	5.256
66	ONGOLE	ONGOLERURAL II	33/11 KV TANGUTURU(N) SS	303322340101	11KV JAMMULAPALEM	Rural	AMR	2.835	2.693	2.835	4.986	5.281
67	ONGOLE	ONGOLETOWN	33/11 KV Ram Nagar Sub Station	303311240202	11KV BHAGYA NAGAR	Urban	AMR	3.447	3.301	3.447	4.218	5.283
68	CRDA	CHILAKALURI PET	33/11KV CHILAKALURIPET(SUBBAIAH THOTA)SS	309231240305	11KV SUBHANI NAGAR FEEDER	Urban	AMR	3.846	3.676	3.846	4.417	5.284
69	VIJAYAWADA	PATAMATA	33/11KV Darsipeta SS	301522340104	11KV NTR Circle	Urban	AMR	4.819	4.630	4.819	3.926	5.285
70	GUNTUR	CHERUKUPALLI	33/11KV Adavula Divi SS	302731340401	11KV ADAVULADEEVI	Rural	AMR	0.130	0.128	0.130	1.577	5.297

SI No.	Received at Circle (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/Rural)	Type of feeder meter (AMI/AMR/Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses
71	GUNTUR	GUNTUR-TOWN4(AUTO NAGAR)	33/11KV V A.S.KRISHNA SEMI INDOOR SS	302131140401	11KV Omega Hospital	Urban	AMR	2.476	2.329	2.476	5.942	5.302
72	VIJAYAWADA	AVANIGADDA	33/11KV KODUR SubStation	301721240101	11KV Koduru(Town)	Rural	AMR	7.828	7.600	7.828	2.909	5.317
73	VIJAYAWADA	DISTRIBUTION IV	33/11KV K.L.Rao Nagar	301411540104	11KV SYNDICATE BANK COLONY	Urban	AMR	2.182	2.087	2.182	4.354	5.318
74	GUNTUR	GUNTUR-TOWN4(AUTO NAGAR)	33/11KV Maanasa sarovaram Sub-Station	302131140104	11KV Takkellapdu	Urban	AMR	9.614	9.513	9.614	1.052	5.325
75	GUNTUR	GUNTUR-TOWN2	33/11KV Gujjanagundla Sub-Station	302121240106	11KV Ring Road	Urban	AMR	5.511	5.428	5.511	1.516	5.331
76	VIJAYAWADA	KANURU	33/11KV New Auto Nagar SubStation	301521140505	11KV INDL C BLOCK	Urban	AMR	0.720	0.689	0.720	4.295	5.337
77	ONGOLE	CHIMAKURTHY	33/11 KV CHIMAKURTHY NORTH SS	303321240401	11KV CHIMAKURTHY TOWN	Urban	AMR	8.770	8.551	8.770	2.493	5.342
78	VIJAYAWADA	D1OLD TOWN	33/11KV FISH MARKET SEMI INDOOR	301411240203	11KV BRAHMIN STREET	Urban	AMR	3.024	2.976	3.024	1.596	5.344
79	VIJAYAWADA	DISTRIBUTION II	33/11KV Durgapuram SS	301421640201	11KV INOX	Urban	AMR	6.446	6.135	6.446	4.828	5.349
80	GUNTUR	GUNTUR-TOWN2	33/11KV Vikas Nagar Sub-Station	302121240301	11KV Navabharath nagar	Urban	AMR	4.821	4.608	4.821	4.410	5.354
81	GUNTUR	GUNTUR-TOWN3	33/11KV Lalpuram Village Sub Station	302112440104	11KV Vijayanthi	Urban	AMR	6.075	5.876	6.075	3.263	5.365
82	ONGOLE	ONGOLERURAL II	33/11 kV Cheruvukommupalem SS	303322440401	11KV CH K PALEM INDUSTRIAL	INDL	AMR	1.329	1.268	1.329	4.587	5.366
83	GUNTUR	GUNTUR-TOWN3	33/11KV Nallapadu Sub-Station	302112340301	11KV MBTS	Urban	AMR	3.351	3.261	3.351	2.687	5.368
84	VIJAYAWADA	DISTRIBUTION IV	33/11KV Kabela SubStation	301411440105	11KV KK NAGAR	Urban	AMR	10.845	10.449	10.845	3.651	5.377
85	VIJAYAWADA	IBRAHIMPATNAM	33/11KV Kesara SubStation	301321340202	11KV keesara	INDL	AMR	4.604	4.410	4.604	4.213	5.381
86	CRDA	CHILAKALURI PET	33/11KV Polireddy Palem Sub-Station	309231340203	11KV Kavuru	Rural	AMR	3.207	3.030	3.207	5.535	5.393
87	GUNTUR	GUNTUR-TOWN2	33/11KV VIDYANAGAR INDOOR SS	302121540103	11KV Vikas Nagar feeder	Urban	AMR	3.593	3.400	3.593	5.375	5.397
88	CRDA	MANGALAGIRI	33/11KV MANGALAGIRI INDOOR SS	309141240201	11KV Auto Nagar	INDL	AMR	3.154	2.932	3.154	7.028	5.399
89	VIJAYAWADA	GUDIVADA TOWN	33/11KV Pedavirivada SubStation	301111340303	11KV Pedavirivada	Rural	AMR	11.476	11.087	11.476	3.393	5.405
90	ONGOLE	ONGOLERURAL II	33/11 KV Tangutur Sub Station	303322540102	11KV BVL GRANITES	INDL	AMR	0.517	0.515	0.517	0.382	5.419
91	VIJAYAWADA	KANURU	33/11KV Yanamalakuduru SubStation	301521140203	11KV SIVA PARVATHI NAGAR FEEDER	Urban	AMR	2.613	2.471	2.613	5.419	5.419
92	GUNTUR	PIDUGURALLA	33/11KV PidugurallaSub-Station(Kondmodu)	302231140106	11KV S R Nagar	Urban	AMR	8.785	8.577	8.785	2.366	5.420
93	VIJAYAWADA	CHILLAKALLU	33/11KV Jaggaiahpeta SubStation	301331140101	11KV Jaggaiahpeta Feeder I	Urban	AMR	2.864	2.686	2.864	6.198	5.423
94	VIJAYAWADA	D1OLD TOWN	33/11KV Bhavanipuram SubStation	301411340105	11KV Teachers Colony	Urban	AMR	7.435	7.191	7.435	3.285	5.435
95	VIJAYAWADA	D1OLD TOWN	33/11KV KG MARKET(G.M School)Semi indoor	301411140307	11KV TARAPETA	Urban	AMR	0.685	0.682	0.685	0.525	5.439
96	ONGOLE	ONGOLETOWN	33/11 KV Market Yard Sub Station	303311140203	11KV LAWERPET	Urban	AMR	4.578	4.380	4.578	4.331	5.454
97	VIJAYAWADA	IBRAHIMPATNAM	33/11KV Kondapalli SubStation	301311440102	11KV IDA	INDL	AMR	6.755	6.436	6.755	4.711	5.456
98	VIJAYAWADA	DISTRIBUTION II	33/11KV Ayodhyanagar SS	301421340204	11KV Budameru Katta	Urban	AMR	4.409	4.275	4.409	3.038	5.462
99	CRDA	GUNTUR RURAL 1	33/11 KV Perecherla SS	309241240302	11KV PERECHERLA TELLA QUARY(BUNC	Rural	AMR	17.010	16.669	17.010	2.004	5.474
100	CRDA	CHILAKALURI PET	33/11KV Pandaripuram SS	309231340301	11KV Singu Nagar	Urban	AMR	1.171	1.107	1.171	5.488	5.488
101	GUNTUR	BAPATLA	33/11KV Nandirajuthota Sub-Station	302711140203	11KV Agraharam	Urban	AMR	5.553	5.385	5.553	3.026	5.495
102	CRDA	CHILAKALURI PET	33/11KV Boyapalem Sub-Station	309231440202	11KV Boyapalem Indl	Rural	AMR	2.297	2.274	2.297	0.985	5.496
103	VIJAYAWADA	GUDIVADA TOWN	33/11KV GUDIVADA (PEDAVEEDI) SEMI INDOOR	301111140201	11KV BANTUMILLI ROAD	Urban	AMR	9.204	8.807	9.204	4.310	5.500
104	CRDA	MANGALAGIRI	33/11KV Tadepalli ss-I Sub-Station	309141540101	11KV UNDAVALLI	Urban	AMR	6.880	6.501	6.880	5.502	5.502
105	VIJAYAWADA	PEDANA	33/11KV Pedana SubStation	301221240201	11KV Pedana Town1	Urban	AMR	2.314	2.194	2.314	5.148	5.503
106	GUNTUR	VINUKONDA	33/11 KV Vinukonda-III SS	302332640402	11KV Indl	INDL	AMR	3.237	2.961	3.237	8.531	5.509

SI No.	Received at Circle (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/Rural)	Type of feeder meter (AMI/AMR/Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses
107	VIJAYAWADA	MACHILIPATNAM	33/11KV MACHILIPATNAM SEMI INDOOR SS	301211340203	11KV COLLEGE	Urban	AMR	1.807	1.733	1.807	4.104	5.513
108	GUNTUR	MACHERLA	33/11KV Koppunuru Sub-Station	302211240104	11KV RELIANCE	Rural	AMR	0.275	0.253	0.275	7.976	5.518
109	VIJAYAWADA	TIRUVURU	33/11KV TIRUVURU TOWN SubStation	301621240202	11KV Rajupeta	Urban	AMR	5.610	5.373	5.610	4.218	5.527
110	VIJAYAWADA	PATAMATA	33/11KV polytechnic SubStation	301522240111	11KV SAINAGAR	Urban	AMR	1.408	1.368	1.408	2.843	5.529
111	VIJAYAWADA	DISTRIBUTION II	33/11KV GandhiNagar SubStation	301421240102	11KV RAILWAYSTATION	Urban	AMR	9.638	9.454	9.638	1.911	5.545
112	VIJAYAWADA	CHILLAKALLU	33/11KV JAGGAIAHPET SEMI INDOOR SS	301331140202	11KV DVR NAGER FEEDER	Urban	AMR	3.318	3.072	3.318	7.426	5.553
113	VIJAYAWADA	GUNADALA	33/11KV Gunadala SubStation	301511240104	11KV E S I	Urban	AMR	5.895	5.792	5.895	1.743	5.553
114	ONGOLE	ONGOLETOWN	33/11 KV Market Yard Sub Station	303311140205	11KV SRIGIRI	Urban	AMR	7.361	7.103	7.361	3.504	5.556
115	CRDA	MANGALAGIRI	33/11KV Tadepalli ss-II Sub-Station	309141540201	11KV BH PURAM	Urban	AMR	3.756	3.618	3.756	3.665	5.563
116	VIJAYAWADA	PATAMATA	33/11KV BHARATHINAGAR SEMI INDOOR SubSta	301522240204	11KV OMKAR KALYANAMANDAPAM FE	Urban	AMR	2.727	2.654	2.727	2.672	5.568
117	VIJAYAWADA	DISTRIBUTION IV	33/11KV milk project SubStation	301411440203	11KV KALARA HOSPITAL FEEDER	Urban	AMR	9.052	8.829	9.052	2.456	5.574
118	VIJAYAWADA	CHALLAPALLI	33/11KV Kodali SS	301711240201	11KV Kodali	Rural	AMR	2.487	2.377	2.487	4.429	5.577
119	VIJAYAWADA	VIJAYAWADA C AND O D3	33/11KV Machavaram (Gulabi Thota)	301422140201	11KV DASANJANEYA FEEDER	Urban	AMR	5.806	5.703	5.806	1.773	5.577
120	CRDA	CHILAKALURI PET	33/11KV CHILAKALURIPET(SUBBAIAH THOTA)SS	309231240302	11KV KALA MANDIR FEEDER	Urban	AMR	3.542	3.443	3.542	2.795	5.580
121	GUNTUR	GUNTUR-TOWN4(AUTO NAGAR)	33/11KV Pedakakani Sub-Station	302131340102	11KV Pedakakani II	Rural	AMR	5.260	5.035	5.260	4.287	5.581
122	GUNTUR	GUNTUR-TOWN4(AUTO NAGAR)	33/11 KV Suddapallidonka SS	302131140304	11 KV Yadav Bazar Feeder	Urban	AMR	7.947	7.493	7.947	5.708	5.582
123	VIJAYAWADA	IBRAHIMPATNAM	33/11KV Paritala SS	301321340403	11KV SVEC	INDL	AMR	11.690	11.148	11.690	4.637	5.587
124	ONGOLE	KANIGIRI	33/11 KV GUDIPADU SS	303131440601	11KV Gudipadu Town B N Palem	Mixed	AMR	0.444	0.490	0.444	-10.403	5.588
125	ONGOLE	ONGOLETOWN	33/11KV Govt Office Compound SS	303311240502	11KV CRP FEEDER	Urban	AMR	5.139	4.948	5.139	3.721	5.589
126	VIJAYAWADA	DISTRIBUTION II	33/11KV Ayodhyanagar SS	301421340201	11KV KEDARESWARAPETA	Urban	AMR	7.970	7.687	7.970	3.545	5.591
127	GUNTUR	MACHERLA	33/11KV Macherla New SS (RIGHT CANAL)	302211140302	11KV chennakesava swamy	Urban	AMR	3.942	3.886	3.942	1.430	5.591
128	GUNTUR	BAPATLA	33/11KV BAPATLA BEACH SS	302711240302	11KV VASANTHI FEEDER	Rural	AMR	2.705	2.555	2.705	5.556	5.592
129	GUNTUR	CHERUKUPALLI	33/11KV P.V.Palem Sub-Station	302731440201	11KV P V Palem	Rural	AMR	3.802	3.724	3.802	2.054	5.595
130	VIJAYAWADA	D1OLD TOWN	33/11KV Ghandi hills SubStation	301411240102	11KV Panja Centre	Urban	AMR	6.554	6.348	6.554	3.132	5.601
131	ONGOLE	ONGOLETOWN	33/11 KV District Stores Sub Station	303311340204	11KV BRUNDAVAN NAGAR	Urban	AMR	5.914	5.600	5.914	5.304	5.602
132	GUNTUR	TENALI-TOWN	33/11KV Tenali SS II Sub-Station	302413140103	11KV Tenali Local IV	Urban	AMR	7.782	7.521	7.782	3.349	5.612
133	GUNTUR	TENALI-TOWN	33/11KV Tenali SS1 Sub-Station	302413240106	11KV Sulthanabad	Urban	AMR	5.674	5.455	5.674	3.860	5.623
134	VIJAYAWADA	GUDIVADA RURALS	33/11KV Singarayapalem SS	301122140301	11KV Singarayapalem	Rural	AMR	4.635	4.427	4.635	4.468	5.626
135	GUNTUR	VINUKONDA	33/11KV Vinukonda Sub-Station	302332640103	11KV Vinukonda 3	Urban	AMR	11.949	11.191	11.949	6.346	5.628
136	VIJAYAWADA	DISTRIBUTION II	33/11KV Durgapuram SS	301421640203	11KV DURGAPURAM	Urban	AMR	6.147	5.853	6.147	4.780	5.631
137	CRDA	CHILAKALURI PET	33/11KV Boppudi Sub-Station	309231140104	11KV Highway Industrial	Rural	AMR	9.856	9.378	9.856	4.851	5.631
138	GUNTUR	BAPATLA	33/11KV BAPATLA BEACH SS	302711240303	11KV PANDURANGAPURAM	Rural	AMR	0.477	0.450	0.477	5.634	5.634
139	CRDA	MANGALAGIRI	33/11KV MANGALAGIRI APSP SS	309141140303	11 KV JAGUAR	Rural	AMR	5.960	5.768	5.960	3.227	5.636
140	VIJAYAWADA	NUZVIDU TOWN	33/11KV NUZIVID TOWN SEMI INDOOR SS	301612140305	11KV BAPUNAGAR	Mixed	AMR	1.530	1.468	1.530	4.044	5.641
141	VIJAYAWADA	MACHILIPATNAM	33/11KV Bhaskarapuram SubStation	301211340103	11KV Railway Station	Urban	AMR	8.061	7.707	8.061	4.394	5.645
142	ONGOLE	ADDANKI	33/11 KV Addanki South Sub Station	303451140301	11KV RAMNAGAR	Urban	AMR	6.054	5.955	6.054	1.639	5.650

Sl No.	Received at Circle (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/Rural)	Type of feeder meter (AMI/AMR/Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses
143	VIJAYAWADA	MYLAVARAM	33/11KV Pulluru SS	301311340303	11KV pulluru	Rural	AMR	0.242	0.228	0.242	5.651	5.651
144	GUNTUR	GUNTUR-TOWN1	33/11KV Brodipet Sub-Station	302111240103	11KV Guntur 20th	Urban	AMR	4.158	3.914	4.158	5.871	5.662
145	CRDA	MANGALAGIRI	33/11KV Mangalagiri SS-1 Sub-Station	309141140106	11KV Water works feeder	Urban	AMR	2.488	2.392	2.488	3.878	5.665
146	GUNTUR	CHERUKUPALLI	33/11KV Khazipalem Sub-Station	302731440101	11KV KHAJIPALEM TOWN	Rural	AMR	9.408	9.155	9.408	2.693	5.668
147	ONGOLE	ONGOLETOWN	33/11 KV Market Yard Sub Station	303311140204	11KV VIP ROAD	Urban	AMR	5.877	5.596	5.877	4.795	5.683
148	VIJAYAWADA	CHALLAPALLI	33/11KV Narayanarao Nagar Sub Station	301711340301	11KV Challapalli	Rural	AMR	8.109	7.724	8.109	4.751	5.694
149	GUNTUR	PONNUR	33/11KV Ponnur SS-2, OLD PONNUR	302721140404	11KV INDUSTRIAL	INDL	AMR	0.707	0.660	0.707	6.702	5.699
150	CRDA	CHILAKALURI PET	33/11KV CHILAKALURIPET(SUBBAIAH THOTA)SS	309231240301	11KV SUBBAIAH THOTA FEDER	Urban	AMR	3.190	3.032	3.190	4.974	5.714
151	ONGOLE	ONGOLETOWN	33/11 KV SS MILK DAIRY	303311340501	11KV DWARAKA NAGAR	Urban	AMR	3.238	3.119	3.238	3.661	5.714
152	GUNTUR	MACHERLA	33/11KV Suddaguntla Sub-Station	302211140202	11KV Town 2	Urban	AMR	6.446	6.274	6.446	2.665	5.717
153	GUNTUR	GUNTUR-TOWN2	33/11KV Gorantla Sub-Station	302121340202	11KV Dwaraka Nagar	Urban	AMR	9.672	9.473	9.672	2.050	5.725
154	VIJAYAWADA	KANURU	33/11KV Poranki SubStation	301521240203	11KV Poranki Agl Feeder	Agricultura	AMR	1.448	1.335	1.448	7.819	5.736
155	GUNTUR	SATTENAPALLI	33/11KV Sattenapalli -SS2(Macherla Road)	302321340103	11KV VENNADEVI	Rural	AMR	0.817	0.737	0.817	9.847	5.747
156	VIJAYAWADA	KAIKALURU	33/11KV PUTTA CHERUVU SS	301141340502	11KV MODUGUMUDI	Rural	AMR	7.422	7.045	7.422	5.090	5.749
157	CRDA	CHILAKALURI PET	33/11KV Satuluru Sub-Station	309231540301	11KV Satuluru	Rural	AMR	8.486	8.001	8.486	5.718	5.755
158	VIJAYAWADA	VIJAYAWADA C AND O D3	33/11KV Krishnalanka PSR Indoor SS	301422340301	11KV METLA BAZAR FEEDER	Urban	AMR	3.948	3.802	3.948	3.702	5.758
159	GUNTUR	GUNTUR-TOWN1	33/11 KV Vishnupriya Complex Semi Indoor	302111340301	11KV VISHNU PRIYA FEEDER	Urban	AMR	0.032	0.031	0.032	4.439	5.768
160	GUNTUR	GUNTUR-TOWN3	33/11KV Superbazar Sub-Station	302112240204	11KV U G cable	Urban	AMR	2.634	2.525	2.634	4.132	5.771
161	VIJAYAWADA	DISTRIBUTION IV	33/11KV milk project SubStation	301411440205	11KV RAJIV SARMA NAGAR FEEDER	Urban	AMR	2.602	2.506	2.602	3.661	5.772
162	GUNTUR	GUNTUR-TOWN1	33/11 KV Vishnupriya Complex Semi Indoor	302111340302	11KV HINDUSTAN FEEDER	Urban	AMR	1.824	1.744	1.824	4.402	5.780
163	CRDA	MANGALAGIRI	33/11KV Tadepalli ss-I Sub-Station	309141540102	11KV KRISHNA NAGAR	Urban	AMR	5.418	5.137	5.418	5.174	5.783
164	GUNTUR	TENALI-TOWN	33/11KV Tenali SS II Sub-Station	302413140105	11KV Ananthavaram	Mixed	AMR	1.746	1.649	1.746	5.505	5.795
165	GUNTUR	GUNTUR-TOWN1	33/11 KV Koretipadu Park Semi Indoor SS	302111240301	11KV Vinayaka Nagar	Urban	AMR	4.459	4.237	4.459	4.976	5.813
166	VIJAYAWADA	CHILLAKALLU	33/11KV Jaggaiahpeta SubStation	301331140102	11KV Jaggaiahpeta Feeder II	Urban	AMR	0.778	0.728	0.778	6.375	5.814
167	GUNTUR	NARASARAOPET	33/11KV SS-II Narasaraopet Sub-Station	302311240104	11KV yellamanda	Rural	AMR	4.483	4.199	4.483	6.347	5.820
168	GUNTUR	TENALI-TOWN	33/11 KV Tenali SS -V (WARF)	302413240202	11KV Tenali Railway Station	Urban	AMR	5.676	5.451	5.676	3.961	5.825
169	VIJAYAWADA	GUDIVADA TOWN	33/11KV GUDIVADA (PEDAVEEDI) SEMI INDOOR	301111140205	11KV Rajendra Nagar	Urban	AMR	4.581	4.340	4.581	5.265	5.826
170	GUNTUR	MACHERLA	33/11KV Suddaguntla Sub-Station	302211140201	11KV Town 1	Urban	AMR	8.245	7.991	8.245	3.082	5.831
171	VIJAYAWADA	KANURU	33/11KV Gangur SubStation	301521240103	11KV GANGURU FEEDER	Rural	AMR	5.610	5.397	5.610	3.793	5.838
172	ONGOLE	CHIRALA	33/11 KV Eepurupalem Sub Station	303441240202	11KV EPURUPALEM	Rural	AMR	7.302	7.041	7.302	3.563	5.854
173	VIJAYAWADA	DISTRIBUTION IV	33/11KV NEW RAJARAJESWARIPET SEMI INDOOR	301421440302	11KV KAMSALI PETA	Urban	AMR	5.903	5.655	5.903	4.189	5.855
174	CRDA	MANGALAGIRI	33/11KV MANGALAGIRI INDOOR SS	309141240202	11KV IT Park	Urban	AMR	1.302	1.235	1.302	5.130	5.856
175	GUNTUR	NARASARAOPET-RURAL	33/11KV Rompicharla Sub-Station	302312340101	11KV Vadlamudivaripalem	Mixed	AMR	0.725	0.645	0.725	11.025	5.859
176	VIJAYAWADA	DISTRIBUTION II	33/11KV Mutyalam padu SubStation	301421340104	11KV Satyanarayanapuram	Urban	AMR	6.752	6.505	6.752	3.652	5.864
177	VIJAYAWADA	PEDANA	33/11KV Krutivennu SubStation	301221440103	11KV Cherukumilli	Rural	AMR	11.642	11.242	11.642	3.434	5.867
178	VIJAYAWADA	MACHILIPATNAM	33/11KV Ullingapalem SubStation	301211240204	11KV Malkapatnam	Urban	AMR	6.642	6.348	6.642	4.432	5.885

SI No.	Received at Circle (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/Rural)	Type of feeder meter (AMI/AMR/Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses
179	VIJAYAWADA	D1OLD TOWN	33/11KV PUNNAMI SS	301411340306	11KV KANYAKA PARAMESWARI	Urban	AMR	1.781	1.712	1.781	3.869	5.894
180	VIJAYAWADA	MACHILIPATNAM	33/11KV MTM Old Power House SubStation	301211440403	11KV Water works	Urban	AMR	1.851	1.742	1.851	5.905	5.905
181	VIJAYAWADA	PATAMATA	33/11KV Auto nagar SubStation	301522140105	11kv High School Road	Urban	AMR	3.984	3.854	3.984	3.276	5.909
182	ONGOLE	SINGARAYAKONDA	33/11KV Ramayapatnam SS	303521340602	11 KV RAMAYAPATNAM TOWN	Rural	AMR	0.715	0.650	0.715	9.113	5.909
183	ONGOLE	PODILI	33/11 KV Kambalapadu Sub Station	303111140402	11KV KAMBALAPADU TOWN	Rural	AMR	0.944	1.005	0.944	-6.460	5.913
184	GUNTUR	GURAZALA	33/11KV Charlagudipadu Sub-Station	302221140204	11KV RWS	Rural	AMR	0.691	0.659	0.691	4.671	5.920
185	VIJAYAWADA	D1OLD TOWN	33/11KV Gollapudi SubStation	301411340203	11KV Ayyappa temple	Rural	AMR	6.483	6.167	6.483	4.878	5.944
186	VIJAYAWADA	VIJAYAWADA C AND O D3	33/11KV RTC Complex SubStation	301422340201	11KV BRAMARAMBA PURAM	Urban	AMR	8.409	8.168	8.409	2.861	5.945
187	ONGOLE	KANDUKUR	33/11 KV Kandukur Town Sub Station	303511140103	11KV LIC	Urban	AMR	7.467	7.155	7.467	4.174	5.946
188	ONGOLE	ONGOLERURAL II	33/11 kV Cheruvukommupalem SS	303322440402	11KV CH K PALEM TOWN	Rural	AMR	1.182	1.226	1.182	-3.743	5.954
189	GUNTUR	BAPATLA	33/11KV Karlapalem Sub-Station	302711340104	11KV Buddam	Rural	AMR	10.131	9.636	10.131	4.890	5.958
190	GUNTUR	GUNTUR-TOWN1	33/11KV Lakshmipuram Semi Indoor SS	302121440305	11KV LEM School	Urban	AMR	2.031	1.899	2.031	6.485	5.960
191	GUNTUR	PIDUGURALLA	33/11KV PidugurallaSub-Station(Kondmodu)	302231140105	11KV Nekarikallu	Mixed	AMR	1.144	1.072	1.144	6.358	5.962
192	VIJAYAWADA	NUZVIDU TOWN	33/11KV Nuzividu IIIT SS	301612140201	11KV Krishnawater Works	Urban	AMR	8.292	7.797	8.292	5.966	5.966
193	CRDA	MANGALAGIRI	33/11KV Kunchanapalli Sub-Station	309141440101	11KV Kolanukonda	Urban	AMR	6.421	6.063	6.421	5.581	5.982
194	CRDA	MANGALAGIRI	33/11KV Mangalagiri SS-2 Sub-Station	309141140202	11KV TOWN - 2	Urban	AMR	9.743	9.232	9.743	5.242	5.992
195	ONGOLE	ONGOLETOWN	33/11 KV District Stores Sub Station	303311340203	11KV NIRMAL NAGAR	Urban	AMR	3.642	3.442	3.642	5.475	5.994
196	ONGOLE	ONGOLERURAL II	33/11 KV Mattigunta Sub Station	303322240502	11KV MATTIGUNTA TOWN	Rural	AMR	1.137	1.115	1.137	1.950	5.995
197	VIJAYAWADA	D1OLD TOWN	33/11KV Old power house SubStation	301411140204	11KV K C Canal	Urban	AMR	9.613	9.384	9.613	2.380	5.998
198	GUNTUR	GUNTUR-TOWN4(AUTO NAGAR)	33/11KV Namburu Sub-Station	302131340205	11KV Namburu Industrial	Urban	AMR	6.607	6.455	6.607	2.293	6.000
199	ONGOLE	ADDANKI	33/11KV Pamidipadu SS	303611340201	11KV PAMIDIPADU TOWN	Rural	AMR	1.675	1.644	1.675	1.877	6.004
200	VIJAYAWADA	DISTRIBUTION IV	33/11KV Payakapuram Sub-Station	301421540103	11KV RADHANAGAR	Urban	AMR	6.515	6.197	6.515	4.882	6.007
201	ONGOLE	ADDANKI	33/11 KV Medarametla Sub Station	303451340108	11KV THIMMANAPALEM 11KV RAVINUT	Mixed	AMR	1.738	1.741	1.738	-0.158	6.018
202	CRDA	MANGALAGIRI	33/11 KV Yerrabalem SS	309141240102	11KV YARRABALEM	Rural	AMR	10.393	9.892	10.393	4.820	6.021
203	ONGOLE	CHIRALA	33/11 KV Jandrapeta Sub Station	303441340101	11KV DEVANGAPURI	Rural	AMR	3.980	3.916	3.980	1.623	6.022
204	VIJAYAWADA	GUNADALA	33/11KV Govt. Hospital SS	301511240204	11KV Srinagar Colony	Urban	AMR	0.574	0.546	0.574	4.711	6.047
205	GUNTUR	PONNUR	33/11KV Nidubrolu SS Sub-Station	302721140102	11KV Nidubrolu-II	Urban	AMR	3.665	3.547	3.665	3.218	6.053
206	GUNTUR	TENALI-TOWN	33/11 KV Sangamjagarlamudi SS	302413440302	11KV GMC Water Works Feeder	Rural	AMR	2.923	2.802	2.923	4.141	6.054
207	VIJAYAWADA	KANURU	33/11KV Murali Nagar SS	301521140604	11KV JRD 2	Urban	AMR	6.529	6.224	6.529	4.672	6.085
208	VIJAYAWADA	PATAMATA	33/11KV Auto nagar SubStation	301522140107	11kv Ganapathi Ashramam Feeder	Urban	AMR	3.491	3.388	3.491	2.954	6.088
209	VIJAYAWADA	D1OLD TOWN	33/11KV FISH MARKET SEMI INDOOR	301411240202	11KV KBN COLLEGE FEEDER	Urban	AMR	6.767	6.591	6.767	2.605	6.090
210	VIJAYAWADA	D1OLD TOWN	33/11KV Container semi Indoor substation	301411640202	11KV SAIPURAM COLONY	Rural	AMR	0.185	0.175	0.185	5.514	6.103
211	GUNTUR	PIDUGURALLA	33/11KV Janapadu Sub-Station	302231140202	11KV Janapdu Rural	Mixed	AMR	3.568	3.459	3.568	3.052	6.104
212	VIJAYAWADA	KANURU	33/11KV Poranki SubStation	301521240204	11KV Salipeta feeder	Urban	AMR	8.310	7.978	8.310	3.993	6.113
213	GUNTUR	VINUKONDA	33/11KV Chinthala Cheruvu SS	302332340301	11KV CHINTALA CHERUVU	Rural	AMR	1.222	1.103	1.222	9.791	6.117
214	GUNTUR	GUNTUR-TOWN4(AUTO NAGAR)	33/11KV IJM (Rain Tree Park)SS	302131340304	11KV WTP	Rural	AMR	0.354	0.348	0.354	1.609	6.118

Sl No.	Received at Circle (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/Rural)	Type of feeder meter (AMI/AMR/Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses
215	ONGOLE	GIDDALUR	33/11 KV Giddalur Sub Station	303241140106	11KV TOWN 4	Urban	AMR	1.306	1.264	1.306	3.186	6.120
216	GUNTUR	TENALI-TOWN	33/11 KV Chinaravuru park semi indoor SS	302413140303	11KV Nazerpet	Urban	AMR	4.808	4.561	4.808	5.122	6.120
217	VIJAYAWADA	VIJAYAWADA C AND O D3	33/11KV Skew Bridge SubStation	301422440104	11KV Patamata Lanka	Urban	AMR	4.462	4.270	4.462	4.289	6.120
218	VIJAYAWADA	KANURU	33/11KV Murali Nagar SS	301521140601	11KV Gowrsankarnagar	Urban	AMR	7.269	6.905	7.269	5.009	6.123
219	VIJAYAWADA	GUNADALA	33/11KV Machavaram (Gulabi Thota)	301422140203	11KV MARYMATHA (GDL) FEEDER	Urban	AMR	7.227	7.112	7.227	1.583	6.130
220	GUNTUR	REPALLE	33/11KV Bhattiprolu Sub-Station	302421340101	11KV Bhattiprolu	Rural	AMR	7.193	6.945	7.193	3.448	6.131
221	VIJAYAWADA	PEDANA	33/11KV Lakshmipuram (Kruthivennu)	301221440201	11KV CHINA GOLLAPALEM	Rural	AMR	12.211	11.765	12.211	3.645	6.132
222	GUNTUR	SATTENAPALLI	33/11KVSattenapalli SS-III(Near BUSTAND)	302321140201	11KV FEIROJU MANDIRAM	Urban	AMR	3.341	3.171	3.341	5.080	6.141
223	GUNTUR	REPALLE	33/11KV RUDRAVARAM(MOORTHOTA) SS	302421240403	11KV Aqua	Rural	AMR	3.121	3.084	3.121	1.192	6.147
224	VIJAYAWADA	D1OLD TOWN	33/11KV Gollapudi SubStation	301411340204	11KV VASAVI PHARMA	Rural	AMR	5.709	5.434	5.709	4.814	6.148
225	GUNTUR	TENALI-TOWN	33/11 KV Tenali SS -V (WARF)	302413240204	11KV Wahab Chowk	Urban	AMR	7.917	7.575	7.917	4.314	6.152
226	ONGOLE	ONGOLETOWN	33/11KV Govt Office Compound SS	303311240501	11KV Seetharamapuram	Urban	AMR	1.783	1.705	1.783	4.360	6.154
227	GUNTUR	VINUKONDA	33/11 KV Mulakaluru SS	302332340204	11KV RWS	Rural	AMR	0.511	0.459	0.511	10.135	6.157
228	VIJAYAWADA	IBRAHIMPATNAM	33/11KV Ibrahimpatnam SubStation	301311140201	11KV Ramco	Urban	AMR	3.811	3.588	3.811	5.840	6.165
229	VIJAYAWADA	CHILLAKALLU	33/11KV AnumanchiPalle SubStation	301331240105	11KV BHAGAVATHI AEROCON	INDL	AMR	0.835	0.812	0.835	2.692	6.173
230	VIJAYAWADA	DISTRIBUTION II	33/11KV Ayodhyanagar SS	301421340202	11KV AYODYANAGAR	Urban	AMR	7.406	7.118	7.406	3.887	6.174
231	VIJAYAWADA	VIJAYAWADA C AND O D3	33/11KV krishnalanka SubStation	301422340102	11KV Krishnalanka	Urban	AMR	5.996	5.779	5.996	3.608	6.182
232	VIJAYAWADA	DISTRIBUTION II	33/11KV Madhuranagar SS	301421640106	11KV SAI BABA COLONY	Urban	AMR	4.706	4.538	4.706	3.560	6.197
233	VIJAYAWADA	VISSANNAPET	33/11KV CHEEPURUGUDEM SubStation	301631340803	11KV Cheepurugudem Village	Rural	AMR	0.381	0.350	0.381	8.051	6.209
234	VIJAYAWADA	AVANIGADDA	33/11KV KODUR SubStation	301721240102	11KV Ullipalem feeder	Mixed	AMR	1.020	0.929	1.020	8.935	6.213
235	ONGOLE	ONGOLERURAL II	33/11 KV Kothapatnam Sub Station	303322140104	11KV KOTHAPATNAM AGL	Agricultura	AMR	2.276	2.135	2.276	6.216	6.216
236	GUNTUR	TENALI-TOWN	33/11KV Tenali SS3 Sub-Station	302413340103	11KV Tenali Local VI	Urban	AMR	9.378	8.899	9.378	5.107	6.217
237	CRDA	GUNTUR RURAL 1	33/11KV Pulladigunta Sub-Station	309241340102	11KV Pulladigunta Indl	Rural	AMR	6.114	5.832	6.114	4.620	6.218
238	VIJAYAWADA	GUDIVADA TOWN	33/11KV Rudrapaka SubStation	301111340104	11KV GAJULAPADU FEEDER	Rural	AMR	11.372	10.733	11.372	5.624	6.225
239	GUNTUR	REPALLE	33/11KV Gangadipalem Sub-Station	302421240205	11KV Rajukalava Express	Rural	AMR	5.386	5.051	5.386	6.231	6.231
240	VIJAYAWADA	PEDANA	33/11KV Lakshmipuram (Kruthivennu)	301221440206	11KV CHANDALA FEEDER	Rural	AMR	5.498	5.209	5.498	5.256	6.240
241	VIJAYAWADA	KANURU	33/11KV Yanamalakuduru SubStation	301521140201	11KV CANAL BANK FEEDER	Urban	AMR	9.602	9.155	9.602	4.653	6.265
242	GUNTUR	PONNUR	33/11KV Nidubrolu Tidco Sub-Station	302721140502	11KV TIDCO-1	Urban	AMR	0.002	0.002	0.002	3.433	6.267
243	GUNTUR	GUNTUR-TOWN1	33/11KV VIDYUT BHAVAN SEMI INDOOR SS	302111340204	11KV LANCHESTER ROAD FEEDER	Urban	AMR	4.813	4.534	4.813	5.780	6.268
244	ONGOLE	KANIGIRI RURALS	33/11 KV KOYALAMPADU SS	303132140402	11KV ANIKALAPALLI	Mixed	AMR	0.490	0.473	0.490	3.649	6.269
245	VIJAYAWADA	CHILLAKALLU	33/11KV JAGGAIAHPET SEMI INDOOR SS	301331140203	11KV NTR circle	Urban	AMR	6.269	5.830	6.269	7.010	6.270
246	VIJAYAWADA	D1OLD TOWN	33/11KV FISH MARKET SEMI INDOOR	301411240201	11KV ANJANEYA TEMPLE	Urban	AMR	6.896	6.629	6.896	3.859	6.272
247	VIJAYAWADA	MACHILIPATNAM	33/11KV MACHILIPATNAM SEMI INDOOR SS	301211340205	11KV PANDU RANGA	Urban	AMR	6.401	6.146	6.401	3.980	6.278
248	VIJAYAWADA	GUDIVADA TOWN	33/11KV Pedavirivada SubStation	301111340301	11KV Ramapuram	Rural	AMR	14.065	13.796	14.065	1.915	6.285
249	VIJAYAWADA	PATAMATA	33/11KV Govt. Hospital SS	301511240202	11KV Vetarnary Coloy	Urban	AMR	6.636	6.479	6.636	2.368	6.304
250	VIJAYAWADA	D1OLD TOWN	33/11KV Container semi Indoor substation	301411640203	11KV SRINIVAS NAGAR	Rural	AMR	0.147	0.138	0.147	5.853	6.320

Sl No.	Received at Circle (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/Rural)	Type of feeder meter (AMI/AMR/Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses
251	GUNTUR	NARASARAOPET-RURAL	33/11KV Savalyapuram Sub-Station	302332240104	11KV Kanamarlapudi	Mixed	AMR	4.351	4.156	4.351	4.489	6.321
252	CRDA	MANGALAGIRI	33/11KV Mallempudi SS	309141440301	11KV MELLEMPUDI TOWN FEEDER	Urban	AMR	1.732	1.646	1.732	4.961	6.328
253	ONGOLE	DARSI	33/11 KV Kurichedu Sub Station	303121440101	11KV 11KV KATAMVARIPALLI E V PALEM	Mixed	AMR	2.322	2.298	2.322	1.040	6.334
254	VIJAYAWADA	KAIKALURU	33/11 KV Varahapatnam SS	301141440102	11KV seethanapalli	Rural	AMR	9.043	8.779	9.043	2.923	6.345
255	VIJAYAWADA	GUDIVADA RURALS	33/11KV kowthavaram SubStation	301122240104	11KV Dokiparru	Rural	AMR	3.297	3.101	3.297	5.965	6.348
256	GUNTUR	SATTENAPALLI	33/11KV Sattenapalli -SS2(Macherla Road)	302321340101	11KV Town D	Urban	AMR	6.408	6.108	6.408	4.687	6.349
257	VIJAYAWADA	PEDANA	33/11KV BRHMAPURAM SS	301221240303	11KV PEDANA WATER WORKS	Urban	AMR	3.502	3.280	3.502	6.350	6.350
258	ONGOLE	KANDUKUR	33/11 KV Kandukur Town Sub Station	303511140101	11KV PAMUR ROAD	Urban	AMR	4.671	4.521	4.671	3.215	6.359
259	VIJAYAWADA	DISTRIBUTION IV	33/11KV Payakapuram Sub-Station	301421540101	11KV PAYAKAPURAM	Urban	AMR	10.940	10.451	10.940	4.473	6.360
260	GUNTUR	GUNTUR-TOWN1	33/11KV Kothapeta Sub-Station	302111140102	11KV Lalapet1	Urban	AMR	6.385	5.988	6.385	6.215	6.360
261	VIJAYAWADA	IBRAHIMPATNAM	33/11KV Kondapalli(APHMEL) SS	301311440203	11KV RCM Colony	Urban	AMR	5.276	5.006	5.276	5.109	6.369
262	GUNTUR	GUNTUR-TOWN4(AUTO NAGAR)	33/11KV R.T.C., Guntur Sub-Station	302131140207	11KV Sivalayam	Urban	AMR	2.918	2.734	2.918	6.308	6.375
263	ONGOLE	VETAPALEM	33/11 KV Chellareddypalem Sub Station	303431340304	11KV RAMAPURAM	Rural	AMR	4.230	4.041	4.230	4.469	6.379
264	VIJAYAWADA	NANDIGAMA	33/11KV ANASAGARAM SS	301321140201	11KV Anasagaram	Rural	AMR	1.215	1.151	1.215	5.279	6.381
265	VIJAYAWADA	NANDIGAMA	33/11KV Nandigama SubStation	301321140107	11KV ITHAVARAM	Mixed	AMR	5.990	5.815	5.990	2.912	6.384
266	VIJAYAWADA	KAIKALURU	33/11KV Kaikalur SubStation	301141140104	11KV GOPAVARAM	Rural	AMR	14.725	14.050	14.725	4.585	6.392
267	GUNTUR	SATTENAPALLI	33/11KV Sattenapalli - SS1(GNT Road)	302321140101	11KV Indl	Urban	AMR	2.048	1.946	2.048	5.002	6.392
268	VIJAYAWADA	CHILLAKALLU	33/11KV MulapaduI(Nawabpeta) SubStation	301331340204	11KV MULLAPADU FEEDER	Mixed	AMR	3.145	2.980	3.145	5.261	6.394
269	ONGOLE	ONGOLETOWN	33/11 KV North SS Sub Station	303311440106	11KV STORE BAZAR	Urban	AMR	2.152	2.040	2.152	5.203	6.395
270	GUNTUR	PIDUGURALLA	33/11KV PGRL New SS(YerapathineniNagar)	302231140501	11KV bypass feeder	Urban	AMR	0.014	0.013	0.014	6.395	6.395
271	VIJAYAWADA	VIJAYAWADA C AND O D3	33/11 KV R.L.Nagar SS	301422440206	11KV GIRLS HIGH SCHOOL	Urban	AMR	2.165	2.078	2.165	4.000	6.406
272	VIJAYAWADA	GUDIVADA RURALS	33/11KV Chigurukota SS	301122140403	11KV Bomminampadu	Rural	AMR	13.589	12.706	13.589	6.499	6.408
273	GUNTUR	VINUKONDA	33/11 KV SS II Vinukonda(Nawazkunta)	302332640303	11KV Vinukonda 7	Urban	AMR	4.945	4.710	4.945	4.762	6.408
274	VIJAYAWADA	GUNADALA	33/11KV Govt. Hospital SS	301511240203	11KV Mahanadu Road feeder	Urban	AMR	5.798	5.608	5.798	3.273	6.412
275	VIJAYAWADA	CHILLAKALLU	33/11KV JAGGAIAHPET SEMI INDOOR SS	301331140205	11KV SHANTHINAGER FEEDER	Urban	AMR	2.349	2.210	2.349	5.943	6.419
276	VIJAYAWADA	KAIKALURU	33/11KV Kaikalur SubStation	301141140102	11KV Bypass Road	Rural	AMR	7.056	6.827	7.056	3.248	6.420
277	VIJAYAWADA	PEDANA	33/11KV Pedana SubStation	301221240202	11KV Pedana Town2	Urban	AMR	0.581	0.542	0.581	6.796	6.430
278	VIJAYAWADA	GUDIVADA RURALS	33/11KV kowthavaram SubStation	301122240102	11KV Vadalamannadu+ Kowthavaram	Rural	AMR	4.225	4.029	4.225	4.636	6.431
279	ONGOLE	KANIGIRI	33/11 KV Kanigiri Sub Station	303131140102	11KV KANIGIRITOWN1	Urban	AMR	11.418	10.696	11.418	6.324	6.432
280	ONGOLE	MARKAPUR	33/11 KV Markapur Sub Station	303221140102	11KV TOWN II	Urban	AMR	11.826	11.362	11.826	3.925	6.443
281	GUNTUR	GUNTUR-TOWN4(AUTO NAGAR)	33/11KV IJM (Rain Tree Park)SS	302131340301	11KV VILLAS	Rural	AMR	0.725	0.694	0.725	4.238	6.450
282	ONGOLE	PARCHOOR	33/11 KV Inkollu Sub Station	303421340105	11KV INKOLLU TOWN-II	Rural	AMR	0.533	0.531	0.533	0.318	6.481
283	VIJAYAWADA	GUNADALA	33/11KV Gunadala SubStation	301511240101	11KV Gunadala	Urban	AMR	3.350	3.236	3.350	3.404	6.482
284	CRDA	MANGALAGIRI	33/11KV Mangalagiri SS-IV (Baptistpet)	309141140404	11KV Old Mangalagiri	Urban	AMR	1.887	1.779	1.887	5.705	6.484
285	GUNTUR	NARASARAOPET	33/11KV KOTAPPAKONDA SUBSTATION	302311340303	11KV KOTAPPAKONDA FEEDER	Rural	AMR	12.730	11.619	12.730	8.729	6.492
286	ONGOLE	ADDANKI	33/11 KV Ravinuthala Sub Station	303451340201	11KV DAIVALARAVURU	Mixed	AMR	1.272	1.247	1.272	1.938	6.496

Sl No.	Received at Circle (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/Rural)	Type of feeder meter (AMI/AMR/Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses
287	VIJAYAWADA	DISTRIBUTION IV	33/11KV Kabela SubStation	301411440101	11KV URMILA NAGAR	Urban	AMR	11.640	11.188	11.640	3.884	6.516
288	VIJAYAWADA	GUNADALA	33/11KV Veerapanenigudem SS	301511140304	11KV V P GUDEM INDUSTRIAL	Rural	AMR	2.398	2.240	2.398	6.601	6.518
289	CRDA	MANGALAGIRI	33/11 KV Yerrabalem SS	309141240101	11KV Industrial	INDL	AMR	7.647	7.276	7.647	4.861	6.526
290	VIJAYAWADA	CHILLAKALLU	33/11KV Balusupadu SS	301331240302	11KV Ramalayam feeder	Urban	AMR	7.064	6.658	7.064	5.742	6.528
291	GUNTUR	TENALI-TOWN	33/11KV Tenali SS1 Sub-Station	302413240101	11KV Tenali Local I	Urban	AMR	6.796	6.496	6.796	4.419	6.529
292	GUNTUR	VINUKONDA	33/11KV Vinukonda Sub-Station	302332640101	11KV Vinukonda 1	Urban	AMR	6.847	6.414	6.847	6.327	6.543
293	GUNTUR	TENALI-TOWN	33/11 KV Chinaravuru park semi indoor SS	302413140306	11KV Kothapet	Urban	AMR	1.891	1.820	1.891	3.771	6.547
294	VIJAYAWADA	GUDIVADA TOWN	33/11KV Autonagar SubStation	301111140102	11KV AUTONAGAR	Urban	AMR	3.964	3.770	3.964	4.897	6.551
295	VIJAYAWADA	DISTRIBUTION II	33/11KV Srinagar colony SS	301421340302	11KV Railway Training Center	Urban	AMR	0.597	0.579	0.597	2.940	6.554
296	GUNTUR	CHERUKUPALLI	33/11KV Gudavalli Sub-Station	302731240201	11KV Gudavalli	Rural	AMR	7.713	7.349	7.713	4.714	6.563
297	GUNTUR	GUNTUR-TOWN4(AUTO NAGAR)	33/11 KV Suddapallidonka SS	302131140302	11 KV PRAGATHI NAGAR	Urban	AMR	1.774	1.643	1.774	7.419	6.571
298	VIJAYAWADA	MTM_RURAL	33/11KV Kona SS	301211440502	11KV POLATITIPPA	Rural	AMR	8.624	8.088	8.624	6.212	6.572
299	CRDA	CHILAKALURI PET	33/11 KV RUTH DICHMEN NAGAR-CPT SS	309231240203	11KV Police Station	Urban	AMR	4.658	4.359	4.658	6.427	6.577
300	VIJAYAWADA	VIJAYAWADA C AND O D3	33/11 KV R.L.Nagar SS	301422440203	11KV RAMALINGESWARA NAGAR	Urban	AMR	5.432	5.196	5.432	4.338	6.590
301	GUNTUR	TENALI-TOWN	33/11 KV R.R.Nagar SS(TENALI SS-6)	302413240303	11KV Morrispet	Urban	AMR	4.909	4.630	4.909	5.682	6.592
302	VIJAYAWADA	CHALLAPALLI	33/11KV Puritigadda SubStation	301711340203	11KV Puritigadda	Mixed	AMR	1.453	1.373	1.453	5.489	6.593
303	CRDA	MANGALAGIRI	33/11KV Mangalagiri SS-2 Sub-Station	309141140205	11KV CAMP	Urban	AMR	4.046	3.867	4.046	4.427	6.593
304	VIJAYAWADA	NUZVIDU RURAL	33/11KV Musunuru SubStation	301611440305	11KV Musunuru 24hrs feeder	INDL	AMR	0.298	0.272	0.298	8.552	6.607
305	VIJAYAWADA	MACHILIPATNAM	33/11KV Bhaskarapuram SubStation	301211340102	11KV Govt Hospital	Urban	AMR	7.232	6.850	7.232	5.282	6.627
306	VIJAYAWADA	KANURU	33/11KV Tadigadapa Sub Station	301521440104	11KV PADMAJA NAGAR COLONY FEEDE	Urban	AMR	11.799	11.182	11.799	5.226	6.637
307	ONGOLE	ONGOLETOWN	33/11 KV RIMS SS	303311240304	11KV Sangamitra	Urban	AMR	3.618	3.492	3.618	3.467	6.642
308	ONGOLE	MARKAPUR	33/11 KV Market yard Sub Station	303221140202	11KV JAGADESWARI	Urban	AMR	5.936	5.668	5.936	4.508	6.645
309	VIJAYAWADA	CHILLAKALLU	33/11KV Chilakallu SubStation	301331240202	11KV Chillakallu Town	Rural	AMR	4.610	4.295	4.610	6.838	6.662
310	GUNTUR	GURAZALA	33/11KV MADUGULA SS	302221140601	11KV MADUGULA TOWN	Rural	AMR	0.039	0.038	0.039	2.104	6.669
311	VIJAYAWADA	KAIKALURU	33/11KV PULAPARRU SS	301141340401	11KV Chinthapadu	Rural	AMR	7.278	6.830	7.278	6.155	6.684
312	VIJAYAWADA	NUZVIDU TOWN	33/11KV Nuzivid SubStation	301612140108	11KV NUZVID-TOWN-II	Urban	AMR	4.326	4.097	4.326	5.302	6.690
313	GUNTUR	MACHERLA	33/11KV Macherla Sub-Station	302211140103	11KV Sagar Road	Urban	AMR	2.282	2.233	2.282	2.159	6.694
314	GUNTUR	PONNUR	33/11KV Kakumanu Sub-Station	302721440101	11KV RETURU	Rural	AMR	3.358	3.202	3.358	4.638	6.705
315	VIJAYAWADA	IBRAHIMPATNAM	33/11KV Paritala SS	301321340402	11KV Uma Holly Day	Rural	AMR	2.884	2.723	2.884	5.553	6.711
316	VIJAYAWADA	GUDIVADA TOWN	33/11KV Gudiwada SubStation	301111240105	11 KV HT feeder	Urban	AMR	4.443	4.207	4.443	5.306	6.711
317	VIJAYAWADA	MACHILIPATNAM	33/11KV Ullingapalem SubStation	301211240202	11KV Fort Road	Urban	AMR	7.457	7.121	7.457	4.508	6.714
318	GUNTUR	GUNTUR-TOWN1	33/11 KV Vishnupriya Complex Semi Indoor	302111340305	11KV R K POLYMER	INDL	AMR	0.018	0.017	0.018	4.733	6.721
319	CRDA	CHILAKALURI PET	33/11KV Edlapadu Sub-Station	309231440101	11KV Edlapadu MHQ	Rural	AMR	4.810	4.631	4.810	3.706	6.727
320	GUNTUR	SATTENAPALLI	33/11KV Sattenapalli - SS1(GNT Road)	302321140103	11KV Town B	Urban	AMR	5.520	5.210	5.520	5.615	6.731
321	VIJAYAWADA	CHILLAKALLU	33/11KV Chilakallu SubStation	301331240201	11KV Chillakallu Industrial Express	Rural	AMR	3.862	3.618	3.862	6.313	6.749
322	GUNTUR	GUNTUR-TOWN3	33/11KV PEDAPALAKALURU SS	302112340704	11KV Mallavaram Feeder	Rural	AMR	3.457	3.338	3.457	3.445	6.780

Sl No.	Received at Circle (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/Rural)	Type of feeder meter (AMI/AMR/Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses
323	VIJAYAWADA	VISSANNAPET	33/11KV Putrela SubStation	301631140301	11KV Putrela Town	Rural	AMR	3.803	3.656	3.803	3.866	6.792
324	VIJAYAWADA	AVANIGADDA	33/11KV Bhavadevrapalli SubStation	301721340101	11KV Bhavadevarapalli CPWS	Rural	AMR	11.989	11.217	11.989	6.433	6.806
325	VIJAYAWADA	CHILLAKALLU	33/11KV Khambampadu SubStation	301331340102	11KV Allurupadu	Mixed	AMR	1.593	1.485	1.593	6.808	6.808
326	VIJAYAWADA	IBRAHIMPATNAM	33/11KV Paritala SS	301321340404	11KV Paritala Town	Rural	AMR	5.147	4.863	5.147	5.529	6.811
327	GUNTUR	TENALI-TOWN	33/11 KV Tenali SS -V (WARF)	302413240201	11KV Balajiraopet	Urban	AMR	7.081	6.704	7.081	5.320	6.813
328	GUNTUR	TENALI-TOWN	33/11KV Tenali SS4 Sub-Station	302413140203	11KV PEDDA RAAVURU	Rural	AMR	7.466	7.107	7.466	4.810	6.816
329	GUNTUR	TENALI-TOWN	33/11KV Tenali SS3 Sub-Station	302413340106	11KV Tenali S S Palem	Urban	AMR	5.809	5.612	5.809	3.393	6.825
330	ONGOLE	KANIGIRI RURALS	33/11 KV Pamur Sub Station	303132240104	11KV PAMURUTOWN	Rural	AMR	11.531	11.443	11.531	0.768	6.825
331	VIJAYAWADA	PEDANA	33/11KV Bantumilli SubStation	301221340104	11KV PEDATUMMIDI	Rural	AMR	13.380	12.466	13.380	6.834	6.833
332	VIJAYAWADA	NUZVIDU TOWN	33/11KV Nuzivid SubStation	301612140101	11KV Local/Nuzvid-3	Urban	AMR	4.012	3.722	4.012	7.222	6.839
333	GUNTUR	NARASARAOPET	33/11KV Uppalapadu Sub-Station	302311340102	11KV KAKAI FEEDER	Mixed	AMR	3.783	3.518	3.783	7.009	6.840
334	ONGOLE	PARCHOOR	33/11 KV Parchuru Sub Station	303421140101	11KV ABV PALEM	Rural	AMR	2.251	2.344	2.251	-4.152	6.840
335	VIJAYAWADA	D1OLD TOWN	33/11KV PUNNAMI SS	301411340305	11 KV SANKARAMATAM	Urban	AMR	2.168	2.083	2.168	3.923	6.850
336	ONGOLE	KANDUKUR	33/11 KV Kandukur Rurals Sub Station	303511240102	11KV JANARDHANCOLONY	Urban	AMR	2.246	2.153	2.246	4.133	6.851
337	VIJAYAWADA	KAIKALURU	33/11 KV Perikagudem(Mandavalle)Sub-Stat	301141340303	11KV Kanukollu	Rural	AMR	8.922	8.636	8.922	3.208	6.860
338	VIJAYAWADA	KAIKALURU	33/11KV Kalidindi SubStation	301141240101	11KV Kalidindi	Rural	AMR	7.383	7.122	7.383	3.533	6.866
339	VIJAYAWADA	PATAMATA	33/11KV polytechnic SubStation	301522240112	11KV RTC COLONY	Urban	AMR	8.965	8.620	8.965	3.851	6.873
340	GUNTUR	TENALI-TOWN	33/11KV Tenali SS II Sub-Station	302413140102	11KV Tenali Local III	Urban	AMR	7.014	6.688	7.014	4.648	6.884
341	VIJAYAWADA	KANURU	33/11KV Madduru SubStation	301521340203	11KV K S N Palen	Mixed	AMR	1.591	1.479	1.591	7.072	6.885
342	ONGOLE	ADDANKI	33/11 KV Medarametla Sub Station	303451340105	11KV MEDARMETLA NORTH	Rural	AMR	4.306	4.240	4.306	1.547	6.889
343	GUNTUR	NARASARAOPET	33/11 KV Narasaraopet SS-VI	302311240204	11KV Town Hall	Urban	AMR	4.658	4.478	4.658	3.861	6.889
344	ONGOLE	ONGOLERURAL II	33/11 kV Cheruvukommupalem SS	303322440403	11KV PELLURU INDUSTRIAL	Rural	AMR	3.852	3.606	3.852	6.398	6.891
345	VIJAYAWADA	GUNADALA	33/11KV Nidamanur SubStation	301511440204	11KV Nidamanuru	Rural	AMR	8.185	7.945	8.185	2.929	6.891
346	VIJAYAWADA	MACHILIPATNAM	33/11KV MTM Old Power House SubStation	301211440407	11KV RING-1	Urban	AMR	6.753	6.389	6.753	5.403	6.894
347	VIJAYAWADA	KAIKALURU	33/11KV Pallewada SubStation	301141340202	11KV Kolletikota	Rural	AMR	11.752	11.323	11.752	3.651	6.902
348	VIJAYAWADA	VIJAYAWADA C AND O D3	33/11KV krishnalanka SubStation	301422340103	11KV Balaji Nagar	Urban	AMR	4.588	4.371	4.588	4.735	6.904
349	GUNTUR	REPALLE	33/11KV Repalle SS1 Sub-Station	302421140102	11KV Repalle Local II	Urban	AMR	5.431	5.169	5.431	4.827	6.911
350	CRDA	CHILAKALURI PET	33/11 KV RUTH DICHMEN NAGAR-CPT SS	309231240201	11KV C R Colony	Urban	AMR	3.710	3.442	3.710	7.231	6.917

Annexure-4

(Division wise Category wise subsidy)

Annexure-1 : Proforma for Consumer Category-wise Subsidy Billed / Received / Due for period 2022-23

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
		(In KWh)			(In KWh)			(In Rs./Kwh)		(In Rs. Cr.)			(In Rs. Crs.)	(In Rs. Crs.)	(In Rs. Crs.)
	1	2	3	4=2+3	5	6	7=5+6	8	9	10=5x8	11=6x9	12=10+11	13	14	15=13-14
AMARAVATHI	Residential	281.32		281.32	Domestic Subsidy: 0-30-41.74 ,31-75-50.82 ,76-125-50.33	--	Domestic Subsidy:0-30-41.74 ,31-75-50.82 ,76-125-50.33	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26	--	17.20	0.00	17.20	17.20	17.20	0.00
	Agriculture (LT+HT)	6.07	16.54	22.61	0.52MU Split(i) corporate farmers:0.1(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:0.26(D) Agro based cottage:0.04(E) Govt/Pvt LISchemes:0.1(F)Floriculture :0.02	16.54	17.06	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	12.26	12.26	12.26	12.47	-0.21
	Commercial / Industrial - LT	55.73	0.00	55.73	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	90.58	0.00	90.58	--	--		--		--	--	--	--		
	Other (Specify)	142.54	0.00	142.54	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		12.56		12.56	12.56	10.85	1.71
	Total	**576.23**	**16.54**	**592.77**		**16.54**				**29.76**	**12.26**	**42.02**	**42.02**	**40.52**	**1.50**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
GUNTUR-TOWN2	Residential	186.29		186.29	Domestic Subsidy: 0-30-36.27 ,31-75-47.25 ,76-125-43.1	--	Domestic Subsidy:0-30-36.27 ,31-75-47.25 ,76-125-43.1	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		15.21	0.00	15.21	15.21	15.21	0.00
	Agriculture (LT+HT)	3.98	13.45	17.43	1.13MU Split(i) corporate farmers:0.1(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:0.62(D) Agro based cottage:0.02(E) Govt/Pvt LISchemes:0.34(F)Floriculture :0.05	13.45	14.58	**AgI Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	9.97	9.97	9.97	10.14	-0.17
	Commercial / Industrial - LT	53.30	0.00	53.30	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	425.93	0.00	425.93	--	--		--		--	--	--	--		
	Other (Specify)	13.00	0.00	13.00	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		11.65		11.65	11.65	9.32	2.33
	Total	**682.50**	**13.45**	**695.95**		**13.45**				**26.86**	**9.97**	**36.84**	**36.84**	**34.67**	**2.16**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
CRDA CIRCLE TOTAL	Residential	467.61	0.00	467.61	Domestic Subsidy: 0-30-78.01 ,31-75-98.08 ,76-125-93.42	--	Domestic Subsidy: 0-30-78.01 ,31-75-98.08 ,76-125-93.42	Domestic Subsidy: 0-30- 1.47 31-75-1.10 76-125-0.26		32.41	0.00	32.41	32.41	32.41	0.00
	Agriculture (LT+HT)	10.05	29.99	40.04	1.65MU Split(i) corporate farmers:0.21(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:0.89(D) Agro based cottage:0.05(E) Govt/Pvt LISchemes:0.44(F)Floriculture :0.06	29.99	31.64	Agl Subsidy: (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	22.24	22.24	22.24	22.61	-11.64
	Commercial / Industrial - LT	109.03	0.00	109.03	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	516.50	0.00	516.50	--	--		--		--	--	--	--		
	Other (Specify)	155.54	0.00	155.54	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			Tariff Consessions: SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		24.21	0.00	24.21	24.21	20.17	4.04
	Total	**1258.73**	**29.99**	**1288.72**		**29.99**				**56.62**	**22.24**	**78.86**	**78.86**	**75.20**	**-7.60**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
BAPATLA	Residential	205.26		205.26	Domestic Subsidy: 0-30-56.51 ,31-75-66.75 ,76-125-48.61	--	Domestic Subsidy:0-30-56.51 ,31-75-66.75 ,76-125-48.61	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		18.93	0.00	18.93	18.93	18.93	0.00
	Agriculture (LT+HT)	103.14	28.76	131.90	93.97MU Split(i) corporate farmers:0.04(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :3.48(B) Aqua:90(D) Agro based cottage:0(E) Govt/Pvt LISchemes:0.45(F)Floriculture :0	28.76	122.73	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	21.32	21.32	21.32	21.68	-0.36
	Commercial / Industrial - LT	38.94	0.00	38.94	--	--		--		--	--	--	--	--	--
	Commercial / Industrial - HT	58.57	0.00	58.57	--	--		--		--	--	--	--	--	--
	Other (Specify)	70.72	0.00	70.72	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		19.21		19.21	19.21	25.83	-6.62
	Total	**476.64**	**28.76**	**505.40**		**28.76**				**38.14**	**21.32**	**59.46**	**59.46**	**66.44**	**-6.98**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
GUNTUR-TOWN1	Residential	615.09		615.09	Domestic Subsidy: 0-30-53.32 ,31-75-64.42 ,76-125-75.32	--	Domestic Subsidy:0-30-53.32 ,31-75-64.42 ,76-125-75.32	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		24.32	0.00	24.32	24.32	24.32	0.00
	Agriculture (LT+HT)	0.88	0.24	1.12	0.51MU Split(i) corporate farmers:0.43(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:0.05(D) Agro based cottage:0(E) Govt/Pvt LISchemes:0(F)Floriculture :0.03	0.24	0.75	**AgI Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	0.18	0.18	0.18	0.18	0.00
	Commercial / Industrial - LT	177.76	0.00	177.76	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	191.50	0.00	191.50	--	--		--		--	--	--	--		
	Other (Specify)	74.48	0.00	74.48	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		7.15		7.15	7.15	6.48	0.67
	Total	**1059.70**	**0.24**	**1059.94**		**0.24**				**31.47**	**0.18**	**31.65**	**31.65**	**30.98**	**0.67**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
MACHERLA	Residential	185.91		185.91	Domestic Subsidy: 0-30-56.71 ,31-75-75.89 ,76-125-46.23	--	Domestic Subsidy:0-30-56.71 ,31-75-75.89 ,76-125-46.23	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		19.27	0.00	19.27	19.27	19.27	0.00
	Agriculture (LT+HT)	15.10	255.06	270.16	4.14MU Split(i) corporate farmers:0.06(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0.04(B) Aqua:4.02(D) Agro based cottage:0.02(E) Govt/Pvt LISchemes:0(F)Floriculture :0	255.06	259.20	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	189.09	189.09	189.09	192.30	-3.21
	Commercial / Industrial - LT	67.59	0.00	67.59	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	290.86	0.00	290.86	--	--		--		--	--	--	--		
	Other (Specify)	52.12	0.00	52.12	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		9.50		9.50	9.50	6.26	3.24
	Total	**611.58**	**255.06**	**866.64**		**255.06**				**28.78**	**189.09**	**217.86**	**217.86**	**217.84**	**0.02**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
NARASARAOPET	Residential	307.54		307.54	Domestic Subsidy: 0-30-66.21 ,31-75-94.16 ,76-125-67.94	--	Domestic Subsidy:0-30-66.21 ,31-75-94.16 ,76-125-67.94	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		26.20	0.00	26.20	26.20	26.20	0.00
	Agriculture (LT+HT)	10.89	190.12	201.01	2.81MU Split(i) corporate farmers:0.17(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:2.52(D) Agro based cottage:0(E) Govt/Pvt LISchemes:0.12(F)Floriculture :0	190.12	192.93	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	140.94	140.94	140.94	143.34	-2.40
	Commercial / Industrial - LT	82.84	0.00	82.84	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	72.59	0.00	72.59	--	--		--		--	--	--	--		
	Other (Specify)	54.48	0.00	54.48	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		14.19		14.19	14.19	10.83	3.36
	Total	**528.35**	**190.12**	**718.47**		**190.12**				**40.39**	**140.94**	**181.33**	**181.33**	**180.37**	**0.96**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
TENALI	Residential	321.24		321.24	Domestic Subsidy: 0-30-59.64 ,31-75-77.2 ,76-125-67.28	--	Domestic Subsidy:0-30-59.64 ,31-75-77.2 ,76-125-67.28	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		24.14	0.00	24.14	24.14	24.14	0.00
	Agriculture (LT+HT)	33.72	39.21	72.94	30.19MU Split(i) corporate farmers:0.37(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:29.8(D) Agro based cottage:0(E) Govt/Pvt LISchemes:0.02(F)Floriculture :0	39.21	69.40	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	29.07	29.07	29.07	29.57	-0.49
	Commercial / Industrial - LT	65.22	0.00	65.22	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	158.44	0.00	158.44	--	--		--		--	--	--	--		
	Other (Specify)	58.29	0.00	58.29	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		23.89		23.89	23.89	27.03	-3.14
	Total	**636.92**	**39.21**	**676.13**		**39.21**				**48.03**	**29.07**	**77.10**	**77.10**	**80.73**	**-3.63**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
GUNTUR CIRCLE TOTAL	Residential	1635.04	0.00	1635.04	Domestic Subsidy: 0-30-292.38 ,31-75-378.43 ,76-125-305.38	--	Domestic Subsidy: 0-30-292.38 ,31-75-378.43 ,76-125-305.38	Domestic Subsidy: 0-30- 1.47 31-75-1.10 76-125-0.26		112.86	0.00	112.86	112.86	112.86	0.00
	Agriculture (LT+HT)	163.73	513.40	677.13	131.61MU Split(i) corporate farmers:1.06(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :3.54(B) Aqua:126.37(D) Agro based cottage:0.04(E) Govt/Pvt LISchemes:0.57(F)Floriculture :0.03	513.40	645.01	Agl Subsidy: (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	380.60	380.60	380.60	387.07	-0.63
	Commercial / Industrial - LT	432.36	0.00	432.36	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	771.96	0.00	771.96	--	--		--		--	--	--	--		
	Other (Specify)	310.10	0.00	310.10	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			Tariff Consessions: SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		73.94	0.00	73.94	73.94	76.43	-2.49
	Total	**3313.19**	**513.40**	**3826.59**		**513.40**				**186.80**	**380.60**	**567.40**	**567.40**	**576.36**	**-3.12**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
ADDANKI	Residential	117.27		117.27	Domestic Subsidy: 0-30-16.66 ,31-75-20.79 ,76-125-15.02	--	Domestic Subsidy:0-30-16.66 ,31-75-20.79 ,76-125-15.02	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		5.85	0.00	5.85	5.85	5.85	0.00
	Agriculture (LT+HT)	2.11	46.52	48.63	1.07MU Split(i) corporate farmers:0(ii)Slat farming:0(iii)Sugarcane:0.01(v) Horticulture :0(B) Aqua:1.06(D) Agro based cottage:0(E) Govt/Pvt LISchemes:0(F)Floriculture :0	46.52	47.59	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	33.49	33.49	33.49	35.03	-1.54
	Commercial / Industrial - LT	58.59	0.00	58.59	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	217.32	0.00	217.32	--	--		--		--	--	--	--		
	Other (Specify)	5.49	0.00	5.49	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		8.47		8.47	8.47	7.52	0.95
	Total	**400.78**	**46.52**	**447.30**		**46.52**				**14.32**	**33.49**	**47.81**	**47.81**	**48.40**	**-0.59**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
CHIRALA	Residential	166.91		166.91	Domestic Subsidy: 0-30-35.4 ,31-75-46.31 ,76-125-36.66	--	Domestic Subsidy:0-30-35.4 ,31-75-46.31 ,76-125-36.66	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		14.48	0.00	14.48	14.48	14.48	0.00
	Agriculture (LT+HT)	55.71	9.49	65.20	54.57MU Split(i) corporate farmers:0.23(ii)Slat farming:0.8(iii)Sugarcane:0(v) Horticulture :0.15(B) Aqua:51.66(D) Agro based cottage:0(E) Govt/Pvt LISchemes:1.73(F)Floriculture :0	9.49	64.06	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	6.83	6.83	6.83	7.14	-0.31
	Commercial / Industrial - LT	33.70	0.00	33.70	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	65.43	0.00	65.43	--	--		--		--	--	--	--		
	Other (Specify)	8.64	0.00	8.64	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		15.29		15.29	15.29	16.93	-1.64
	Total	**330.39**	**9.49**	**339.87**		**9.49**				**29.77**	**6.83**	**36.60**	**36.60**	**38.55**	**-1.95**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
DARSI	Residential	123.35		123.35	Domestic Subsidy: 0-30-43.63 ,31-75-50.59 ,76-125-28.75	--	Domestic Subsidy:0-30-43.63 ,31-75-50.59 ,76-125-28.75	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		12.87	0.00	12.87	12.87	12.87	0.00
	Agriculture (LT+HT)	4.80	199.15	203.95	2.02MU Split(i) corporate farmers:0.07(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0.03(B) Aqua:1.83(D) Agro based cottage:0.09(E) Govt/Pvt LISchemes:0(F)Floriculture :0	199.15	201.17	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	143.36	143.36	143.36	149.94	-6.59
	Commercial / Industrial - LT	125.94	0.00	125.94	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	66.77	0.00	66.77	--	--		--		--	--	--	--		
	Other (Specify)	12.88	0.00	12.88	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		7.37		7.37	7.37	6.68	0.69
	Total	**333.75**	**199.15**	**532.90**		**199.15**				**20.24**	**143.36**	**163.60**	**163.60**	**169.49**	**-5.90**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
KANDUKURU	Residential	121.74		121.74	Domestic Subsidy: 0-30-47.47 ,31-75-48.75 ,76-125-29.79	--	Domestic Subsidy:0-30-47.47 ,31-75-48.75 ,76-125-29.79	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		13.15	0.00	13.15	13.15	13.15	0.00
	Agriculture (LT+HT)	31.28	44.52	75.80	29.69MU Split(i) corporate farmers:0.02(ii)Slat farming:0.2(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:29.14(D) Agro based cottage:0.33(E) Govt/Pvt LISchemes:0(F)Floriculture :0	44.52	74.21	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	32.05	32.05	32.05	33.52	-1.47
	Commercial / Industrial - LT	31.18	0.00	31.18	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	66.90	0.00	66.90	--	--		--		--	--	--	--		
	Other (Specify)	11.31	0.00	11.31	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		10.52		10.52	10.52	13.63	-3.12
	Total	**262.41**	**44.52**	**306.93**		**44.52**				**23.66**	**32.05**	**55.71**	**55.71**	**60.30**	**-4.59**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
KANIGIRI	Residential	60.16		60.16	Domestic Subsidy: 0-30-32.14 ,31-75-28.16 ,76-125-14.19	--	Domestic Subsidy:0-30-32.14 ,31-75-28.16 ,76-125-14.19	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		6.71	0.00	6.71	6.71	6.71	0.00
	Agriculture (LT+HT)	0.39	75.13	75.52	0.33MU Split(i) corporate farmers:0.09(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:0.24(D) Agro based cottage:0(E) Govt/Pvt LISchemes:0(F)Floriculture :0	75.13	75.46	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	54.08	54.08	54.08	56.57	-2.48
	Commercial / Industrial - LT	18.10	0.00	18.10	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	7.09	0.00	7.09	--	--		--		--	--	--	--		
	Other (Specify)	6.08	0.00	6.08	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		3.34		3.34	3.34	2.96	0.38
	Total	**91.82**	**75.13**	**166.96**		**75.13**				**10.04**	**54.08**	**64.13**	**64.13**	**66.23**	**-2.10**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
MARKAPURAM	Residential	164.65		164.65	Domestic Subsidy: 0-30-79.74 ,31-75-94.3 ,76-125-54.2	--	Domestic Subsidy:0-30-79.74 ,31-75-94.3 ,76-125-54.2	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		23.71	0.00	23.71	23.71	23.71	0.00
	Agriculture (LT+HT)	0.57	368.35	368.92	0.53MU Split(i) corporate farmers:0(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:0.53(D) Agro based cottage:0(E) Govt/Pvt LISchemes:0(F)Floriculture :0	368.35	368.88	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	265.16	265.16	265.16	277.34	-12.18
	Commercial / Industrial - LT	43.57	0.00	43.57	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	10.69	0.00	10.69	--	--		--		--	--	--	--		
	Other (Specify)	76.88	0.00	76.88	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		6.51		6.51	6.51	6.09	0.41
	Total	**296.36**	**368.35**	**664.71**		**368.35**				**30.22**	**265.16**	**295.38**	**295.38**	**307.14**	**-11.77**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
ONGOLE	Residential	275.01		275.01	Domestic Subsidy: 0-30-47.34 ,31-75-54.59 ,76-125-46.47	--	Domestic Subsidy:0-30-47.34 ,31-75-54.59 ,76-125-46.47	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		17.60	0.00	17.60	17.60	17.60	0.00
	Agriculture (LT+HT)	75.35	27.44	102.79	78.22MU Split(i) corporate farmers:0.03(ii)Slat farming:0.66(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:77.48(D) Agro based cottage:0.04(E) Govt/Pvt LISchemes:0.01(F)Floriculture :0	27.44	105.66	**AgI Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	19.75	19.75	19.75	20.66	-0.91
	Commercial / Industrial - LT	94.35	0.00	94.35	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	146.90	0.00	146.90	--	--		--		--	--	--	--		
	Other (Specify)	79.93	0.00	79.93	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		15.72		15.72	15.72	32.14	-16.42
	Total	**671.53**	**27.44**	**698.97**		**27.44**				**33.32**	**19.75**	**53.07**	**53.07**	**70.40**	**-17.33**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
ONGOLE CIRCLE TOTAL	Residential	1029.09	0.00	1029.09	Domestic Subsidy: 0-30-302.42 ,31-75-343.5 ,76-125-225.09	--	Domestic Subsidy: 0-30-302.42 ,31-75-343.5 ,76-125-225.09	Domestic Subsidy: 0-30- 1.47 31-75-1.10 76-125-0.26		94.36	0.00	94.36	94.36	94.36	0.00
	Agriculture (LT+HT)	170.21	770.60	940.81	166.52MU Split(i) corporate farmers:0.44(ii)Slat farming:1.67(iii)Sugarcane:0.01(v) Horticulture :0.18(B) Aqua:161.96(D) Agro based cottage:0.51(E) Govt/Pvt LISchemes:1.75(F)Floriculture :0	770.60	937.12	Agl Subsidy: (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	554.72	554.72	554.72	580.20	-32.63
	Commercial / Industrial - LT	405.43	0.00	405.43	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	581.11	0.00	581.11	--	--		--		--	--	--	--		
	Other (Specify)	201.21	0.00	201.21	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			Tariff Consessions: SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		67.21	0.00	67.21	67.21	85.95	-18.74
	Total	**2387.05**	**770.60**	**3157.65**		**770.60**				**161.57**	**554.72**	**716.29**	**716.29**	**760.52**	**-51.37**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
GUDIVADA	Residential	265.67		265.67	Domestic Subsidy: 0-30-44.73 ,31-75-60.32 ,76-125-59.51	--	Domestic Subsidy:0-30-44.73 ,31-75-60.32 ,76-125-59.51	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		20.36	0.00	20.36	20.36	20.36	0.00
	Agriculture (LT+HT)	482.28	65.78	548.06	472.93MU Split(i) corporate farmers:0.33(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:472.24(D) Agro based cottage:0(E) Govt/Pvt LISchemes:0.36(F)Floriculture :0	65.78	538.71	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	47.61	47.61	47.61	49.35	-1.73
	Commercial / Industrial - LT	58.68	0.00	58.68	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	356.40	0.00	356.40	--	--		--		--	--	--	--		
	Other (Specify)	41.43	0.00	41.43	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		35.55		35.55	35.55	129.60	-94.06
	Total	**1204.46**	**65.78**	**1270.24**		**65.78**				**55.90**	**47.61**	**103.52**	**103.52**	**199.30**	**-95.79**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
GUNADALA	Residential	511.60		511.60	Domestic Subsidy: 0-30-36.54 ,31-75-49.85 ,76-125-58.9	--	Domestic Subsidy:0-30-36.54 ,31-75-49.85 ,76-125-58.9	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		18.82	0.00	18.82	18.82	18.82	0.00
	Agriculture (LT+HT)	1.37	32.87	34.24	1.24MU Split(i) corporate farmers:0.69(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:0.54(D) Agro based cottage:0(E) Govt/Pvt LISchemes:0.01(F)Floriculture :0	32.87	34.11	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	23.79	23.79	23.79	24.66	-0.87
	Commercial / Industrial - LT	157.35	0.00	157.35	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	209.24	0.00	209.24	--	--		--		--	--	--	--		
	Other (Specify)	43.05	0.00	43.05	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		7.53		7.53	7.53	8.90	-1.37
	Total	**922.61**	**32.87**	**955.48**		**32.87**				**26.35**	**23.79**	**50.14**	**50.14**	**52.38**	**-2.24**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
MACHILIPATNAM	Residential	235.88		235.88	Domestic Subsidy: 0-30-44.82 ,31-75-59.75 ,76-125-53.77	--	Domestic Subsidy:0-30-44.82 ,31-75-59.75 ,76-125-53.77	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		19.06	0.00	19.06	19.06	19.06	0.00
	Agriculture (LT+HT)	207.03	11.06	218.08	203.43MU Split(i) corporate farmers:0.2(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:203.23(D) Agro based cottage:0(E) Govt/Pvt LISchemes:0(F)Floriculture :0	11.06	214.49	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	8.00	8.00	8.00	8.29	-0.29
	Commercial / Industrial - LT	52.45	0.00	52.45	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	46.05	0.00	46.05	--	--		--		--	--	--	--		
	Other (Specify)	18.99	0.00	18.99	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		15.80		15.80	15.80	27.79	-12.00
	Total	**560.40**	**11.06**	**571.45**		**11.06**				**34.85**	**8.00**	**42.86**	**42.86**	**55.14**	**-12.29**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
NUZVID	Residential	186.11		186.11	Domestic Subsidy: 0-30-42.75 ,31-75-63.96 ,76-125-48.69	--	Domestic Subsidy:0-30-42.75 ,31-75-63.96 ,76-125-48.69	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		18.26	0.00	18.26	18.26	18.26	0.00
	Agriculture (LT+HT)	3.28	365.87	369.15	1.98MU Split(i) corporate farmers:0.4(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:1.58(D) Agro based cottage:0(E) Govt/Pvt LISchemes:0(F)Floriculture :0	365.87	367.85	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	264.83	264.83	264.83	274.46	-9.64
	Commercial / Industrial - LT	41.05	0.00	41.05	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	99.54	0.00	99.54	--	--		--		--	--	--	--		
	Other (Specify)	37.27	0.00	37.27	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		15.73		15.73	15.73	16.73	-1.00
	Total	**367.25**	**365.87**	**733.12**		**365.87**				**33.99**	**264.83**	**298.81**	**298.81**	**309.45**	**-10.64**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
VJA RURAL	Residential	278.18		278.18	Domestic Subsidy: 0-30-52.48 ,31-75-75.24 ,76-125-67.55	--	Domestic Subsidy:0-30-52.48 ,31-75-75.24 ,76-125-67.55	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		23.82	0.00	23.82	23.82	23.82	0.00
	Agriculture (LT+HT)	17.51	89.19	106.70	3.65MU Split(i) corporate farmers:0.11(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0.02(B) Aqua:3.09(D) Agro based cottage:0(E) Govt/Pvt LISchemes:0.43(F)Floriculture :0	89.19	92.84	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	64.56	64.56	64.56	66.91	-2.35
	Commercial / Industrial - LT	68.25	0.00	68.25	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	314.29	0.00	314.29	--	--		--		--	--	--	--		
	Other (Specify)	70.00	0.00	70.00	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		18.96		18.96	18.96	20.59	-1.63
	Total	**748.23**	**89.19**	**837.42**		**89.19**				**42.78**	**64.56**	**107.34**	**107.34**	**111.32**	**-3.98**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
VJA TOWN	Residential	576.65		576.65	Domestic Subsidy: 0-30-38.97 ,31-75-53.08 ,76-125-65.22	--	Domestic Subsidy:0-30-38.97 ,31-75-53.08 ,76-125-65.22	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		20.56	0.00	20.56	20.56	20.56	0.00
	Agriculture (LT+HT)	0.55	0.00	0.55	0.11MU Split(i) corporate farmers:0.11(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:0(D) Agro based cottage:0(E) Govt/Pvt LISchemes:0(F)Floriculture :0	0.00	0.11	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	0.00		0.00	0.00	0.00
	Commercial / Industrial - LT	185.46	0.00	185.46	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	127.50	0.00	127.50	--	--		--		--	--	--	--		
	Other (Specify)	49.11	0.00	49.11	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		3.13		3.13	3.13	3.58	-0.45
	Total	**939.27**	**0.00**	**939.27**		**0.00**				**23.69**	**0.00**	**23.69**	**23.69**	**24.14**	**-0.45**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
VUYYUR	Residential	132.57		132.57	Domestic Subsidy: 0-30-32.8 ,31-75-41.82 ,76-125-33.18	--	Domestic Subsidy:0-30-32.8 ,31-75-41.82 ,76-125-33.18	**Domestic Subsidy:** 0-30- 1.47 31-75-1.10 76-125-0.26		12.38	0.00	12.38	12.38	12.38	0.00
	Agriculture (LT+HT)	70.04	35.72	105.76	69.23MU Split(i) corporate farmers:0.28(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0(B) Aqua:68.85(D) Agro based cottage:0(E) Govt/Pvt LISchemes:0.1(F)Floriculture :0	35.72	104.95	**Agl Subsidy:** (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	25.86	25.86	25.86	26.80	-0.94
	Commercial / Industrial - LT	25.18	0.00	25.18	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	11.93	0.00	11.93	--	--		--		--	--	--	--		
	Other (Specify)	10.92	0.00	10.92	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			**Tariff Consessions:** SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		10.77		10.77	10.77	15.32	-4.55
	Total	**250.64**	**35.72**	**286.36**		**35.72**				**23.15**	**25.86**	**49.00**	**49.00**	**54.50**	**-5.50**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
VJA CIRCLE TOTAL	Residential	2186.65	0.00	2186.65	Domestic Subsidy: 0-30-293.09 ,31-75-404.01 ,76-125-386.81	--	Domestic Subsidy: 0-30-293.09 ,31-75-404.01 ,76-125-386.81	Domestic Subsidy: 0-30- 1.47 31-75-1.10 76-125-0.26		133.24	0.00	133.24	133.24	133.24	0.00
	Agriculture (LT+HT)	782.06	600.49	1382.55	752.55MU Split(i) corporate farmers:2.1(ii)Slat farming:0(iii)Sugarcane:0(v) Horticulture :0.03(B) Aqua:749.51(D) Agro based cottage:0(E) Govt/Pvt LISchemes:0.91(F)Floriculture :0	600.49	1353.04	Agl Subsidy: (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	434.65	434.65	434.65	450.46	-3.25
	Commercial / Industrial - LT	588.43	0.00	588.43	--	--		--		--	--	--	--		
	Commercial / Industrial - HT	1164.94	0.00	1164.94	--	--		--		--	--	--	--		
	Other (Specify)	270.77	0.00	270.77	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			Tariff Consessions: SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		107.46	0.00	107.46	107.46	222.53	-115.07
	Total	**4992.86**	**600.49**	**5593.34**		**600.49**				**240.71**	**434.65**	**675.35**	**675.35**	**806.23**	**-118.32**

Division name	Consumer Category (Separate for each subsidized Consumer category)	Billed Energy (as per EA Sales)			Subsidized Billed Energy			Applicable rate of Subsidy as notified by State Govt.		Subsidy Due from State Govt.			Subsidy Actually Billed / Claimed from State Govt. (As against Co.12)	Subsidy Received from State Govt. (As against Col/13)	Balance subsidy yet to be Received from State Govt.
		Metered	Un-Metered	Total	Metered (out of Col.2)	Un-Metered (out of Col.3)	Total	Metered	Un-Metered	Metered	Un-Metered	Total			
DISCOM TOTAL	Residential	5318.39	0.00	5318.39	Domestic Subsidy: 0-30-965.91 ,31-75-1224.01 ,76-125-1010.71	--	Domestic Subsidy: 0-30-965.91 ,31-75-1224.01 ,76-125-1010.71	Domestic Subsidy: 0-30- 1.47 31-75-1.10 76-125-0.26		372.88	0.00	372.88	372.88	372.88	0.00
	Agriculture (LT+HT)	1126.05	1914.48	3040.53	1052.39MU Split(i) corporate farmers:3.82(ii)Slat farming:1.67(iii)Sugarcane:0.011(v) Horticulture :3.76(B) Aqua:1038.75(D) Agro based cottage:0.61(E) Govt/Pvt LISchemes:3.68(F)Floriculture :0.085	1914.48	2966.87	Agl Subsidy: (i) corporate farmers:3.22 (ii) salt farming: 4.34 (iii)Sugarcane:6.97 (v) Horticulture:6.65 (B) Aqua:2.88 (D) Agro based cottage:3.19 (E) Govt/Pvt LISchemes: 0.55	6.88	0.00	1392.20	1392.20	1392.20	1440.34	-48.15
	Commercial / Industrial - LT	1535.26	0.00	1535.26	--	--	--	--	--	--	--	--	--	--	--
	Commercial / Industrial - HT	3034.52	0.00	3034.52	--	--	--	--	--	--	--	--	--	--	--
	Other (Specify)	937.61	0.00	937.61	Tariff concessions: SC/ST units(upto 200 units)-149.12 Laundries-0.00 MBC Communities-0.00 Gold smit-0.16 Rolled Gold-0.72 Nayee Brahmins-0.20 Handlooms-0.54 Aqua-311.12			Tariff Consessions: SC/ST: 0-30: 1.90 31-75: 3.00 76-125: 4.50 126-200: 6.00 Laundries- MBC Communities- Gold smit- Nayee Brahmins- Rolled Gold- Nayee Brahmins- Handlooms- Aqua -2.35		272.82	0.00	272.82	272.82	405.08	-132.26
	Total	**11951.83**	**1914.48**	**13866.31**		**1914.48**	**2966.87**			**1237.64**	**800.26**	**2037.90**	**2037.90**	**2218.30**	**-180.40**

Annexure-5

(Power purchase details)

APCPDCL PP COST FOR FY 22-23

Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310016	NAVEEN		Dr.NTTPS	1609363884	1480645719	6321916916	7802562634
1310016	NAVEEN		Dr.NTTPS-IV	753839637.9	669064439.1	2712006414	3381070853
1310016	NAVEEN		RTPP Stage-I	441581666.8	478021708.6	1893319444	2371341153
1310016	NAVEEN		RTPP Stage-II	579168142.7	615942598.1	2492571797	3108514395
1310016	NAVEEN		RTPP Stage-III	284100198.3	398040360.9	1224840681	1622881042
1310016	NAVEEN		RTPP Stage-IV	669432045	1256346178	2705974859	3962321037
1310016	NAVEEN	SGS	Sub Total APGenco Thermal	4337485574	4898061004	17350630110	22248691114
1310016	NAVEEN		Srisailam -RBPH	430301573.2	530541540	0	530541540
1310016	NAVEEN		NSRCPH	68861223.38	60894060.93	0	60894060.93
1310016	NAVEEN		NSTPDC PH	22230253.02	116933400	0	116933400
1310016	NAVEEN		Upper Sileru	88979139.18	173899783	0	173899783
1310016	NAVEEN		Lower Sileru	246982951.5	369383202	0	369383202
1310016	NAVEEN		Donkarai	22657244.55	27356675.95	0	27356675.95
1310016	NAVEEN		Pennaahobilam	3143659.232	31555678.13	0	31555678.13
1310016	NAVEEN		Mini Hydel (Chettipeta)	670219.77	4247880.934	0	4247880.934
1310016	NAVEEN		Machkund	61884866.34	102962401.4	0	102962401.4
1310016	NAVEEN		TB Dam	40569097.86	48210778.55	0	48210778.55
1310016	NAVEEN	SGS	Sub Total APGenco Hydel	986280228.1	1465985401	0	1465985401
1310016	NAVEEN		RTPP Stage-IV (Differential cost)	0	1824844	1922227	3747071
	NAVEEN			0	0	0	0
	NAVEEN			0	0	0	0
	NAVEEN			0	0	0	0
1310016	NAVEEN		APGenco Total	5323765802	6365871249	17352552337	23718423586



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310005	NAVEEN	SGS	APGPCL Stage I	0	0	0	0
1310005	NAVEEN	SGS	APGPCL Stage II	0	0	0	0
1310394	RAMBABU	SGS	APPDCL Unit -1	674629396.2	1761461603	2181251370	3942712972
1310394	RAMBABU	SGS	APPDCL Unit -2	596949675	1761468565	1930560461	3692029025
1310394	RAMBABU	SGS	APPDCL STAGE -2,UNIT-3 (800 MV	27342571.93	39095287.02	85855675.82	124950962.8
1310394	RAMBABU	SGS	FCA CLAIMS FY 22-23	0	0	93737571.76	93737571.76
1310497	NAVEEN	Own	Godavari Gas Power Plant	53216508.02	69975142.63	309727983.5	379703126.1
		1	SGS TOTAL	6675903953	9997871845	21953685399	31951557244
1310654	PALLAVI	CGS	NTPC (SR) Ramagundam I & II	468580590	377555920	1938442054	2315997974
RRAS	PALLAVI	CGS	RRAS	0	0	-231158	-231158
1310654	PALLAVI	CGS	NTPC (SR) Simhadri Stage I	753924580	1302249836	3384633732	4686883568
1310654	PALLAVI	CGS	NTPC (SR) Simhadri Stage I (2019-2	0	159334106	0	159334106
1310654	PALLAVI	CGS	NTPC (SR) Simhadri Stage 2	317433027	737509870	1384789065	2122298935
1310654	PALLAVI	CGS	NTPC (SR) Talcher St. II	306975007	385566790	594147462	979714252
1310654	PALLAVI	CGS	NTPC (SR) Talcher St. II (2019-20)	0	32529373	0	32529373
1310654	PALLAVI	CGS	NTPC (SR) Ramagundam Stage-III	105909952	95833700	407071067	502904767
1310654	PALLAVI	CGS	NTPC Kudgi Stage I	286497479	648036982	1634277548	2282314530
1310654	PALLAVI	CGS	NTPC DADRI	0	-701464	0	-701464
1310334	PALLAVI	CGS	NTECL Valluru	129370984	268513865	449828902	718342767
1310334	PALLAVI	CGS	NTECL 19-20	0	6519719	0	6519719
1310003	PALLAVI	CGS	NLC Stage-I	52348521	62610720.8	142912841	205523561.8
1310003	PALLAVI	CGS	NLC Wage revision Stage 1	0	36631454	0	36631454
1310003	PALLAVI	CGS	NLC TPS I EXP)	1705942	1944421	4208388	6152809
1310003	PALLAVI	CGS	NLC Deferred tax liability	0	289531	0	289531
1310003	PALLAVI	CGS	NLC Stage-II	104232302	120075072	285378673	405453745
1310003	PALLAVI	CGS	NLC Wage revision Stage 2	0	70222706	0	70222706



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310003	PALLAVI	CGS	NLC TPS II EXP	649639	1419422	1703935	3123357
1310304	PALLAVI	CGS	NTPC Aravalli	0	12472462	0	12472462
1310004	RADHA	CGS	NPC (MAPS)	13849862.01	0	36364790.97	36364790.97
1310007	RADHA	CGS	NPC (Kaiga Unit-I,II & III)	205097561.2	0	725038144.2	725038144.2
1310654	PALLAVI	CGS	NTPC Mouda	0	4116434	0	4116434
1310413	RADHA	CGS	NPCIL(Kudamkulam)	1485990.44	0	6529261.682	6529261.682
SCED	RADHA	CGS	SCED	0	0	-39369795	-39369795
1310438	PALLAVI	CGS	NTPL (NLC Tamilnadu Power Ltd Sta	164147342	304044875	682259747	986304622
1310438	PALLAVI	CGS	NTPL Surcharge	0	36659455	0	36659455
1310660	PALLAVI	CGS	NLC NNTPS	84204874	154903948	185472892	340376840
		2	CGS TOTAL	2996413653	4818339198	11823457550	16641796748
1310010	NAVEEN	IPP	Spectrum Power	0	0	0	0
1310017	NAVEEN	IPP	Lanco Kondapalli	0	65900375	2633615	68533990
1310434	BHUVANA	IPP	Thermal Powertech Corporation India	418977553	639350320	969790144	1609140464
1310434	BHUVANA	IPP	Change in Law(TPCIL)	0	0	118140583	118140583
1310434	BHUVANA	IPP	Carrying Cost(TPCIL)	0	0	0	0
1310688	BHUVANA	IPP	SEMBCORP PROJECT-2 (350MW)	110811994	189127602	250293718	439421320
1310688	BHUVANA	IPP	SEMBCORP PROJECT-2 (150MW)	18485280	0	131430341	131430341
1310688	BHUVANA	IPP	SEMBCORP PROJECT-2 (125MW)	15404400	34382621	82413540	116796161
1310441	KUS KUMAR	IPP	Hinduja National Power Corp Ltd(HNI	1058072219	1432762418	3259860038	4692622457
1310441	KUS KUMAR	IPP	Hinduja National Power Corp Ltd(HNI	0	2884552121	0	2884552121
1310216	PALLAVI	IPP	Srivathsa Power	0	0	0	0
		3	IPP TOTAL	1621751446	5246075457	4814561979	10060637437
1310107	MALLI	ST	Indian Energy Exchange Ltd	1582028929	0	11650705978	11650705978
1310107	MALLI	ST	Indian Energy Exchange Ltd(STOA ch	0	0	419767233	419767233
1310132	MALLI	ST	Power Exchange India Ltd	181421002	0	1531385948	1531385948



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310132	MALLI	ST	Power Exchange India Ltd(STOA Cha	0	0	48523316	48523316
1310685	MALLI	ST	HINDUSTAN POWER EXCHANGE	68927688	0	463152890	463152890
1310685	MALLI	ST	HINDUSTAN POWER EXCHANGE	0	0	18336929	18336929
1310662	RADHA	ST	NHPC Limited (Trading)	0	0	0	0
1310264	RADHA	ST	Kreate Energy(Trading)	0	0	0	0
1310046	RADHA	ST	NVVNL Limited Banked (Trading)	0	0	10579359.61	10579359.61
1310046	RADHA	ST	NTPC Limited (Trading)	0	0	0	0
1310264	RADHA	ST	Kreate Energy (STOA Charges)	0	0	13483338.52	13483338.52
1310046	RADHA	ST	NVVNL-OTPC	61480464.85	0	504885805.5	504885805.5
1310046	RADHA	ST	NVVNL-APNAR	0	0	0	0
1310046	RADHA	ST	NVVNL-JPNL	0	0	0	0
1310038	RADHA	ST	PTC-SEIL	0	0	0	0
1310038	RADHA	ST	PTC-NBEIL	0	0	0	0
1310038	RADHA	ST	PTC-OTPC	68776292.02	0	704346908.1	704346908.1
1310038	RADHA	ST	PTC-EMPL	0	0	0	0
1310530	RADHA	ST	ARUNCHAL PRADESH	0	5369243.692	315066	5684309.692
1310629	RADHA	ST	SEMBCORP GAYATRI POWER LTI	0	0	0	0
1310687	RADHA	ST	Shubheksha (STOA & Trading Margin	0	0	23861589.48	23861589.48
1310687	RADHA	ST	Shubheksha	2623117.248	0	23083431.78	23083431.78
		4	INTER STATE TRADERS (SHORT T	1965257493	5369243.692	15412427793	15417797037
1310186	RADHA	Bagasse	Chodavaram Sugars	348183.2025	564056.7881	914836.1421	1478892.93
1310184	RADHA	Bagasse	Deccan sugars/Navabharat	0	0	0	0
1310182	RADHA	Bagasse	Etikoppaka Ind Ltd	0	0	0	0
1310183	RADHA	Bagasse	EID Parry India Ltd (GMR Tech)	0	0	0	0
1310167	MADHAVI	Bagasse	Sagar Sugars (Seasonal)	3092573.86	0	16514341.85	16514341.85
1310173	AMARAVATHI	Bagasse	KCP sugars Vuyyuru	1814218.2	0	9170424.406	9170424.406



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310174	AMARAVATHI	Bagasse	KCP Sugars lakshmipuram	0	0	0	0
1310175	MADHAVI	Bagasse	Empee Power Company(India)	0	0	0	0
		5	NCE -BAGASSE Total	5254975.263	564056.7881	26599602.4	27163659.19
1310180	RADHA	Biomass	Shri Papers Limited	344639.3154	651369.5094	1902413.319	2553782.828
1310179	RADHA	Biomass	Sri Kalyani Agro product	0	0	0	0
1310178	RADHA	Biomass	Varam Power	0	0	0	0
1310153	AMARAVATHI	Biomass	Sri Venkata Sreedevi(Bollineni Casting	0	0	949262	949262
1310163	AMARAVATHI	Biomass	Balaji Agro	6629163.94	0	48883951.35	48883951.35
1310161	AMARAVATHI	Biomass	Matrix Power	0	0	0	0
1310147	MADHAVI	Biomass	Satyakala power	0	0	0	0
1310148	MADHAVI	Biomass	Satyamaharshi	9298100	0	67272819	67272819
1310156	AMARAVATHI	Biomass	Jocil Ltd	0	0	0	0
1310150	AMARAVATHI	Biomass	Jyothi Bio Energy 6MW	0	0	0	0
1310149	AMARAVATHI	Biomass	Jyothi Bio Energy 6MW	0	0	0	0
1310155	AMARAVATHI	Biomass	Clarion Power	0	0	0	0
1310158	MADHAVI	Biomass	Greenko (Sri Balaji Biomass)	0	0	0	0
1310154	MADHAVI	Biomass	Veeraiah non Conventional	0	0	0	0
1310151	MADHAVI	Biomass	Vijaya Agro Power	0	0	0	0
1310622	RADHA	Biomass	Vishnu Vidyut India Ltd	0	0	0	0
1310122		Biomass	Sri Rayalaseema Energy	0	0	0	0
		6	NCE-Biomass Total	16271903.26	651369.5094	119008445.7	119659815.2
1310189	RADHA	Iwaste	3F Industries Ltd (Foods & Fats)	1710075.18	2804522.375	9439614.434	12244136.81
1310420	MADHAVI	Iwaste	Redan Infra Pvt Ltd	0	0	0	0
1310682	LAKSHMI	Iwaste	Jindal urban waste Mangament (guntur	66419920.42	0	417614751.1	417614751.1
1310683	RAMBABU	Iwaste	Jindal urban waste Mangament (Viskap	9690650.64	0	60576260.25	60576260.25
		7	NCE-Industrial Waste TOTAL	77820646.24	2804522.375	487630625.8	490435148.2



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310192	RADHA	Mhydel	Sardar Power	1071054.46	2149856.541	31241.0568	2181097.597
1310191	RADHA	Mhydel	Mani Hamsa	0	0	0	0
1310169	AMARAVATHI	Mhydel	Active Corp Ltd	0	0	0	0
1310164	AMARAVATHI	Mhydel	Bhavani Hydro	630883.564	0	1950463.541	1950463.541
1310166	MADHAVI	Mhydel	Pmc Power	0	0	0	0
1310172	AMARAVATHI	Mhydel	Balaji Energy pvt ltd	1891399.092	0	5694122.723	5694122.723
1310037	MADHAVI	Mhydel	Km Power Velpanur	284141.16	0	860599.9488	860599.9488
1310030	MADHAVI	Mhydel	Km Power Gkondur	0	0	0	0
1310040	MADHAVI	Mhydel	Km Power Madhavaram	2370060.18	0	6679609.536	6679609.536
1310029	MADHAVI	Mhydel	Ncl energy Chabolu	0	0	0	0
1310573	RADHA	Mhydel	Vetamamidi MHPP Project	868831.5	1528151.723	0	1528151.723
1310051	RAMBABU	Mhydel	Ncl Energy TB Dam	5731501.968	0	10352239.15	10352239.15
1310674	AMARAVATHI	Mhydel	KANDALERU	0	0	0	0
1310409	SIVAJI/LAKSHMI	banked Energy	Deccan cements	0	0	0	0
1310416	SIVAJI/LAKSHMI	banked Energy	The KCP Ltd., GNT - 4096, 4000 & 40	0	0	2167797.675	2167797.675
1310609	SIVAJI/LAKSHMI	banked Energy	Trimula Cotton & Agro Products GNT	0	0	1854653.162	1854653.162
		8	Mini Hydel Total	12847871.92	3678008.264	29590726.8	33268735.06
1310328	SUNITHA	Wind	NEDCAP,1.60 MW	172496.604	0	550960.6557	550960.6557
1310232	SUNITHA	Wind	Nandi Rollers Flour Mills (P) Ltd.,	76898.19015	0	195947.2479	195947.2479
1310233	SUNITHA	Wind	Orange Sorting Machines (India) Pvt. L	76584.8418	0	194857.0242	194857.0242
1310234	SUNITHA	Wind	Prakash Beedies Pvt. Ltd.	73634.14935	0	183998.0141	183998.0141
1310235	SUNITHA	Wind	Vikram Traders	67476.21887	0	171820.2108	171820.2108
1310236	SUNITHA	Wind	Compucom Software Ltd	70315.0176	0	178693.5981	178693.5981
1310237	SUNITHA	Wind	Chandulal Surajlal	49668.13475	0	126058.357	126058.357
1310238	SUNITHA	Wind	G.Shoe Export	42879.7812	0	109560.8329	109560.8329
1310239	SUNITHA	Wind	Arts & Crafts Exports	54163.2708	0	137449.4934	137449.4934



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310240	PARIMALA	Wind	Meghna Associates	33473.53978	0	86565.22241	86565.22241
1310241	BHUVANA	Wind	Mayura Steels Pvt. Ltd.	61828.32986	0	157643.9616	157643.9616
1310257	BHUVANA	Wind	Shilpa Medicare Ltd	114371.814	0	293306.778	293306.778
1310242	BHUVANA	Wind	S. Kumar	60931.34332	0	155508.9164	155508.9164
1310243	BHUVANA	Wind	Siddaganga Oil Extractions Pvt Ltd	124415.2867	0	317576.4102	317576.4102
1310244	BHUVANA	Wind	Protectron Elecromech Pvt. Ltd Ankire	61305.42283	0	156344.3904	156344.3904
1310245	BHUVANA	Wind	Canara Cement Pipes	52557.45546	0	133977.4327	133977.4327
1310246	BHUVANA	Wind	Texmo Precision Castings	122533.1071	0	311976.9108	311976.9108
1310247	BHUVANA	Wind	Texmo Industries	160296.7113	0	407870.7012	407870.7012
1310248	BHUVANA	Wind	Vaayu Phase - I	483140.446	0	1275168.763	1275168.763
1310249	BHUVANA	Wind	Vaayu Phase -II	382549.763	0	1009792.03	1009792.03
1310250	BHUVANA	Wind	Vaayu Phase -III	442928.5995	0	1169170.153	1169170.153
1310251	BHUVANA	Wind	Vaayu Phase -IV	1063636.271	0	2807249.542	2807249.542
1310252	BHUVANA	Wind	Vaayu Phase -V	521895.3374	0	1377614.558	1377614.558
1310253	BHUVANA	Wind	Vaayu Phase -VI	1010121.983	0	2666337.093	2666337.093
1310254	BHUVANA	Wind	Vaayu Phase -VII	816757.556	0	2155673.297	2155673.297
1310255	SUNITHA	Wind	Vish Wind Phase I	64362.8508	0	156375.568	156375.568
1310256	SUNITHA	Wind	Vish Wind Phase II	305433.6061	0	741984.4396	741984.4396
1310284	SUNITHA	Wind	Vish Wind Phase III	121740.5064	0	295786.6297	295786.6297
1310318	SUNITHA	Wind	Vish Wind Phase - IV	148702.1145	0	361242.516	361242.516
1310297	SUNITHA	Wind	International Conveyors Ltd., Phase I	59976.0978	0	153022.6789	153022.6789
1310298	SUNITHA	Wind	International Conveyors Ltd., Phase II	52136.92649	0	132975.8293	132975.8293
1310302	SUNITHA	Wind	Triveni Enterprises	70492.462	0	179856.1728	179856.1728
1310281	E.SRINIVAS	Wind	Happy Valley Developers	47662.7696	0	121322.9538	121322.9538
1310282	E.SRINIVAS	Wind	Shreem Electric Ltd.,	105686.7798	0	269874.1702	269874.1702
1310283	E.SRINIVAS	Wind	Texonic Instruments	49751.2384	0	126230.6122	126230.6122



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310319	E.SRINIVAS	Wind	Ramsons Asbestos Cement Products	324835.8504	0	137221	137221
1310410	E.SRINIVAS	Wind	Hetero Wind Power(13.5)	2297506.276	0	10794730.39	10794730.39
1310482	E.SRINIVAS	Wind	Sunwin Powertech(4 MW)	367574.8914	0	1775386.508	1775386.508
1310483	E.SRINIVAS	Wind	Vibrant (0.8MW)	69448.8702	0	335438.2788	335438.2788
1310513	E.SRINIVAS	Wind	Hetero Wind Power(10.5 MW)	1548986.408	0	7479366.368	7479366.368
1310514	E.SRINIVAS	Wind	Hetero Wind Power(6MW)	989843.0982	0	4779504.866	4779504.866
1310515	E.SRINIVAS	Wind	Hetero Wind Power(24 MW)	3511742.235	0	16956627.87	16956627.87
1310563	E.SRINIVAS	Wind	Fujin Wind Parks	6349641.865	0	30731932.51	30731932.51
1310561	E.SRINIVAS	Wind	Aeolus Wind parks Pvt.Ltd	412448.8422	0	1996229.355	1996229.355
1310555	E.SRINIVAS	Wind	Dindore Winds Pvt. Ltd	898131.1356	0	4346883.612	4346883.612
1310581	E.SRINIVAS	Wind	PTC Energy -Kandimallayapalli	5761622.774	0	27885945.8	27885945.8
1310345	PARIMALA	Wind	M.G.M. Springs Pvt. Ltd	63959.10614	0	155397.2296	155397.2296
1310344	PARIMALA	Wind	Protectron Electromech Pvt.Ltd	0	0	0	0
1310341	PARIMALA	Wind	Vish Wind Infrastructure Pvt Ltd (Phas	0	0	0	0
1310342	PARIMALA	Wind	Vish Wind Infrastructure Pvt Ltd (Phas	0	0	0	0
1310343	PARIMALA	Wind	Vish Wind Infrastructure Pvt Ltd (Phas	0	0	0	0
1310335	PARIMALA	Wind	Tadas Wind Energy Pvt Ltd (Phase -I)	0	0	0	0
1310336	PARIMALA	Wind	Tadas Wind Energy Pvt Ltd (Phase -II)	0	0	0	0
1310337	PARIMALA	Wind	Tadas Wind Energy Pvt Ltd (Phase -III	0	0	0	0
1310338	PARIMALA	Wind	Tadas Wind Energy Pvt Ltd (Phase -IV	0	0	0	0
1310339	PARIMALA	Wind	Tadas Wind Energy Pvt Ltd (Phase -V)	0	0	0	0
1310340	PARIMALA	Wind	Tadas Wind Energy Pvt Ltd (Phase -VI	0	0	0	0
1310353	PARIMALA	Wind	Tadas Wind Energy Pvt Ltd (Phase -VI	0	0	0	0
1310356	PARIMALA	Wind	Oil Country Tubular Ltd	0	0	0	0
1310354	PARIMALA	Wind	R3K Power LLP(Formerly Sukaso Cer	4847.2512	0	22295.48832	22295.48832
1310368	PARIMALA	Wind	Neminath Trading Company	60134.8098	0	282611.7832	282611.7832



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310369	PARIMALA	Wind	Khandke Wind Energy Pvt Ltd (Phase-	227714.6094	0	1070177.208	1070177.208
1310373	PARIMALA	Wind	Khandke Wind Energy Pvt Ltd (Phase-	552541.6125	0	2596746.722	2596746.722
1310382	PARIMALA	Wind	Khandke Wind Energy Pvt Ltd (Phase-	295739.329	0	1389870.05	1389870.05
1310374	PARIMALA	Wind	Khandke Wind Energy Pvt Ltd (Phase-	194650.0584	0	914786.4215	914786.4215
1310387	PARIMALA	Wind	Khandke Wind Energy Pvt Ltd (Phase-	1568327.028	0	7370583.463	7370583.463
1310371	PARIMALA	Wind	Saptagir Camphor Ltd-I	54319.97712	0	255283.9368	255283.9368
1310454	PARIMALA	Wind	Amrit Bottlers Pvt Ltd	74250.22329	0	315537.4832	315537.4832
1310572	PARIMALA	Wind	Saptagir Camphor Ltd-2	80268.49432	0	341112.8011	341112.8011
1310474	PARIMALA	Wind	KKV Agro Powers Ltd	104905.6553	0	445811.1074	445811.1074
1310550	PARIMALA	Wind	TSSS Infotech and Infra Pvt Ltd	248109.4337	0	1198280.106	1198280.106
1310522	SUNITHA	Wind	Sterling Agro Industries Ltd-1	96708.83086	0	467066.5171	467066.5171
1310523	SUNITHA	Wind	Sterling Agro Industries Ltd-2	574312.209	0	2773713.587	2773713.587
1310324	SUNITHA	Wind	Mytrah Vayu (Pennar) Pvt Ltd (Phase-	1209246.8	0	2938208.842	2938208.842
1310326	SUNITHA	Wind	Indian Oil Corporation Ltd (16.8 MW)	1419466.446	0	3565045.175	3565045.175
1310325	SUNITHA	Wind	Indian Oil Corporation Ltd (10.5 MW)	711089.5104	0	1790800.466	1790800.466
1310346	SUNITHA	Wind	Mytrah Vayu (Pennar) Pvt Ltd (Phase-	3323713.561	0	15620720.13	15620720.13
1310408	SUNITHA	Wind	En En Electrical Engineers Pvt Ltd	140549.7456	0	660567.9331	660567.9331
1310411	SUNITHA	Wind	Santhiram Wind Power Private Ltd	125979.5172	0	592075.9329	592075.9329
1310392	SUNITHA	Wind	Hi-tech Systems & Services Ltd	306971.8812	0	1442702.07	1442702.07
1310389	SUNITHA	Wind	Woodside Fashions Ltd	146795.2962	0	689905.6713	689905.6713
1310543	SUNITHA	Wind	Ostro Andhra Wind Pvt Ltd	11614018.54	0	56211850.62	56211850.62
1310544	SUNITHA	Wind	Ostro AP Wind Pvt Ltd	11844314.56	0	57326481.95	57326481.95
1310524	SUNITHA	Wind	Danu Wind Parks Pvt Ltd	3373321.097	0	16324774.68	16324774.68
1310525	SUNITHA	Wind	Natco Power Pvt Ltd	248351.604	0	1201862.391	1201862.391
1310405	SUNITHA	Wind	Vena Energy Power Resources Pvt Ltd	3850339.583	0	18096549.66	18096549.66
1310549	SUNITHA	Wind	Axis Wind Farms (Anantapur)Pvt Ltd	8478787.152	0	41037329.77	41037329.77



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310602	SUNITHA	Wind	Axis Wind Farms (Rayalaseema) Pvt L	8830237.371	0	42738348.88	42738348.88
1310621	SUNITHA	Wind	Vibrant Greentech India Pvt Limited 2.	17467.656	0	23.1066	23.1066
1310451	DAS	Wind	Guttaseema Wind Energy Company Pv	1327951.24	0	6427283.888	6427283.888
1310453	DAS	Wind	Eenadu Television Private Ltd 2.1 MW	119196.213	0	506583.8469	506583.8469
1310455	DAS	Wind	Ushodaya Enterprises Private Ltd 4.2 M	224954.421	0	956056.2893	956056.2893
1310456	MADHAVI	Wind	SANDLA WIND PROJECT Pvt. Ltd 5	6055591.475	0	29248507.05	29248507.05
1310457	DAS	Wind	Mangalam Fashions Limited 2.1 MW (	109995.3516	0	531277.3778	531277.3778
1310458	DAS	Wind	Levelstate Systems Pvt. Ltd 2.1 MW (E	100319.5212	0	484543.11	484543.11
1310459	DAS	Wind	Woodside Fashions Limited 2.1 MW (I	105088.1166	0	507575.7339	507575.7339
1310461	DAS	Wind	Imperial Arts 2.1 MW (BLG 91)	107912.49	0	458628.2576	458628.2576
1310462	DAS	Wind	Jai Bharat Gum & Chemicals Ltd 2.1 M	114213.123	0	551649.2931	551649.2931
1310463	DAS	Wind	Dinesh Enterprises 2.1 MW (BLG-121	99664.8342	0	481381.2052	481381.2052
1310464	DAS	Wind	Kaushaliya Devi Dhoot 2.1 MW (BLG	102598.6722	0	495551.6731	495551.6731
1310465	DAS	Wind	Satya Narayana Dhoot 2.1 MW (BLG-	101289.2982	0	489227.1072	489227.1072
1310466	DAS	Wind	OM Prakash Soni 2.1 MW (BLG-44)	90082.1304	0	382849.346	382849.346
1310467	DAS	Wind	Manoj Agarwalla 2.1 MW (BLG-045)	104931.2718	0	445957.38	445957.38
1310468	DAS	Wind	Prince Art Exporter 4.2 MW (BLG 92-	217936.3164	0	926229.6365	926229.6365
1310469	DAS	Wind	SAI PET Preforms 2.1 MW (BLG-47)	101616.2916	0	490806.3197	490806.3197
1310470	DAS	Wind	Shree Ram Industries 4.2 MW (BLG 4	195292.3152	0	829992.2229	829992.2229
1310471	DAS	Wind	Shri Nath Gum & Chemicals 2.1 MW (	100829.967	0	487008.3322	487008.3322
1310472	DAS	Wind	Rajasthan Gum Private Ltd 8.4MW (BI	389237.4456	0	1880016.853	1880016.853
1310477	MADHAVI	Wind	Chimique (India) Ltd 2.1 MW AVR00	231317.3718	0	1073180.764	1073180.764
1310501	DAS	Wind	Hi-Tech Systems & Services Pvt Ltd 2.	115938.8826	0	559984.929	559984.929
1310502	MADHAVI	Wind	Mytrah Vayu (Indravathi) Private Ltd (	6340190.099	0	30623117.65	30623117.65
1310520	DAS	Wind	Orange Uravakonda Wind Power Pvt L	11691931.66	0	56588949.34	56588949.34
1310526	MADHAVI	Wind	Jai Bharat Gum & Chemicals Ltd 2.1M	228087.1158	0	1103941.062	1103941.062



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310527	MADHAVI	Wind	RBA Properties Ltd 2.1 (AVR001)	232228.7988	0	1123987.302	1123987.302
1310551	MADHAVI	Wind	Rajasthan Gum Private Ltd 4.2 MW (V	405282.0618	0	1961565.142	1961565.142
1310553	MADHAVI	Wind	Jai Bharat Gum & Chemicals Ltd 4.2M	468518.2908	0	2267628.005	2267628.005
1310556	DAS	Wind	Saipuram Wind Energy Pvt Ltd 104.5 M	10490025.76	0	50771724.47	50771724.47
1310582	DAS	Wind	Adurjee & Bros Private Limited 14.7M	1135265.536	0	5494685.071	5494685.071
1310583	DAS	Wind	Naukhal Investment Private Limited 4.	388007.8944	0	1877958.134	1877958.134
1310584	DAS	Wind	Cyrus Poonawalla Family Trust 2.1 MV	179797.5894	0	870220.2393	870220.2393
1310585	DAS	Wind	Mayank Green Energy 2.1 MW (BLG-	259464.7116	0	1255809.372	1255809.372
1310586	DAS	Wind	Hi-Tech Systems & Services Pvt Ltd 8.	972438.2268	0	4706600.215	4706600.215
1310587	DAS	Wind	Hi-Tech Systems & Services Pvt Ltd 4.	477222.7104	0	2309757.638	2309757.638
1310588	DAS	Wind	Villos Greenfield Farms 6.3 MW (BLC	501101.631	0	2425332.081	2425332.081
1310589	DAS	Wind	CYZA Chem Private Limited 4.2 MW	350618.148	0	1696991.706	1696991.706
1310590	DAS	Wind	Poonawala Estates Stud and Agri Farm	383289.2466	0	1855120.056	1855120.056
1310591	DAS	Wind	Chanda Investment & Trading Co.Pvt L	366151.6182	0	1772173.664	1772173.664
1310592	DAS	Wind	Poonawalla Aviation Pvt Ltd 6.3MW (	526012.413	0	2545899.761	2545899.761
1310593	DAS	Wind	Poonawalla Shares and Securities Pvt L	335917.449	0	1625840.248	1625840.248
1310594	MADHAVI	Wind	Eenadu Television Private Ltd 10.5MW	1033804.455	0	4393669.05	4393669.05
1310597	DAS	Wind	Ushodaya Enterprises Pvt. Ltd 6.3 MW	746062.6332	0	3170766.249	3170766.249
1310603	MADHAVI	Wind	Arkas Energy LLP 2.1 MW (VAJ007)	179871.1104	0	870576.0716	870576.0716
1310605	MADHAVI	Wind	Chimique (India) Ltd 2.1MW (VAJ-00	213683.535	0	1034229.626	1034229.626
1310606	MADHAVI	Wind	Ushodaya Enterprises Pvt. Ltd 2.1MW	209858.8092	0	891899.9975	891899.9975
1310618	DAS	Wind	Eenadu Television Private Ltd 2.1MW	217886.3688	0	1017687.067	1017687.067
1310619	DAS	Wind	Vayuputhra Energy Private Limited 20	1927163.961	0	9327473.627	9327473.627
1310358	AMARAVATHI	Wind	NALCO,Gandikota	2068068.008	0	9510504.147	9510504.147
1310370	AMARAVATHI	Wind	IOCL(14.7MW)	1703528.017	0	8004111.536	8004111.536
1310401	AMARAVATHI	Wind	IOCL(4.2MW)	678097.4868	0	3186133.831	3186133.831



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310376	AMARAVATHI	Wind	Sri KPR Infra & Project Ltd	247134.6564	0	1155841.661	1155841.661
1310378	E.SRINIVAS	Wind	KRBL LTD(2.1)MW	229776.9318	0	1079662.887	1079662.887
1310377	E.SRINIVAS	Wind	Sri KPR Industries Ltd(Sri Venkateswa	213697.7724	0	1004097.77	1004097.77
1310375	AMARAVATHI	Wind	Weld fuse Pvt ltd	229688.2398	0	1079248.835	1079248.835
1310519	AMARAVATHI	WIND	Orange Ananthapur wind power Pvt Lt	9151740.736	0	43560213.46	43560213.46
1310539	AMARAVATHI	WIND	Tata Power Renewable Energy Ltd	8609785.703	0	41671362.73	41671362.73
1310518	AMARAVATHI	WIND	Ostro Anantapur Pvt Ltd	9869545.865	0	47768601.1	47768601.1
1310425	AMARAVATHI	WIND	Poly Solar Park	2515897.956	0	12151787.27	12151787.27
1310424	AMARAVATHI	Wind	Jed Solar park	2813144.293	0	13668281.04	13668281.04
1310623	AMARAVATHI	WIND	Zemira Renewable Energy Ltd(50.4MV	3712884.955	0	17970362.72	17970362.72
1310601	AMARAVATHI	WIND	RSM Estates Ltd	166377.0894	0	802947.8148	802947.8148
1310596	AMARAVATHI	WIND	Mangalam fashions Limited	193126.3632	0	932061.4272	932061.4272
1310599	AMARAVATHI	WIND	Bommidala Enterprises Pvt Ltd	182477.2548	0	772982.7558	772982.7558
1310600	AMARAVATHI	WIND	Daulat Financial Services Pvt Ltd 2MV	188341.4298	0	906394.896	906394.896
1310604	AMARAVATHI	WIND	Amrit bottles Pvt Ltd 2MW	246098.3604	0	1042546.219	1042546.219
1310598	AMARAVATHI	WIND	HC commercial Ltd2.00MW	182632.4658	0	878424.4734	878424.4734
1310595	AMARAVATHI	WIND	Sri KPR Infra & Projects Ltd (2MW)	253686.6612	0	1224339.845	1224339.845
1310419	AMARAVATHI	WIND	Rajasthan Gum Private Ltd 2.1	167767.4532	0	741195.0762	741195.0762
1310418	AMARAVATHI	WIND	KRBL 8.4 tallimadugula	543080.2548	0	2432414.977	2432414.977
1310439	AMARAVATHI	WIND	Hi-Tech systems & Services Ltd 2.1MV	239237.8008	0	1086548.887	1086548.887
1310414	AMARAVATHI	WIND	Sterling Agro Industries ltd 4.2MW	0	0	0	0
1310447	AMARAVATHI	WIND	Sri Vijayeebhava Enterprises Pvt Ltd 2	149519.7744	0	701190.894	701190.894
1310552	AMARAVATHI	WIND	NREDCAP Ltd 4MW Molagavali	603486.5088	0	2564426.717	2564426.717
1310578	E.SRINIVAS	WIND	PTC Energy Ltd 50MW Molagavalli-3	6581163.695	0	31850225.2	31850225.2
1310559	AMARAVATHI	WIND	Molagavalli Renewable Pvt Ltd 46MW	6999593.646	0	33875447.47	33875447.47
1310580	E.SRINIVAS	WIND	PTC Energy Ltd 40MW Payalakunta	2864869	0	13862044.72	13862044.72



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310548	E.SRINIVAS	WIND	Animala wind power pvt Ltd 60MW	6483083.881	0	31313295.03	31313295.03
1310562	E.SRINIVAS	WIND	Animala wind power pvt Ltd 30MW	2818631.06	0	13642174.22	13642174.22
1310579	E.SRINIVAS	WIND	PTC Energy Ltd 49.5MW Devanakond	5926323.818	0	28680287.93	28680287.93
1310577	E.SRINIVAS	WIND	Green Infra Wind Solutions LTD (SEM	7162579.667	0	34663178.34	34663178.34
1310554	E.SRINIVAS	WIND	Danu Wind Parks Pvt Ltd (23MW)	4606592.46	0	22293876.93	22293876.93
1310541	E.SRINIVAS	WIND	Renew Wind Energy 4.2 (Shivapur) Pv	520188.1494	0	2516659.54	2516659.54
1310540	E.SRINIVAS	WIND	Renew Wind Energy39.9 (Shivapur) P	5157055.157	0	24950464.9	24950464.9
1310542	E.SRINIVAS	WIND	Renew Wind Energy31.5(Shivapur) Pv	4570990.791	0	22114554.31	22114554.31
1310538	E.SRINIVAS	WIND	Renew Wind Energy 44.1(Shivapur) P	5838332.252	0	28188226.35	28188226.35
1310430	E.SRINIVAS	WIND	BNR Constructions	0	0	0	0
1310301	E.SRINIVAS	WIND	Sai Silks (Kalamandir)	0	0	0	0
1310690	E.SRINIVAS	WIND	DANU WIND PARKS PVT LTD 2.3M	3247838.489	0	10007520	10007520
1310436	LAVANYA	WIND	ANANTPURA WIND ENERGIES PV	812955.54	0	3819916.593	3819916.593
1310547	LAVANYA	WIND	AXIS WIND FARMS (MPR DAM) P	6848352.78	0	33146027.46	33146027.46
1310372	LAVANYA	WIND	BETA WIND FARM PRIVATE LTD	2074809.3	0	9751545.36	9751545.36
1310081	LAVANYA	WIND	BHARAT WIND FARM	0	0	0	0
1310428	LAVANYA	WIND	ENERGON POWER RESOURCES P	9886824	0	46468072.8	46468072.8
1310565	LAVANYA	WIND	HELIOS INFRATECH PRIVATE LIM	11439167.4	0	55365570.22	55365570.22
1310056	LAVANYA	WIND	HYDERABAD CHEMICALS LTD., A	257766.96	0	674836.422	674836.422
1310450	LAVANYA	WIND	JINDAL ALUMINIUM LIMITED 25.	2802263.418	0	13526072.44	13526072.44
1310575	LAVANYA	WIND	KCT RENEWABLE ENEGRY PVT L	1538138.676	0	7428690.817	7428690.817
1310576	LAVANYA	WIND	KCT RENEWABLE ENEGRY PVT L	2512560.336	0	12159029.86	12159029.86
1310517	LAVANYA	WIND	KCT RENEWABLE ENEGRY PVT L	2870796.66	0	13865866.18	13865866.18
1310449	LAVANYA	WIND	KCT RENEWABLE ENERGY PVT L	2802153.72	0	13520795.25	13520795.25
1310516	LAVANYA	WIND	KCT RENEWABLE ENERGY PVT L	3164227.14	0	15283112.06	15283112.06
1310433	LAVANYA	WIND	MYTRAH VAYU (INDRAVATI) PV	4236149.316	0	20453733.98	20453733.98



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310620	LAVANYA	WIND	MYTRAH VAYU (KRISHNA) PRIV.	216414.599	0	1045173.56	1045173.56
1310546	LAVANYA	WIND	MYTRAH VAYU (KRISHNA) PVT I	358432.4578	0	1728690.079	1728690.079
1310388	LAVANYA	WIND	MYTRAH VAYU (KRISHNA) PVT.	3519091.765	0	16537971.12	16537971.12
1310558	LAVANYA	WIND	MYTRAH VAYU (TUNGABHADRA	7301685.6	0	32364820.15	32364820.15
1310537	LAVANYA	WIND	MYTRAH VAYU (TUNGABHADRA	7473234.6	0	36095256.32	36095256.32
1310033	LAVANYA	WIND	NILE LIMITED	42337.59767	0	163545.1296	163545.1296
1310171	LAVANYA	WIND	NREDCAP 2.5MW NELLORE	140693.52	0	555939.1944	555939.1944
1310327	LAVANYA	WIND	NREDCAP LTD 5.95MW	471878.784	0	1146665.305	1146665.305
1310020	LAVANYA	WIND	NREDCAP LTD. 2.75 MW	21099.36	0	31639.704	31639.704
1310383	LAVANYA	WIND	RAYALA WIND POWER COMPAN	9081777.943	0	40932409.92	40932409.92
1310404	LAVANYA	WIND	RAYALA WIND POWER COMPAN	4277929.183	0	18977907.78	18977907.78
1310448	LAVANYA	WIND	RAYALA WIND POWER COMPAN	787069.146	0	3497370.29	3497370.29
1310431	LAVANYA	WIND	RAYALASEEMA WIND ENERGY C	834101.58	0	3920178.231	3920178.231
1310564	PARIMALA	WIND	SKEIRON RENEWABLE ENERGY A	25604913.6	0	123927781.8	123927781.8
1310560	LAVANYA	WIND	VAYU URJA BHARAT PVT LTD	6088435.056	0	-14757050.33	-14757050.33
1310291	LAVANYA	WIND	VIBRANT GREENTECH INDIA PVT	346420.916	0	914224.7752	914224.7752
1310484	LAVANYA	WIND	VIBRANT GREENTECH INDIA PVT	788238.48	0	3771393.433	3771393.433
1310011	PARIMALA	WIND	WEIZMANN LTD., PHIII	0	0	3529515	3529515
1310521	PARIMALA	WIND	ZR RENEWABLE ENERGY PVT LT	1476651.78	0	7116623.44	7116623.44
1310423	UDAYA LAKSHM	banked Energy	Blyth Wind Park Pvt Ltd(Banked energ	0	0	0	0
1310545	UDAYA LAKSHM	banked Energy	Srinivasa Cotton & Oil Mills Pvt Ltd(B	0	0	0	0
1310634	SIVAJI/LAKSHMI	banked Energy	Idulapadu cotton mills(banked Energy)	0	0	409.4694863	409.4694863
1310612	SIVAJI/LAKSHMI	banked Energy	Heritage Foods ltd, Chinnahutur(banke	0	0	0	0
1310611	SIVAJI/LAKSHMI	banked Energy	Heritage Foods ltd, Tatrakallu(banked I	0	0	0	0
1310610	SIVAJI/LAKSHMI	banked Energy	Ramabhadra Industries Pvt. LTd.,(bank	0	0	293518.3022	293518.3022
1310609	SIVAJI/LAKSHMI	banked Energy	Tirumala Cotton & Agro Products(banl	0	0	0	0



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310412	SIVAJI/LAKSHMI	banked Energy	ITC(banked Energy)	0	0	0	0
1310410	SIVAJI/LAKSHMI	banked Energy	Hetero Wind power(banked energy)	0	0	6720574.153	6720574.153
1310679	SIVAJI/LAKSHMI	banked Energy	IOCLbanked energy	0	0	5141543.672	5141543.672
1310635	SIVAJI/LAKSHMI	banked Energy	ATRIA WIND POWER PRIVATE LI	0	0	0	0
1310656	SIVAJI/LAKSHMI	banked Energy	Heritage Foods ltd, Belugappa	0	0	0	0
1310651	SIVAJI/LAKSHMI	banked Energy	Rambhadra Industries, BLG 55	0	0	312375.6833	312375.6833
1310652	SIVAJI/LAKSHMI	banked Energy	Rambhadra Industries, BLG 97	0	0	85776.56447	85776.56447
1310678	SIVAJI/LAKSHMI	banked Energy	Sagar Cements	0	0	2522525.693	2522525.693
1310672	SIVAJI/LAKSHMI	banked Energy	TTD	0	0	1091170.189	1091170.189
1310689	SIVAJI/LAKSHMI	banked Energy	Indira Power	0	0	133770.4829	133770.4829
							0
							0
		wIND	Others - Inadverternt Power to be reconciled				0
		wIND					0
		wIND		0	0	0	0
		9	NCE-WIND TOTAL	367984499.6	0	1704842101	1704842101
1310308	CHIMPIRAIAH	Solar	Sri Power Gen - II (A)	94094.824	0	1685245.911	1685245.911
1310313	CHIMPIRAIAH	Solar	Amrit Jal Ventures Pvt. Ltd	135488.62	0	2426602.884	2426602.884
1310316	CHIMPIRAIAH	Solar	Gajanan Financial Services Ltd	151392.656	0	2711441.049	2711441.049
1310317	CHIMPIRAIAH	Solar	Kishore Infra	420120.6538	0	7524362.516	7524362.516
1310329	CHIMPIRAIAH	Solar	AP Industrial Infra Corp. Ltd., (APIIC)	85144.26	0	1524935.677	1524935.677
1310427	CHIMPIRAIAH	Solar	Amaravathi Textiles P Ltd	1731582.64	0	12348858.68	12348858.68
1310475	CHIMPIRAIAH	Solar	SAI Achyuth (New)	1096751.24	0	7117915.058	7117915.058
1310481	CHIMPIRAIAH	Solar	Raja Ratna Energy Holdings Pvt Ltd(N	876188.5286	0	6405334.745	6405334.745
1310485	CHIMPIRAIAH	Solar	Palnadu Power	4354889.812	0	28263236.02	28263236.02
1310486	CHIMPIRAIAH	Solar	Bright Solar	1284396.443	0	9348363.112	9348363.112



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310487	CHIMPIRAIAH	Solar	Welspun 30MW	5852412.06	0	41951725.25	41951725.25
1310488	CHIMPIRAIAH	Solar	Welspun 70MW	12809949.62	0	91637078.95	91637078.95
1310489	CHIMPIRAIAH	Solar	Renew Solar 21MW	18154776.93	0	129733635.1	129733635.1
1310490	CHIMPIRAIAH	Solar	New Era Enviro Ventures Pvt Ltd	1708604.26	0	11053397.98	11053397.98
1310491	CHIMPIRAIAH	Solar	Azure Power	8777008.393	0	61767753.71	61767753.71
1310492	CHIMPIRAIAH	Solar	Renew Solar 39MW	7233922.65	0	51910509.76	51910509.76
1310493	CHIMPIRAIAH	Solar	GRT Jewellers	1104612.26	0	8029777.01	8029777.01
1310494	CHIMPIRAIAH	Solar	Arohi Solar Pvt Ltd 50MW	9621049.931	0	64707163.9	64707163.9
1310507	CHIMPIRAIAH	Solar	Niranjana Solar Energy Pvt Ltd	3490979.105	0	23800452.22	23800452.22
1310510	CHIMPIRAIAH	Solar	Hindupur Solar Park Pvt Ltd (ANAN)	7493200.965	0	46980899.45	46980899.45
1310506	RAMBABU	Solar	EAAMA Estate Pvt Ltd	432535.4188	0	3055795.989	3055795.989
1310680	SIVAJI/LAKSHMI	banked Energy	Arkha solar power pvt ltd	0	0	5667732.604	5667732.604
1310670	SIVAJI/LAKSHMI	banked Energy	Sri Chakra Cement Ltd	0	0	360499.444	360499.444
1310287	CHIMPIRAIAH	Solar	Sri Power Gen Power (Cherivi) (K)	203598.186	0	753309.8882	753309.8832
1310399	E.SRINIVAS	Solar	Sri Lakshmi Venkateswara Green Ener	793465.694	0	5149592.437	5149592.437
1310400	E.SRINIVAS	Solar	Adhedya Power Pvt Ltd	300145.878	0	1947943.798	1947943.798
1310505	CHIMPIRAIAH	Solar	ACME Jai Salmer	3407141.941	0	22903490.89	22903490.89
1310508	CHIMPIRAIAH	Solar	Dayanidhi Solar Power Pvt Ltd	7043014.873	0	50204722.95	50204722.95
1310511	CHIMPIRAIAH	Solar	Vishwatma Solar Energy Pvt. Ltd	5439984.877	0	37088732.68	37088732.68
1310509	CHIMPIRAIAH	Solar	Sumeru Energy Pvt. Ltd	1086126.3	0	7005517.735	7005517.735
1310528	RAMBABU	Solar	VBC RENEWABLE ENERGY PVT L	355888.1162	0	2545370.006	2545370.006
1310529	CHIMPIRAIAH	Solar	Sprouts Energy Pvt Ltd	388678.16	0	2506977.082	2506977.032
1310531	CHIMPIRAIAH	Solar	YASHWANTH SOLAR ENERGY PV	147327.054	0	554135.946	554135.946
1310532	CHIMPIRAIAH	Solar	Hindupur Solar Park Pvt Ltd(Chittor 4(	7028160.256	0	44895185.16	44895185.16
1310534	CHIMPIRAIAH	Solar	Waneep	4404893.793	0	30294651.81	30294651.31
1310669	SIVAJI/LAKSHMI	banked Energy	Sri Subramanya Solar Power Projects I	0	0	121168.7462	121168.7462



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310650	SIVAJI/LAKSHMI	banked Energy	Cyber Village Solutions Pvt. Ltd.,	0	0	0	0
1310568	SIVAJI/LAKSHMI	banked Energy	Narasimha Swamy Solar Generators Pr	0	0	1343261.811	1343261.811
1310608	SIVAJI/LAKSHMI	banked Energy	Repal Renewables Pvt Ltd	0	0	246285.8017	246285.8017
1310644	SIVAJI/LAKSHMI	banked Energy	REPAL RENEWABLES PVT LTD.,(	0	0	1896227.806	1896227.806
1310645	SIVAJI/LAKSHMI	banked Energy	REPAL RENEWABLES PVT. LTD.,	0	0	1553553.681	1553553.681
1310642	SIVAJI/LAKSHMI	banked Energy	NATEMS GREEN ENERGY PRIVAT	0	0	10517258.07	10517258.07
1310661	MALLI	SOLAR	M/s. APGENCO SOLAR 400MW	85778818.46		247307408.9	247307408.9
1310646	SIVAJI/LAKSHMI	banked Energy	Visakhapatnam Port Trust	0	0	2904874.486	2904874.486
1310681	SIVAJI/LAKSHMI	banked Energy	Odysseus Logos LLP	0	0	278953	278953
1310677	SIVAJI/LAKSHMI	banked Energy	Amplus andhra Power Pvt Ltd	0	0	1725984.632	1725984.632
1310557	SIVAJI/LAKSHMI	banked Energy	Sri City Solar	0	0	0	0
1310535	SIVAJI/LAKSHMI	banked Energy	Vuddanda Solar Pvt Ltd	0	0	724496.5358	724496.5358
1310686	SIVAJI/LAKSHMI	banked Energy	Aurobindo pharma ltd	0	0	662716.6829	662716.6829
1310607	RAMBABU	Solar	New & Renewable Energy Developmer	10187.91	0	69277.788	69277.738
1310533	RAMBABU	Solar	Apgenco (solar) Project	912687.268	0	5466996.842	5466996.842
1310633	CHIMPIRAIAH	Solar	M/s.Solar Energy Corporation of India	40305495.12	0	181374729.7	181374729.7
1310632	CHIMPIRAIAH	Solar	M/s.Solar Energy Corporation of India	12555392.92	0	56499268.08	56499268.08
1310624	CHIMPIRAIAH	Solar	M/s.Solar Energy Corporation of India	11584828.88	0	52131726.58	52131726.58
1310641	CHIMPIRAIAH	Solar	M/s.Solar Energy Corporation of India	24047704.03	0	108214664.8	108214664.8
1310640	CHIMPIRAIAH	Solar	Waneep Solar Pvt Ltd 25MW- Nagari	3924381.335	0	16518896.91	16518896.91
1310639	CHIMPIRAIAH	Solar	M/s. Rain Coke Ltd	3978327.794	0	17155656.18	17155656.18
1310638	CHIMPIRAIAH	Solar	M/s. SEI GREEN FLASH PVT LTD	6017994.32	0	26026106.06	26026106.06
1310637	CHIMPIRAIAH	Solar	M/s. SEI ARUSHI PVT LTD	5779782.362	0	24960947.31	24960947.31
1310647	CHIMPIRAIAH	Solar	M/s.Solar Energy Corporation of India	13031598.96	0	58642195.88	58642195.38
1310657	CHIMPIRAIAH	Solar	SB SOLAR 3MW	526551.02	0	1053101.04	1053101.04
		10	NCE-SOLAR Total	325961276.8	0	1643258105	1643258105



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310655	MALLI	Bundled Solar	NTPC NVVNL Bundled Power (Only	5522458.728	0	59429161.08	59429161.08
1310655	MALLI	Coal	NTPC NVVNL Bundled Power (Only	52725274	88372512	225241563	313614075
1310567	MALLI	Bundled Solar	NTPC NSM Phase-II, Bundled Power	331906633.8	0	1483469758	1483469758
1310567	MALLI	Coal	NTPC NSM Phase-II, Bundled Power	0	45201152	812953	46014105
1310653	MALLI	Bundled Solar	NTPC NPKunta Ultra Mega Solar Proj	244828774.6	282752.24	835477894.7	835760646.9
1310653	MALLI	Bundled Solar	NTPC SBG NPKunta Solar Project	0	0	0	0
1310653	MALLI	Bundled Solar	NTPC AYANA NPKUNTA	0	0	0	0
1310653	MALLI	Bundled Solar	NTPC SPRNG	0	0	0	0
		11	OTHERS NCEs Total	634983141.1	133856416.2	2604431330	2738287746
1310009	RADHA	CTU	PGCIL POC Charges(CGS Tr.Charges	0	3045768958	0	3045768958
1310009	RADHA	CTU	PGCIL Non POC Charges(ULDC)	0	9352663.413	0	9352663.413
1310064	NAVEEN	STU	APTRANSCO Transmission Charges (	0	0	0	0
1310064	NAVEEN	STU	APTRANSCO Transmission Charges (	0	0	0	0
1310064	NAVEEN	STU	APTRANSCO Transmission Charges (	0	6271290873	0	6271290873
1310064	NAVEEN	STU	APTRANSCO SLDC Charges (EP)	0	0	0	0
1310064	NAVEEN	STU	APTRANSCO SLDC Charges (SP)	0	0	0	0
1310064	NAVEEN	STU	APTRANSCO SLDC Charges (CP)	0	75831456	0	75831456
1310064	NAVEEN	STU	AP TRANSCO ANNUAL FEE	0	14758690	0	14758690
1310107	MALLI	CTU	IEE & PEIL ANNUAL MEMBERSHI	0	206559	0	206559
1310658	RADHA	CTU	POSOCO SRLDC Charges	0	8941640.068	0	8941640.068
1310434	BHUVANA	CTU	Long Term (SEIL-LTOA) Tr. Charges	0	0	66085311	66085311
1310434	BHUVANA	CTU	Long Term (SRLDC CHARGES)	0	417722	0	417722
1310367	NAVEEN	CTU	Long Term (KSK-LTOA) Tr. Charges	0	0	0	0
1310658	BHUVANA	CTU	Long Term (SEIL-STOA) Charges	0	32037503	3315959	35353462
1310266	RADHA		POSOCO-Deviation Charges (CGS UI	9327474.716		478812058.7	478812058.7
1310074	RADHA	CTU	POSOCO Reactive charges/Tangedco	0	-14882292.52	0	-14882292.52



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310659	NAVEEN	CTU	POWER COMPANY OF KARNATA	0	0	-6585011.995	-6585011.995
		12	Trasmission & UI Charges	9327474.716	9443723772	541628316.7	9985352088
1310417	NAVEEN	Ipp Thermal	TSPPCC	6659629.274	0	50413394	50413394
		13	Inter State Traders (MTOA)	6659629.274	0	50413394	50413394
			Grand Total	14697955656	30280918369	60271964964	90552883333
1310153	AMARAVATHI	Biomass	Sri Venkata Sreedevi(Bollineni Casting	0	0	2997652	2997652
1310156	AMARAVATHI	Biomass	Jocil Ltd 6MW	0	0	816548	816548
1310163	AMARAVATHI	Biomass	Balaji Agro Oils Limited	0	0	1781515	1781515
1310358	AMARAVATHI	WIND	NALCO,Gandikota	0	0	26131845	26131845
1310684	SIVAJI/LAKSHMI	WIND	CHAITNAYA PROJECT	0	0	3641988	3641988
1310232	SUNITHA	Wind	Nandi Rollers Flour Mills (P) Ltd.,	0	0	7013	7013
1310233	SUNITHA	Wind	Orange Sorting Machines (India) Pvt. I	0	0	7275	7275
1310234	SUNITHA	Wind	Prakash Beedies Pvt. Ltd.	0	0	7363	7363
1310235	SUNITHA	Wind	Vikram Traders	0	0	6291	6291
1310236	SUNITHA	Wind	Compucom Software Ltd	0	0	6909	6909
1310237	SUNITHA	Wind	Chandulal Surajlal	0	0	5044	5044
1310238	SUNITHA	Wind	G.Shoe Export	0	0	3624	3624
1310239	SUNITHA	Wind	Arts & Crafts Exports	0	0	5518	5518
1310297	SUNITHA	Wind	International Conveyors Ltd., Phase I	0	0	5275	5275
1310298	SUNITHA	Wind	International Conveyors Ltd., Phase II	0	0	4631	4631
1310302	SUNITHA	Wind	Triveni Enterprises	0	0	6216	6216
1310326	SUNITHA	Wind	Indian Oil Corporation Ltd (16.8 MW)	0	0	182031	182031
1310325	SUNITHA	Wind	Indian Oil Corporation Ltd (10.5 MW)	0	0	86314	86314
1310674	AMARAVATHI	Mhydel	kanderlu	0	0	209218	209218
1310558			Mytrah vayu 100.6	0	0	-2975280	-2975280
1310172	AMARAVATHI	Mhydel	Balaji Energy pvt ltd	0	0	1915136	1915136



Vendor No	Emp	Type	Name of Developer	Energy	Fixed Cost	Variable Cost	Total
1310241	BHUVANA		Mayura Steels Pvt. Ltd.	0	0	5544	5544
1310257	BHUVANA		Shilpa Medicare Ltd	0	0	8563	8563
1310242	BHUVANA		S. Kumar	0	0	5311	5311
1310243	BHUVANA		Siddaganga Oil Extractions Pvt Ltd	0	0	10799	10799
1310244	BHUVANA		Protectron Elecromech Pvt. Ltd Ankire	0	0	5463	5463
1310245	BHUVANA		Canara Cement Pipes	0	0	4740	4740
1310246	BHUVANA		Texmo Precision Castings	0	0	11428	11428
1310247	BHUVANA		Texmo Industries	0	0	15203	15203
1310394	RAMBABU		APPDCL Stage-II Unit III Infirm Pow	134035084	0	551273982.6	551273982.6
1310633	CHIMPIRAIAH		M/s.Solar Energy Corporation of India	0	0	58199580.94	58199580.94
1310624	CHIMPIRAIAH		M/s.Solar Energy Corporation of India	0	0	10599528.64	10599528.64
1310281	E.SRINIVAS		Happy Valley Developers	0	0	3983	3983
1310282	E.SRINIVAS		Shreem Electric Ltd.,	0	0	8124	8124
1310283	E.SRINIVAS		Texonic Instruments	0	0	4757	4757
FPCCA			FPPCA Adjustment F.Y21-22			2907000000	2907000000
1310248	BHUVANA	wIND	Vaayu Phase - I	0	0	0	0
1310249	BHUVANA	wIND	Vaayu Phase -II	0	0	0	0
1310250	BHUVANA	wIND	Vaayu Phase -III	0	0	0	0
1310251	BHUVANA	wIND	Vaayu Phase -IV	0	0	0	0
1310252	BHUVANA	wIND	Vaayu Phase -V	0	0	0	0
1310253	BHUVANA	wIND	Vaayu Phase -VI	0	0	0	0
1310254	BHUVANA	wIND	Vaayu Phase -VII	0	0	0	0
1310240	PARIMALA	wIND	Meghna Associates	0	0	1801	1801
1310354	PARIMALA	wIND	R3K Power	0	0	1022879	1022879
1310344	PARIMALA	wIND	Protectron Electromech Pvt. Ltd.,	0	0	434115	434115
1310341	PARIMALA	wIND	Vish Wind Infrastructire - I	0	0	8094713	8094713



Annexure-6

APCPDCL Drawl at Transco-Discom boundary points (Based on MRI)

&

APCPDCL Consumption

ABSTRACT OF ENERGY EXCHANGES BETWEEN TRANSCO AND APCPDCL FOR THE YEAR 2022-23

S.No.	Description	Apr-22	May-22	Jun-22	Jul-22	Aug-22	Sep-22	Oct-22	Nov-22	Dec-22	Jan-23	Feb-23	Mar-23	CUM 22-23
1	Energy received at 33KV or 11KV Bulk supply points in EHT SS (MU)	1330.42	1332.75	1317.11	1095.66	1191.43	1187.67	1079.40	1085.23	1051.91	1112.76	1133.78	1256.72	14174.83
2	Energy received at 132KV feeders points at SS (MU)	76.97	81.16	82.18	77.21	82.62	79.82	84.55	79.82	85.11	84.60	81.46	100.07	995.57
3	Energy Export (+)/Import(-) at interface points of private developers (MU)	24.42	18.92	16.52	17.59	25.97	34.11	33.25	33.50	36.36	42.10	38.79	36.05	357.57
4	Energy received (+)/sent out (-) at interface points of other Circles (MU)	3.29	5.19	2.44	2.06	2.05	1.99	1.89	2.00	1.77	1.85	1.78	1.94	28.24
5	Total Energy Received (1+2+3+4) (MU)	1435.10	1438.02	1418.24	1192.53	1302.06	1303.59	1199.09	1200.55	1175.14	1241.30	1255.80	1394.78	15556.21
6	Energy Delivered to EHT Consumers as 3rd party Sale (MU)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
7	Energy Delivered as 3rd party Sale at 33KV and 11 KV (MU)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8	75% Wheeling charge for 3rd party sale at 33KV and 11 KV (MU)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
9	Aux. Consumption (MU)	0.53	0.54	0.52	0.44	0.46	0.53	0.41	0.40	0.40	0.39	0.51	0.52	5.64
10	Total outflow not chargeable (6+7+8+9)(MU)	0.53	0.54	0.52	0.44	0.46	0.53	0.41	0.40	0.40	0.39	0.51	0.52	5.64
11	Net Energy Chargeable (5-10) (MU)	1434.56	1437.48	1417.72	1192.08	1301.60	1303.07	1198.69	1200.15	1174.74	1240.92	1255.29	1394.26	15550.57
12	11 KV open access sales	0.28	0.33	2.69	0.86	0.63	0.75	0.69	0.85	0.30	0.83	0.69	-9.05	-0.15
13	33KV Open access sales	11.13	19.68	40.34	27.73	26.73	26.52	23.68	20.96	21.36	26.67	22.88	135.94	403.62
14	EHT open access sales	1.52	0.92	4.15	1.62	2.95	5.09	14.93	3.72	3.50	6.20	3.54	23.04	71.18
15	Total Open access sales(12+13+14)	12.93	20.93	47.18	30.21	30.31	32.36	39.30	25.53	25.16	33.70	27.11	149.93	474.65
16	**Actual Net Energy Against billed sales(11-15)**	**1421.63**	**1416.55**	**1370.54**	**1161.87**	**1271.29**	**1270.71**	**1159.38**	**1174.61**	**1149.59**	**1207.22**	**1228.19**	**1244.33**	**15075.92**

ABSTRACT OF CONSUMPTION OF APCPDCL FOR THE YEAR 2022-23

S.No.	Category	APR	MAY	JUN	JULY	AUG	SEP	OCT	NOV	DEC	JAN	FEB	MAR	CUM
LT SALES														
1	Domestic Cat-I A	523.18	578.24	524.61	454.36	488.03	460.26	417.51	367.49	367.46	337.61	360.99	434.67	5314.43
2	Commercial & Others cat-II(A to F)	97.64	102.45	96.73	88.72	92.85	89.13	84.62	79.96	83.23	76.57	81.17	92.70	1065.77
3	Industrial cat-III (A to D)	36.81	39.81	40.70	39.14	39.68	38.25	35.66	37.43	40.37	41.06	39.58	41.00	469.48
4	Institutional cat-IV (A to F)	28.19	26.20	25.46	25.67	26.91	26.90	26.51	26.94	27.95	26.57	26.61	28.70	322.61
5	Agricultural (Metered sales)	124.42	96.37	93.62	78.16	85.44	92.45	92.69	83.98	73.80	71.10	73.94	86.44	1052.41
	Agricultural (Assesed)	173.79	122.61	153.60	84.72	120.88	155.66	130.69	168.25	125.15	230.05	220.33	228.75	1914.48
TOTAL WITH AGL.		**984.03**	**965.68**	**934.72**	**770.76**	**853.79**	**862.65**	**787.68**	**764.05**	**717.96**	**782.97**	**802.62**	**912.27**	**10139.18**
HT SALES														
1	Townships and Colonies	1.34	1.39	1.24	1.16	1.19	1.25	1.21	1.09	1.16	1.02	1.07	0.44	13.56
2	Commercial & Others	42.85	45.34	41.94	38.84	42.17	40.57	37.97	36.28	38.99	33.81	36.08	46.49	481.32
3	Industrial	236.62	236.98	220.18	216.09	214.61	200.20	188.63	220.53	242.36	222.84	229.42	124.75	2553.22
4	Institutional	48.50	52.71	49.45	48.83	50.34	49.63	51.41	48.89	53.29	51.68	48.94	51.80	605.47
5	Agricultural and Related	6.90	2.15	2.71	2.03	3.99	6.32	4.46	7.80	7.12	10.13	11.28	8.75	73.66
	Voltage wise HT sales													
	11 KV Discom sales	115.64	120.57	121.91	116.57	122.78	119.09	111.67	118.11	126.25	122.25	122.52	132.66	1450.03
	33 KV Discom sales	146.03	138.29	116.59	115.47	110.43	105.29	103.03	121.27	134.31	121.33	122.44	27.70	1362.19
	EHT Discom sales	74.52	79.71	77.02	74.91	79.09	73.60	68.97	75.21	82.36	75.91	81.85	71.86	915.02
TOTAL		**336.20**	**338.57**	**315.52**	**306.95**	**312.31**	**297.98**	**283.67**	**314.59**	**342.92**	**319.49**	**326.80**	**232.22**	**3727.23**
TOTAL SALES (LT+HT)		**1320.23**	**1304.25**	**1250.24**	**1077.72**	**1166.10**	**1160.63**	**1071.35**	**1078.64**	**1060.88**	**1102.46**	**1129.42**	**1144.49**	**13866.41**

Distribution Loss in Mu		**101.40**	**112.30**	**120.30**	**84.15**	**105.20**	**110.08**	**88.03**	**95.97**	**88.71**	**104.76**	**98.77**	**99.84**	**1209.51**

*Certified energy drawls of APCPDCL at Transco-Discom boundary points based on manual readings are presented Annexure-14

ANNEXURE – 7

(Details of consumers)

(Details of Consumers)				
Summary of consumers				
Period From APR-22 To MAR-23				
S.No	**Type of Consumers**	**Category of Consumers (EHT/HT/LT/Others)**	**Voltage Level (In Voltage)**	**No of Consumers**
1	Domestic	LT	Lt Cat-1	4041825
2	Hor. & Nur. & Coffee/Tea & Rubber (Metered)	LT	Lt-VA V	4243
3	Mixed Load	LT	LT VA (i),(ii),(iii)	2641
4	IP Sets	LT	Lt-VA II	422102
5	Commercial	LT	Lt Cat-II	462717
6	Industrial (Small)	LT	LT IIIB,D	1873
7	Industrial (Medium)	LT	LT IIIA	17525
8	Hor. & Nur. & Coffee/Tea & Rubber (Flat)	HT	11KV	
9	Heating and Motive Power	HT	11KV	2
10	HT Water Supply	HT	11KV	96
11	HT Industrial	HT	11kv	2168
12	HT Commercial	HT	11kv	1364
13	Applicable to Government Hospitals & Hospitals	HT	11kv	101
14	Lift Irrigation Schemes/Lift Irrigation Societies	HT	11kv	271
15	HT Res. Apartments Applicable to all areas	HT	11KV	32
16	Function Halls/Auditoria	HT	11KV	144
17	Startup power	HT	11KV	1
18	Religious Places	HT	11KV	8
19	Railway Traction	EHT	132KV	12
20	Aqua culture&Animal Husbandry	HT	11KV	45
21	HT Industrial	HT	33kv	205
22	HT Industrial	EHT	132kv	10
23	HT Commercial	HT	33kv	31
24	Applicable to Government Hospitals & Hospitals	HT	33kv	6
25	Lift Irrigation Schemes/Lift Irrigation Societies	HT	33kv	16
26	Lift Irrigation Schemes/Lift Irrigation Societies	EHT	132kv	1
27	HT Res. Apartments Applicable to all areas	HT	33KV	5
28	Startup power	HT	33KV	38
29	Startup power	EHT	132KV	1
30	Electric Vehicles/Charging Stations	HT	11KV	1
31	Energy Intensive Industries(Ferro Alloy Indu, PV ingots)	HT	33KV	1
32	Others-5 (if any , specify in remarks)	LT	LT IV B	29213
33	Others-5 (if any , specify in remarks)	LT	LT IVA	32640
34	Others-5 (if any , specify in remarks)	LT	5(A)(iv)	11
35	Others-5 (if any , specify in remarks)	LT	Lt 4(c)(i)	11542
36	Others-5 (if any , specify in remarks)	LT	Lt 5(B)	22880
37	Others-5 (if any , specify in remarks)	LT	Lt 5(A)(vi)	13
38	Others-5 (if any , specify in remarks)	LT	Lt 4(A)	267
39	Others-5 (if any , specify in remarks)	LT	LT 5D	140
40	Others-5 (if any , specify in remarks)	LT		2
			Total	5054193

ANNEXURE – 8

(Division-wise sales losses)

Division wise input sales and losses

Name of the Division	Apr-22		May-22		Jun-22		Jul-22		Aug-22		Sep-22		Oct-22		Nov-22		Dec-22		Jan-23		Feb-23		Mar-23		FY 2022-23			
	INPUT MU	Sales MU	INPUT MU	Sales MU	INPUT MU	Sales MU	INPUT MU	Sales MU	INPUT MU	Sales MU	INPUT MU	Sales MU	INPUT MU	Sales MU	INPUT MU	Sales MU	INPUT MU	Sales MU	INPUT MU	Sales MU	INPUT MU	Sales MU	INPUT MU	Sales MU	INPUT MU	Sales MU	LOSS	% Loss
VIJAYAWADA TOWN	97.84	95.08	110.63	105.46	102.95	94.01	81.34	78.34	88.65	83.98	84.21	79.21	75.30	71.49	69.85	64.82	69.70	66.93	63.75	61.09	69.86	65.54	82.30	78.12	996.38	944.07	52.31	5.25
GUNADALA	96.44	92.23	106.48	100.78	101.47	93.04	83.94	79.64	91.43	85.20	85.65	81.04	80.85	74.39	74.85	69.22	75.75	70.51	69.78	66.19	74.12	69.66	87.01	83.95	1027.76	965.86	61.90	6.02
VIJAYAWADA RURAL	77.89	73.67	80.29	72.57	75.86	70.23	68.30	64.31	77.85	71.70	75.30	69.43	61.28	58.14	74.41	69.71	75.82	70.82	72.10	66.78	80.38	74.74	79.10	72.66	898.58	834.75	63.82	7.10
GUDIVADA	147.88	136.24	138.89	123.29	128.71	117.05	107.66	97.30	110.67	99.70	111.98	101.30	110.69	100.92	110.93	100.08	110.48	99.22	112.38	100.53	113.44	101.62	122.10	112.49	1425.80	1289.75	136.05	9.54
NUZVIDU	74.45	67.45	65.77	58.76	67.81	61.10	51.06	45.54	62.32	55.51	64.85	58.03	59.17	53.82	61.49	57.10	58.02	51.52	88.09	77.17	79.17	70.52	89.59	77.28	821.79	733.82	87.97	10.70
MACHILIPATNAM	61.86	57.31	62.52	56.79	58.71	52.97	49.73	45.27	54.58	49.41	54.85	49.60	49.85	46.15	47.40	42.90	45.01	41.00	44.90	40.46	45.05	41.19	51.65	46.80	626.12	569.85	56.27	8.99
VUYYURU	30.39	28.55	31.13	28.06	29.12	26.45	24.96	22.86	28.42	25.67	28.62	25.94	27.70	24.68	23.92	21.78	20.20	18.21	21.21	19.04	21.85	19.79	28.66	24.89	316.18	285.92	30.26	9.57
Vijayawada circle	**586.75**	**550.54**	**595.71**	**545.72**	**564.63**	**514.85**	**466.99**	**433.27**	**513.92**	**471.17**	**505.46**	**464.55**	**464.84**	**429.59**	**462.85**	**425.60**	**454.98**	**418.21**	**472.21**	**431.26**	**483.86**	**443.07**	**540.40**	**496.20**	**6112.60**	**5624.02**	**488.58**	**7.99**
GUNTUR-TOWN1	109.56	104.32	120.80	114.40	110.61	103.16	95.12	89.14	101.32	94.22	94.53	88.85	86.63	80.53	80.47	75.55	81.92	78.11	77.28	72.24	79.92	76.50	85.07	81.37	1123.23	1058.39	64.84	5.77
TENALI	72.14	67.01	74.81	69.24	66.75	61.04	57.13	53.76	63.89	59.23	60.86	56.22	56.77	52.71	53.07	49.42	54.10	51.15	52.03	48.36	53.26	49.52	49.16	46.27	713.97	663.95	50.03	7.01
BAPATLA	50.70	46.74	53.79	49.51	53.72	49.07	46.85	43.65	49.38	45.47	47.93	43.37	45.18	41.60	41.84	38.22	38.12	35.34	37.61	34.59	37.40	34.68	44.28	41.54	546.80	503.77	43.03	7.87
NARASARAOPET	70.89	63.87	66.06	59.53	68.16	61.53	53.60	49.27	62.05	56.00	78.65	68.68	65.21	58.78	74.02	67.39	60.68	53.37	72.35	64.68	64.46	56.11	73.43	66.99	809.56	726.20	83.36	10.30
MACHERLA	86.16	77.60	77.09	69.44	85.60	77.52	67.96	63.25	81.71	73.58	76.38	69.12	69.25	63.67	73.17	66.82	79.97	68.99	88.13	78.46	99.58	86.69	80.80	74.15	965.81	869.30	96.51	9.99
GUNTUR-TOWN2	58.91	54.78	63.58	59.15	61.27	55.72	51.72	47.64	56.31	51.50	57.00	50.70	50.08	46.68	49.15	45.52	47.93	45.75	50.10	44.95	49.66	45.82	50.58	45.70	646.28	593.92	52.37	8.10
AMARAVATHI	75.04	69.75	74.34	70.15	61.27	55.51	58.72	53.85	54.98	50.73	55.23	49.22	53.47	49.57	57.18	52.41	63.20	63.04	58.92	56.20	58.99	58.43	11.37	5.80	682.72	634.64	48.07	7.04
Guntur circle	**523.41**	**484.08**	**530.47**	**491.43**	**507.38**	**463.55**	**431.11**	**400.56**	**469.63**	**430.73**	**470.58**	**426.16**	**426.58**	**393.54**	**428.90**	**395.33**	**425.92**	**395.75**	**436.43**	**399.49**	**443.28**	**407.74**	**394.69**	**361.82**	**5488.37**	**5050.17**	**438.20**	**7.98**
ONGOLE	69.35	65.59	71.70	66.31	67.85	63.12	64.62	60.76	71.12	65.65	67.27	62.43	62.25	58.97	55.36	54.68	56.39	53.77	55.60	51.28	55.75	51.94	65.65	61.20	762.91	715.70	47.21	6.19
KANDUKUR	31.33	28.64	28.11	26.36	31.01	28.39	28.13	25.89	29.73	27.13	28.90	26.26	28.68	26.11	25.94	23.51	25.50	23.10	26.88	24.34	24.95	23.14	27.50	26.31	336.66	309.18	27.48	8.16
CHIRALA	35.11	34.05	35.57	33.47	32.00	28.05	29.82	27.38	31.06	30.09	30.12	29.54	27.51	26.78	29.20	26.53	29.05	26.32	27.92	25.35	28.91	26.90	32.60	27.89	368.86	342.35	26.51	7.19
ADDANKI	43.36	38.49	43.85	40.03	48.83	44.33	43.06	39.67	44.39	40.32	43.05	39.04	36.68	33.46	42.11	38.23	35.21	33.99	38.68	35.91	38.23	35.76	40.25	37.27	497.70	456.49	41.21	8.28
KANIGIRI	16.90	15.24	13.95	12.71	13.70	12.33	11.39	10.34	12.50	11.44	13.27	11.98	13.51	12.32	11.88	10.78	18.23	16.49	20.04	18.13	18.82	17.45	19.55	17.60	183.74	166.82	16.92	9.21
DARSI	52.10	46.41	44.09	39.96	49.14	44.85	44.65	41.09	51.14	46.23	54.10	48.66	37.41	34.82	51.28	46.21	48.39	43.64	57.37	52.12	48.73	45.07	49.75	47.76	588.14	536.81	51.33	8.73
MARKAPURAM	63.33	57.19	53.09	48.27	56.00	50.78	42.12	38.76	47.81	43.35	57.95	52.02	61.94	55.76	67.10	57.77	55.91	49.60	72.09	64.58	85.65	78.35	73.94	68.44	736.93	664.87	72.06	9.78
Ongole circle	**311.47**	**285.61**	**290.37**	**267.11**	**298.54**	**271.84**	**263.77**	**243.89**	**287.75**	**264.20**	**294.67**	**269.93**	**267.96**	**248.22**	**282.86**	**257.71**	**268.69**	**246.92**	**298.58**	**271.71**	**301.04**	**278.61**	**309.24**	**286.47**	**3474.94**	**3192.22**	**282.72**	**8.14**
APCPDCL Total	**1421.63**	**1320.23**	**1416.55**	**1304.25**	**1370.55**	**1250.24**	**1161.87**	**1077.72**	**1271.29**	**1166.10**	**1270.71**	**1160.63**	**1159.38**	**1071.35**	**1174.61**	**1078.64**	**1149.59**	**1060.88**	**1207.22**	**1102.46**	**1228.19**	**1129.42**	**1244.33**	**1144.49**	**15075.92**	**13866.41**	**1209.51**	**8.02**

ANNEXURE – 9

(Infrastructure works)

Works proposed for loss reduction under RDSS

	Component			New 33KV line in case of Overloaded 33KV feeders - Single Circuit with 100 Sq.mm AAA Conductor over 12.5 Mts.Spun Poles				33 KV Line (Double Circuit) with 150 Sq.mm AAA Conductor over M+12 Towers			No. of 33KV bays at SS			11 KV Line (Single Circuit) with 100 Sq.mm AAA Conductor over 11Mts Spun Poles Per KM				11 KV Bay with VCB			11 KV Feeder VCBs required (1 /NO)		
Sl.No	District	Division	33KV Feeder Bifurcation (Nos.)	Feeders (Nos)	Qty(CKM)	Unit Cost	Total cost	Qty(CKM)	Unit Cost	Total cost	QTY	Unit cost	Total cost	11KV Feeder Bifurcation (Nos.)	Qty CKM	Unit Cost	Total cost	Qty CKM	Unit Cost	Total cost	Qty CKM	Unit Cost	Total cost
1	Krishna	Vijayawada town	2	2	4	11.74	46.98	0.00	64.61	0.00	1	11.54	11.54	17	61.5	11.49	706.635	11	9.44	103.84	0	3.88	0
2	Krishna	Gunadala	1	1	2	11.74	23.49	0.00	64.61	0.00	1	11.54	11.54	1	2	11.49	22.98	0	9.44	0	0	3.88	0
3	Krishna	Rural VJA	3	3	44	11.74	516.73	0.00	64.61	0.00	1	11.54	11.54	6	66.5	11.49	764.085	6	9.44	56.64	0	3.88	0
4	Krishna	Gudivada	5	5	73	11.74	857.31	0.00	64.61	0.00	2	11.54	23.08	20	142.5	11.49	1637.33	14	9.44	132.16	2	3.88	7.76
5	Krishna	Nuzivid	17	17	249.62	11.74	2931.51	0.00	64.61	0.00	10	11.54	115.4	32	198.9	11.49	2285.36	30	9.44	283.2	1	3.88	3.88
6	Krishna	Vuyyuru	0	-	0	11.74	0.00	0.00	64.61	0.00	0	11.54	0	7	35.075	11.49	403.012	1	9.44	9.44	6	3.88	23.28
7	Krishna	Machilipatnam	0	-	0	11.74	0.00	0.00	64.61	0.00	0	11.54	0	5	17.8	11.49	204.522	5	9.44	47.2	0	3.88	0
		Total	**28**	**28**	**372.62**		**4376.02**	**0.00**		**0.00**	**15**		**173.1**	**88**	**524.28**		**6023.92**	**67**		**632.48**	**9**		**34.92**
1	Guntur	Narasaraopet	8	8	131.6	11.74	1545.50	0.00	64.61	0.00	6	11.54	69.24	24	143.9	11.49	1653.41	23	9.44	217.12	20	3.88	77.6
2	Guntur	Macherla	1	1	7	11.74	82.21	0.00	64.61	0.00	0	11.54	0	6	26.5	11.49	304.485	5	9.44	47.2	5	3.88	19.4
3	Guntur	Tenali	6	6	70	11.74	822.07	0.00	64.61	0.00	3	11.54	34.62	10	20.3	11.49	233.247	6	9.44	56.64	6	3.88	23.28
4	Guntur	Bapatla	2	2	17	11.74	199.65	0.00	64.61	0.00	2	11.54	23.08	7	33.5	11.49	384.915	7	9.44	66.08	7	3.88	27.16
5	Guntur	Town I Guntur	3	3	22.23	11.74	261.07	2.30	64.61	148.60	1	11.54	11.54	7	32.1	11.49	368.829	4	9.44	37.76	0	3.88	0
6	Guntur	Town II Guntur	1	1	25.5	11.74	299.47	0.00	64.61	0.00	0	11.54	0	17	86	11.49	988.14	17	9.44	160.48	0	3.88	0
7	Guntur	Amaravati	0	0	0	11.74	0.00	0.00	64.61	0.00	0	11.54	0	5	5.1	11.49	58.599	0	9.44	0	3	3.88	11.64
		Total	**21**	**21**	**273.33**		**3209.96**	**2.3**		**148.6**	**12**		**138.48**	**76**	**347.4**		**3991.63**	**62**		**585.28**	**41**		**159.08**
1	Prakasam	Markapur	8	8	120	11.74	1409.27	0.00	64.61	0.00	5	11.54	57.7	25	265	11.49	3044.85	25	9.44	236	0	3.88	0
2	Prakasam	Ongole	3	3	18	11.74	211.39	0.00	64.61	0.00	2	11.54	23.08	27	109.9	11.49	1262.75	17	9.44	160.48	10	3.88	38.8
3	Prakasam	Kandukur	3	3	29.52	11.74	346.68	0.00	64.61	0.00	0	11.54	0	12	46.9	11.49	538.881	11	9.44	103.84	1	3.88	3.88
4	Prakasam	Chirala	3	3	13.8	11.74	162.07	0.00	64.61	0.00	0	11.54	0	2	31	11.49	356.19	1	9.44	9.44	1	3.88	3.88
5	Prakasam	Addanki	4	4	43.5	11.74	510.86	0.00	64.61	0.00	1	11.54	11.54	25	130.2	11.49	1496	19	9.44	179.36	0	3.88	0
6	Prakasam	Kanigiri	2	2	36	11.74	422.78	0.00	64.61	0.00	1	11.54	11.54	3	11	11.49	126.39	2	9.44	18.88	0	3.88	0
7	Prakasam	Darsi	7	7	122	11.74	1432.76	0.00	64.61	0.00	4	11.54	46.16	12	106.2	11.49	1220.24	12	9.44	113.28	0	3.88	0
		Total	**30**	**30**	**382.82**		**4495.804**	**0**		**0**	**13**		**150.02**	**106**	**700.2**		**8045.3**	**87**		**821.28**	**12**		**46.56**
		Grand total	**79**	**79**	**1028.8**		**12081.78**	**2.3**		**148.6**	**40**	**0**	**461.6**	**270**	**1571.9**		**18060.8**	**216**		**2039**	**62**		**240.56**

Loss Reduction: New 33 KV Feeders (For Over Loaded Feeders) Line

Sl No.	Circle	Division	Name of Source Sub-Station	Existing Feeder Details	33 KV Line (33 KV Line with 150 Sq.mm AAA Conductor over 12.5 Mts. PSCC Poles)				33 KV Line (Double Circuit) with 100 Sq.mm AAA Conductor over M+12 Towers				33 KV Line (Double Circuit) with 150 Sq.mm AAA Conductor over 12.5 Mts.Spun per KM				33 KV Bay with VCB			Total Amount in Lakhs
				Name of 33KV Feeder	Type	Qty in Ckm	Rate in Lakhs	Amount	Type	Qty in Ckm	Rate in Lakhs	Amount	Type	Qty in Ckm	Rate in Lakhs	Amount	Qty in Nos	Rate in Lakhs	Amount	
1	VIJAYAWADA	Vja Town	33KV GOLLAPUDI	33KV GOLLAPUDI	150 Sqmm AAA	3	11.74	35.23									1	11.5	12	46.77
2	VIJAYAWADA	Vja Town	33 KV City SS	33 KV City SS	150 Sqmm AAA	1	11.74	11.74										11.5	0	11.74
3	VIJAYAWADA	GUDIVADA	Gudivada	33KV ARUGOLANU-NANDIVADA	150 Sqmm AAA	9	11.74	105.70										11.5	0	105.70
4	VIJAYAWADA	GUDIVADA	PEDAPARUPUDI	33KV Pedaparupudi	150 Sqmm AAA	10	11.74	117.44										11.5	0	117.44
5	VIJAYAWADA	GUDIVADA	Kowthavaram	33KV Kowthavaram	150 Sqmm AAA	16	11.74	187.90									1	11.5	12	199.44
6	VIJAYAWADA	GUDIVADA	Kanumolu	H.Junction	150 Sqmm AAA	23	11.74	270.11									1	11.5	12	281.65
7	VIJAYAWADA	GUDIVADA	Kanumolu	Veeravalli	150 Sqmm AAA	15	11.74	176.16									0	11.5	0	176.16
8	VIJAYAWADA	Rural Vja	KONA	SARADHANAGAR	150 Sqmm AAA	12	11.74	140.93									1	11.5	12	152.47
9	VIJAYAWADA	Rural Vja	220KV KONDAPALLI	33KV Mulapadu feeder	150 Sqmm AAA	25	11.74	293.60										11.5	0	293.60
10	VIJAYAWADA	Rural Vja	220KV KONDAPALLI	33KV Mulapadu feeder	150 Sqmm AAA	7	11.74	82.21										11.5	0	82.21
11	VIJAYAWADA	Nuzivid	220 KV Nuzvid SS	Indoor feeder	150 Sqmm AAA	6.5	11.74	76.34									0	11.5	0	76.34
12	VIJAYAWADA	Nuzivid	JANGAMGUDEM	JANGAMGUDEM	150 Sqmm AAA	3.5	11.74	41.10									1	11.5	12	52.65
13	VIJAYAWADA	Nuzivid	ADAVINEKKALAM	33 KV ADAVINEKKALAM	150 Sqmm AAA	39	11.74	458.01									1	11.5	12	469.55
14	VIJAYAWADA	NUZVID	RAMANAKKAPETA	33 KV CHEKKAPALLI	150 Sqmm AAA	7	11.74	82.21									0	11.5	0	82.21
15	VIJAYAWADA	Nuzivid	132/33 KV Kahbhampadu	Tiruvuru	150 Sqmm AAA	17	11.74	199.65									1	11.5	12	211.19
16	VIJAYAWADA	Nuzivid	132/33 KV Kahbhampadu	Tiruvuru	150 Sqmm AAA	15	11.74	176.16									1	11.5	12	187.70
17	VIJAYAWADA	Nuzivid	New 220 kv A.konduruss	TIRUVURU	150 Sqmm AAA	20.5	11.74	240.75									0	11.5	0	240.75
18	VIJAYAWADA	Nuzivid	220/132 KV A.KONDURU	Ganugapadu	150 Sqmm AAA	21.5	11.74	252.49									1	11.5	12	264.04
19	VIJAYAWADA	Nuzvid	220 KV A.Konduru	Ganugapadu	150 Sqmm AAA	24	11.74	281.85									1	11.5	12	293.40
20	VIJAYAWADA	Nuzvid	Kummarikuntla	Kummarikuntla	150 Sqmm AAA	7	11.74	82.21									0	11.5	0	82.21
21	VIJAYAWADA	Nuzivid	132/33 KV Kahbhampadu	Gampalagudem	150 Sqmm AAA	24	11.74	281.85									1	11.5	12	293.40
22	VIJAYAWADA	Nuzivid	132/33 KV Kahbhampadu	Vutukuru	150 Sqmm AAA	10	11.74	117.44									1	11.5	12	128.98
23	VIJAYAWADA	NUZVID	JANARDHANAVARAM	JANARDHANAVARAM	150 Sqmm AAA	1.62	11.74	19.03									0	11.5	0	19.03
24	VIJAYAWADA	NUZVID	DIGAVALI	NEW DIGAVALI	150 Sqmm AAA	18	11.74	211.39									1	11.5	12	222.93
25	VIJAYAWADA	Nuzivid	132/33kv Narasapuram	33KV Vissannapeta	150 Sqmm AAA	12	11.74	140.93									0	11.5	0	140.93
26	VIJAYAWADA	Nuzivid	132/33kv Narasapuram	New Feeder	150 Sqmm AAA	18	11.74	211.39									1	11.5	12	222.93
27	VIJAYAWADA	NUZVID	Anneraopeta	Anneraopeta	150 Sqmm AAA	5	11.74	58.72									0	11.5	0	58.72
28	VIJAYAWADA	Gunadala	132KV Nunna ss	33kv Surampalli	150 Sqmm AAA	2	11.74	23.49									1	11.5	12	35.03
1	Guntur	Town-1	132KV Pedapalakaluru	New 33KV Pattabhipuram Feeder	150 Sqmm AAA		11.74							10	11.74	117		11.5	0	117.44
2	Guntur	Town-1	132KV Pedapalakaluru	New 33KV Pattabhipuram Feeder	150 Sqmm AAA		11.74			2.3	64.61	149						11.5	0	148.61
3	Guntur	Town-1	132KV GNT SS1	New 33KV Takkellapadu Feeder	150 Sqmm AAA		11.74							0.5	11.74	6		11.5	0	5.87
4	Guntur	Narasaraopeta	220/132/33KV SS NRT	NRT-I	150 Sqmm AAA	7.8	11.74	91.60									1	11.5	12	103.14
5	Guntur	Narasaraopeta	220/132/33KV SS NRT	NRT-II	150 Sqmm AAA	12.3	11.74	144.45									1	11.5	12	155.99
6	Guntur	Narasaraopeta	132/33 kv ss piduguralla	Nakarikallu circutr-1	150 Sqmm AAA	25	11.74	293.60									0	11.5	0	293.60
7	Guntur	Narasaraopeta	132/33 KV ABBURU	ATCHAMPET	150 Sqmm AAA	36.9	11.74	433.35									1	11.5	12	444.89
8	Guntur	Narasaraopeta	132/33 KV ABBURU	Sattenapalli	150 Sqmm AAA	3.5	11.74	41.10									1	11.5	12	52.65
9	Guntur	Narasaraopeta	132/33 KV VKD SS	Vellaturu	150 Sqmm AAA	15.4	11.74	180.86									1	11.5	12	192.40
10	Guntur	Narasaraopeta	132/33 KV VKD SS	Vinukonda	150 Sqmm AAA	10.5	11.74	123.31									1	11.5	12	134.85
11	Guntur	Narasaraopeta	132/33 KV VKD SS	Bandlamottu	150 Sqmm AAA	20.2	11.74	237.23									0	11.5	0	237.23
12	Guntur	Town-1	132KV GNT SS1	New 33KV Takkellapadu Feeder	150 Sqmm AAA	4.5	11.74	52.85									0	11.5	0	52.85
13	Guntur	Town-1	220/132KVtadikonda ss	New 33KV IJM Feeder	150 Sqmm AAA	5	11.74	58.72									1	11.5	12	70.26
14	Guntur	Tenali	132/33KVSS TENALI	Tenali 2	150 Sqmm AAA	5	11.74	58.72									1	11.5	12	70.26
15	Guntur	Tenali	132/33KVSS TENALI	Tenali IV	150 Sqmm AAA	16	11.74	187.90									1	11.5	12	199.44
16	Guntur	Tenali	132/33KVSS CHAKRAYAPALEM	Kollipara	150 Sqmm AAA	20	11.74	234.88									0	11.5	0	234.88
17	Guntur	Tenali	132/33KVSS CHAKRAYAPALEM	Vemuru	150 Sqmm AAA	14	11.74	164.41									1	11.5	12	175.96

Loss Reduction: New 33 KV Feeders (For Over Loaded Feeders) Line

Sl No.	Circle	Division	Name of Source Sub-Station	Existing Feeder Details	33 KV Line (33 KV Line with 150 Sq.mm AAA Conductor over 12.5 Mts. PSCC Poles)				33 KV Line (Double Circuit) with 100 Sq.mm AAA Conductor over M+12 Towers				33 KV Line (Double Circuit) with 150 Sq.mm AAA Conductor over 12.5 Mts.Spun per KM				33 KV Bay with VCB			Total Amount in Lakhs
				Name of 33KV Feeder	Type	Qty in Ckm	Rate in Lakhs	Amount	Type	Qty in Ckm	Rate in Lakhs	Amount	Type	Qty in Ckm	Rate in Lakhs	Amount	Qty in Nos	Rate in Lakhs	Amount	
18	Guntur	Tenali	132/33KVSS REPALLE	REPALLE	150 Sqmm AAA	2.5	11.74	29.36									0	11.5	0	29.36
19	Guntur	Tenali	132/33KVSS REPALLE	GANGADIPALEM	150 Sqmm AAA	12.5	11.74	146.80									0	11.5	0	146.80
20	Guntur	Bapatla	132/33KV REPALLE	NIZAMPATNAM	150 Sqmm AAA	15	11.74	176.16									1	11.5	12	187.70
21	Guntur	Bapatla	132/33KV BAPATLA	BAPATLA	150 Sqmm AAA	2	11.74	23.49									1	11.5	12	35.03
22	Guntur	Macherla	132KV PIDUGURALLA	(MACHAVARAM)	150 Sqmm AAA	7	11.74	82.21									0	11.5	0	82.21
1	CRDA	Town-2 Guntur	220/132/33KV SS Narasaraopet	Phirangipuram	150 Sqmm AAA	25.5	11.74	299.47										11.5	0	299.47
2	Ongole	Ongole	220/132 KV Ongole	33 KV Hospital Feeder	150 Sqmm AAA	8	11.74	93.95									1	11.5	12	105.49
3	Ongole	Ongole	132 KV Ongole	33 KV Town 1	150 Sqmm AAA	2	11.74	23.49									1	11.5	12	35.03
4	Ongole	Ongole	132 KV Ongole	33 KV Town 3	150 Sqmm AAA	8	11.74	93.95									0	11.5	0	93.95
5	Ongole	Kandukur	132/33KV SS-Kandukuru	33 KV Gudluru	150 Sqmm AAA	10.9	11.74	128.01										11.5	0	128.01
6	Ongole	Kandukur	33/11KV SS- PAKALA	33 KV PAKALA	150 Sqmm AAA	10	11.74	117.44										11.5	0	117.44
7	Ongole	Kandukur	132/33KVSS -Kandukuru	33kv s.Konda Feeder-2	150 Sqmm AAA	8.62	11.74	101.23										11.5	0	101.23
8	Ongole	Markapur	132/33KV CUMBUM	33KV AKKAPALLI	150 Sqmm AAA	6	11.74	70.46									1	11.5	12	82.00
9	Ongole	Markapur	CUMBUM	M.H.PURAM	150 Sqmm AAA	17	11.74	199.65									0	11.5	0	199.65
10	Ongole	Markapur	Giddalur	Komarolu	150 Sqmm AAA	15	11.74	176.16									1	11.5	12	187.70
11	Ongole	Markapur	KESINENIPALLI	33KV DUPADU	150 Sqmm AAA	18	11.74	211.39									1	11.5	12	222.93
12	Ongole	Markapur	Y PALEM	33KV TRIPURANTAKAM	150 Sqmm AAA	26	11.74	305.34									1	11.5	12	316.88
13	Ongole	Markapur	DARIMADUGU	33KV PUTHAKAYALAPALLI	150 Sqmm AAA	8	11.74	93.95									0	11.5	0	93.95
14	Ongole	Markapur	DARIMADUGU	33KV SANIKAVARAM	150 Sqmm AAA	14	11.74	164.41									1	11.5	12	175.96
15	Ongole	Markapur	132/33KV CUMBUM	33KV THIPPAYAPALEM	150 Sqmm AAA	16	11.74	187.90									0	11.5	0	187.90
16	Ongole	DARSI	220 / 132 KV Uppalapadu	33 KV DKPadu	150 Sqmm AAA	18	11.74	211.39									0	11.5	0	211.39
17	ONGOLE	DARSI	33/11KV EDARA	33KV MARELLA	150 Sqmm AAA	16	11.74	187.90									1	11.5	12	199.44
18	ONGOLE	DARSI	33/11KV EDARA	33KV EDARA	150 Sqmm AAA	30	11.74	352.32									1	11.5	12	363.86
19	Ongole	Darsi	220 / 132 KV Uppalapadu	33 KV Podili	150 Sqmm AAA	21	11.74	246.62									0	11.5	0	246.62
20	Ongole	Darsi	132KV Kanigiri	33KV Pedarikatla	150 Sqmm AAA	11	11.74	129.18									1	11.5	12	140.72
21	Ongole	Darsi	220 KV PODILI	33 KV Chimakurthy Town	150 Sqmm AAA	14	11.74	164.41									0	11.5	0	164.41
22	Ongole	Darsi	220 KV PODILI	33 KV MCHPalem	150 Sqmm AAA	12	11.74	140.93									1	11.5	12	152.47
23	Ongole	Chirala	132KV Chirala	33KV Vetapalem	150 Sqmm AAA	1	11.74	11.74									0	11.5	0	11.74
24	Ongole	Chirala	132KV Chirala	33KV Pandillapalli Feeder	150 Sqmm AAA	10.5	11.74	123.31									0	11.5	0	123.31
25	Ongole	Chirala	132 KV Chirala	33 KV D2 Chirala	150 Sqmm AAA	2.3	11.74	27.01									0	11.5	0	27.01
26	Ongole	Addanki	132 KV Martur	33 KV Martur	150 Sqmm AAA	16	11.74	187.90									1	11.5	12	199.44
27	Ongole	Addanki	132 KV Pothavaram	33 KV Santhamaguluru	150 Sqmm AAA	2.5	11.74	29.36									0	11.5	0	29.36
28	Ongole	Addanki	132 KV Martur	33 KV Ballikurava	150 Sqmm AAA	10	11.74	117.44									0	11.5	0	117.44
29	Ongole	Addanki	132 KV Martur	33 KV Ballikurava	150 Sqmm AAA	15	11.74	176.16									0	11.5	0	176.16
30	Ongole	Kanigiri	132KV Kanigiri	Gudipadu	150 Sqmm AAA	23	11.74	270.11									1	11.5	12	281.65
31	Ongole	Kanigiri	132KV Kanigiri	Alavalapadu	150 Sqmm AAA	13	11.74	152.67									0	11.5	0	152.67
						1016.04	**951**	**11932**	**0**	**2.30**	**65**	**149**	**0**	**10.50**	**23**	**123**	**40**	**935**	**462**	**12665.86**

Loss Reduction:New 11 KV Feeders (For Over Loaded Feeders) Line

Sl No.	Circle	Division	Name of Source Sub-Station	Existing Feeder Details	11 KV Line (11 KV Line with 100 Sq.mm AAA Conductor over 11 Mts. Spun Poles)				11Kv bay extension at 33/11KV Sub-station with VCB			11 KV Feeder VCBs (If only bay available)			Total Amount in Lakhs
				Name of 11KV Feeder	Type	Qty in Ckm	Rate in Lakhs	Amount	Qty in Nos	Rate in Lakhs	Amount	Qty in KM	Rate in Lakhs	Amount	
1	Vijayawada	Vja Town	33/11KV Gandhi Hill SS	11KV Fish Market	100 Sqmm AAA	1.20	11.489	13.79	1	9.44	9.44		3.88	0.00	23.23
2	Vijayawada	Vja Town	33/11KV Gandhi Hill SS	11KV KBN College	100 Sqmm AAA	2.00	11.489	22.98	1	9.44	9.44		3.88	0.00	32.42
3	Vijayawada	Vja Town	33/11KV Fish Market SS	11KV Mahantipuram	100 Sqmm AAA	1.80	11.489	20.68	1	9.44	9.44		3.88	0.00	30.12
4	Vijayawada	Vja Town	33/11KV Fish Market SS	11KV Nyzam gate	100 Sqmm AAA	1.30	11.489	14.94	1	9.44	9.44		3.88	0.00	24.38
5	Vijayawada	Vja Town	Moulanagar	Moulanagar	100 Sqmm AAA	14.00	11.489	160.85	0	9.44	0.00	0	3.88	0.00	160.85
6	Vijayawada	Vja Town	Moulanagar	Ayyappa temple	100 Sqmm AAA	12.80	11.489	147.06	0	9.44	0.00	0	3.88	0.00	147.06
7	Vijayawada	Vja Town	Moulanagar	Saipuram colont	100 Sqmm AAA	15.20	11.489	174.63	0	9.44	0.00	0	3.88	0.00	174.63
8	Vijayawada	Vja Town	33/11 KV Gandhinagar	11 KV Railway Station	100 Sqmm AAA	1.00	11.489	11.49	1	9.44	9.44		3.88	0.00	20.93
9	Vijayawada	Vja Town	Ayodyanagar	Kedareswara peta	100 Sqmm AAA	0.90	11.489	10.34	1	9.44	9.44		3.88	0.00	19.78
10	Vijayawada	Vja Town	Mutyalampadu	Khudus Nagar	100 Sqmm AAA	1.10	11.489	12.64	1	9.44	9.44		3.88	0.00	22.08
11	Vijayawada	Vja Town	Mutyalampadu	Mutyalampadu	100 Sqmm AAA	1.70	11.489	19.53	1	9.44	9.44		3.88	0.00	28.98
12	Vijayawada	Vja Town	Maduranagar SS	Devinagar SS	100 Sqmm AAA	1.00	11.489	11.49	0	9.44	0.00	0	3.88	0.00	11.49
13	Vijayawada	Vja Town	Maduranagar SS	GVR Nagar	100 Sqmm AAA	0.80	11.489	9.19	0	9.44	0.00	0	3.88	0.00	9.19
14	Vijayawada	Vja Town	33/11KV JUBLEE INDOOR SS	11KV AIR	100 Sqmm AAA	3.00	11.489	34.47	1	9.44	9.44		3.88	0.00	43.91
15	Vijayawada	Vja Town	33/11KV MG INDOOR SS	11KV JAMMICHETTU	100 Sqmm AAA	2.50	11.489	28.72	1	9.44	9.44		3.88	0.00	38.17
16	Vijayawada	Vja Town	33/11 KV Skew Bridge SS	11 KV Telephone Exchange Feeder	100 Sqmm AAA	0.20	11.489	2.30	0	9.44	0.00	0	3.88	0.00	2.30
17	Vijayawada	Vja Town	33/11 KV VAMBAY COLONY	11 KV VAMBAY COLONY	100 Sqmm AAA	1.00	11.489	11.49	1	9.44	9.44		3.88	0.00	20.93
18	Vijayawada	Vjy Rural	ALLURU	11KV G MADHVARAM	100 Sqmm AAA	10.00	11.489	114.89	1	9.44	9.44		3.88	0.00	124.33
19	Vijayawada	Vjy Rural	33/11 KV PULLURU SS	11 KV MULAKALAPENTA	100 Sqmm AAA	10.00	11.489	114.89	1	9.44	9.44		3.88	0.00	124.33
20	Vijayawada	Vjy Rural	33/11 KV MYLAVARAM SS	11 KV JANGALAPALLI	100 Sqmm AAA	0.50	11.489	5.74	1	9.44	9.44		3.88	0.00	15.19
21	Vijayawada	Vjy Rural	33/11KV anasagaram SS	11KV Hanumanthapalem	100 Sqmm AAA	6.00	11.489	68.93	1	9.44	9.44		3.88	0.00	78.38
22	Vijayawada	Vjy Rural	33/11kv thoragudipadu	11kv ragavapuram	100 Sqmm AAA	22.00	11.489	252.76	1	9.44	9.44	0	3.88	0.00	262.20
23	Vijayawada	Vjy Rural	33/11kv thoragudipadu	11kv konduru	100 Sqmm AAA	18.00	11.489	206.80	1	9.44	9.44	0	3.88	0.00	216.25
24	Vijayawada	Gudivada	NANDIVADA	NANDIVADA	100 Sqmm AAA	2.5	11.489	28.72	1	9.44	9.44		3.88	0.00	38.17
25	Vijayawada	Gudivada	33/11 KV PEDAERIKAPADU	11 KV KARMIKANAGAR	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44		3.88	0.00	66.89
26	Vijayawada	Gudivada	CHIGURUKOTA	11KV Bomminampadu	100 Sqmm AAA	3.5	11.489	40.21	1	9.44	9.44	0	3.88	0.00	49.66
27	Vijayawada	Gudivada	33/11KV VENTRAPRAGADA SS	11kv Vanapamula	100 Sqmm AAA	2.0	11.489	22.98	0	9.44	0.00		3.88	0.00	22.98
28	Vijayawada	Gudivada	33/11KV VENTRAPRAGADA SS	11kv Pamulapadu	100 Sqmm AAA	5.0	11.489	57.45	0	9.44	0.00		3.88	0.00	57.45
29	Vijayawada	Gudivada	Kaikaluru	Gopavaram	100 Sqmm AAA	12.0	11.489	137.87	1	9.44	9.44		3.88	0.00	147.31
30	Vijayawada	Gudivada	Kaikaluru	Bhiravapatnam	100 Sqmm AAA	13.0	11.489	149.36	1	9.44	9.44		3.88	0.00	158.80
31	Vijayawada	Gudivada	PALLEWADA	11KV ALAPADU	100 Sqmm AAA	8.0	11.489	91.91	1	9.44	9.44		3.88	0.00	101.36
32	Vijayawada	Gudivada	PALLEWADA	11KV KOTTADA	100 Sqmm AAA	7.0	11.489	80.42	1	9.44	9.44		3.88	0.00	89.87
33	Vijayawada	Gudivada	VARAHAPATNAM	11KV AQUA FEEDER	100 Sqmm AAA	4.0	11.489	45.96	1	9.44	9.44		3.88	0.00	55.40
34	Vijayawada	Gudivada	VARAHAPATNAM	11KV RAMAVARAM FEEDER	100 Sqmm AAA	8.0	11.489	91.91	1	9.44	9.44		3.88	0.00	101.36
35	Vijayawada	Gudivada	33/11KV PERIKEGUDEM	KORLAPDU	100 Sqmm AAA	2.5	11.489	28.72		9.44	0.00	1	3.88	3.88	32.60
36	Vijayawada	Gudivada	33/11KV PULPARRU	NUTCHII	100 Sqmm AAA	3.5	11.489	40.21		9.44	0.00	1	3.88	3.88	44.09
37	Vijayawada	Gudivada	33/11KV PERIKEGUDEM	M.T.PADU	100 Sqmm AAA	1.5	11.489	17.23	1	9.44	9.44		3.88	0.00	26.68
38	Vijayawada	Gudivada	KALIDIND	11 VENKATAPURAM	100 Sqmm AAA	6.0	11.489	68.93		9.44	0.00		3.88	0.00	68.93
39	Vijayawada	Gudivada	KORUKOLLU	SRP	100 Sqmm AAA	5.0	11.489	57.45		9.44	0.00		3.88	0.00	57.45

Loss Reduction:New 11 KV Feeders (For Over Loaded Feeders) Line

Sl No.	Circle	Division	Name of Source Sub-Station	Existing Feeder Details	11 KV Line (11 KV Line with 100 Sq.mm AAA Conductor over 11 Mts. Spun Poles)				11Kv bay extension at 33/11KV Sub-station with VCB			11 KV Feeder VCBs (If only bay available)			Total Amount in Lakhs
				Name of 11KV Feeder	Type	Qty in Ckm	Rate in Lakhs	Amount	Qty in Nos	Rate in Lakhs	Amount	Qty in KM	Rate in Lakhs	Amount	
40	Vijayawada	Gudivada	Telaprolu	Telaprolu AGL	100 Sqmm AAA	18.0	11.489	206.80	1	9.44	9.44		3.88	0.00	216.25
41	Vijayawada	Gudivada	Atkuru	Pottipadu	100 Sqmm AAA	12.0	11.489	137.87	1	9.44	9.44		3.88	0.00	147.31
42	Vijayawada	Gudivada	Nandamuru	Manikonda AGL	100 Sqmm AAA	19.0	11.489	218.29	1	9.44	9.44		3.88	0.00	227.74
43	Vijayawada	Gudivada	Nandamuru	Indupalli	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44		3.88	0.00	66.89
44	Vijayawada	Machilipatnam	BANTUMILLI	PENDURU	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44		3.88	0.00	66.89
45	Vijayawada	Machilipatnam	BANTUMILLI	PEDATUMMIDI	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44		3.88	0.00	66.89
46	Vijayawada	Machilipatnam	BANTUMILLI	BANTUMILLI RURAL	100 Sqmm AAA	5.0	11.489	57.45		9.44	0.00		3.88	0.00	57.45
47	Vijayawada	Machilipatnam	MOVVA	11KV KUCHIPUDI	100 Sqmm AAA	2.0	11.489	22.98	2	9.44	18.89		3.88	0.00	41.87
48	Vijayawada	Machilipatnam	SARADANAGARAM	INNAGUDURU	100 Sqmm AAA	0.8	11.489	9.19	1	9.44	9.44		3.88	0.00	18.64
49	Vijayawada	Vuyyuru	Vuyyuru	Vuyyuru-III	100 Sqmm AAA	7.0	11.489	80.42	0	9.44	0.00	1	3.88	3.88	84.30
50	Vijayawada	Vuyyuru	Pedaogirala	11kv Chinaogirala	100 Sqmm AAA	0.550	11.489	6.32	0	9.44	0.00	1	3.88	3.88	10.20
51	Vijayawada	Vuyyuru	Katuru	11KV Kadavakollu	100 Sqmm AAA	1.360	11.489	15.63	0	9.44	0.00	1	3.88	3.88	19.50
52	Vijayawada	Vuyyuru	Mudunuru	Saipuram	100 Sqmm AAA	2.465	11.489	28.32	0	9.44	0.00	1	3.88	3.88	32.20
53	Vijayawada	Vuyyuru	Pedakallepalli	Pedakallepalli	100 Sqmm AAA	6.5	11.489	74.68	0	9.44	0.00	1	3.88	3.88	78.56
54	Vijayawada	Vuyyuru	Mopidevi	Bobbarlanka	100 Sqmm AAA	7.2	11.489	82.72	0	9.44	0.00	1	3.88	3.88	86.60
55	Vijayawada	Vuyyuru	Viswanadhapalli	11KV Pittalanka Express	100 Sqmm AAA	10.0	11.489	114.89	1	9.44	9.44		3.88	0.00	124.33
56	Vijayawada	Nuzvid	33/11 KV Annavaram	11 KV Venkatayapalem	100 Sqmm AAA	8.2	11.489	94.21		9.44	0.00		3.88	0.00	94.21
57	Vijayawada	Nuzvid	33/11 KV Pallerlamudi	Madicherla	100 Sqmm AAA	5.8	11.489	66.64	1	9.44	9.44		3.88	0.00	76.08
58	Vijayawada	Nuzvid	33/11 KV Meerjapuram	Kothapalli	100 Sqmm AAA	4.3	11.489	49.40	1	9.44	9.44		3.88	0.00	58.85
59	Vijayawada	Nuzvid	33/11 KV Morsapudi	Indira	100 Sqmm AAA	1.0	11.489	11.49	1	9.44	9.44		3.88	0.00	20.93
60	Vijayawada	Nuzvid	33/11 KV MEERJAPURAM	11 KV MEERJAPURAM RURAL	100 Sqmm AAA	2.1	11.489	24.13	1	9.44	9.44		3.88	0.00	33.57
61	Vijayawada	Nuzvid	33/11KV PALLERLAMUDI	11KV PALLERLAMUDI RURAL	100 Sqmm AAA	1.4	11.489	16.08	1	9.44	9.44		3.88	0.00	25.53
62	Vijayawada	Nuzvid	33/11 kv ADAVINEKKALAM	11 KV SARAO PETA FEEDER	100 Sqmm AAA	24.0	11.489	275.74	1	9.44	9.44		3.88	0.00	285.18
63	Vijayawada	Nuzvid	33/11 KV RAMANAKKAPETA	11 KV AKKIREDDYGUDEM AGL	100 Sqmm AAA	2.1	11.489	24.13	1	9.44	9.44		3.88	0.00	33.57
64	Vijayawada	Nuzvid	33/11 KV RAMANAKKAPETA	11 KV GOLLAGUDEM	100 Sqmm AAA	1.0	11.489	11.49	1	9.44	9.44		3.88	0.00	20.93
65	Vijayawada	Nuzvid	33/11 KV Vutukuru	Vutukuru	100 Sqmm AAA	4.0	11.489	45.96	1	9.44	9.44		3.88	0.00	55.40
66	Vijayawada	Nuzvid	Penugolanu	Meduru	100 Sqmm AAA	4.5	11.489	51.70	0	9.44	0.00	1	3.88	3.88	55.58
67	Vijayawada	Nuzvid	Gampalagudem	Gollapudi	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44		3.88	0.00	66.89
68	Vijayawada	Nuzvid	Kanumuru	Anumollanka	100 Sqmm AAA	2.0	11.489	22.98	1	9.44	9.44		3.88	0.00	32.42
69	Vijayawada	Nuzvid	33/11kv Chatrai SS	11kv Chatrai Rural	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44		3.88	0.00	66.89
70	Vijayawada	Nuzvid	33/11kv Chatrai SS	11kv Burugudem Rural	100 Sqmm AAA	1.5	11.489	17.23	1	9.44	9.44		3.88	0.00	26.68
71	Vijayawada	Nuzvid	33/11kv Janadhanavaram SS	11kv Janardhanavaram Rural	100 Sqmm AAA	4.0	11.489	45.96	1	9.44	9.44		3.88	0.00	55.40
72	Vijayawada	Nuzvid	33/11kv Janadhanavaram SS	11kv Arugolanupeta Rural	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44		3.88	0.00	66.89
73	Vijayawada	Nuzvid	33/11kv Tummagudem SS	11kv Tummagudem	100 Sqmm AAA	6.0	11.489	68.93	1	9.44	9.44		3.88	0.00	78.38
74	Vijayawada	Nuzvid	33/11kv Tummagudem SS	11kv Jayapuram	100 Sqmm AAA	4.0	11.489	45.96	1	9.44	9.44		3.88	0.00	55.40
75	Vijayawada	Nuzvid	33/11kv Somavaram SS	11kv Marlapalem	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44		3.88	0.00	66.89
76	Vijayawada	Nuzvid	33/11kv Kotapadu SS	11kv Chinnampeta	100 Sqmm AAA	6.0	11.489	68.93	1	9.44	9.44		3.88	0.00	78.38
77	Vijayawada	Nuzvid	33/11kv Kotapadu SS	11kv Pothanapalli	100 Sqmm AAA	6.0	11.489	68.93	1	9.44	9.44		3.88	0.00	78.38
78	Vijayawada	Nuzvid	33/11kv Polavaram SS	11kv Polavaram Rural	100 Sqmm AAA	3.0	11.489	34.47	1	9.44	9.44		3.88	0.00	43.91
79	Vijayawada	Nuzvid	33/11kv Tsanubanda SS	11kv N R Palem	100 Sqmm AAA	4.5	11.489	51.70	1	9.44	9.44		3.88	0.00	61.14

Loss Reduction:New 11 KV Feeders (For Over Loaded Feeders) Line

Sl No.	Circle	Division	Name of Source Sub-Station	Existing Feeder Details	11 KV Line (11 KV Line with 100 Sq.mm AAA Conductor over 11 Mts. Spun Poles)				11Kv bay extension at 33/11KV Sub-station with VCB			11 KV Feeder VCBs (If only bay available)			Total Amount in Lakhs
				Name of 11KV Feeder	Type	Qty in Ckm	Rate in Lakhs	Amount	Qty in Nos	Rate in Lakhs	Amount	Qty in KM	Rate in Lakhs	Amount	
80	Vijayawada	Nuzvid	33/11kv Narasapuram SS	11KV Tsanubanda	100 Sqmm AAA	6.0	11.489	68.93	1	9.44	9.44		3.88	0.00	78.38
81	Vijayawada	Nuzvid	33/11kv Kondaparva SS	11kV Chithapur	100 Sqmm AAA	3.5	11.489	40.21	1	9.44	9.44		3.88	0.00	49.66
82	Vijayawada	Nuzvid	Vissannapeta	VISSANNAPETA RURAL	100 Sqmm AAA	20.0	11.489	229.78	1	9.44	9.44		3.88	0.00	239.22
83	Vijayawada	Nuzvid	RAMACHANDRA PURAM	KALAGARA	100 Sqmm AAA	18.0	11.489	206.80	1	9.44	9.44		3.88	0.00	216.25
84	Vijayawada	Nuzvid	PUTRELA	JANALAGADDA	100 Sqmm AAA	15.0	11.489	172.34	1	9.44	9.44		3.88	0.00	181.78
85	Vijayawada	Nuzvid	PUTRELA	PUTRELA RURAL	100 Sqmm AAA	12.0	11.489	137.87	1	9.44	9.44		3.88	0.00	147.31
86	Vijayawada	Nuzvid	33/11kv Muchinapalli SS	11kv Moddulaparva Agl	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44		3.88	0.00	66.89
87	Vijayawada	Nuzvid	33/11kv Rangapuram SS	11kv Reddygudem Agl	100 Sqmm AAA	4.0	11.489	45.96	1	9.44	9.44		3.88	0.00	55.40
88	Vijayawada	Gunadala	33/11kv Nunna	11KV Nunna Feeder	100 Sqmm AAA	2.0	11.489	22.98	0	9.44	0.00	0	3.88	0.00	22.98
1	Guntur	Town-1	New Lalpuram	Higway	100 Sqmm AAA	4.0	11.489	45.96	0	9.44	0.00	0	3.88	0.00	45.96
2	Guntur	Town-1	Pothuru	Vartha	100 Sqmm AAA	4.5	11.489	51.70	0	9.44	0.00	0	3.88	0.00	51.70
3	Guntur	Town-1	Manasasarovaram	Local 3rd	100 Sqmm AAA	2.6	11.489	29.87	1	9.44	9.44	0	3.88	0.00	39.32
4	Guntur	Town-1	AS Krishna	Sethanagar	100 Sqmm AAA	2.0	11.489	22.98	0	9.44	0.00	0	3.88	0.00	22.98
5	Guntur	Town-1	Pedakakani	Venigandla	100 Sqmm AAA	8.0	11.489	91.91	1	9.44	9.44	0	3.88	0.00	101.36
6	Guntur	Town-1	Pedakakani	Pedakakani -II	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44	0	3.88	0.00	66.89
7	Guntur	Town-1	Pedakakani	Pedakakani Industrial	100 Sqmm AAA	6.0	11.489	68.93	1	9.44	9.44	0	3.88	0.00	78.38
8	Guntur	Tenali	TENALISS-3	Tenali V	100 Sqmm AAA	1.3	11.489	14.94	1	9.44	9.44	1	3.88	3.88	28.26
9	Guntur	Tenali	TENALISS-3	Tenali VI	100 Sqmm AAA	2.5	11.489	28.72	1	9.44	9.44	1	3.88	3.88	42.04
10	Guntur	Tenali	TENALISS-2	Tenali X	100 Sqmm AAA	3.5	11.489	40.21	1	9.44	9.44	1	3.88	3.88	53.53
11	Guntur	Tenali	Autonagar	Autonagar	100 Sqmm AAA	1.5	11.489	17.23	1	9.44	9.44	1	3.88	3.88	30.55
12	Guntur	Tenali	Kolakaluru	Kolakaluru AGL	100 Sqmm AAA	1.3	11.489	14.94	0	9.44	0.00	0	3.88	0.00	14.94
13	Guntur	Tenali	Autonagar	Nandivelugu	100 Sqmm AAA	5.0	11.489	57.45	0	9.44	0.00	0	3.88	0.00	57.45
14	Guntur	Tenali	Autonagar	Katevaram	100 Sqmm AAA	1.0	11.489	11.49	0	9.44	0.00	0	3.88	0.00	11.49
15	Guntur	Tenali	Vemuru	Chavali	100 Sqmm AAA	0.0	11.489	0.00	0	9.44	0.00	0	3.88	0.00	0.00
16	Guntur	Tenali	Repalle SS-I	Repalle Local-I	100 Sqmm AAA	1.2	11.489	13.79	1	9.44	9.44	1	3.88	3.88	27.11
17	Guntur	Tenali	Repalle SS-II	Repalle Local-IV	100 Sqmm AAA	3.0	11.489	34.47	1	9.44	9.44	1	3.88	3.88	47.79
18	Guntur	Bapatla	Cherukupalli SS	Cherukupalli	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44	1	3.88	3.88	70.77
19	Guntur	Bapatla	KHAZIPALEM	CHNADOLU	100 Sqmm AAA	8.0	11.489	91.91	1	9.44	9.44	1	3.88	3.88	105.23
20	Guntur	Bapatla	Gudavalli	Peddavaram	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44	1	3.88	3.88	70.77
21	Guntur	Bapatla	Ponnur SS-1	Jupudi	100 Sqmm AAA	8.0	11.489	91.91	1	9.44	9.44	1	3.88	3.88	105.23
22	Guntur	Bapatla	Bapatla SS-1	Patelnagar	100 Sqmm AAA	0.5	11.489	5.74	1	9.44	9.44	1	3.88	3.88	19.07
23	Guntur	Bapatla	Bapatla SS-2	Hyderpet	100 Sqmm AAA	3.0	11.489	34.47	1	9.44	9.44	1	3.88	3.88	47.79
24	Guntur	Bapatla	P.V.Palem	Alluru	100 Sqmm AAA	4.0	11.489	45.96	1	9.44	9.44	1	3.88	3.88	59.28
25	Guntur	Narasaraopeta	NRT -II SS	Islampet	100 Sqmm AAA	1.1	11.489	12.64	1	9.44	9.44	1	3.88	3.88	25.96
26	Guntur	Narasaraopeta	NRT -III SS	RWS	100 Sqmm AAA	3.0	11.489	34.47	1	9.44	9.44	0	3.88	0.00	43.91
27	Guntur	Narasaraopeta	NRT -III SS	Allurivaripalem	100 Sqmm AAA	4.2	11.489	48.25	1	9.44	9.44	1	3.88	3.88	61.57
28	Guntur	Narasaraopeta	Kottappakonda SS	Kottappakonda	100 Sqmm AAA	2.1	11.489	24.13	1	9.44	9.44	1	3.88	3.88	37.45
29	Guntur	Narasaraopeta	Nakarikallu SS	Narasingapadu	100 Sqmm AAA	3.0	11.489	34.47	1	9.44	9.44	0	3.88	0.00	43.91
30	Guntur	Narasaraopeta	Muppalla SS	Inumella	100 Sqmm AAA	6.0	11.489	68.93	1	9.44	9.44	1	3.88	3.88	82.25
31	Guntur	Narasaraopeta	Kocherla SS	Kocherla	100 Sqmm AAA	8.2	11.489	94.21	1	9.44	9.44	1	3.88	3.88	107.53

Loss Reduction:New 11 KV Feeders (For Over Loaded Feeders) Line

Sl No.	Circle	Division	Name of Source Sub-Station	Existing Feeder Details	11 KV Line (11 KV Line with 100 Sq.mm AAA Conductor over 11 Mts. Spun Poles)				11Kv bay extension at 33/11KV Sub-station with VCB			11 KV Feeder VCBs (If only bay available)			Total Amount in Lakhs
				Name of 11KV Feeder	Type	Qty in Ckm	Rate in Lakhs	Amount	Qty in Nos	Rate in Lakhs	Amount	Qty in KM	Rate in Lakhs	Amount	
32	Guntur	Narasaraopeta	MUPPALLA	DAMMALAPADU	100 Sqmm AAA	3.1	11.489	35.62	1	9.44	9.44	0	3.88	0.00	45.06
33	Guntur	Narasaraopeta	DODLERU	HASANABAD	100 Sqmm AAA	5.3	11.489	60.89	1	9.44	9.44	1	3.88	3.88	74.21
34	Guntur	Narasaraopeta	DODLERU	NINDUJERLA	100 Sqmm AAA	10.5	11.489	120.63	1	9.44	9.44	1	3.88	3.88	133.96
35	Guntur	Narasaraopeta	KROSURU	GRANDHASIRI	100 Sqmm AAA	6.8	11.489	78.13	1	9.44	9.44	1	3.88	3.88	91.45
36	Guntur	Narasaraopeta	ATCHAMPET	VELPUR	100 Sqmm AAA	7.3	11.489	83.87	1	9.44	9.44	1	3.88	3.88	97.19
37	Guntur	Narasaraopeta	TALLACHERUVU	NELLESWARAPALEM	100 Sqmm AAA	4.8	11.489	55.15	1	9.44	9.44	1	3.88	3.88	68.47
38	Guntur	Narasaraopeta	ATCHAMPET	VELPUR	100 Sqmm AAA	7.3	11.489	83.87	1	9.44	9.44	1	3.88	3.88	97.19
39	Guntur	Narasaraopeta	MADIPADU	JP THANDA	100 Sqmm AAA	7.9	11.489	90.76	1	9.44	9.44	1	3.88	3.88	104.08
40	Guntur	Narasaraopeta	SS Gutlapalli	Palakuru	100 Sqmm AAA	11.0	11.489	126.38	1	9.44	9.44	1	3.88	3.88	139.70
41	Guntur	Narasaraopeta	SS Gutlapalli	Kandrika	100 Sqmm AAA	8.2	11.489	94.21	1	9.44	9.44	1	3.88	3.88	107.53
42	Guntur	Narasaraopeta	SS Vellaturu	Perurapadu	100 Sqmm AAA	12.2	11.489	140.17	1	9.44	9.44	1	3.88	3.88	153.49
43	Guntur	Narasaraopeta	SS Remidicherla	Remidicherla	100 Sqmm AAA	8.1	11.489	93.06	1	9.44	9.44	1	3.88	3.88	106.38
44	Guntur	Narasaraopeta	SS Ravulapuram	Bodipalem	100 Sqmm AAA	1.3	11.489	14.94	1	9.44	9.44	1	3.88	3.88	28.26
45	Guntur	Narasaraopeta	SS Enugupalem	Pitlambandla	100 Sqmm AAA	5.2	11.489	59.74	1	9.44	9.44	1	3.88	3.88	73.06
46	Guntur	Narasaraopeta	SS Enugupalem	Pedakancherla	100 Sqmm AAA	6.4	11.489	73.53	1	9.44	9.44	1	3.88	3.88	86.85
47	Guntur	Narasaraopeta	SS Chekateegalapalem	Nuzendla	100 Sqmm AAA	5.4	11.489	62.04	1	9.44	9.44	1	3.88	3.88	75.36
48	Guntur	Narasaraopeta	SS Nuzendla	Ravvaram	100 Sqmm AAA	5.5	11.489	63.19	0	9.44	0.00	0	3.88	0.00	63.19
49	Guntur	Macherla	KAREMPUDI	KPD	100 Sqmm AAA	4.0	11.489	45.96	1	9.44	9.44	1	3.88	3.88	59.28
50	Guntur	Macherla	GURAZALA	GZL-1	100 Sqmm AAA	3.0	11.489	34.47	1	9.44	9.44	1	3.88	3.88	47.79
51	Guntur	Macherla	RENTACHINTALA	RCL	100 Sqmm AAA	3.0	11.489	34.47	1	9.44	9.44	1	3.88	3.88	47.79
52	Guntur	Macherla	MADINAPADU	S AGRAHRAM AGL	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44	1	3.88	3.88	70.77
53	Guntur	Macherla	MACHAVARAM	CHENNAYAPALEM	100 Sqmm AAA	10.0	11.489	114.89	1	9.44	9.44	1	3.88	3.88	128.21
54	Guntur	Macherla	Bellamkonda	Bellamkonda TOWN II	100 Sqmm AAA	1.5	11.489	17.23	0	9.44	0.00	0	3.88	0.00	17.23
1	CRDA	AMARAVATHI	33/11 Mangalagiri SS.2	11 KV Town1	100 Sqmm AAA	2.0	11.489	22.98	0	9.44	0.00	0	3.88	0.00	22.98
2	CRDA	AMARAVATHI	33/11KV Mahanadu SS	11 KV Navodaya	100 Sqmm AAA	1.0	11.489	11.49	0	9.44	0.00	0	3.88	0.00	11.49
3	CRDA	AMARAVATHI	33/11KV Pedavadlapudi SS	11KV Kothapalem-2 feeder	100 Sqmm AAA	0.5	11.489	5.74	0	9.44	0.00	1	3.88	3.88	9.62
4	CRDA	AMARAVATHI	33/11KV Pedavadlapudi SS	11KV Chaithanya Nagar feeder	100 Sqmm AAA	1.2	11.489	13.79	0	9.44	0.00	1	3.88	3.88	17.66
5	CRDA	AMARAVATHI	33/11KV Pedavadlapudi SS	11KV Rural AGL feeder	100 Sqmm AAA	0.4	11.489	4.60	0	9.44	0.00	1	3.88	3.88	8.47
6	CRDA	Town-II Guntur	33/11KV Subbaiah Thota	Maddinagar	100 Sqmm AAA	3.10	11.489	35.62	1	9.44	9.44		3.88	0.00	45.06
7	CRDA	Town-II Guntur	33/11KV Chilakaluripet	Bondulapalem	100 Sqmm AAA	3.50	11.489	40.21	1	9.44	9.44		3.88	0.00	49.66
8	CRDA	Town-II Guntur	33/11 KV Maddirala	Chilakaluripet A2	100 Sqmm AAA	4.80	11.489	55.15	1	9.44	9.44		3.88	0.00	64.59
9	CRDA	Town-II Guntur	33/11 KV Maddirala	Gopalavaripalem	100 Sqmm AAA	3.50	11.489	40.21	1	9.44	9.44		3.88	0.00	49.66
10	CRDA	Town-II Guntur	33/11 KV Pasumarru	Navodaya	100 Sqmm AAA	3.70	11.489	42.51	1	9.44	9.44		3.88	0.00	51.95
11	CRDA	Town-II Guntur	33/11 KV Gangannapalem	Gottipadu	100 Sqmm AAA	3.90	11.489	44.81	1	9.44	9.44		3.88	0.00	54.25
12	CRDA	Town-II Guntur	33/11 KV Gangannapalem	Gangannapalem	100 Sqmm AAA	5.50	11.489	63.19	1	9.44	9.44		3.88	0.00	72.63
13	CRDA	Town-II Guntur	33/11 KV Sathuluru	Kavuru	100 Sqmm AAA	6.10	11.489	70.08	1	9.44	9.44		3.88	0.00	79.53
14	CRDA	Town-II Guntur	33/11 KV Sathuluru	Sathuluru	100 Sqmm AAA	6.50	11.489	74.68	1	9.44	9.44		3.88	0.00	84.12
15	CRDA	Town-II Guntur	33/11KV Nadendla	Gorizavolu	100 Sqmm AAA	5.20	11.489	59.74	1	9.44	9.44		3.88	0.00	69.19
16	CRDA	Town-II Guntur	33/11KV Ganapavaram	Tubadu	100 Sqmm AAA	6.10	11.489	70.08	1	9.44	9.44		3.88	0.00	79.53

Loss Reduction:New 11 KV Feeders (For Over Loaded Feeders) Line

Sl No.	Circle	Division	Name of Source Sub-Station	Existing Feeder Details	11 KV Line (11 KV Line with 100 Sq.mm AAA Conductor over 11 Mts. Spun Poles)				11Kv bay extension at 33/11KV Sub-station with VCB			11 KV Feeder VCBs (If only bay available)			Total Amount in Lakhs
				Name of 11KV Feeder	Type	Qty in Ckm	Rate in Lakhs	Amount	Qty in Nos	Rate in Lakhs	Amount	Qty in KM	Rate in Lakhs	Amount	
17	CRDA	Town-II Guntur	33/11KV Edlapadu	Veluru	100 Sqmm AAA	5.50	11.489	63.19	1	9.44	9.44		3.88	0.00	72.63
18	CRDA	Town-II Guntur	33/11KV Kondaveedu	Nadendla Rural	100 Sqmm AAA	5.50	11.489	63.19	1	9.44	9.44		3.88	0.00	72.63
19	CRDA	Town-II Guntur	33/11KV Kondaveedu	Singiskhanpet	100 Sqmm AAA	5.20	11.489	59.74	1	9.44	9.44		3.88	0.00	69.19
20	CRDA	Town-II Guntur	33/11KV Nudurupadu	YG YG Padu AGL	100 Sqmm AAA	6.20	11.489	71.23	1	9.44	9.44		3.88	0.00	80.68
21	CRDA	Town-II Guntur	33/11KV Dogiparru	Ameenabad AGL	100 Sqmm AAA	5.50	11.489	63.19	1	9.44	9.44		3.88	0.00	72.63
22	CRDA	Town-II Guntur	33/11 KV Dokiparru SS	11KV Ameenabad	100 Sqmm AAA	6.20	11.489	71.23	1	9.44	9.44		3.88	0.00	80.68
1	Ongole	Ongole	Market SS	VIP Road	100 Sqmm AAA	2.0	11.489	22.98	0	9.44	0.00	1	3.88	3.88	26.85
2	Ongole	Ongole	Market SS	Lawyerpet	100 Sqmm AAA	2.0	11.489	22.98	0	9.44	0.00	1	3.88	3.88	26.85
3	Ongole	Ongole	Market SS	Filterbed	100 Sqmm AAA	1.0	11.489	11.49	0	9.44	0.00	1	3.88	3.88	15.37
4	Ongole	Ongole	Market SS	Srigiri	100 Sqmm AAA	3.0	11.489	34.47	0	9.44	0.00	1	3.88	3.88	38.34
5	Ongole	Ongole	Hospital SS	Enuguchettu	100 Sqmm AAA	2.0	11.489	22.98	0	9.44	0.00	1	3.88	3.88	26.85
6	Ongole	Ongole	Hospital SS	Municipal	100 Sqmm AAA	3.0	11.489	34.47	0	9.44	0.00	1	3.88	3.88	38.34
7	Ongole	Ongole	Pole Centre	Rajiv Nagar	100 Sqmm AAA	3.0	11.489	34.47	0	9.44	0.00	1	3.88	3.88	38.34
8	Ongole	Ongole	Indoor SS	Gaddalaguntta	100 Sqmm AAA	2.0	11.489	22.98	0	9.44	0.00	1	3.88	3.88	26.85
9	Ongole	Ongole	Stores SS	Brundavanam	100 Sqmm AAA	3.0	11.489	34.47	1	9.44	9.44	0	3.88	0.00	43.91
10	Ongole	Ongole	Stores SS	Nirmal Nagar	100 Sqmm AAA	2.0	11.489	22.98	1	9.44	9.44	0	3.88	0.00	32.42
11	Ongole	Ongole	33/11 KV Gaddaagunta	11KV MODEL TOWN FEEDER	100 Sqmm AAA	0.2	11.489	2.30	1	9.44	9.44	0	3.88	0.00	11.74
12	Ongole	Ongole	33/11 KV Ram Nagar	11KV KMS FEEDER	100 Sqmm AAA	0.2	11.489	2.30	1	9.44	9.44	0	3.88	0.00	11.74
13	Ongole	Ongole	33/11 KV Govt Office Compound SS	11 KV CRP Feeder	100 Sqmm AAA	0.5	11.489	5.74	1	9.44	9.44	0	3.88	0.00	15.19
14	Ongole	Ongole	POLICE QUARTERS SS	Maruthi Nagar Feeder	100 Sqmm AAA	2.5	11.489	28.72	1	9.44	9.44	0	3.88	0.00	38.17
15	Ongole	Ongole	Pernamitta	Industrial	100 Sqmm AAA	3.5	11.489	40.21	1	9.44	9.44	0	3.88	0.00	49.66
16	Ongole	Ongole	OLD govt.Hospital	Rail peta	100 Sqmm AAA	4.0	11.489	45.96	1	9.44	9.44	0	3.88	0.00	55.40
17	Ongole	Ongole	Motumala	Padharthyt Agl	100 Sqmm AAA	4.0	11.489	45.96	0	9.44	0.00	1	3.88	3.88	49.83
18	Ongole	Ongole	Rayavaripalem	Pasupukuduru	100 Sqmm AAA	5.0	11.489	57.45	0	9.44	0.00	1	3.88	3.88	61.32
19	Ongole	Ongole	Proposed 33/11KV Surareddy Palem SS	11KV Surareddypalem Town	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44	0	3.88	0.00	66.89
20	Ongole	Ongole	Proposed 33/11KV Surareddy Palem SS	11KV Valluru	100 Sqmm AAA	4.0	11.489	45.96	1	9.44	9.44	0	3.88	0.00	55.40
21	Ongole	Ongole	Proposed 33/11KV Surareddy Palem SS	11KV Vasepallipadu	100 Sqmm AAA	1.0	11.489	11.49	1	9.44	9.44	0	3.88	0.00	20.93
22	Ongole	Ongole	Throvagunta	11KV Throvagunta Town	100 Sqmm AAA	2.5	11.489	28.72	1	9.44	9.44	0	3.88	0.00	38.17
23	Ongole	Ongole	Throvagunta	11KV Manduvavripalem	100 Sqmm AAA	2.5	11.489	28.72	1	9.44	9.44	0	3.88	0.00	38.17
24	Ongole	Ongole	Cheruvukommupalem	11KV Pelluru Town	100 Sqmm AAA	5	11.489	57.45	1	9.44	9.44	0	3.88	0.00	66.89
25	Ongole	Ongole	Koppolu	11KV GKV Palem Town	100 Sqmm AAA	7	11.489	80.42	1	9.44	9.44	0	3.88	0.00	89.87
26	Ongole	Ongole	33/11KV chilakapadu SS	11KV Vemulapadu Feeder	100 Sqmm AAA	25	11.489	287.23	1	9.44	9.44	0	3.88	0.00	296.67
27	Ongole	Ongole	33/11KV Endluru SS	11KV Rudravaram feeder	100 Sqmm AAA	15.0	11.489	172.34	1	9.44	9.44	0	3.88	0.00	181.78
28	Ongole	Kandukur	33/11KV Kandukur ss	11 KV Sai nagar	100 Sqmm AAA	2.0	11.489	22.98	1	9.44	9.44	0	3.88	0.00	32.42
29	Ongole	Kandukur	33/11KV VV Palem ss	11KV Lingapalem feeder	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44	0	3.88	0.00	66.89
30	Ongole	Kandukur	SANAMPUDI	KALIKIVAYA	100 Sqmm AAA	14.0	11.489	160.85	1	9.44	9.44	0	3.88	0.00	170.29

Loss Reduction:New 11 KV Feeders (For Over Loaded Feeders) Line

Sl No.	Circle	Division	Name of Source Sub-Station	Existing Feeder Details	11 KV Line (11 KV Line with 100 Sq.mm AAA Conductor over 11 Mts. Spun Poles)				11Kv bay extension at 33/11KV Sub-station with VCB			11 KV Feeder VCBs (If only bay available)			Total Amount in Lakhs
				Name of 11KV Feeder	Type	Qty in Ckm	Rate in Lakhs	Amount	Qty in Nos	Rate in Lakhs	Amount	Qty in KM	Rate in Lakhs	Amount	
31	Ongole	Kandukur	Karedu	11 KV Kothapallipalem	100 Sqmm AAA	0.7	11.489	8.04	1	9.44	9.44	0	3.88	0.00	17.49
32	Ongole	Kandukur	Chakicharla	11 KV Pedapattapupalem Aqua	100 Sqmm AAA	0.7	11.489	8.04	0	9.44	0.00	1	3.88	3.88	11.92
33	Ongole	Kandukur	Atmakur	11KV Atmakur	100 Sqmm AAA	2.5	11.489	28.72	1	9.44	9.44	0	3.88	0.00	38.17
34	Ongole	Kandukur	Gudluru	11 KV POTLURU	100 Sqmm AAA	2.5	11.489	28.72	1	9.44	9.44	0	3.88	0.00	38.17
35	Ongole	Kandukur	Thettu	11KV Chevuru	100 Sqmm AAA	8.5	11.489	97.66	1	9.44	9.44	0	3.88	0.00	107.10
36	Ongole	Kandukur	Kandukur Town	LIC feeder	100 Sqmm AAA	2	11.489	22.98	1	9.44	9.44	0	3.88	0.00	32.42
37	Ongole	Kandukur	S.Konda	Singarayakonda Town 2	100 Sqmm AAA	4	11.489	45.96	1	9.44	9.44	0	3.88	0.00	55.40
38	Ongole	Kandukur	Pakala	Kesupalem Aqua	100 Sqmm AAA	2.5	11.489	28.72	1	9.44	9.44	0	3.88	0.00	38.17
39	Ongole	Kandukur	L.Samudram	Vengalapuram	100 Sqmm AAA	2.5	11.489	28.72	1	9.44	9.44	0	3.88	0.00	38.17
40	Ongole	Markapur	B.V.PETA	B.V.PETA TOWN	100 Sqmm AAA	1	11.489	11.49	1	9.44	9.44	0	3.88	0.00	20.93
41	Ongole	Markapur	Komarolu	11 kv Chintalapalli	100 Sqmm AAA	25	11.489	287.23	1	9.44	9.44	0	3.88	0.00	296.67
42	Ongole	Markapur	Komarolu	11kv Suravaripalli	100 Sqmm AAA	28	11.489	321.69	1	9.44	9.44	0	3.88	0.00	331.14
43	Ongole	Markapur	Kanchipalli	11 KV Venkatapuram	100 Sqmm AAA	10	11.489	114.89	1	9.44	9.44	0	3.88	0.00	124.33
44	Ongole	Markapur	Ambavaram	11 KV VR PALLI	100 Sqmm AAA	11	11.489	126.38	1	9.44	9.44	0	3.88	0.00	135.82
45	Ongole	Markapur	Uyyalawada	11 KV Uyyalawada	100 Sqmm AAA	12	11.489	137.87	1	9.44	9.44	0	3.88	0.00	147.31
46	Ongole	Markapur	MEDAPI	MEDAPI	100 Sqmm AAA	12	11.489	137.87	1	9.44	9.44	0	3.88	0.00	147.31
47	Ongole	Markapur	MEDAPI	VENGAYAPALEM	100 Sqmm AAA	9	11.489	103.40	1	9.44	9.44	0	3.88	0.00	112.85
48	Ongole	Markapur	SOMEPALLI	SOMEPALLI	100 Sqmm AAA	8	11.489	91.91	1	9.44	9.44	0	3.88	0.00	101.36
49	Ongole	Markapur	VISWANADHPURAM	VELLAMPALLI	100 Sqmm AAA	14	11.489	160.85	1	9.44	9.44	0	3.88	0.00	170.29
50	Ongole	Markapur	GANAPAVARAM	GANAPAVARAM	100 Sqmm AAA	13	11.489	149.36	1	9.44	9.44	0	3.88	0.00	158.80
51	Ongole	Markapur	GANAPAVARAM	ENDURIVARIPALEM	100 Sqmm AAA	14	11.489	160.85	1	9.44	9.44	0	3.88	0.00	170.29
52	Ongole	Markapur	TRIPURANTAKAM	KANKANALA PALLI	100 Sqmm AAA	15	11.489	172.34	1	9.44	9.44	0	3.88	0.00	181.78
53	Ongole	Markapur	KOMATIKUNTA	11 KV VEMULAKOTA	100 Sqmm AAA	4.5	11.489	51.70	1	9.44	9.44	0	3.88	0.00	61.14
54	Ongole	Markapur	RAAYAVARAM	11 BODAPADU	100 Sqmm AAA	3.5	11.489	40.21	1	9.44	9.44	0	3.88	0.00	49.66
55	Ongole	Markapur	BODICHERLA(BHUPATHIPALLI)	11 KV BHUPATHIPALLI	100 Sqmm AAA	4.5	11.489	51.70	1	9.44	9.44	0	3.88	0.00	61.14
56	Ongole	Markapur	GAJJALAKONDA	11 KV MALAPATIPALLI	100 Sqmm AAA	5.5	11.489	63.19	1	9.44	9.44	0	3.88	0.00	72.63
57	Ongole	Markapur	UMMAREDDY PALLI	11 KV MERJAPETA	100 Sqmm AAA	12	11.489	137.87	1	9.44	9.44	0	3.88	0.00	147.31
58	Ongole	Markapur	THOKAPALLI	11 KV MALLAVARAM	100 Sqmm AAA	9.5	11.489	109.15	1	9.44	9.44	0	3.88	0.00	118.59
59	Ongole	Markapur	P.ARAVEEDU	11 KV SIDDINAYUNIPALLI	100 Sqmm AAA	5.5	11.489	63.19	1	9.44	9.44	0	3.88	0.00	72.63
60	Ongole	Markapur	P.ARAVEEDU	11 KV GOBBURU-AGL	100 Sqmm AAA	12	11.489	137.87	1	9.44	9.44	0	3.88	0.00	147.31
61	Ongole	Markapur	B.CHERLOPALLI	11 KV BADVEDU	100 Sqmm AAA	9.5	11.489	109.15	1	9.44	9.44	0	3.88	0.00	118.59
62	Ongole	Markapur	MARKAPUR TOWN	11 KV CUMBUM ROADS	100 Sqmm AAA	6.5	11.489	74.68	1	9.44	9.44	0	3.88	0.00	84.12
63	Ongole	Markapur	MARKET YARD	11 KV RAJYALAXMICOLONY	100 Sqmm AAA	12	11.489	137.87	1	9.44	9.44	0	3.88	0.00	147.31
64	Ongole	Markapur	MARKET YARD	11 KV VISWESWARA HALL	100 Sqmm AAA	8	11.489	91.91	1	9.44	9.44	0	3.88	0.00	101.36
65	Ongole	Darsi	Lakkavaram	11 KV Bellamkondavaripalem	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44	0	3.88	0.00	66.89
66	Ongole	Darsi	33/11 KV KURICHEDU	11 KV POTLAPADU	100 Sqmm AAA	7.0	11.489	80.42	1	9.44	9.44	0	3.88	0.00	89.87
67	Ongole	Darsi	33/11 KV AVULAMANDA	11 KV KALLURU	100 Sqmm AAA	14.0	11.489	160.85	1	9.44	9.44	0	3.88	0.00	170.29
68	Ongole	Darsi	RAJAMPALLI	YO PALLI	100 Sqmm AAA	20.0	11.489	229.78	1	9.44	9.44	0	3.88	0.00	239.22
69	Ongole	Darsi	CHANDALURU	DEVAVARAM	100 Sqmm AAA	15.0	11.489	172.34	1	9.44	9.44	0	3.88	0.00	181.78

Loss Reduction:New 11 KV Feeders (For Over Loaded Feeders) Line

Sl No.	Circle	Division	Name of Source Sub-Station	Existing Feeder Details	11 KV Line (11 KV Line with 100 Sq.mm AAA Conductor over 11 Mts. Spun Poles)				11Kv bay extension at 33/11KV Sub-station with VCB			11 KV Feeder VCBs (If only bay available)			Total Amount in Lakhs
				Name of 11KV Feeder	Type	Qty in Ckm	Rate in Lakhs	Amount	Qty in Nos	Rate in Lakhs	Amount	Qty in KM	Rate in Lakhs	Amount	
70	Ongole	Darsi	Chandavaram	11 KV Chandavaram agl	100 Sqmm AAA	4.0	11.489	45.96	1	9.44	9.44	0	3.88	0.00	55.40
71	Ongole	Darsi	Katuruvaripalem	11 KV Kellampalli	100 Sqmm AAA	12.0	11.489	137.87	1	9.44	9.44	0	3.88	0.00	147.31
72	Ongole	Darsi	Podili	11 KV Gundlasamudaram	100 Sqmm AAA	8.0	11.489	91.91	1	9.44	9.44	0	3.88	0.00	101.36
73	Ongole	Darsi	Katuruvaripalem	Kellampalli	100 Sqmm AAA	12.0	11.489	137.87	1	9.44	9.44	0	3.88	0.00	147.31
74	Ongole	Darsi	Chimakurthy	11 KV Town-3	100 Sqmm AAA	2.5	11.489	28.72	1	9.44	9.44	0	3.88	0.00	38.17
75	Ongole	Darsi	PNPalem	11KV T.Gudipadu	100 Sqmm AAA	3.5	11.489	40.21	1	9.44	9.44	0	3.88	0.00	49.66
76	Ongole	Darsi	PNPalem	11KV PMPalem	100 Sqmm AAA	3.2	11.489	36.76	1	9.44	9.44	0	3.88	0.00	46.21
77	Ongole	Chirala	kothapalem	11KV Chinaganjam	100 Sqmm AAA	15.0	11.489	172.34		9.44	0.00	1	3.88	3.88	176.21
78	Ongole	Chirala	Pedaganjam	11KV Pedaganjam Town	100 Sqmm AAA	16.0	11.489	183.82	1	9.44	9.44		3.88	0.00	193.27
79	Ongole	Addanki	Addanki South	11 KV Vasavinagar	100 Sqmm AAA	3.0	11.489	34.47	1	9.44	9.44	0	3.88	0.00	43.91
80	Ongole	Addanki	Addanki North	11 KV Town-2	100 Sqmm AAA	3.0	11.489	34.47	0	9.44	0.00	0	3.88	0.00	34.47
81	Ongole	Addanki	Sadhunagar	11 KV Sadhunagar AGL	100 Sqmm AAA	6.0	11.489	68.93	1	9.44	9.44	0	3.88	0.00	78.38
82	Ongole	Addanki	Addanki South	11 KV Nagulapadu	100 Sqmm AAA	7.5	11.489	86.17	0	9.44	0.00	0	3.88	0.00	86.17
83	Ongole	Addanki	Medarametla	11 KV Anamanamuru	100 Sqmm AAA	6.0	11.489	68.93	1	9.44	9.44	0	3.88	0.00	78.38
84	Ongole	Addanki	J.Panguluru	11 KV Chandaluru	100 Sqmm AAA	3.0	11.489	34.47	1	9.44	9.44	0	3.88	0.00	43.91
85	Ongole	Addanki	J.Panguluru	11 KV Alavalapadu	100 Sqmm AAA	6.0	11.489	68.93	0	9.44	0.00	0	3.88	0.00	68.93
86	Ongole	Addanki	RAMKURU	11KV BR PALEM	100 Sqmm AAA	1.2	11.489	13.79	0	9.44	0.00	0	3.88	0.00	13.79
87	Ongole	Addanki	Martur	11 KV MLAP	100 Sqmm AAA	7.0	11.489	80.42	1	9.44	9.44	0	3.88	0.00	89.87
88	Ongole	Addanki	Martur	11 KV North	100 Sqmm AAA	6.0	11.489	68.93	1	9.44	9.44	0	3.88	0.00	78.38
89	Ongole	Addanki	Martur	11 KV Jonnathali	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44	0	3.88	0.00	66.89
90	Ongole	Addanki	Konanki	11 KV Industrial	100 Sqmm AAA	8.0	11.489	91.91	1	9.44	9.44	0	3.88	0.00	101.36
91	Ongole	Addanki	Dronadula	11 KV Kolalapudi	100 Sqmm AAA	7.0	11.489	80.42	1	9.44	9.44	0	3.88	0.00	89.87
92	Ongole	Addanki	Santhamaguluru	11 KV Santhamaguluru MHQ	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44	0	3.88	0.00	66.89
93	Ongole	Addanki	Santhamaguluru	11 KV Gurijepalli	100 Sqmm AAA	13.0	11.489	149.36	1	9.44	9.44	0	3.88	0.00	158.80
94	Ongole	Addanki	Santhamaguluru	11 KV Elchuru	100 Sqmm AAA	1.8	11.489	20.68	0	9.44	0.00	0	3.88	0.00	20.68
95	Ongole	Addanki	Kommalapadu	11 KV Kunduru	100 Sqmm AAA	8.0	11.489	91.91	1	9.44	9.44	0	3.88	0.00	101.36
96	Ongole	Addanki	Kommalapadu	11 KV Karumanchi	100 Sqmm AAA	6.0	11.489	68.93	1	9.44	9.44	0	3.88	0.00	78.38
97	Ongole	Addanki	Gurijepalli	11 KV Thangedumalli	100 Sqmm AAA	6.0	11.489	68.93	1	9.44	9.44	0	3.88	0.00	78.38
98	Ongole	Addanki	Puttavarpalem	11 KV Yellalacheruvu	100 Sqmm AAA	11.0	11.489	126.38	1	9.44	9.44	0	3.88	0.00	135.82
99	Ongole	Addanki	Ballikurava	11 KV Ballikurava MHQ Feeder	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44	0	3.88	0.00	66.89
100	Ongole	Addanki	Vemavaram	11 KV Vemavaram Industrial	100 Sqmm AAA	1.0	11.489	11.49	1	9.44	9.44	0	3.88	0.00	20.93
101	Ongole	Addanki	V.Kopperapadu	Kukatlapalli	100 Sqmm AAA	1.2	11.489	13.79	0	9.44	0.00	0	3.88	0.00	13.79
102	Ongole	Addanki	Vallapalli	Vallapalli	100 Sqmm AAA	1.5	11.489	17.23	1	9.44	9.44	0	3.88	0.00	26.68
103	Ongole	Addanki	Eddanapudi	11 KV Yanamadala	100 Sqmm AAA	2.0	11.489	22.98	1	9.44	9.44	0	3.88	0.00	32.42
104	Ongole	Kanigiri	11KV Town I	11KV Town iv	100 Sqmm AAA	5.0	11.489	57.45	1	9.44	9.44	0	3.88	0.00	66.89
105	Ongole	Kanigiri	11KV Town III	11KV Town v	100 Sqmm AAA	5.0	11.489	57.45	0	9.44	0.00	0	3.88	0.00	57.45
106	Ongole	Kanigiri	11KV Pamur Town	11KV Pamur Town I	100 Sqmm AAA	1.0	11.489	11.49	1	9.44	9.44	0	3.88	0.00	20.93
						1571.88		**18059.27**	**216**	**2550**	**2040**	**62**	**1047**	**240**	**20340**
															203.40

ANNEXURE – 10

(Annual Proceedings)

Annual Energy Audit Proceedings at Central Power Distribution Company of Andhra Pradesh Limited (APCPDCL) for FY 2022-23

Dates. 26.06.2023 to 27.06.2023

TEAM FROM EAST COAST SUSTAINABLE PRIVATE LIMITED, VISAKHAPATNAM

1. Mr. G. Srinivasa Rao, AEA
2. Mr. S. Janardhana Rao, Sector Expert
3. Mr. P. V. RamPrasad, CEA
4. Mr. K. Lokeswara Rao, Engineer
5. Miss. J. Sai Sowmya, Engineer

TEAM FROM CENTRAL POWER DISTRIBUTION COMPANY OF ANDHRA PRADESH LIMITED (APCPDCL). VIJAYAWADA

1. Mr. V. Ravi, CGM/O&M
2. Mr. K. Venkateswarlu, CGM/Finance
3. Mr. P. Yhoganand, GM/IT
4. Mr. R. Sai Srinivas, Dy.EE/IPC &RAC and Energy Manager
5. Mr. K. John Thomas, EE/LMC,CSC&EA
6. Mr. V. Sai Vijay, Dy.EE/EA

The audit team has verified various measurement and monitoring systems available at Central Power Distribution Company of Andhra Pradesh Limited (APCPDCL) for relevant Annual Energy Audit for FY 2022-23. Subsequently, the audit team verified the data filled in sector specific pro-forma document by the DISCOM with primary and secondary documents and the details are tabulated as follows.

S.NO	Reference	Name	Available Monitoring System	Record Verification	Supporting Document	Remarks
FY 2022-23 Data Verification						
Input Energy						
1	A1 to A22	Input Energy (MU)	Energy Input from T<>D is presented in Abstract of Energy Exchange statement on monthly basis. The energy exchange statement is prepared based on both MRI readings & Joint meter readings	The input energy from energy exchange statements based on MRI is used in the pro-forma.	1. Abstract of Energy Exchange between TRANSCO and APCPDCL 2. Monthly energy exchange data through MRI	
Division Losses						
2	Column A to V	No of connection metered (Nos)	DC has category wise connections as part of Centralised Billing System (CBS)	DC has provided monthly sale of power data containig division wise, category wise connected load, connections, consumption. The connected load of consumers is as on 31st March 2023 is verified.	1. Division wise Monthly sale of power data, billing data	
		No of connection Un-metered (Nos)				
		Connected Load Metered (MW)	DC has category wise connections as part of Central Billing Station (CBS)			
		Connected Load Un-metered (MW)				
		Input Energy (MU)	Energy Input from T<>D will be coommunicated EBC/SLDC by E mail			
		Metered energy (MU)	DC has category wise consumption and billing as part of Central Billing Station (CBS)			
		Unmetered energy/Assessment Energy	Consumption towards Agricultural consumers is assessed consumption. The DC uses methodology of Indian Statistical Inistitute (ISI) for this purpose	The DC has provided the assessment as per the ISI methodology	1. ISI Methodology 2. Model calculation of assessed agriculture consumption	
		Billed Amount	DC has category wise demand and collection amount ,which was provided by the Accounts wing	DC has provided division wise monthly billed details		
		Collected Amount				
		AT&C Loss	AT&C loss is estimated based on BEE formula			
Details of Input Energy Sources						
3	A	Generation at Transmission Periphery (Details)	DC has various sources of power such as intra-state generators, central share, from power exchanges, purchases from energy traders, renewable energy sources. Allocation from these sources and drawl by the DC is reflected in Power Purchase Cost statement provided by APPCC.	APCPDCL POWER PURCHASE COST FY 2022-23	APCPDCL POWER PURCHASE COST FY 2022-23 certified by APPCC (Andhra Pradesh Power Purchase Coordination Committee)	
	B	Embedded Generation in DISCOM Area	DC drawl from Embedded generators provided by SLDC & Accounts wing.			
Details of Feeder wise Losses						
4		DC has provided feeder wise technical losses and AT & C losses.			Backup data for 350 number of feeders with AT&C losses from EA dashboard.	

East Coast Sustainable Pvt. Ltd.

			Details of Consumers and Consumption			
5		DC has energy audit dashboard to capture the details of category wise consumers and their respective consumptions for each division.				
			Details of DT wise metering and Losses			
6		DTRs where meters/ modems were provided under RAPDRP/ IPDS are either not fuctional or erratic. Hence, Energy Audit of DTRs is not being done. DC informed that sanctione for implementation of smart metersfor all DTRs above 25KVA (except agricultural DTRs) has been received and work has been awarded under RDSS. Number of DTRs consider for smart metering is for 1,13,650 under phase-I RDSS.			Sanctioned document under RDSS.	
			Details of Subsidy			
7			Details of Consumer Category-wise Subsidy Billed/Received/Due for period: from 1st April 2022 to 31st March 2023	Details of subsidy are furnished by DC.		

Clauses of BEE Regulations						
Clause	Clause Details	Sub Clause Number	Subclause Details	Present Status	Documents Verified	Remarks
3	Intervals of time for conduct of annual energy audit	a	Conducted an annual energy audit for every financial year and submitted the annual energy audit report to the Bureau and respective State Designated Agency and also made available on the website of the electricity distribution company within a period of four months from the expiry of the relevant financial year	Annual energy audit for FY 2021-2022 was conducted. Report was submitted to BEE and SDA. Report is also uploaded onto APCPDCL website.		
4	Intervals of time for conduct of periodic energy accounting.	a	All feeder wise, circle wise and division wise periodic energy accounting is conducted by the energy manager of the electricity distribution company for each quarter of the financial year.	Periodic energy accounting reports for Q1,Q2, Q3 and Q4 for FY22-23 have been prepared by the DC and submitted to BEE, SDA and as per the BEE regulation and also posted the details on the APCPDCL website.		Soft copy has been submitted
		b	Submitted the periodic energy accounting report to the Bureau and respective State Designated Agency and also made available on the website of electricity distribution company within forty-five days from the date of the periodic energy accounting.	Periodic energy accounting reports for Q1,Q2, Q3 and Q4 for FY22-23 have been prepared by the DC and submitted to BEE, SDA and as per the BEE regulation and also posted the details on the APCPDCL website.		Soft copy has been submitted
		c	Electricity distribution company conducted its first periodic energy accounting, for the last quarter of the financial year immediately preceding the date of such commencement (i.e. 6th October 2021).	Periodic energy accounting reports for Q1,Q2, Q3 and Q4 for FY22-23 have been prepared by the DC and submitted to BEE, SDA and as per the BEE regulation and also posted the details on the APCPDCL website.		
		d	Electricity distribution company conducted its subsequent periodic energy accounting for each quarter of the financial year for a period of two financial years from the date of such commencement, and submit the periodic energy accounting report within sixty days from the date of periodic energy accounting.	Periodic energy accounting reports for Q1,Q2, Q3 and Q4 for FY22-23 have been prepared by the DC and submitted to BEE, SDA and as per the BEE regulation and also posted the details on the APCPDCL website.		
	Pre-requisites for annual energy audit and periodic energy accounting	a	Identification and mapping of all of the electrical network assets	All the electrical assets are mapped into CPDCL Dashboard. Billing data is stored in CBS (Centralised Billing System) software.		
		b	Identification and mapping of high tension and low-tension consumers	All the HT and LT consumers have been mapped.	1. EHT (132kv) consumer details have been verified and the record of which is attached.	
		c	Development and implementation of information technology enabled energy accounting and audit system, including associated software	DC has developed energy accounting and audit system including associated software as part of Energy audit dashboard.	A 11kv input feeder has been verified using the DC's software and record of which is attached.	



Clause	Clause Details	Sub Clause Number	Subclause Details	Present Status	Documents Verified	Remarks
5		d	Electricity distribution company ensures the installation of functional meters for all consumers, transformers and feeders. Meter installation is done in a phased manner within a period of three financial years from the date of the commencement of these regulations in accordance with the trajectory set out in the First Schedule	All feeders up to 11 kV have been metered. All consumers have been metered except consumers under agriculture category. DTRs where meters/ modems were provided under RAPDRP/ IPDS are either not fuctional or erratic. Hence, Energy Audit of DTRs is not beimg done. DC informed that sanctionc for impiementation of smart metersfor all DTRs above 25KVA (except agricultural DTRs) has been received and work has been awarded under RDSS. Number of DTRs consider for smart metering is for 1,13,650 under phase-I RDSS.	Sanctioned document under RDSS.	
			d.1. 100% Communicable Feeder Metering integrated with AMI, by 31st December 2022 along with replacement of existing non-communicable feeder meters.	d.1. All **11 kV feeders** are communicable with AMR (3462 Nos as on date). Communicable meters with AMI has been sanctioned under RDSS for a total of 3726 feeders (11 kV - 3332 Nos and 33 kV- 394 Nos)	Sanctioned letter for feeder metering with AMI under RDSS.	It also intends to install communicable meters f or 33 kV f eeders.
5	Pre-requisites for annual energy audit and periodic energy accounting	d	d.2. All **Distribution Transformers** (other than HVDS DT up to 25kVA and other DTs below 25 kVA) shall be metered with communicable meters. Communicable DT Metering for the following areas/ consumers to be completed by March 2023 and in balance areas by December 2023: d.2.1. All Electricity Divisions of 500 AMRUT cities, with AT&C Losses > 15% d.2.2. All Union Territories (for areas with technical difficulty, non-communicable meters may be installed) d.2.3. All Industrial and Commercial consumers d.2.4. All Government offices at Block level and above d.2.5. Other high loss areas i.e. rural areas with losses more than 25% and urban areas with losses more than 15%	d.2.1. DC intends to install communicable meters to DTRs with AMI for **AMRUT cities** (Amaravati, Chilakaluripet, Gudivada, Guntur, Machilipatnam, Narasaraopet, Ongole, Tenali and VIjayawada) under Revamped Distribution Sector Scheme (RDSS). LOA issued for installation of AMI meters for DTRs capacity > 25 KVA (except agricultural DTRs) d.2.2. Not Relevant for DC. d.2.3. DC intends to install communicable meters with AMI for **commercial and industrial consumers** under Revamped Distribution Sector Scheme (RDSS). LOA issued. d.2.4. DC intends to install communicable meters with AMI for **Government offices at Block level(Mandal) and above** under Revamped Distribution Sector Scheme (RDSS). LOA issued. d.2.5. DC intends to install communicable meters with AMI for **other high loss areas** i.e. rural areas with losses more than 25% and urban areas with losses more than 15% under Revamped Distribution Sector Scheme (RDSS). LOA issued	LOA issued.	
	Pre-requisites for annual energy audit and periodic energy accounting		d.3. **Prepaid Smart Consumer Metering** to be completed for all directly connected meters and AMR in case of other meters, by December 2023 in the following areas: d.3.1. All Electricity Divisions of 500 AMRUT cities, with AT&C Losses > 15%; d.3.2. All Union Territories (for areas with technical difficulty, prepaid meters to be installed); d.3.3. All Industrial and Commercial consumers; d.3.4. All Government offices at Block level and above; d.3.5. Other high loss areas i.e. rural areas with losses more than 25% and urban areas with losses more than 15%.	d.3.1. DC intends to install Prepaid Smart Consumer metering for AMRUT cities (Amaravati, Chilakaluripet, Gudivada, Guntur, Machilipatnam, Narasaraopet, Ongole, Tenali, VIjayawada) under Revamped Distribution Sector Scheme (RDSS). AMRUT cities are covered under Phase-I. d.3.2. Not Relevant for DC. d.3.3. DC intends to install consumer meters with AMI for **commercial and industrial consumers** covered under Phase-I of Revamped Distribution Sector Scheme (RDSS). d.3.4. DC intends to install consumer meters with AMI for **Government offices at Block level(Mandal) are covered under Phase-I of Revamped Distribution Sector Scheme (RDSS).** d.3.5. DC intends to install consumer meters with AMI for **other high loss areas** i.e. rural areas with losses more than 25% and urban areas with losses more than 15% are covered under Phase-I of Revamped Distribution Sector Scheme (RDSS).	Sanctioned letter/ LOA issued under RDSS.	
			d.4. Consumer Metering: 98% by FY 2022-23 99% by FY 2023-24	Consumer Metering is completed except the agricultural services.		



Clause	Clause Details	Sub Clause Number	Subclause Details	Present Status	Documents Verified	Remarks
			d.5. Targets for functional meters— Meter FY 22-23 FY 23-24 FY24-25 Feeder metering 98.5% 99.5% 99.5% DT metering 90% 95% 98% Consumer metering 93% 96% 98	Feeder Metering is 100% completed for 11kV feeder level. DC informed that sanctioned for implementation of smart metersfor all DTRs above 25KVA (except agricultural DTRs) has been received and work has been awarded under RDSS. Number of DTRs consider for smart metering is for 1,13,650 under phase-I RDSS. Consumer metering is 100% available except for agricultural consumers.	Sanctioned letter/ LOA issued under RDSS.	
5	Pre-requisites for annual energy audit and periodic energy accounting	e	e.1. All distribution transformers (other than high voltage distribution system up to 25kVA and other distribution system below 25 kVA) is metered with communicable meters and existing non communicable distribution transformer meters is replaced with communicable meters and integrated with advanced metering infrastructure.	DC informed that sanctioned for implementation of smart metersfor all DTRs above 25KVA (except agricultural DTRs) has been received and work has been awarded under RDSS. Number of DTRs consider for smart metering is for 1,13,650 under phase-I RDSS.	Sanctioned letter/ LOA issued under RDSS.	
		f	Electricity distribution company has established an information technology enabled system to create energy accounting reports without any manual interference and such systems may be within a period of three years from the date of the commencement of these regulations in case of urban and priority area consumers; and within five years from the date of the commencement of these regulations in case of rural consumers	Information technology based energy auditing system has been developed by the DC in which information is fetched automatically for energy accounting and auditing of circle-wise, divison-wise. All energy inputs and output/ sales are fetched automatically for creating reports in energy auditing system. However energy consumption towards agriculture category is estimated as per ISI methodology approved by SERC. This data of input energy is manually fed into energy audit system. Further all input energy at 11 kV level are read manually.	Samples reports from energy audit portal have been collected	1. Presently there is a provision for monitoring the 11 kV feeder losses through Enegy Audit dash board. 2. Provision for monitoring 33 kV feeder losses may be incorporated in the EA dash board.
		g	Electricity distribution company has a centralized energy accounting and audit cell comprising of— (i) a nodal officer, an energy manager and an information technology manager, having professional experience of not less than five years; and (ii) a financial manager having professional experience of not less than five years	The DC has energy audit cell with the following staff 1. A nodal officer- CGM-O&M 2. Designated energy manager who is a qualified energy auditor- Dy.EE/IPC & RAC/APCPDCL 3. A qualified information technology manager- GM/IT 4. A qualified financial manager- CGM Finance	DC's submission to BEE has been verified. Lr. No. GM/LMC/CSC&EA/Dy.ee/CSC/F.No/ D.No : 679/21, Dt: 16.12.21	Full fledged energy auditing department is in place and functional
6	Reporting requirements for annual energy audit and periodic energy accounting	a	Electricity distribution company has a nodal officer, who is a full time employee of the electricity distribution company in the rank of the Chief Engineer or above, for the purpose of reporting of the annual energy audit and periodic energy accounting and communicate the same to the Bureau.	The DC is complying with this requirement		Full fledged energy auditing department is in place and functional
		b	Electricity distribution company ensures that the energy accounting data is generated from a metering system or till such time the metering system is not in place, by an agreed method of assumption as may be prescribed by the State Commission	Information technology based energy auditing system has been developed by the DC in which information is fetched automatically for energy accounting and auditing of circle-wise, divison-wise and voltage-wise. All energy inputs and output/ sales are fetched automatically for creating reports in energy auditing system. However energy consumption towards agriculture category is estimated as per ISI methodology approved by SERC. This data of input energy is manually fed into energy audit system. Further all input energy at 11 kV level are read manually.		

East Coast Sustainable Pvt. Ltd.

Clause	Clause Details	Sub Clause Number	Subclause Details	Present Status	Documents Verified	Remarks
	Reporting requirements for annual energy audit and periodic energy accounting	c	Metering of distribution transformers at High Voltage Distribution System up to 25KVA is done on cluster meter installed by the electricity distribution company	Smart meters have been sanctioned under RDSS to install to Agl. Consumers for implementation of DBT scheme. LOA issued in this regard. MoP (PFC) has sanctioned the segregation of feeders with more than 30% Agl. Consumption and providing meters at feeder level.	1. PFC document	
		d	The energy accounting and audit system and software is developed to create monthly, quarterly and yearly energy accounting reports.	The DC has developed an energy accounting and audit system and software which is having the capability to create monthly, yearly energy accounting reports.		
6		e	Electricity distribution company has provided the details of the information technology system in place as specified in clause (f) of regulation 5 that ensures minimal manual intervention in creating the energy accounting reports and any manual intervention of any nature, in respect of the period specified therein, shall be clearly indicated in the periodic energy accounting report	Information technology based energy auditing system has been developed by the DC in which information is fetched automatically for energy accounting and auditing of circle-wise, divison-wise. All energy inputs and output/ sales are fetched automatically for creating reports in energy auditing system. However energy consumption towards agriculture category is estimated as per ISI methodology approved by SERC. This data of input energy is manually fed into energy audit system.		
7	Validation through sample data checks and field visits:	a. Validation of feeder data:	Based on data available in 11 kV Feeder meter at substation for a sample size of 10% for which documentary evidence to be captured in the audit report.	DC has provided feeder wise technical losses and AT & C losses.	Backup data for 350 number of feeders with AT&C losses from EA dashboard.	
		b. Validation of energy flow data and losses:	Min. 10 or 1% (whichever is higher) of DISCOM's input energy metering points between Transmission and 66kV/33kV/11kV distribution feeders by checking functional and communication status of meters etc.	DC has provided details for 10 Nos of input energy metering points (LV's). APCPDCL is considering 132/ 33 kV LV's as TRANSCO-DISCOM boundary points.	Backup data for 10 nos of input energy metering points (LV's).	
		For all Divisions with AT&C losses greater than 25% or at-least 1/3 of the total Divisions of DISCOM	Total of min. 10 or 1% of metering points (whichever is higher) between 220-132-110- 66 /33 kV outgoing and 22kV-11kV-6.6kV-3kV incoming feeders/ direct end-consumer by checking functional and communication status of meters.	DC has provided details for 10 Nos of outgoing feeder.	Backup data for 10 nos of outgoing feeders	
			In an Urban High Loss Division, check 5 or 1% of Metering points (whichever is higher) at DTs where communicable meters were already installed under other schemes such as R-APDRP and IPDS.	DTRs where meters/ modems were provided under RAPDRP/ IPDS are either not fuctional or erratic. Hence, Energy Audit of DTRs is not being done.		
			Total of min. of 10 or 1% of metering points (whichever is higher) between 11kV/6.6kV feeders and DTs by checking functional and Communication status of meters.	There are no divisions with AT&C losses more than 25%. However, all metering points at 11 kV feeders are having functional meters. In respect of DTRs, installation of metering is in the process under RDSS.		



Clause	Clause Details	Sub Clause Number	Subclause Details	Present Status	Documents Verified	Remarks
	Validation through sample data checks and field visits:	For all Divisions with AT&C losses greater than 25% or at-least 1/3 of the total Divisions of DISCOM	Foot survey of feeder to check for thefts/ hooking etc.	DC has system of recording inspection reports of field surveys in Monitoring And Tracking System (MATS).	Sample reports have been collected.	
			Verify metering and connection status of min. of 10 or 2% consumers of the Division (whichever is higher) of the following category of consumers – Agriculture (Metered and Un-metered), Govt. category connection (ULB, RLB etc.), and LT Industrial.	Connection status/ metering status of consumers is available in Central Billing System (CBS). DC has provided the details for 2% of Govt. category connection (ULB, RLB etc.), and LT Industrial.	Sample reports have been collected.	

TEAM FROM EAST COAST SUSTAINABLE PRIVATE LIMITED, VISAKHAPATNAM

1
2
3
4
5
6

P.V Rama Rao

K. Lokeshwar Rao

J. Sai Suryo

East Coast Sustainable Pvt. Ltd.

TEAM FROM CENTRAL POWER DISTRIBUTION COMPANY OF ANDHRA PRADESH LIMITED (APCPDCL), VIJAYAWADA

1
2
3
4
5
6

26/06/23

P. Ramana GM/IT 26/6/23

26/6/2023

26/6/23


EE/LMC-RA

DYEE/EA

ANNEXURE – 11

(Grid Maps)


Grid Map Krishna District

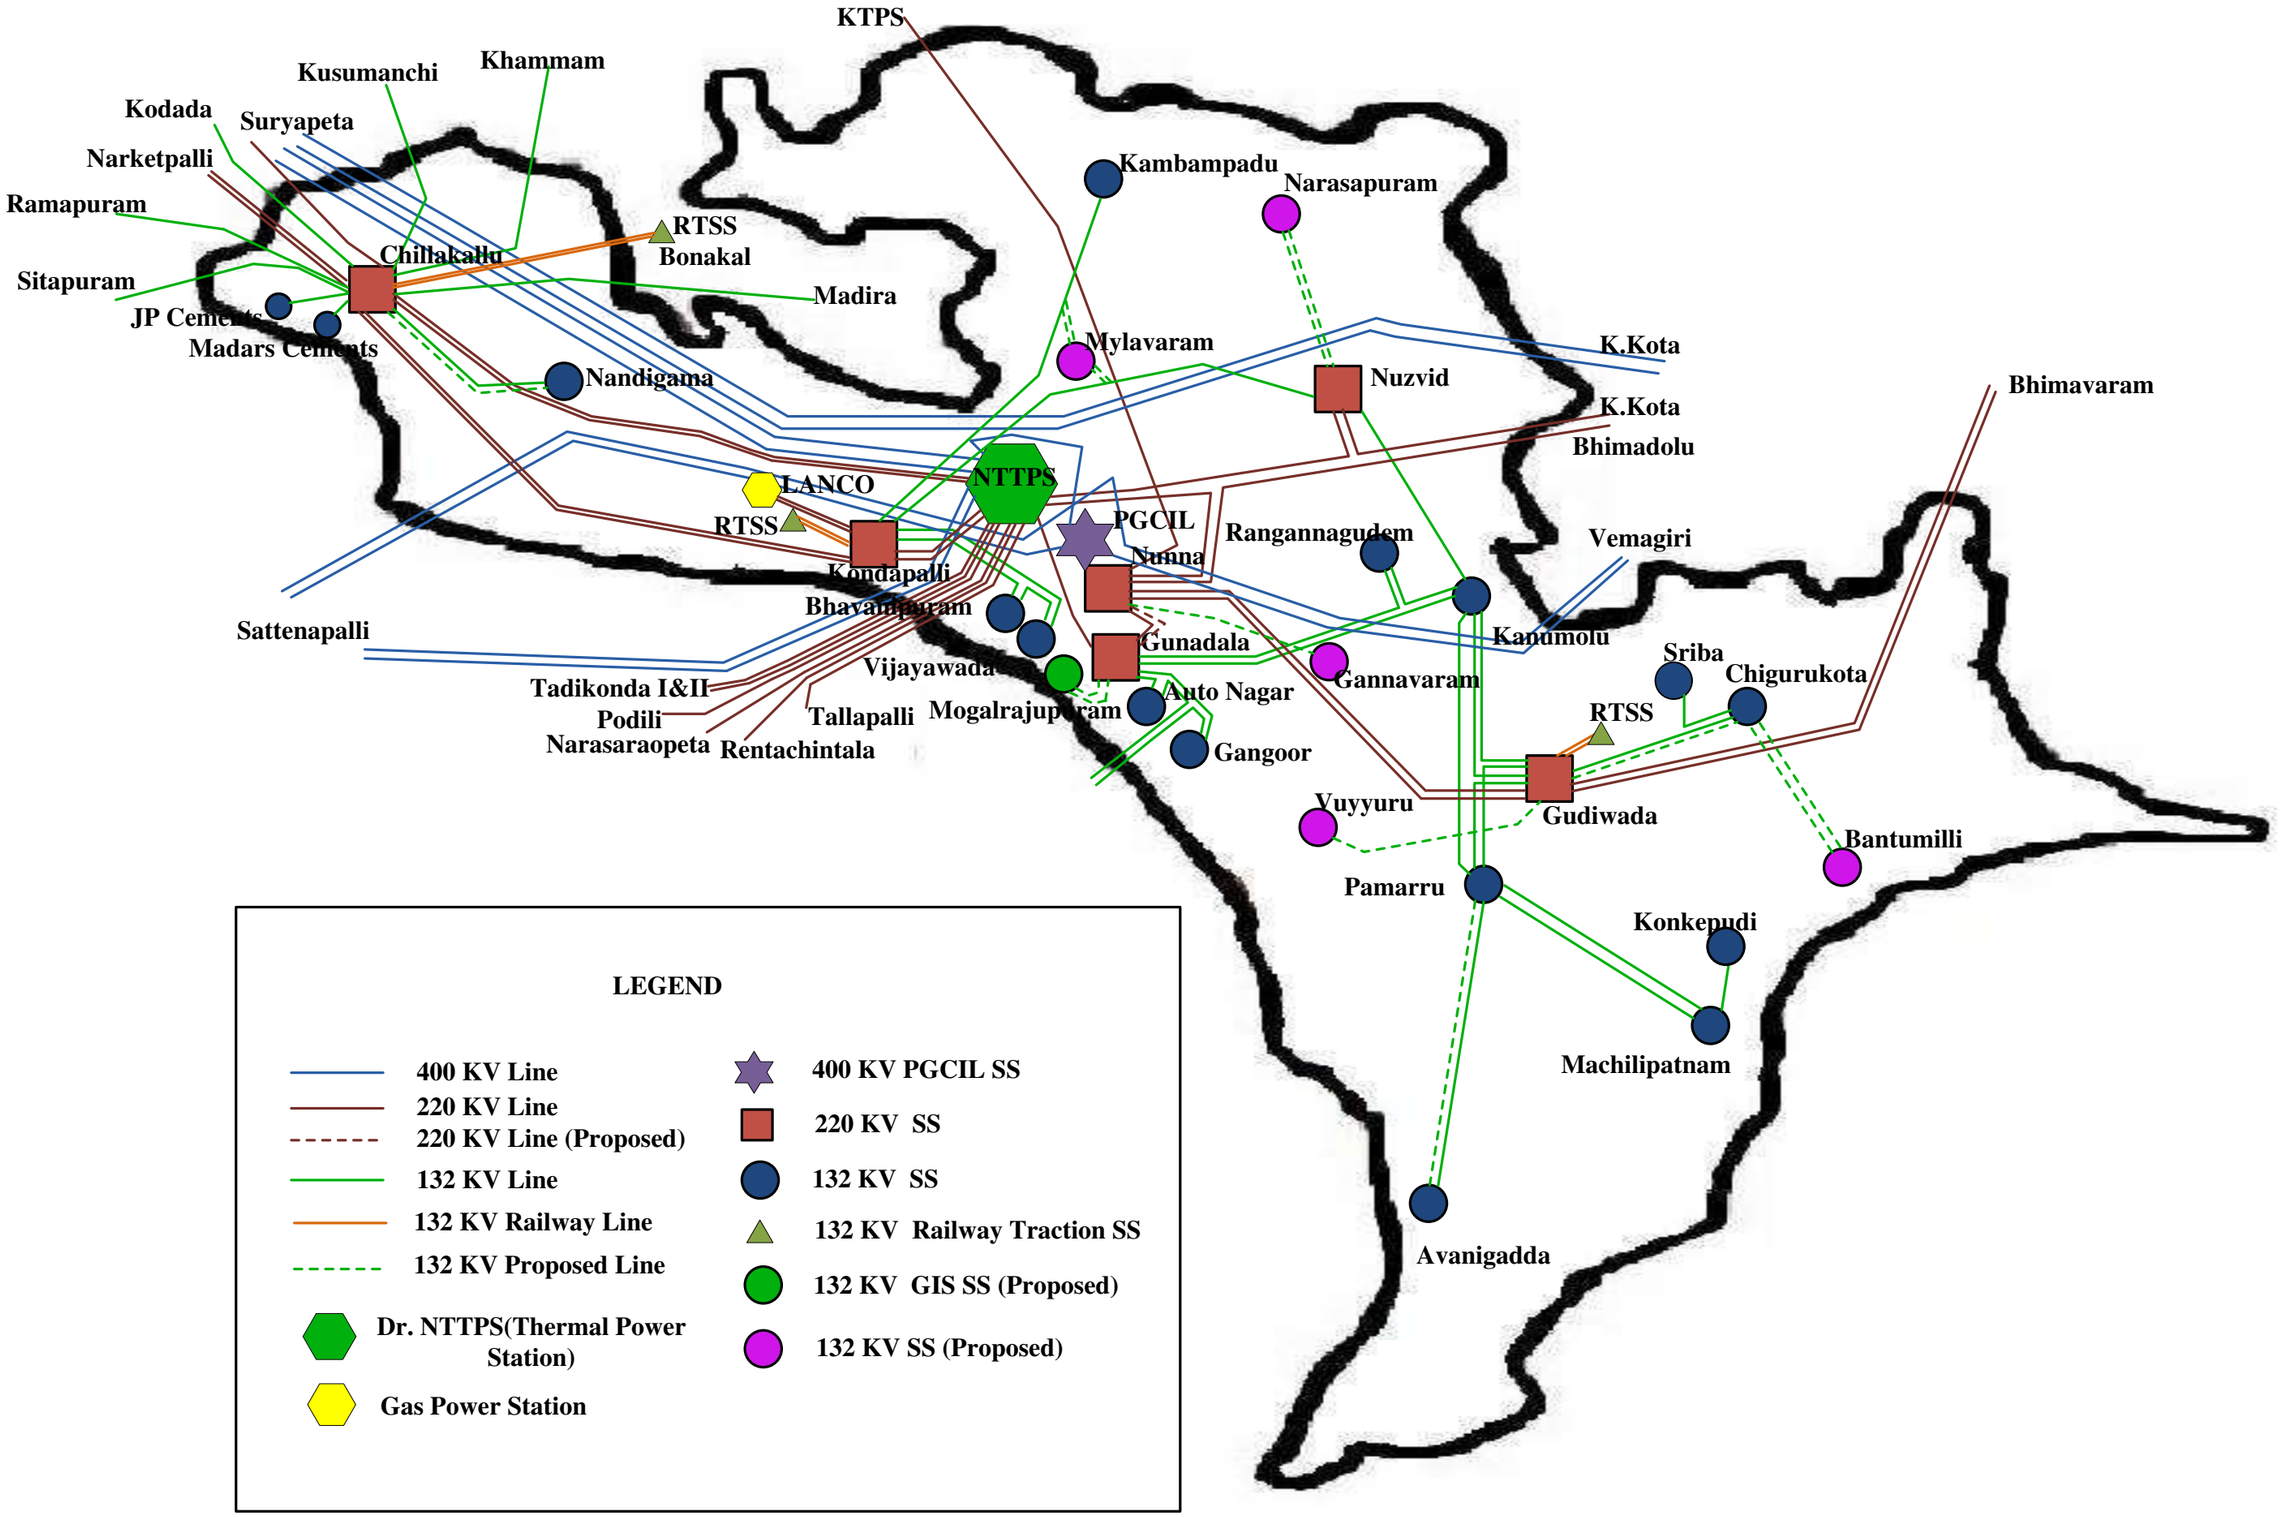

LEGEND

- 400 KV Line
- 220 KV Line
- 220 KV Line (Proposed)
- 132 KV Line
- 132 KV Railway Line
- 132 KV Proposed Line
- Dr. NTTPS(Thermal Power Station)
- Gas Power Station
- 400 KV PGCIL SS
- 220 KV SS
- 132 KV SS
- 132 KV Railway Traction SS
- 132 KV GIS SS (Proposed)
- 132 KV SS (Proposed)

765/400/220/132 KV GEOGRAPHICAL POWER MAP OF GUNTUR DISTRICT

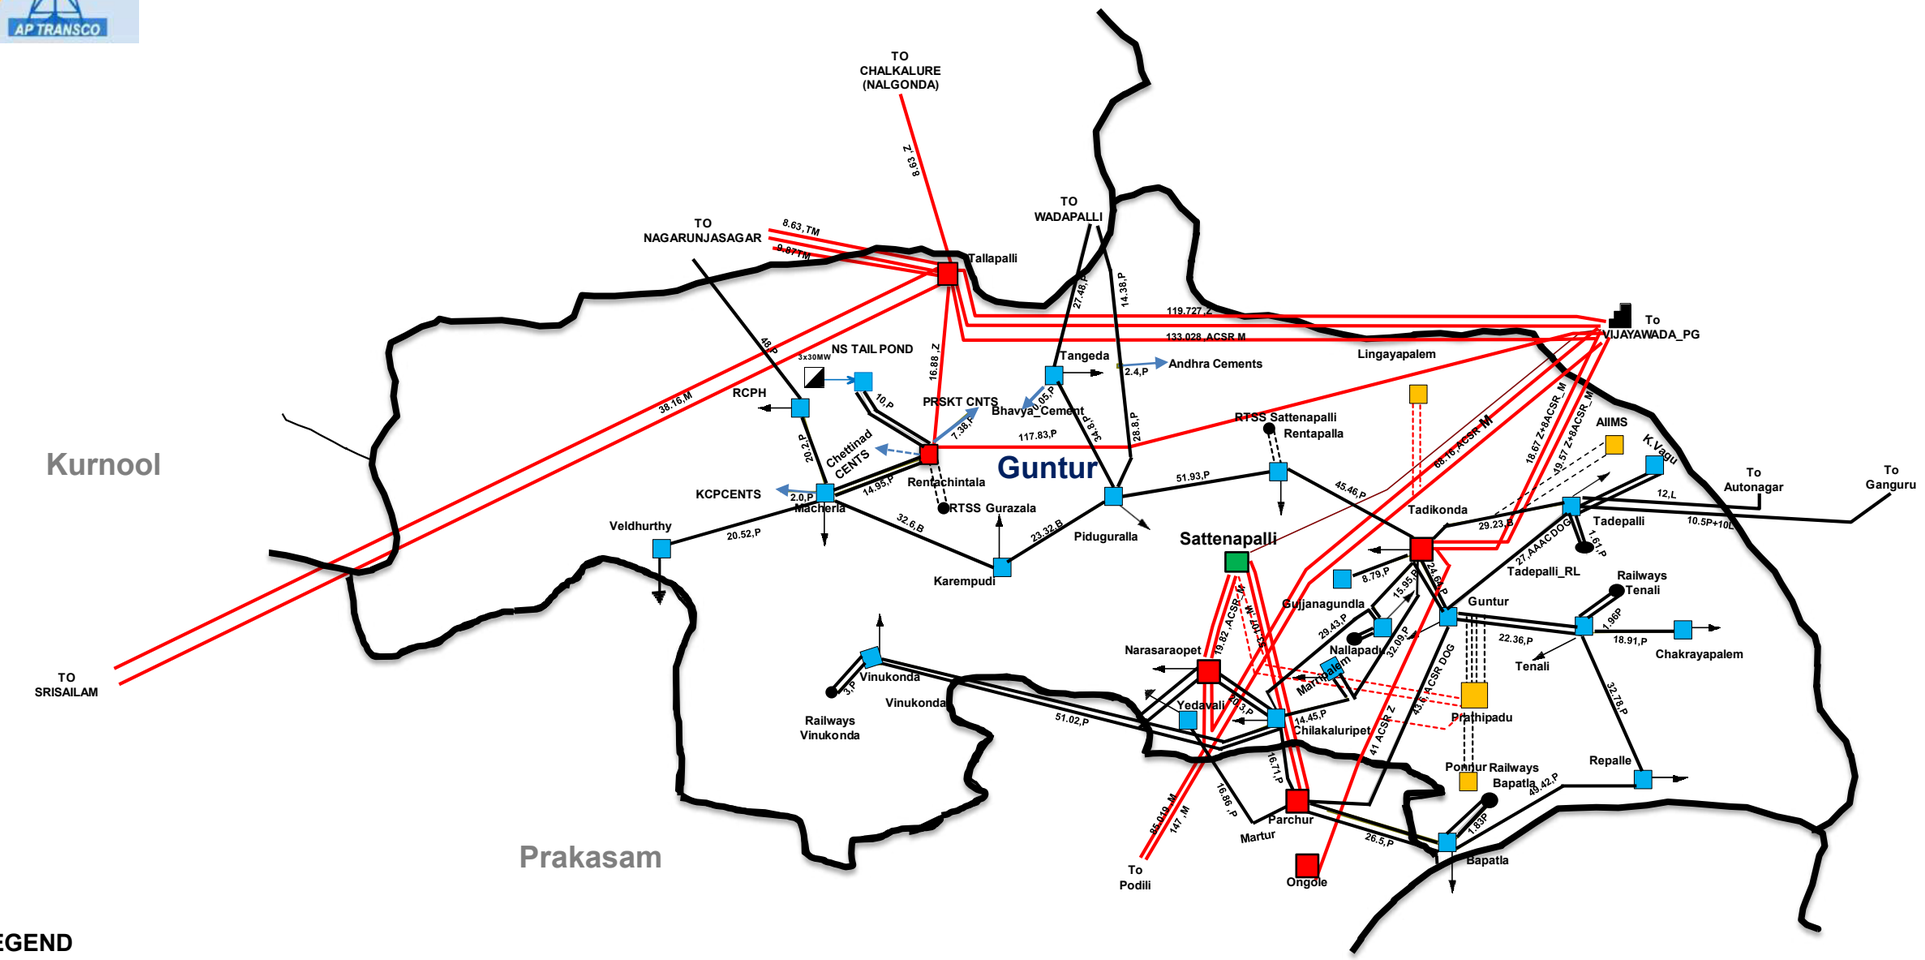

LEGEND


MW (MVAr)	Km & Type of Conductor.	MW (MVAr)

PARTICULARS	EXISTING	PROPOSED
400 KV S/S (State)		
220 KV S/S		
132 KV S/S		
400 KV Line (State		
220 KV Line		
132 KV Line		
HYDRO		
THERMAL		
Railway		
132 KV EHT		
LOAD		

CONDUCTOR SYMBOL	CONDUCTOR NAME
P	Panther
L	Lynx
LN	Lion
A_D	AAAC_Dog
B	Bear
ZE	Zebra
ACSR_M	ACSR_MOOSE
QM	QUAD MOOSE
TM	TWIN MOOSE

As on 01.10.2018

GEOGRAPHICAL POWER MAP OF ONGOLE CIRCLE

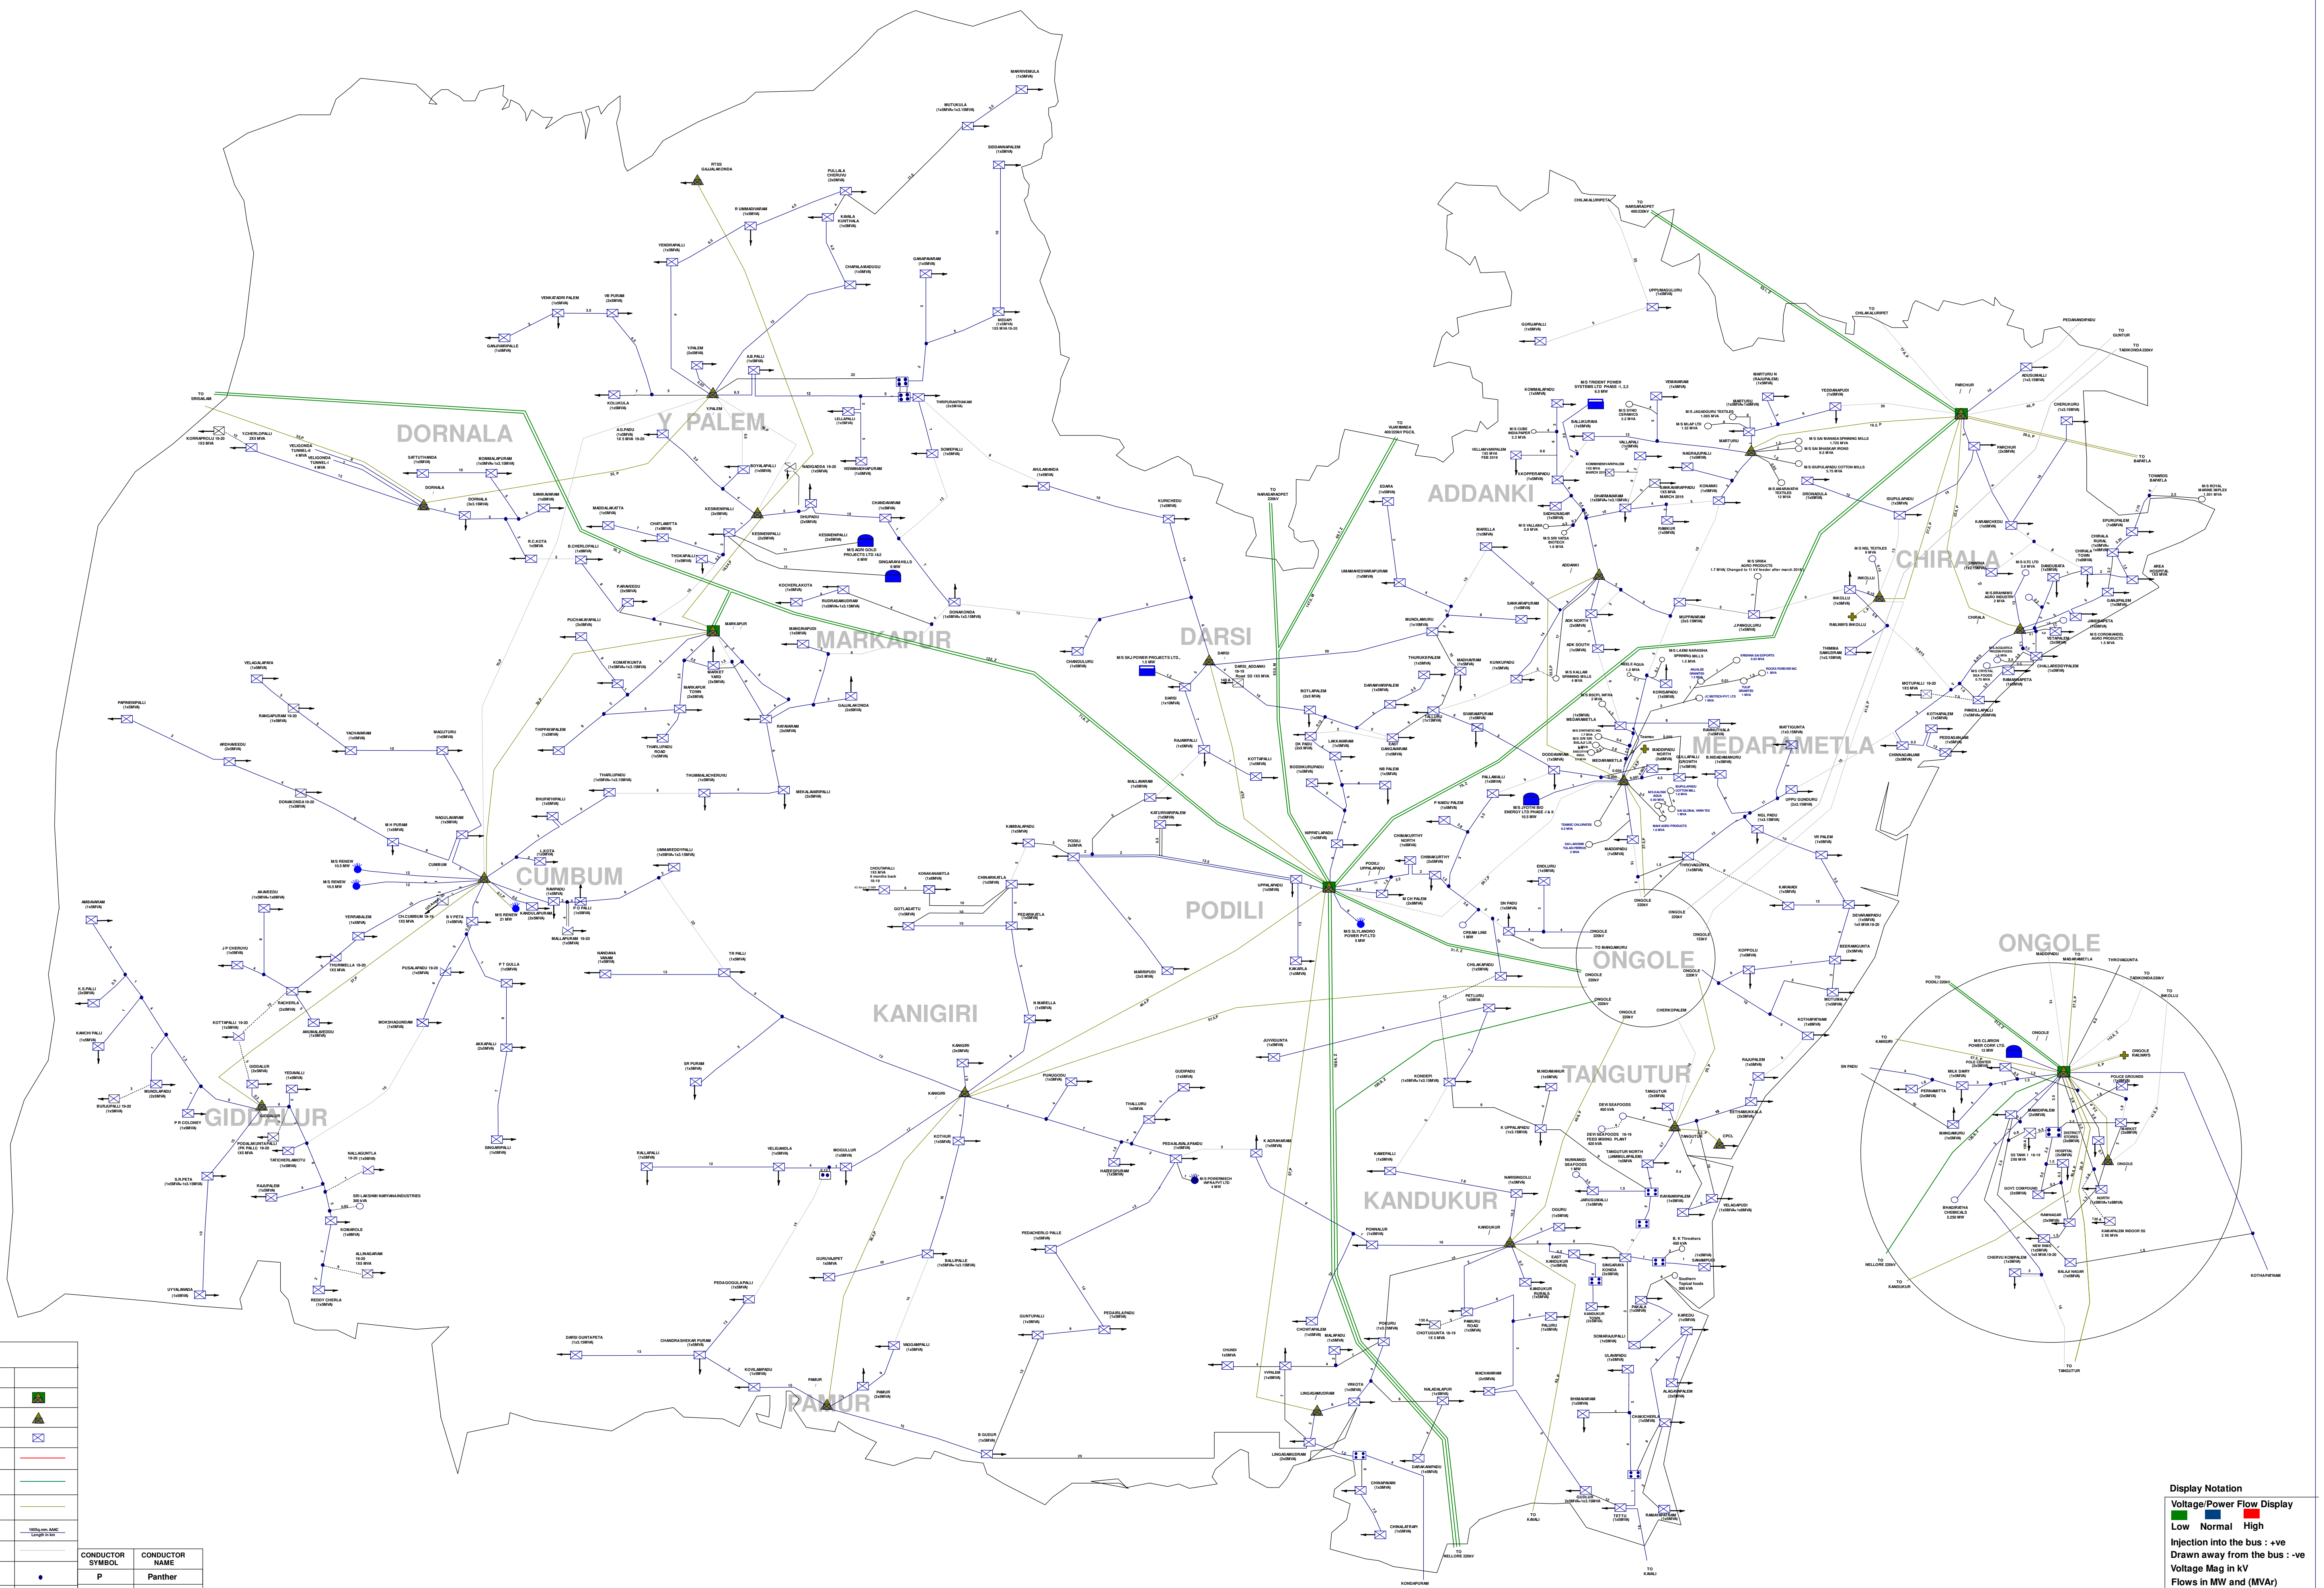

LEGEND	
PARTICULARS	
220/132/33kV SUBSTATION	
132/33kV SUBSTATION	
33kV SUBSTATION	
400kV LINE	
220kV LINE	
132kV LINE	
33kV LINE	100Sq.mm. AAAC Length in km
ONE END OPEN LINE	
TAP POINT	
4 POLE STRUCTURE	
33kV HT LOAD	
MINI-HYDRO	
CO-GEN	
132 kV EHT	
SOLAR	
WIND	
LOAD	

CONDUCTOR SYMBOL	CONDUCTOR NAME
P	Panther
Z	Zebra

Display Notation

Voltage/Power Flow Display

Low Normal High

Injection into the bus : +ve
Drawn away from the bus : -ve
Voltage Mag in kV
Flows in MW and (MVAr)
Note:- Not to scale

				DESCRIPTION
DRAWN	RamanGouda L			
CHECKED	Pavan Iyengar	R0	30-10-2018	OPERATIONAL STUDY RESULTS SIMULATED FOR 2017-18 PEAK LOAD CONDITION
REVIEWED	Ilyas Mohammad	R1	04-04-2019	
APPROVED		REV.	DATE	

GEOGRAPHOICAL DIAGRAM OF ONGOLE DISTRICT FOR EXISTING NETWORK CONDITION

Transmission Corporation of Andhra Pradesh Ltd.
Vidyut Soudha,
Gunadala,
Vijayawada - 520 004

Power Research and Development Consultants Pvt Ltd.,
5, 11th cross, 2nd stage, West of Chord Road,
Bangalore-560 086
Tel: +91-80-4245 5555, 2319 2209
Email: info@prdcinfotech.com

P.O DETAILS: CPT220/SEPM/PRDC/System Studies/RC No./D.No.271/18 Dated 08.05.2018

Drawn using: MiPower TM

DWG. NO. :AP/SPDCL/LFA/EXISTING/ONGOLE/DWG-7

ANNEXURE – 12

(Field Verification data as per SOP)

Sample data of input energy metering points between APTransco and APCPDCL for the FY 2022-23

					Apr-22	May-22	Jun-22	Jul-22	Aug-22	Sep-22	Oct-22	Nov-22	Dec-22	Jan-23	Feb-23	Mar-23	
DISTRICT	**TYPE**	**SUPPLY POINT**	**METERING POINT**	**METERNO**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**FY 22-23 Total**
Krishna	132/33kV	Gunadala	50MVA 132/33 kV Transformer#2	15461985	16.190	16.774	15.145	13.642	14.992	11.777	9.759	10.018	9.543	8.658	9.884	13.172	**149.55**
Krishna	132/33kV	Nuzividu	50MVA 132/33 kV Transformer#2	XD551504	11.213	9.411	7.890	6.132	8.586	7.863	6.327	9.257	9.802	11.467	11.638	10.184	**109.77**
Krishna	132/33kV	Gudivada	50MVA 132/33 kV Transformer#2	15462244	15.138	15.280	14.549	12.205	12.708	12.676	12.267	11.669	11.567	11.628	10.706	11.856	**152.25**
Krishna	132/33kV	Chigurukota	50MVA 132/33 kV Transformer#1	XD511983	18.581	18.346	18.311	13.349	13.184	14.604	14.390	13.515	12.875	13.456	14.519	17.956	**183.08**
Guntur	132/33kV	Narsaraopet	31.5MVA 132/33 kV Transformer#2	KA901860	7.859	9.251	9.006	7.098	7.110	8.807	7.205	5.459	6.973	7.044	8.066	7.535	**91.41**
Guntur	132/33kV	Tadikonda	50MVA 132/33 kV Transformer#1	AP906605	13.330	13.609	15.222	12.632	13.830	15.382	11.590	11.985	10.731	13.262	13.476	15.517	**160.57**
Guntur	132/33kV	Yedavalli	16MVA 132/33 kV Transformer#2	XC450994	5.272	5.202	6.120	5.752	4.806	5.368	5.171	6.030	4.585	6.052	5.572	6.088	**66.02**
Prakasam	132/33kV	Ongole (220kV)	50MVA 132/33 kV Transformer#1	15462157	9.498	10.067	10.125	8.775	9.487	9.274	8.824	7.959	7.985	7.564	7.281	8.880	**105.72**
Prakasam	132/33kV	Lingasamudram	16MVA 132/33 kV Transformer#2	TN903928	2.473	1.956	1.803	1.332	1.513	1.252	1.268	1.226	1.293	1.842	1.979	2.014	**19.95**
Prakasam	132/33kV	Markapur	31.5MVA 132/33 kV Transformer#2	15462156	5.821	5.517	5.848	4.608	4.858	5.738	5.079	6.000	5.420	7.342	7.403	6.678	**70.31**
		Total			**105.37**	**105.41**	**104.02**	**85.53**	**91.07**	**92.74**	**81.88**	**83.12**	**80.77**	**88.32**	**90.52**	**99.88**	**1108.64**

Sample data of input energy metering points between 220-132-10-66/33KV out going and 22KV-11KV-6.6KV-3KV incoming feeders of APCPDCL for the FY 2022-23

					Apr-22	May-22	Jun-22	Jul-22	Aug-22	Sep-22	Oct-22	Nov-22	Dec-22	Jan-23	Feb-23	Mar-23	
DISTRICT	**TYPE**	**SUPPLY POINT**	**METERING POINT**	**METER NO**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**MRI ENERGY**	**FY 22-23 Total**
Krishna	Traction	Kondapalli	132 kV Kondapalli Rly. Traction#2	AP906769	2.076	2.346	1.984	1.967	1.963	1.797	1.881	1.971	2.302	2.435	1.939	2.209	**24.869**
Krishna	132kV Fdr	Chillakallu	132 kV Madras Cements	APX00007	0.019	0.014	0.009	0.013	0.011	0.010	0.013	0.011	0.009	0.001	0.010	0.003	**0.123**
Krishna	132kV Fdr	Chillakallu	132 kV Jaypee Cements	PDSM	1.845	1.749	1.909	2.263	3.140	2.397	4.981	3.272	6.041	5.463	3.053	13.506	**49.619**
Krishna	132/33kV	Rangannagudam	132KV Mohan Spintex Textiles	XE485979	8.145	8.384	7.555	6.802	5.219	5.684	5.965	7.095	7.456	7.224	6.466	7.435	**83.430**
Guntur	132kV Fdr	Rentapalla	132 KV RTSS Feeder	X0390736	1.537	1.651	1.638	1.760	1.776	2.103	1.627	1.549	1.768	1.883	1.564	1.881	**20.736**
Guntur	132kV Fdr	Thangeda (SWS)	132KV Bhavya Cements	12287760	4.386	3.308	6.505	3.828	5.349	3.961	3.894	2.893	2.007	1.782	2.768	1.801	**42.481**
Guntur	132kV Fdr	Rentachintala	132KV Chettinadu feeder	XC477784	5.669	6.227	6.530	5.552	6.784	5.733	5.482	4.891	5.338	4.819	5.628	8.095	**70.749**
Prakasam	Traction	Ongole (220kV)	132 kV Ongole Rly. Traction#1	12287788	2.280	1.369	2.151	3.071	3.931	1.671	0.868	1.221	4.644	0.296	4.162	2.370	**28.035**
Prakasam	132kV Fdr	InKollu	132 kV JVIL	12287790	3.999	3.569	2.964	2.307	2.814	3.061	2.579	2.946	3.997	4.084	3.678	4.374	**40.372**
Prakasam	132kV Fdr	Marturu	132KV Amaravathi feeder	APZ01076	4.953	4.104	3.594	3.640	2.223	1.633	1.117	1.225	1.817	2.474	3.399	4.595	**34.774**
		Total			**34.907**	**32.720**	**34.840**	**31.204**	**33.210**	**28.051**	**28.407**	**27.075**	**35.380**	**30.460**	**32.666**	**46.269**	**395.189**

Sample inspection report generated from MATS

A.P. Central Power Distribution Corporation Limited

LT Inspection Report for : THEFT OF ENRGY-METERED

CaseNo **DPE/GNT1/GNT3/10819/23** **Date 17-Feb-2023**

Insp. Report S.No. **7653**

Inspection report of Sri. **M.SURENDRABABU** (Name of the Inspecting Officer) **DEE** (Designation of the Inspecting Officer), **DPE-II** for the Service Connection No. **1113829004167** Service Category **LT1(C)-DOMESTIC** in Section of **GUNTUR RURAL** Distribution **1113829-VENGALAYAPALEM** on **16-Feb-2023** (Date) at **13:15** Hours (time).

1.Name of the Consumer & Service Holder Name(SH Name): - Address

SH Name	**MAMIDALA NAGASREE**	
ConsName	**MAMIDALA NAGA SRI**	**PH:9849164553::VENGALAYAPALEM**
Son of	**W/O KRISHNA CHAITANYA MALLIK**	**VILLAGE::GUNTUR-RURAL SECTION**

2.Persons present at the time of inspection 3. Company staff present at the time of inspection :

Name of the Person	Relation	Signed
MAMIDALA NAGA SRI	REG.CONSUMER	YES

Name	Desig	Dept
K.KOTESWARA RAO	JLM	VENGALAYAPALEM

4.Nature of Premises

i) Type of the premises:	**DOMESTIC**
ii) Area of the premises	
Urban	

5.Meter Box and Meter Diagram Indicating the Seal's Position:

CT Meter Box Non-CT Meter Meter Diagram

Meter Location Location Height

Seals Position	**Impression on Seals**	**Seal Bit Number**	**Condition of Seals**
Before Insp.			
After Insp.			

Location of Seals

Meter Box	CT Chamber	I/C Chamber	O/C Chamber	Meter Cover	Terminal Cover

6) Meter Particulars:

Make	Sl.No	Constant	Type	Capacity	Reading	MF
HPL	29283984	6400	SPM 02	5-30A	7342	

7. Load Details (in watts):

Contracted Load	**6000**			**Connected Load**		**4695**
Load Purpose:	**MU1**	**MU2**	**INF**	**HVY**	**OTH**	**Total Load**
Domestic	**370**	**1615**	**2550**	**160**	**0**	**4695**
Commercial	**0**	**0**	**0**	**0**	**0**	**0**

Sl. No.	Appliance Name	Usage	Wattage	Unit	Number	Total Load	Load Utilized
1	AC	MU2	1615	WT	1	1615	DOMESTIC
4	CFL	MU1	5	WT	6	30	DOMESTIC
2	Fan	MU1	60	WT	3	180	DOMESTIC
9	Fridge	HVY	160	WT	1	160	DOMESTIC
6	Geyser	INF	1500	WT	1	1500	DOMESTIC
10	Invertor	INF	650	WT	1	650	DOMESTIC
3	LED BULB	MU1	20	WT	4	80	DOMESTIC
5	Mixer	INF	200	WT	1	200	DOMESTIC
7	Television	MU1	80	WT	1	80	DOMESTIC
8	Washing machine	INF	200	WT	1	200	DOMESTIC

8. Observations made at the time of Inspection :

Art the time of inspection energy meter was not recording energy (No pulse) against consumer loads. On detailed inspection it was observed that the meter incoming service wire was tapped behind the meter board with the help of yellow and blue coloured copper cables and directly connected to the changeover switch (located in both room) without connection to meter as second source of power supply apart from regular power supply through meter. Thus the energy meter bypassed and consumer indulged in theft of energy.

9. Conclusion points:

Hence POE case was booked.

10. Whether the observations were shown to the Consumer/Consumer's representative:

Yes

11.Action taken to preserve the evidence and defects rectified if any. Also recommended the action to be taken, if any to be taken by the department:

Cables used for meter bypass were removed and seized. Functioning of meter found normal.

12.Statement of the Consumer/His Representative:

-

13. Office Details :

Circle	Division	Sub Division	Section	E.R.O.
GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	GUNTUR RURAL	GUNTUR-TOWN1

To
The Deputy Executive Engineer, Opn, GUNTUR-TOWN3

Deputy Executive Engineer
DPE-II

A.P. Central Power Distribution Corporation Limited

LT Inspection Report for : THEFT OF ENRGY-METERED

CaseNo **DPE/AMVT/MNGR/4537/23** **Date** **25-Feb-2023**

Insp. Report S.No. **7657**

Inspection report of Sri. **M.SURENDRABABU** (Name of the Inspecting Officer) **DEE** (Designation of the Inspecting Officer), **DPE-II** for the Service Connection No. **9211408000390** Service Category **LT1(C)-DOMESTIC** in Section of **KUNCHNAPALLI** Distribution **9211408-MALLEMPUDI** on **25-Feb-2023** (Date) at **14:15** Hours (time).

1.Name of the Consumer & Service Holder Name(SH Name): - Address

SH Name	**D.SANJEVA REDDY**	**.::MALLAMPUDI VILLAGE::TADEPALLI MANDAL**
ConsName	**DONTHIREDDY DONTHIREDDY SANJEEVA REDDY**	
Son of	**S/O SUBBA REDDY**	

2.Persons present at the time of inspection 3. Compan[illegible]ection :

Name of the Person	Relation	Signed
D SANJEEVA REDDY	REG.CONSUMER	YES

Name	Desig	Dept
K JASWANTH	JLM/GR-2	APCPDCL

4.Nature of Premises

i) Type of the premises:	**DOMESTIC**
ii) Area of the premises	
Urban	

5.Meter Box and Meter Diagram Indicating the Seals Position:

CT Meter Box	Non-CT Meter	Meter Diagram

Meter Location		Location Height	

Seals Position	**Impression on Seals**	**Seal Bit Number**	**Condition of Seals**
Before Insp.			
After Insp.			

Location of Seals

Meter Box	CT Chamber	I/C Chamber	O/C Chamber	Meter Cover	Terminal Cover

6) Meter Particulars:

Make	Sl.No	Constant	Type	Capacity	Reading	MF
HPL	33491166	6400	SPEM02	5-30A	4660	

7. Load Details (in watts):

Contracted Load	**1440**			**Connected Load**		**7576**
Load Purpose:	**MU1**	**MU2**	**INF**	**HVY**	**OTH**	**Total Load**
Domestic	**701**	**4730**	**1825**	**320**	**0**	**7576**
Commercial	**0**	**0**	**0**	**0**	**0**	**0**

Sl. No.	Appliance Name	Usage	Wattage	Unit	Number	Total Load	Load Utilized
1	**AC**	**MU2**	**1910**	**WT**	**1**	**1910**	**DOMESTIC**
2	**AC**	**MU2**	**1410**	**WT**	**2**	**2820**	**DOMESTIC**
3	**Fan**	**MU1**	**60**	**WT**	**7**	**420**	**DOMESTIC**
10	**Fridge**	**HVY**	**160**	**WT**	**2**	**320**	**DOMESTIC**
7	**Invertor**	**INF**	**650**	**WT**	**1**	**650**	**DOMESTIC**
9	**LED BULB**	**MU1**	**7**	**WT**	**3**	**21**	**DOMESTIC**
11	**Mixer**	**INF**	**200**	**WT**	**1**	**200**	**DOMESTIC**
12	**Rice Cooker**	**INF**	**400**	**WT**	**1**	**400**	**DOMESTIC**
8	**Television**	**MU1**	**100**	**WT**	**1**	**100**	**DOMESTIC**
4	**Tube light**	**MU1**	**20**	**WT**	**8**	**160**	**DOMESTIC**
5	**Washing machine**	**INF**	**200**	**WT**	**1**	**200**	**DOMESTIC**
6	**Water Motor**	**INF**	**375**	**WT**	**1**	**375**	**DOMESTIC**

8. Observations made at the time of Inspection :

At the time of inspection, energy meter was not recording energy (No pulse) against consumer loads. Consumer have two number services with SC.No. 390 and Sc.No.1214. Energy meter of Sc.No.1214 was also verified and found that energy was not recording against loads. On detailed inspection it was observed that the meter incoming service wire of Sc.No.390

was tapped at the top of Bath room roof with the help of Grey colour copper cable and connected to change over switch which is also connected in-between Sc.No.1214 & 390. Thus, the energy meters wire bypassed and consumer has control over functioning of energy meters by operating change over switch and consumer indulged in theft of energy.

9. Conclusion points:

Hence theft of energy case booked

10. Whether the observations were shown to the Consumer/Consumer's representative:

Yes

11.Action taken to preserve the evidence and defects rectified if any. Also recommended the action to be taken, if any to be taken by the department:

Copper cable used for meter bypass was removed and seized. functioning of meter found normal.

12.Statement of the Consumer/His Representative:

.

13. Office Details :

Circle	Division	Sub Division	Section	E.R.O.
CRDA	AMARAVATHI	MANGALAGIRI	KUNCHNAPALLI	MANGALAGIRI

To
The Deputy Executive Engineer, Opn, MANGALAGIRI

Deputy Executive Engineer
DPE-II

A.P. Central Power Distribution Corporation Limited

LT Inspection Report for : THEFT OF ENRGY-METERED

CaseNo **DPE/GUDV/HJUNC/12805/23** **Date 27-Mar-2023**

Insp. Report S.No. **3314**

Inspection report of Sri. **G. V. DURGA PRASAD** (Name of the Inspecting Officer) **AE** (Designation of the Inspecting Officer), **DPE-I** for the Service Connection No. **6144212001535** Service Category **LT1(B)-DOMESTIC** in Section of **HJUNCTION** Distribution **6144212-MADICHARLA** on **24-Mar-2023** (Date) at **15:50** Hours (time).

1.Name of the Consumer & Service Holder Name(SH Name): - Address

SH Name	**JASTHI HIMA KIRAN**	**PH.NO:9949213636::-::MADICHERLA (V) H.JUNCTION SECTION**
ConsName	**JASTI VIJAYA BHUSHAN KUMAR @BUJJI (BENEFICIARY)**	
Son of	**RAMA BRAHMAM**	

2.Persons present at the time of inspection 3. Compan[illegible]ection :

Name of the Person	Relation	Signed
CH.PRASAD	WORKER	YES

Name	Desig	Dept
-	-	-

4.Nature of Premises

i) Type of the premises:	**DOMESTIC**
ii) Area of the premises	
Rural	

5.Meter Box and Meter Diagram Indicating the Seals Position:

CT Meter Box	Non-CT Meter	Meter Diagram

Meter Location		Location Height	

Seals Position	**Impression on Seals**	**Seal Bit Number**	**Condition of Seals**
Before Insp.			
After Insp.			

Location of Seals

Meter Box	CT Chamber	I/C Chamber	O/C Chamber	Meter Cover	Terminal Cover

6) Meter Particulars:

Make	Sl.No	Constant	Type	Capacity	Reading	MF
HPL	10312226	6400	HESP-01	5-30A	3629	

7. Load Details (in watts):

Contracted Load	**2000**			**Connected Load**		**4118**
Load Purpose:	**MU1**	**MU2**	**INF**	**HVY**	**OTH**	**Total Load**
Domestic	**480**	**1400**	**746**	**0**	**1492**	**4118**
Commercial	**0**	**0**	**0**	**0**	**0**	**0**

Sl. No.	Appliance Name	Usage	Wattage	Unit	Number	Total Load	Load Utilized
6	**AC**	**MU2**	**1400**	**WT**	**1**	**1400**	**DOMESTIC**
5	**CUTTING MOTOR**	**OTH**	**2**	**HP**	**1**	**1492**	**DOMESTIC**
3	**Fan**	**MU1**	**60**	**WT**	**2**	**120**	**DOMESTIC**
7	**Fan**	**MU1**	**60**	**WT**	**2**	**120**	**DOMESTIC**
2	**LED BULB**	**MU1**	**20**	**WT**	**4**	**80**	**DOMESTIC**
9	**LED BULB**	**MU1**	**20**	**WT**	**2**	**40**	**DOMESTIC**
1	**Motor**	**INF**	**746**	**WT**	**1**	**746**	**DOMESTIC**
4	**Tube light**	**MU1**	**40**	**WT**	**2**	**80**	**DOMESTIC**
8	**Tube light**	**MU1**	**40**	**WT**	**1**	**40**	**DOMESTIC**

8. Observations made at the time of Inspection :

At the time of inspection observe meter is not responding on consumer load. Remove cutout fuse and observe part of the load is still working. After due observed consumer is being utilising supply directly by connecting on LT HG fuse set and earth wires and is used for part of the load by bypassing the supply even though, there is authorised service available in the premises. Thus the consumer dishonestly indulged and committed in theft of energy. Hence theft of energy case boked. Removed the wires and normally restored and observed meter.

9. Conclusion points:

Hence theft of energy case is booked.

10. Whether the observations were shown to the Consumer/Consumer's representative:

Yes

11.Action taken to preserve the evidence and defects rectified if any. Also recommended the action to be taken, if any to be taken by the department:

Removed the wires and seized which is used of bypassing the supply.

12.Statement of the Consumer/His Representative:

-

13. Office Details :

Circle	Division	Sub Division	Section	E.R.O.
VIJAYAWADA	GUDIVADA	HJUNCTION	HJUNCTION	HJUNCTION

To
The Deputy Executive Engineer, Opn, HJUNCTION

Assistant Engineer
DPE-I

A.P. Central Power Distribution Corporation Limited

LT Inspection Report for : THEFT OF ENRGY-METERED

CaseNo **DPE/GNT2/GNTR1/3215/23** **Date** **12-Jan-2023**

Insp. Report S.No. **7609**

Inspection report of Sri. **M.SURENDRABABU** (Name of the Inspecting Officer) **DEE** (Designation of the Inspecting Officer), **DPE-II** for the Service Connection No. **9111463001544** Service Category **LT1(C)-DOMESTIC** in Section of **PHIRANGIPURAM** Distribution **9111463-PONUGUPADU** on **11-Jan-2023** (Date) at **10:40** Hours (time).

1.Name of the Consumer & Service Holder Name(SH Name): - Address

SH Name	**MACHABATTUNI,SUREKHA**	
ConsName	**MACHABATTUNI SUREKHA**	**..::PONUGUPADU**
Son of	**W/O SRINIVASA RAO**	**VILLAGE::PHIRANGIPURAM SECTION**

2.Persons present at the time of inspection 3. Company staff present at the time of inspection :

Name of the Person	Relation	Signed
M.AMBACHARYULU	FATHER IN LAW	NO

Name	Desig	Dept
K.SRIKANTH	JLM	NUDURUPADU

4.Nature of Premises

i) Type of the premises:	**DOMESTIC**
ii) Area of the premises	
Urban	

5.Meter Box and Meter Diagram Indicating the Seal's Position:

CT Meter Box	Non-CT Meter	Meter Diagram	
Meter Location		Location Height	

Seals Position	Impression on Seals	Seal Bit Number	Condition of Seals
Before Insp.			
After Insp.			

Location of Seals

Meter Box	CT Chamber	I/C Chamber	O/C Chamber	Meter Cover	Terminal Cover

6) Meter Particulars:

Make	Sl.No	Constant	Type	Capacity	Reading	MF
Holley	2669836	3200	.	5-30A	4572	

7. Load Details (in watts):

Contracted Load	1000			Connected Load		1600
Load Purpose:	MU1	MU2	INF	HVY	OTH	Total Load
Domestic	0	1600	0	0	0	1600
Commercial	0	0	0	0	0	0

Sl. No.	Appliance Name	Usage	Wattage	Unit	Number	Total Load	Load Utilized
1	AC	MU2	1600	WT	1	1600	DOMESTIC

8. Observations made at the time of Inspection :

At the time of inspection the energy meter was not recording energy (No pulse) against Air conditioner load. ON detailed inspection it was observed that the meter incoming service wire was tapped behind meter board with the help of blue and red coloured copper cables and directly connected to the mains switch of Air conditioner load. Thus the energy meter bypassed and consumer indulged in theft of energy.

9. Conclusion points:

Hence POE case was booked.

10. Whether the observations were shown to the Consumer/Consumer's representative:

Yes

11.Action taken to preserve the evidence and defects rectified if any. Also recommended the action to be taken, if any to be taken by the department:

Cables used for meter bypass were removed and seized partly.

12.Statement of the Consumer/His Representative:

-

13. Office Details :

Circle	Division	Sub Division	Section	E.R.O.

CRDA	**GUNTUR-TOWN2**	**GUNTUR-RURAL1**	**PHIRANGIPURAM**	**GUNTUR-RURAL1**

To
The Deputy Executive Engineer, Opn, GUNTUR-RURAL1

Deputy Executive Engineer
DPE-II

A.P. Central Power Distribution Corporation Limited

LT Inspection Report for : THEFT OF ENRGY-DIRECT TAPPING

CaseNo **DPE/KNDK/KANDR/5492/23** **Date** **09-Mar-2023**

Insp. Report S.No. **6659**

Inspection report of Sri. **P.MOULALI KHAN** (Name of the Inspecting Officer) **AEE** (Designation of the Inspecting Officer), **DPE-II** for the Service Connection No. **DT** Service Category **LT1(C)-DOMESTIC** in Section of **LSAMUDRAM** Distribution **4513224-THIMMAREDDYPALEM** on **07-Mar-2023** (Date) at **13:50** Hours (time).

1.Name of the Consumer & Service Holder Name(SH Name): - Address

SH Name	**KONDREDDY MALLIKHARJUNA**	**CEll:-9652773447::-::THIMMAREDDYPALEM(V) L.SAMUDRAM (M)**
ConsName	**KONDREDDY MALLIKHARJUNA**	
Son of	**MALA KONDAIAH**	

2.Persons present at the time of inspection 3. Company staff present at the time of inspection :

Name of the Person	Relation	Signed
KONDREDDY MALLIKHARJUNA	OWNER	YES

Name	Desig	Dept
K. HARI KRISHNA	JLM/GR2	SANKHAVARAM

4.Nature of Premises

i) Type of the premises:	**DOMESTIC**
ii) Area of the premises	
Rural	

5.Meter Box and Meter Diagram Indicating the Seal's Position:

CT Meter Box Non-CT Meter Meter Diagram

Meter Location Location Height

Seals Position	**Impression on Seals**	**Seal Bit Number**	**Condition of Seals**
Before Insp.			
After Insp.			

Location of Seals

Meter Box	CT Chamber	I/C Chamber	O/C Chamber	Meter Cover	Terminal Cover

6) Meter Particulars:

Make	Sl.No	Constant	Type	Capacity	Reading	MF
					null	

7. Load Details (in watts):

Contracted Load	**0**			**Connected Load**		**750**
Load Purpose:	**MU1**	**MU2**	**INF**	**HVY**	**OTH**	**Total Load**
Domestic	**0**	**0**	**750**	**0**	**0**	**750**
Commercial	**0**	**0**	**0**	**0**	**0**	**0**

Sl. No.	Appliance Name	Usage	Wattage	Unit	Number	Total Load	Load Utilized
1	**Water Motor**	**INF**	**750**	**WT**	**1**	**750**	**DOMESTIC**

8. Observations made at the time of Inspection :

At the time of inspection it is observed that the consumer has authorizedly utilizing supply for water motor(i,e) directly tapping from near by the LT over head lines with the help of 2 nos pale Red insulated aluminum wires with aluminum hooks whose other ends are connected to the water motor starter switch. Thus the consumer has dishonestly involved in theft of energy. Hence Direct tapping case is booked under the section 135 (1) (a) of I.E Act 2003.

9. Conclusion points:

Thus the consumer has committed in theft of energy.

10. Whether the observations were shown to the Consumer/Consumer's representative:

Yes

11.Action taken to preserve the evidence and defects rectified if any. Also recommended the action to be taken, if any to be taken by the department:

Tapping wires are removed and seized for evidence. The Deputy Executive Engineer/O/Kandukuru Rurals is requested to arrange to issue P.A notice to the consumer.

12.Statement of the Consumer/His Representative:

-

13. Office Details :

Circle	Division	Sub Division	Section	E.R.O.
ONGOLE	KANDUKUR	KANDUKUR-RURAL	LSAMUDRAM	KANDUKUR

To
The Deputy Executive Engineer, Opn, KANDUKUR-RURAL

Asst.Executive Engineer
DPE-II

A.P. Central Power Distribution Corporation Limited

LT Inspection Report for : THEFT OF ENRGY-METERED

CaseNo **DPE/CHRL/CHRL/7098/23** **Date** **21-Feb-2023**

Insp. Report S.No. **8714**

Inspection report of Sri. **T. HYMAVATHI** (Name of the Inspecting Officer) **EE** (Designation of the Inspecting Officer), **DPE-I** for the Service Connection No. **4411206000788** Service Category **LT1(B)-DOMESTIC** in Section of **CHIRALA-RURAL** Distribution **4411206-KAVURIVARIPALEM** on **21-Feb-2023** (Date) at **13:40** Hours (time).

1.Name of the Consumer & Service Holder Name(SH Name): - Address

SH Name	**KAVURI KONDALU REDDY**	
ConsName	**KAVURI KONDALU REDDY**	**-::-::KAVURIVARIPALEM (V), CHIRALA (M)**
Son of	**S/O. SUBBAREDDY**	

2.Persons present at the time of inspection 3. Company staff present at the time of inspection :

Name of the Person	Relation	Signed
KAVURI KONDALU REDDY	OWNER	YES

Name	Desig	Dept
-	-	-

4.Nature of Premises

i) Type of the premises:	**DOMESTIC**
ii) Area of the premises	
Rural	

5.Meter Box and Meter Diagram Indicating the Seal's Position:

CT Meter Box	Non-CT Meter	Meter Diagram	
Meter Location		Location Height	

Seals Position	Impression on Seals	Seal Bit Number	Condition of Seals
Before Insp.			
After Insp.			

Location of Seals

Meter Box	CT Chamber	I/C Chamber	O/C Chamber	Meter Cover	Terminal Cover

6) Meter Particulars:

Make	Sl.No	Constant	Type	Capacity	Reading	MF
NPL	01077508	-	-	5-30A	9032	

7. Load Details (in watts):

Contracted Load	**260**			**Connected Load**		**373**
Load Purpose:	**MU1**	**MU2**	**INF**	**HVY**	**OTH**	**Total Load**
Domestic	**0**	**0**	**373**	**0**	**0**	**373**
Commercial	**0**	**0**	**0**	**0**	**0**	**0**

Sl. No.	Appliance Name	Usage	Wattage	Unit	Number	Total Load	Load Utilized
1	**Water Motor**	**INF**	**373**	**WT**	**1**	**373**	**DOMESTIC**

8. Observations made at the time of Inspection :

At the time of inspection the consumer having authorized SC.No.788, but utilizing power supply unauthoritically to his house for water motor purpose by directly tapping the nearby existing LT overhead lines with the help of black color service wires thus the consumer committed theft in use of electricity hence pilferage of energy case booked under the section 135 (1) (B) of I.E Act -2003. The above mechanism the consumer suppressed the units and revenue loss to the department (APCPDCL).

9. Conclusion points:

The consumer is involved in Pilferage of energy case.

10. Whether the observations were shown to the Consumer/Consumer's representative:

Yes

11.Action taken to preserve the evidence and defects rectified if any. Also recommended the action to be taken, if any to be taken by the department:

Wires removed

12.Statement of the Consumer/His Representative:

-

13. Office Details :

Circle	Division	Sub Division	Section	E.R.O.
ONGOLE	CHIRALA	CHIRALA-TOWN	CHIRALA-RURAL	CHIRALA

To
The Deputy Executive Engineer, Opn, CHIRALA-TOWN

Executive Engineer
DPE-I

A.P. Central Power Distribution Corporation Limited

LT Inspection Report for : THEFT OF ENRGY-DIRECT TAPPING

CaseNo **ONG/MRKP/CMBM/5599/23** **Date** **28-Feb-2023**

Insp. Report S.No. **0020**

Inspection report of Sri. **M SRINIVASULU** (Name of the Inspecting Officer) **AEE** (Designation of the Inspecting Officer), **KOMAROLU** for the Service Connection No. **DT** Service Category **LT1(A)-DOMESTIC** in Section of **CUMBUM** Distribution **4211204-DARGA** on **10-Feb-2023** (Date) at **11:30** Hours (time).

1.Name of the Consumer & Service Holder Name(SH Name): - Address

SH Name	..	
ConsName	**MEKALA PRASAD**	
Son of	**S/O PEDDA RAJULU**	**..::NEAR SC NO.428::DARGA**

2.Persons present at the time of inspection 3. Company staff present at the time of inspection :

Name of the Person	Relation	Signed
MEKALA PRASAD	SELF	NO

Name	Desig	Dept
Y NARAYANA	LM	YES

4.Nature of Premises

i) Type of the premises:	**DOMESTIC**
ii) Area of the premises	
Rural	

5.Meter Box and Meter Diagram Indicating the Seal's Position:

CT Meter Box	Non-CT Meter	Meter Diagram	
Meter Location		Location Height	

Seals Position	**Impression on Seals**	**Seal Bit Number**	**Condition of Seals**
Before Insp.			
After Insp.			

Location of Seals

Meter Box	CT Chamber	I/C Chamber	O/C Chamber	Meter Cover	Terminal Cover

6) Meter Particulars:

Make	Sl.No	Constant	Type	Capacity	Reading	MF
					null	

7. Load Details (in watts):

Contracted Load	**0**			**Connected Load**		**100**
Load Purpose:	**MU1**	**MU2**	**INF**	**HVY**	**OTH**	**Total Load**
Domestic	**100**	**0**	**0**	**0**	**0**	**100**
Commercial	**0**	**0**	**0**	**0**	**0**	**0**

Sl. No.	Appliance Name	Usage	Wattage	Unit	Number	Total Load	Load Utilized
1	**Fan**	**MU1**	**60**	**WT**	**1**	**60**	**DOMESTIC**
2	**Tube light**	**MU1**	**40**	**WT**	**1**	**40**	**DOMESTIC**

8. Observations made at the time of Inspection :

AT THE TIME OF INSPCTION THE PARTY USING UN OTHORISED SUPPLY FROM LT LINE WITH 5 MT BLACK COLOR PVC WRE THERE IS NO ATHORISED SERVICE INTHAT PRIMICES .HEVCE IT IS DIRECT TAPPING CASE BOOLKED

9. Conclusion points:

THEFT CASE BOOKED

10. Whether the observations were shown to the Consumer/Consumer's representative:

Yes

11.Action taken to preserve the evidence and defects rectified if any. Also recommended the action to be taken, if any to be taken by the department:

..

12.Statement of the Consumer/His Representative:

NOT GIVEV

13. Office Details :

Circle	**Division**	**Sub Division**	**Section**	**E.R.O.**

ONGOLE	**MARKAPURAM**	**CUMBUM**	**CUMBUM**	**CUMBUM**

To
The Deputy Executive Engineer, Opn, CUMBUM

Asst. Executive Engineer
KOMAROLU

A.P. Central Power Distribution Corporation Limited

LT Inspection Report for : THEFT OF ENRGY-METERED

CaseNo **DPE/NRPT/NRPTR2/3575/23** **Date** **30-Jan-2023**

Insp. Report S.No. **7285**

Inspection report of Sri. **A. SIVA NAGI REDDY** (Name of the Inspecting Officer) **AEE** (Designation of the Inspecting Officer), **DPE-II** for the Service Connection No. **1343468002644** Service Category **LT1(C)-DOMESTIC** in Section of **IPURU** Distribution **1343468-MUPPALA** on **28-Jan-2023** (Date) at **12:30** Hours (time).

1.Name of the Consumer & Service Holder Name(SH Name): - Address

SH Name	**VANGAVOLU,NAGESWARA RAO**	**PH:9866778876::A MUPPALLA VILLAGE::IPURU SECTION**
ConsName	**VANGAVOLU NAGESWARA RAO**	
Son of	**VENKATA SUBBAIAH**	

2.Persons present at the time of inspection 3. Company staff present at the time of inspection :

Name of the Person	Relation	Signed
VANGAVOLU ANURADHA	WIFE	NO

Name	Desig	Dept
G.RAVINDRA BABU	LI	IPURU

4.Nature of Premises

i) Type of the premises:	**DOMESTIC**
ii) Area of the premises	
Urban	

5.Meter Box and Meter Diagram Indicating the Seal's Position:

CT Meter Box	Non-CT Meter	Meter Diagram	
Meter Location		Location Height	

Seals Position	Impression on Seals	Seal Bit Number	Condition of Seals
Before Insp.			
After Insp.			

Location of Seals

Meter Box	CT Chamber	I/C Chamber	O/C Chamber	Meter Cover	Terminal Cover

6) Meter Particulars:

Make	Sl.No	Constant	Type	Capacity	Reading	MF
HPL	32088722	.	.	5-30A	1847	

7. Load Details (in watts):

Contracted Load	**3000**			**Connected Load**		**3800**
Load Purpose:	**MU1**	**MU2**	**INF**	**HVY**	**OTH**	**Total Load**
Domestic	**360**	**1500**	**1750**	**190**	**0**	**3800**
Commercial	**0**	**0**	**0**	**0**	**0**	**0**

Sl. No.	Appliance Name	Usage	Wattage	Unit	Number	Total Load	Load Utilized
1	**AC**	**MU2**	**1500**	**WT**	**1**	**1500**	**DOMESTIC**
4	**Fan**	**MU1**	**60**	**WT**	**3**	**180**	**DOMESTIC**
3	**Fridge**	**HVY**	**190**	**WT**	**1**	**190**	**DOMESTIC**
7	**Invertor**	**INF**	**1000**	**WT**	**1**	**1000**	**DOMESTIC**
5	**Motor**	**INF**	**750**	**WT**	**1**	**750**	**DOMESTIC**
2	**Television**	**MU1**	**100**	**WT**	**1**	**100**	**DOMESTIC**
6	**Tube light**	**MU1**	**20**	**WT**	**4**	**80**	**DOMESTIC**

8. Observations made at the time of Inspection :

At the time of inspection the meter is not responding with consumer load. On verification found that the consumer has taken a loop wire from incoming service wire before meter and connected to the load point. Thus the consumer indulged in theft of energy.

9. Conclusion points:

Hence POE case was booked.

10. Whether the observations were shown to the Consumer/Consumer's representative:

Yes

11.Action taken to preserve the evidence and defects rectified if any. Also recommended the action to be taken, if any to be taken by the department:

Loop wire seized.

12.Statement of the Consumer/His Representative:

-

13. Office Details :

Circle	Division	Sub Division	Section	E.R.O.
GUNTUR	NARASARAOPETA	NARASARAOPETA-RURAL	IPURU	VINUKONDA

To
The Deputy Executive Engineer, Opn, NARASARAOPETA-RURAL

Asst.Executive Engineer
DPE-II

A.P. Central Power Distribution Corporation Limited

LT Inspection Report for : THEFT OF ENRGY-METERED

CaseNo **DPE/TENL/TNLR1/7850/23** **Date** **10-Mar-2023**

Insp. Report S.No. **2275.2568**

Inspection report of Sri. **G. V. DURGA PRASAD** (Name of the Inspecting Officer) **AE** (Designation of the Inspecting Officer), **DPE-I** for the Service Connection No. **1212402000056** Service Category **LT1(C)-DOMESTIC** in Section of **KOLLURU** Distribution **1212402-AMUDALA LANKA** on **07-Mar-2023** (Date) at **11:25** Hours (time).

1.Name of the Consumer & Service Holder Name(SH Name): - Address

SH Name	**M.KOTESWARA RAO**	
ConsName	**MANDAVA SEETHA RAMAIAH (BENEFICIARY)**	**-::-::AMUDALA LANKA (V), KOLLURU (M).**
Son of	**KOTESWARA RAO**	

2.Persons present at the time of inspection 3. Company staff present at the time of inspection :

Name of the Person	Relation	Signed
M.SEETHA RAMAIAH	BENEFICIAR	YES
-	-	NO

Name	Desig	Dept
-	-	-
-	-	-

4.Nature of Premises

i) Type of the premises:	**DOMESTIC**
ii) Area of the premises	
Rural	

5.Meter Box and Meter Diagram Indicating the Seal's Position:

CT Meter Box Non-CT Meter Meter Diagram

Meter Location Location Height

Seals Position	Impression on Seals	Seal Bit Number	Condition of Seals
Before Insp.			
After Insp.			

Location of Seals

Meter Box	CT Chamber	I/C Chamber	O/C Chamber	Meter Cover	Terminal Cover

6) Meter Particulars:

Make	Sl.No	Constant	Type	Capacity	Reading	MF
HPL	33663606	6400	SPEM-02	5-30A	2169	

7. Load Details (in watts):

Contracted Load	1440			Connected Load		2800
Load Purpose:	MU1	MU2	INF	HVY	OTH	Total Load
Domestic	200	1600	800	200	0	2800
Commercial	0	0	0	0	0	0

Sl. No.	Appliance Name	Usage	Wattage	Unit	Number	Total Load	Load Utilized
1	AC	MU2	1600	WT	1	1600	DOMESTIC
2	Fan	MU1	60	WT	2	120	DOMESTIC
4	Fridge	HVY	200	WT	1	200	DOMESTIC
5	Invertor	INF	800	WT	1	800	DOMESTIC
3	Tube light	MU1	40	WT	2	80	DOMESTIC

8. Observations made at the time of Inspection :

At the time of inspection observe meter is not responding on consumer load. Remove cut out fuse and observe part of the load is still working. After due observation, found incoming service wire was pealed off and connected with other wires whose ends are directly connected to the separate fuse set, which is going to the part of the load by bypassing the supply before the meter, behind the meter board. This arrangement does not record real consumption utilizing by the consumer. Thus the consumer dishonestly indulged and committed in theft of energy. Hence theft of energy case booked. Remove the bypassed wires and normalcy restored. [Note: To Dy.EE/Opn/Tenali Rural and AE/O/Kolluru is requested to remove one service being the consumer has been utilizing the two services i.e sc no:1212402000056 and 6733101000174 one in single house. Hence one service removed by clubbing both services to save revenue.

9. Conclusion points:

Hence theft of energy case booked.

10. Whether the observations were shown to the Consumer/Consumer's representative:

Yes

11.Action taken to preserve the evidence and defects rectified if any. Also recommended the action to be taken, if any to be taken by the department:

Removed the bypassed wires and seized.

12.Statement of the Consumer/His Representative:

-

13. Office Details :

Circle	Division	Sub Division	Section	E.R.O.
GUNTUR	TENALI	TENALI-RURAL1	KOLLURU	TENALI

To
The Deputy Executive Engineer, Opn, TENALI-RURAL1

Assistant Engineer
DPE-I

Sample data of Govt. and LT industrial services

Sample data of Govt. Services

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
1	VIJAYAWADA RURAL	6311205000144	D E E S C RLY	GUNTUPALLY	NS	95.86	3	CT-METER	LnG	P0075078	125/5A	1
2	VIJAYAWADA RURAL	6311622001665	ZILLA PARISHATH CPWS	MAJAORWATERWORKS	NS	34.27	3	2-ELECTRON	Genus	3062326	5-30A	1
3	VIJAYAWADA RURAL	6311622005330	ZILLA PARISHATH CPWS	KANCHIKACHERLA MANDALAM.	NS	20	3	2-ELECTRON	HPL	3893516	5-30A	1
4	VIJAYAWADA RURAL	6311615000066	ZILLA PARISHATH CPWS	PERAKALAPADU; KCL MANDAL.	NS	20	1	2-ELECTRON	HPL	6290867	5-30A	1
5	VIJAYAWADA RURAL	6311602000394	ZILLA PARISHATH CPWS	CHEVITIKALLU, KCL MANDAL.LU.	NS	68	3	CT-METER	UTL	APS08740	125	1
6	VIJAYAWADA RURAL	6311602000551	ZILLA PARISHATH CPWS	CHEVITIKALLU, KCL MANDAL.	NS	89.67	3	CT-METER	LnT	16200034	125/5A	1
7	VIJAYAWADA RURAL	6311400001686	ZONAL ENGINEER		NS	29	3	CT-METER	LnG	P0075250	125/5A	1
8	VIJAYAWADA RURAL	6312117000951	ZILLA PARISHADH CPWS		NS	7.21	3	2-ELECTRON	HPL	6424480	May-30	1
9	VIJAYAWADA RURAL	6312110000302	ZILLA PARISHADH CPWS		NS	4.47	1	2-ELECTRON	LnT	62433043	5-30A	1
10	VIJAYAWADA RURAL	6312100001599	ZILLA PARISHADH CPWS	G.KONDURU	NS	51.6	3	CT-METER	HPL	111120	50	1
11	VIJAYAWADA RURAL	6312125000440	ZILLA PARISHADH CPWS		NS	8.47	3	2-ELECTRON	LnT	16370113	5-30A	1
12	GUDIVADA	6133100000262	SOUTH CENTRAL RAILWAYS		NS	9	1	2-ELECTRON	HPL	6292274	3X5-30A	1
13	GUDIVADA	6133341000249	AE/Z.P.C.W.S.S	MANDAVALI MANDALAM.	NS	22.25	3	2-ELECTRON	Genus	3042993	5-30A	1
14	GUDIVADA	6133303000105	AE/Z.P.C.W.S.S		NS	15	3	2-ELECTRON	HPL	6241336	5-30A	1
15	GUDIVADA	6133310000315	AE/Z.P.C.W.S.S	DYYYMPADU	NS	12.5	3	2-ELECTRON	AVON	3178976	5-30A	1
16	GUDIVADA	6144205001823	RAILWAY VJA	BAPULAPADU.	NS	10	3	2-ELECTRON	Genus	3073539	5-30A	1
17	NUZVIDU	6622200000492	MANAGER, A.P.S.R.T.C.	TIRUVURU	NS	43	3	CT-METER	1	1	1	1
18	VIJAYAWADA TOWN	6435619000774	PANCHAYAT SECRETARY,P S PAIDURUPADU	PAIDURUPADU	NS	2	1	ELEC	HPL	33777446		1
19	GUNADALA	6521121001796	The Secretary	---------	NS	5	3	6-HTCTMTR	7	16239686	5	1
20	GUNADALA	6521300003133	Asst Director Of Fisheris	OPP. OLD POLICE STATION.	NS	15	3	2-ELECTRON	HPL	3368867	5.30A	1
21	VUYYURU	6711100005603	DEPOT. MANAGER	VUYYURU	NS	51.264	3	CT-METER	AVON	8003486	125/5A	1
22	VIJAYAWADA RURAL	6333220000781	ZILLAPARISHAD,KRISHNA	VEDADRI	NS	45	3	CT-METER	HPL	8003306	5-30A	1
23	VIJAYAWADA RURAL	6333209002223	The Secretory	--	NS	5	3	2-ELECTRON	HPL	6322128	5-30A	1
24	VIJAYAWADA RURAL	6333202001351	The Secretary	--	NS	16	3	CT-METER	AVON	9122206	125/5A	1
25	VIJAYAWADA RURAL	6333100004289	SRI THIRUPATHAMMA TEMPLE WATER		NS	70	3	CT-METER	HPL	5024973	5-30A	1
26	VIJAYAWADA TOWN	6423299201168	The Commissioner	DHOBI GHAT, RAVES CANAL BUND	NS	2	1	2-ELECTRON	HPL	30801402	5-30A	1
27	VIJAYAWADA TOWN	6423249011332	V M C	KEDARESWARAPET	NS	35	3	CT-METER	UTL	111	125	1
28	VIJAYAWADA TOWN	6423386043698	A P S R T C	Near Global Hospital,Gopala Krishn	NS	40	3	CT-METER	L&G	P0076442	125/5A	1
29	VIJAYAWADA TOWN	6423388007445	A P S R T C	Eluru Road	NS	44	3	CT-METER	TTL	SP405583	125/5A	1
30	VIJAYAWADA TOWN	6423645212397	V M C Pump House Park	MUTYALAMPADU	NS	19	3	2-ELECTRON	Genus	3011411	3X5-30A	1
31	VIJAYAWADA TOWN	6423645123443	The Commissionervmc	DURGAPURAM	NS	49.6	3	CT-METER	Genus	4892450	125/5A	1
32	VIJAYAWADA TOWN	6423645217780	V M C Waterworks	MUTYALAMPADU	NS	22.788	3	2-ELECTRON	Genus	3042371	3X5-30A	1
33	VIJAYAWADA TOWN	6423645204121	V M C Pumpset	AZITSINGHNAGAR	NS	23.19	3	2-ELECTRON	Genus	3011285	5-30A	1
34	VIJAYAWADA TOWN	6423444258572	COMMISSONER	VIJAYAWADA	NS	100	3	CT-METER	Secure	X1886418		1
35	VIJAYAWADA TOWN	6424415135975	The Commissioner	JAWAHARLAL BUILDINGS.	NS	50	3	CT-METER	SECURE	35262	125	1
36	VIJAYAWADA TOWN	6424391127599	Commissioner	BLOCK V G O PUMPING STATION	NS	33.5	3	CT-METER	SECURE	35289	125-5A	1
37	VIJAYAWADA RURAL	6322212000802	ZILLLA PARISHATH CPWS	JUJJURU, VPD MANDAL.	NS	40	3	CT-METER	HPL	5023086	200/5A	1
38	VIJAYAWADA RURAL	6322223000369	ZILLLA PARISHATH CPWS	--	NS	13.41	3	2-ELECTRON	HPL	6380955	5.30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
39	VIJAYAWADA RURAL	6322402000014	ZILLA PARISHATH CPWS	B.K.V.PALEM, C.PADU MANDAL.	NS	27.68	3	2-ELECTRON	HPL	3371706	May-30	1
40	VIJAYAWADA RURAL	6322407000374	ZILLA PARISHATH CPWS	GUDIMETLA, C.PADU MANDAL.	NS	125.34	3	CT-METER	Secure	A0043615	125/5	1
41	VIJAYAWADA RURAL	6322402800222	ZILLA PARISHATH CPWS	BKV PALEM(OLD).	NS	47.68	3	CT-METER	0	13526066	0	1
42	VIJAYAWADA RURAL	6322402000015	ZILLA PARISHATH CPWS	B.K.V.PALEM, C.PADU MANDAL.	NS	8.36	3	2-ELECTRON	HPL	3845641	5.3	1
43	VIJAYAWADA RURAL	6322412000387	ZILLA PARISHATH CPWS	KONAYAPALEM.	NS	33.75	3	2-ELECTRON	HPL	6240815	5.3	1
44	VIJAYAWADA RURAL	6322411000009	ZILLA PARISHATH CPWS	KATRRENI PALLI, CPD (M).	NS	101.47	3	CT-METER		APE3746	20	1
45	GUNADALA	6511108001745	The A P S Seeds Development	PRASADAMPADU	NS	133.5	3	CT-METER		9624617	5	1
46	GUNADALA	6511302012914	The Commisionervmcdhobi-Ghat	DHOBIGHAT	NS	5	3	2-ELECTRON	Genus	3073178	May-30	1
47	GUNADALA	6511300010758	Asst Divsional Engineer	NA	NS	70	3	CT-METER	ELSTER	42172	3	1
48	GUNADALA	6511300013401	The Commissioner V M C	THE SEWAGE PUMPSTATION	NS	76	3		SECURE	X0793990	10/5A	0.5
49	GUNADALA	6511300010759	Asst Divisional Engineer	NA	NS	70	3	CT-METER		3640	5	1
50	GUNADALA	6512207006619	Commissioner	PANDARIPURAM	NS	46.7	3	CT-METER	Genus	7178637	125/5A	1
51	GUNADALA	6512300026794	V M C	S.N.B.COLONY	NS	49.92	3	CT-METER	VISIONTEC	1238763	75/5A	1
52	GUNADALA	6512317003543	State Bank Co-Opp Society	NA	NS	7.61	3	2-ELECTRON	HPL	6235576	5-30A	1
53	NUZVIDU	6614307001538	SURPANCH GRAMAPANCHAYAT,P.W.S	EDARA	NS	5	3	2-ELECTRON	LnT	16395110	May-30	1
54	NUZVIDU	6614307001269	SURPANCH GRAMA PANCHAYATI.	EDARA.	NS	2	1	2-ELECTRON	NPL	4355550	5-30A	1
55	NUZVIDU	6614131000936	ZILLAPARISHATH CPWS		NS	10	3	2-ELECTRON	HPL	6414501	5-30A	1
56	NUZVIDU	6614100001416	ZILLAPARISHATH CPWS		NS	15	3	2-ELECTRON	Genus	3042194	5-30A	1
57	NUZVIDU	6614100001417	ZILLAPARISHATH CPWS		NS	75	3	CT-METER	LG	A0017193	5A	1
58	NUZVIDU	6614203001988	SARPANCHGRAMAPANCHI	--	NS	4.209	1	0	NPL	1098435	20	1
59	NUZVIDU	6611100001610	A P S R T C	(depot Workshop)	NS	72.44	3	CT-METER	L&G	A0017649	125/5A	1
60	NUZVIDU	6611100004383	A P S R T C	(Pumping scheme)	NS	5	3	2-ELECTRON	HPL	6403332	5-30A	1
61	GUDIVADA	6122200001177	SECRETARY, GRAMAPANCHAYATI	KOWTHAVARAM	NS	8	3	2-ELECTRON	HPL	6323509	May-30	1
62	GUDIVADA	6122131000734	SECRATARY GRAMAPANCHYAT	PEDAPALAPARRU	NS	5.18	3	ELEC	HPL	3706822	0	1
63	GUDIVADA	6111298003451	DEPOT MANAGER,A.P.S.R.T.C	A.P.S.R.T.C.	NS	74.3	3	CT-METER	1	AP015087	1	1
64	GUDIVADA	6111414001378	SURPANCH,		NS	4	1	2-ELECTRON	HPL	34780735	May-30	1
65	GUDIVADA	6111108000940	THE SECRETARY,		NS	7	3		Genus	3026699	3X5/30A	1
66	GUDIVADA	6111123000079	M/S KRISHNA DHALL PRODUCERS		NS	71.5	3	CT-METER	AVON	8000295	125/5A	1
67	MACHILIPATNAM	6222105004164	Depot Manager Apsrtc	EDEPALLI	NS	51	3	CT-METER		4992	5	1
68	MACHILIPATNAM	6222105005509	Rtc Pump House	NA NA	NS	3.029	3	2-ELECTRON	HPL	6235681	5-30A	1
69	MACHILIPATNAM	6223533024778	ZP CPWS	SARADANAGAR-CPWS	NS	70.5	3	CT-METER	L&G	4892611	125/5A	1
70	MACHILIPATNAM	6223524000220	Executive Engineer Rws	0	NS	5	3	2-ELECTRON	AVON	3175204	May-30	1
71	MACHILIPATNAM	6223514000794	ZP CPWS	CHINNAPURAM(PWS MAJOR)	NS	25.5	3	2-ELECTRON	HPL	3815336	May-30	1
72	MACHILIPATNAM	6223513000196	ZP CPWS	-------	NS	3	1	2-ELECTRON	HPL	32162879	5.30A	1
73	VUYYURU	6722107000255	Chief Executive Officer	Machilipatanam	NS	20.5	3	2-ELECTRON	Genus	3027544	May-30	1
74	VUYYURU	6722100001797	DEPOT MANAGER	AVANIGADDA	NS	74.428	3	CT-METER	GENUS	7178540	125/5A	1
75	VUYYURU	6722305000181	Chief Executive Officer	MAchilipatnam	NS	16	3	2-ELECTRON	LnT	16395550	5-30A	1
76	VUYYURU	6722230000236	Chief Executive Officer	Machilipatnam	NS	52	3	CT-METER		6938		1
77	VUYYURU	6722219000218	Chief Executive Officer	Machilipatnam	NS	13	3	2-ELECTRON	Genus	3063034	5-30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
78	VUYYURU	6722231000151	Chief Executive Officer	MAchilipatnam	NS	16.54	3	2-ELECTRON	GENUS	1504371	May-30	1
79	MACHILIPATNAM	6244106000230	C.E.O. KRISHNA ZP	CHORAMPUDI-PWS MINOR	NS	11.321	3	2-ELECTRON	HPL	3371113	5-30A	1
80	MACHILIPATNAM	6244101000251	C.E.O.KRISHNA ZP	MAIN ROAD	NS	12.5	3	2-ELECTRON	Genus	3044711	5-30A	1
81	MACHILIPATNAM	6244106000396	C.E.O.KRISHNA ZP	0	NS	5	3	2-ELECTRON	AVON	3191023	5-30A	1
82	MACHILIPATNAM	6244340000256	C.E.O.KRISHNA ZP	0	NS	50	3	CT-METER	AVON	8000882	125/5A	1
83	MACHILIPATNAM	6244332001057	C E O KRISHNA Z.P	0	NS	5	3	2-ELECTRON	GENUS	3026770	May-30	1
84	MACHILIPATNAM	6244333000612	C E O Z.P. KRISHNA	0	NS	10	3	2-ELECTRON	HPL	3384303	5-30A	1
85	MACHILIPATNAM	6244333000604	C E O Z.P. KRISHNA	0	NS	30	3	CT-METER	AVON	8004087	125/5A	1
86	MACHILIPATNAM	6244316000106	C E O Z.P. KRISHNA	0	NS	5	3	2-ELECTRON	HE	6279936	May-30	1
87	VUYYURU	6733215000636	SECRETARY		NS	3	1	0	HPL	27727360	530	1
88	VUYYURU	6733200002738	SECRETARY	GHANTASALA	NS	10	3	2-ELECTRON	HPL	3695260	35-30	1
89	VUYYURU	6733102004462	EXECUTIVE ENGINEER	CHALLAPALLI	NS	3.26	1	2-ELECTRON	HPL	32875413	May-30	1
90	GUDIVADA	6133425000377	AE/Z.P.C.W.S.S.		NS	12.5	3	2-ELECTRON	HPL	3316285	May-30	1
91	GUDIVADA	6133428000270	AE/Z.P.C.W.S.S	KKLR MANDAL	NS	43	3	CT-METER	LnG	4892435	5-30A	1
92	GUDIVADA	6133425000386	AE/Z.P.C.W.S.S	KAIKALURU MANDALAM	NS	5	3	2-ELECTRON	LNT	16394516	May-30	1
93	GUDIVADA	6133402000375	AE/Z.P.C.W.S.S	KKLR MANDAL	NS	5	3	2-ELECTRON	L&T	16223359	3X5-30A	1
94	GUDIVADA	6133420000120	AE/Z.P.C.W.S.S		NS	7.5	3	2-ELECTRON	HPL	6379955	May-30	1
95	MACHILIPATNAM	6223514001901	ZP CPWS	---	NS	3	1	0	0	19847091	0	1
96	MACHILIPATNAM	6223241000969	C.E.O.KRISHNA ZP	0	NS	20	3	CT-METER	L AND T	13527397		1
97	MACHILIPATNAM	6223241000919	C.E.O.KRISHNA ZP	0	NS	45.3	3	CT-METER	0	15665890	5	1
98	MACHILIPATNAM	6223241000921	C.E.O.KRISHNA ZP	0	NS	34	3	CT-METER	0	15665990	5	1
99	VIJAYAWADA RURAL	6311206001369	E.O.GP(STL MAJOR)		NS	10	3	0	LNT	16240103	3-240A	1
100	VIJAYAWADA RURAL	6311208000035	E.O.GP(STL MINOR)		NS	4	1	2-ELECTRON	HPL	32115198	5-30A	1
101	VIJAYAWADA RURAL	6311208000457	SURPACH, GRAM PANCHAYAT	MINORWATER WORKS	NS	25	3	CT-METER	Genus	7027888	125/5A	1
102	VIJAYAWADA RURAL	6311202000727	PANCHYAT SECRETARY DAMLUR	SC COLOMY DAMULURU	NS	7	3	ELEC	HPL	6233429	--	1
103	VIJAYAWADA RURAL	6311211001957	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	HPL	28212919		1
104	VIJAYAWADA RURAL	6311211001647	The Head Mistress	--	NS	1	1	2-ELECTRON	HPL	15918847	5-30A	1
105	VIJAYAWADA RURAL	6311202000612	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	L AND T	60893345		1
106	VIJAYAWADA RURAL	6311211001537	E.O.GP(STL MINOR)		NS	10	3	2-ELECTRON	HPL	3062250	5-30A	1
107	VIJAYAWADA RURAL	6311206000155	EO/GRAMPANCHAYAT	JUPUDI	NS	0.3	1	2-ELECTRON	HPL	62327405	5-30A	1
108	VIJAYAWADA RURAL	6312312000274	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	L AND T	60068285	5-30A	1
109	VIJAYAWADA RURAL	6312318000118	PRIMARY CO.OPERATIVE SOCI	PULLURU	NS	2.435	1	2-ELECTRON	HPL	31907851	5-30A	1
110	VIJAYAWADA RURAL	6312300001669	E.D.SC.CO-OP.SOCIETY		NS	0.28	1	2-ELECTRON	HPL	29894744	5-30A	1
111	VIJAYAWADA RURAL	6312300003622	GOVT. HOSPITAL,	MYLAVARAM	NS	40	3	CT-METER	HPL	338	10	1
112	VIJAYAWADA RURAL	6312300008838	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	2-ELECTRON	HPL	34582413	5-30A	1
113	VIJAYAWADA RURAL	6312304000047	Z.P.H.SCHOOL		NS	17.812	3	CT-METER	AVON	9121872	125/5A	1
114	VIJAYAWADA RURAL	6312315000287	SURPANCH	MINOR WATER WORKS	NS	5.268	1	2-ELECTRON	HPL	6370541	5-30A	1
115	VIJAYAWADA RURAL	6312300006139	SARPANCH(MAJOR WATER WAORKS)	MYLAVARAM	NS	5	3	2-ELECTRON	Genus	3045692	3X5-30A	1
116	VUYYURU	6722100007369	M P P SCHOOL	NA	NS	1	1	2-ELECTRON	HPL	31726885	May-30	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
117	VUYYURU	6722100010174	Anganvadi Center	--	NS	0.25	1	0	HPL	28015219		1
118	VUYYURU	6722100000914	PRINCIPAL HINDI		NS	0.8	1	2-ELECTRON	HPL	32112805	0	1
119	VUYYURU	6722111001186	Anganvadi Center	--	NS	0.25	1	0	HPL	28094295		1
120	VUYYURU	6722106000316	The Secretary	--	NS	1	1	2-ELECTRON	LnT	62325296	30A	1
121	VUYYURU	6722101000681	THE,GRAM PANCHAYAT AWARAOPALEM	ASWARAOPALEM	NS	1	1	2-ELECTRON	HE	20887698	May-30	1
122	VUYYURU	6722202000874	The Head Master	--	NS	1	1	2-ELECTRON	HPL	27598562	May-30	1
123	VUYYURU	6722200003238	MANDAL DEVLOPMENT OFFICER	0	NS	1	1	2-ELECTRON	HPL	33207357	5-30A	1
124	VUYYURU	6722209000331	HEADMASTER M P ELIMENTARY	NA	NS	1	1	2-ELECTRON	HPL	31935617	5-30A	1
125	MACHILIPATNAM	6244101000055	SARPANCH (MINOR STL)	AMUDALAPALLI,BTL MDL.	NS	7.25	1	2-ELECTRON	AEW	10428147	5-30A	1
126	MACHILIPATNAM	6244119800063	M P P SCHOOL	KAPU TURU	NS	0.4	1	2-ELECTRON	HOLLEY	2661628	5-30A	1
127	MACHILIPATNAM	6244129000183	PANCHAYATHY SECRETARY	WATER WORKS	NS	10	1	2-ELECTRON	HPL	31387558	May-30	1
128	MACHILIPATNAM	6244109000468	M.P.P.SCHOOL	0	NS	1	1	2-ELECTRON	VISIONTEK	9593155	5-30A	1
129	MACHILIPATNAM	6244110000033	SARPANCH(MINOR STL)	NARAYANAPURAM-STL MINOR	NS	0.24	1	0	0	10080422	0	1
130	MACHILIPATNAM	6244122000378	SARPANCH(MINOR STL)	NAGESWARARAOPETA-STL MINOR	NS	0.8	1	2-ELECTRON	HPL	26139488	5-30A	1
131	MACHILIPATNAM	6244125000345	EXECUTIVE OFFICER,(PWS)	PEDATUMIDI-MAJOR PWS	NS	10.67	3	2-ELECTRON	HPL	3371193	5-30A	1
132	MACHILIPATNAM	6244120000370	SURPANCH(MINOR PWS)	MUNJULURU-PWS MINOR	NS	9.34	3	2-ELECTRON	HPL	6397744	5-30A	1
133	MACHILIPATNAM	6244106800001	SARPANCH(MINOR STL)	CHORAMPUDI-STL MINOR	NS	1.6	1	2-ELECTRON	HPL	33178595	5-30A	1
134	MACHILIPATNAM	6244121000192	SARPANCH(MINOR STL)	NAGANNACHERUVU-STL MINOR	NS	1.28	1	2-ELECTRON	HPL	34884196	5-30A	1
135	GUDIVADA	6133407000060	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	31647225	5-30A	1
136	GUDIVADA	6133441000197	SURPANCH GRAMA PANCHAYAT	VARAHAPATNAM	NS	0.68	1	2-ELECTRON	HPL	32839331	May-30	1
137	GUDIVADA	6133425000683	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.26	1	2-ELECTRON	HPL	32523036	5-30A	1
138	GUDIVADA	6133425000656	M.P.U.P. School	--	NS	1	1	2-ELECTRON	HPL	33470292	May-30	1
139	GUDIVADA	6133408000469	SECRETARY GRAMA PANCHAYET	--	NS	2	1	0	HE	10620716		1
140	GUDIVADA	6133433000059	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.26	1	2-ELECTRON	HPL	20632406	5-30A	1
141	GUDIVADA	6133408000206	THE EXECUTIVE OFFICER	KAIKALUR MANDAL	NS	3	3	2-ELECTRON	GENUS	3074471	May-30	1
142	GUDIVADA	6133412000439	M.P.P.School	--	NS	1	1	0	NPL	752268		1
143	GUDIVADA	6133431000124	ANGANWADI CENTER	RAJULA KOTTADA	NS	1	1	DIGITAL	HPL	33250473	--	1
144	GUDIVADA	6133439000269	THE EXECUTIVE OFFICER	KAIKALUR MANDAL	NS	12.5	3	2-ELECTRON	LnT	16397588	May-30	1
145	GUDIVADA	6133425000673	M.P.P.School	--	NS	1	1	2-ELECTRON	NPL	4431694	5-30A	1
146	VIJAYAWADA TOWN	6435314254541	Commissioner Vmc	S.T.L., KOTHAPETA.	NS	5	3	2-ELECTRON	Genus	3003392	May-30	1
147	VIJAYAWADA TOWN	6435313201500	V M C Dispencery	37058, KOTHAPET	NS	0.4	1	2-ELECTRON	HPL	31787676	5-30A	1
148	VIJAYAWADA TOWN	6435314280598	Stl	K G MARKET	NS	4.56	1	2-ELECTRON	HPL	34474270	5-30A	1
149	VIJAYAWADA TOWN	6435314253974	Stl	B.R.P ROAD,	NS	2.2	1	0	LT	62330916	40	1
150	VIJAYAWADA TOWN	6435313201505	Municipal Office	26912, VIJAYAWADA	NS	8.7	3	2-ELECTRON	LnT	16366687	3Q5-30A	1
151	VIJAYAWADA TOWN	6435313259672	Commissiner V M C	ENTRE DIVIDER LIGHTING,	NS	12	3	2-ELECTRON	Genus	3043709	May-30	1
152	VIJAYAWADA TOWN	6435313003633	POTNURI KRISHNA PRASAD	7005	NS	2.9	1	0	NA	24000296	NA	1
153	VIJAYAWADA TOWN	6435399280605	Stl	ANJANEYA VAGU	NS	21.7	3	CT-METER	0	13526120	0	1
154	VIJAYAWADA TOWN	6435313262068	Commissioner Of V M C	G.P.GATTU HILL BOOSTER.	NS	16.5	3	2-ELECTRON	HPL	6424769	3-5.30 A	1
155	VIJAYAWADA TOWN	6435399287686	COMMISSIONER VMC	VIJAYAWADA	NS	30	3	CT-METER	HPL	6207736	200/5A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
156	VIJAYAWADA TOWN	6435313262375	Commissioner	35473, WYNCHIPET	NS	6	3	2-ELECTRON	LnT	16245805	3Q5-30A	1
157	VIJAYAWADA TOWN	6435314253512	V M C Commissioner	9929, FISH MARKET	NS	3.029	1	2-ELECTRON	HPL	31460943	5-30 A	1
158	VIJAYAWADA TOWN	6435314201504	V M C	42394,	NS	2.3	1	2-ELECTRON	HPL	32113016	May-30	1
159	VIJAYAWADA TOWN	6435313280606	Stl	G P GATTU	NS	9	3	2-ELECTRON	Genus	3074785	May-30	1
160	VIJAYAWADA TOWN	6435314280607	Stl	GULAM MIHIDDIN STREET	NS	13.01	3	2-ELECTRON	HPL	6384120	3Q5-30A	1
161	GUNADALA	6521208004678	M P Urdu Elesehool	NA	NS	1	1	2-ELECTRON	HPL	34157531	May-30	1
162	GUNADALA	6521226005753	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	5.36	3	2-ELECTRON	HPL	3893463	May-30	1
163	GUNADALA	6521225008965	Panchayat Secretary	M.P.COLONY,	NS	15.51	3	2-ELECTRON	HPL	6258771	5-30A	1
164	GUNADALA	6521222023165	SRI LAKSHMI SAI,ENGINEERING DRILLING	BUNDAR ROAD	NS	50	3	CT-METER	GENUS	7030962		1
165	GUNADALA	6521225033217	MUNICIPAL COMMISSIONER	NEAR RRR BIRYANI POINT KANURU	NS	5	3	3-Electron	HPL	3227066		1
166	GUNADALA	6521215027327	CDPO,ICDS PROJECT VIJAYAWADA I AND II	KANURU	NS	6.702	3	ELEC	HPL	6322220		1
167	GUNADALA	6521218019528	Commissioner,YSR Tadigadapa Municipality,Krish	--------	NS	1	1	0	HPL	27774600	May-30	1
168	GUNADALA	6521225000386	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	14.92	3	2-ELECTRON	AVON	8069786	May-30	1
169	GUNADALA	6521226010066	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	10	3	2-ELECTRON	AVON	8070489	30	1
170	GUNADALA	6521225013042	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	9.12	3	2-ELECTRON	Genus	3026809	5-30A	1
171	GUNADALA	6521214029337	ANGANWADI,SCHOOL	KANURU	NS	1	1	ELEC	HPL	30113700		1
172	GUNADALA	6521226000984	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	10.2	3	2-ELECTRON	Genus	3047307	5-30A	1
173	GUNADALA	6521222022717	MAGULURU,CHITTIBABU	BUNDAR ROAD NEAR SIRIS	NS	50	3	CT-METER	GENUS	7028356		1
174	VUYYURU	6711112000020	EXECUTIVE OFFICER,	M.R.GUDEM	NS	3	1	2-ELECTRON	HPL	32517332	5-30 A	1
175	VUYYURU	6711100005225	B.C. GIRLS HOSTEL	VUYYURU	NS	5	3	2-ELECTRON	HPL	3844760	5-30 A	1
176	VUYYURU	6711100021204	THE,AO RDO OFFICE VUYYURU	GANDIGUNTA	NS	2.681	1	Electronic	HE	19864167		1
177	VUYYURU	6711102000211	ANGANWADI WORKER	MAIN ROAD	NS	0.24	1	0	HPL	28015078		1
178	VUYYURU	6711100005783	COMMISSIONER NAGARAPANCHAYAT VUYYURU	VUYYURU	NS	3.76	1	2-ELECTRON	HPL	31582196	5-30A	1
179	VUYYURU	6711100005082	MANDAL DEVELOPMENT OFFICER	VUYYURU	NS	0.26	1	2-ELECTRON	HPL	31726356	5-30A	1
180	VUYYURU	6711100002227	POLICE STATION	VUYYURU	NS	1.26	1	2-ELECTRON	HPL	33391549	5-30A	1
181	VUYYURU	6711100007476	COMMISSIONER NAGARA PANCHAYAT VUYYURU	VUYYURU	NS	25	3	CT-METER	LnG	APE31879	125/5A	1
182	VUYYURU	6711100019377	THE,COMMISSIONER NP VUYYURU	VUYYURU	NS	12	3	ELEC	HPL	6403599		1
183	VIJAYAWADA TOWN	6435313286085	COMMISSIONER VMC,COMMISSIONER VMC	WYNCHIPET	NS	6	3	ELEC	HPL	3841281		1
184	VIJAYAWADA TOWN	6435314237225	Stl	NA	NS	4.8	3	2-ELECTRON	HPL	3044655	May-30	1
185	VIJAYAWADA TOWN	6435314217643	Annapurna U P School	40565, VIJAYAWADA	NS	4.14	1	2-ELECTRON	HPL	32113019	May-30	1
186	VIJAYAWADA TOWN	6435314203601	Satyanarayana Swamy	NA	NS	34.46	3	2-ELECTRON	Genus	3047619	May-30	1
187	VIJAYAWADA TOWN	6435399280602	Stl	SRINIVAS MAHAL	NS	8.95	3	CT-METER	0	13526203	0	1
188	VIJAYAWADA TOWN	6435314005337	Police Station	NA	NS	3.175	1	2-ELECTRON	HPL	64638441	5-30 A	1
189	VIJAYAWADA TOWN	6435314242599	The Commissioner V M C	37043	NS	6.91	3	2-ELECTRON	Genus	3073663	May-30	1
190	VIJAYAWADA TOWN	6435313280603	Stl	NEAR NIZAM GATE	NS	10	3	2-ELECTRON	HPL	6399556	3Q5-30A	1
191	VIJAYAWADA TOWN	6436197310789	Stl	NEAR KALARA HOSPITAL SIDE	NS	3.5	1	2-ELECTRON	HPL	64658853	5-30A	1
192	GUNADALA	6521201012615	Paladugu,Govardhani	ASHOK NAGAR	NS	7.43	3	2-ELECTRON	Genus	3063310	3X5-30A	1
193	GUNADALA	6521225001157	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	2.32	1	2-ELECTRON	HPL	31652317	5-30A	1
194	GUNADALA	6521225033216	MUNICIPAL COMMISSIONER	KANURU	SL	5	3	3-Electron	HPL	3231804		1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
195	GUNADALA	6521224027591	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	6.702	3	2-ELECTRON	HPL	6401803	5-30A	1
196	GUNADALA	6521226026305	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	13.405	3	ELEC	HPL	6242113		1
197	GUNADALA	6521208002368	M P P Ely School	NA	NS	4.2	1	2-ELECTRON	HPL	29089237	530	1
198	GUNADALA	6521225033218	MUNICIPAL COMMISSIONER	NEAR BHARATH PETROL BUNK PAN	NS	5	3	3-Electron	HPL	3691357		1
199	GUNADALA	6521226008469	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	12.3	3	2-ELECTRON	Genus	3046623	5-30A	1
200	GUNADALA	6521403012496	YSR TADIGADAPA,MUNICIPALITY	AMBEDKAR NAGAR	NS	6	3	3-Electron	HPL	6328660		1
201	VUYYURU	6711307001153	THE M. P. P. SCHOOL	9492977129	NS	1	1	2-ELECTRON	HPL	31938275	5-30A	1
202	VUYYURU	6711319001370	Village Revenue officer	PENAMAKURU	NS	1	1	ELEC	HPL	34010059		1
203	VUYYURU	6711309000270	GRAM SACHIVALAYAM	ILURU	NS	0.26	1	2-ELECTRON	HPL	26536586	5-30A	1
204	VUYYURU	6711326002486	GRAMA PANCHAYAT	YAKAMURU	NS	0.4	1	2-ELECTRON	HPL	7559680	5-30A	1
205	VUYYURU	6711321000630	HEAD MASTER	ROYYURU	NS	0.98	1	2-ELECTRON	HPL	29220293	530	1
206	VUYYURU	6711313000214	SURPANCH GRAM PANCHAYATH	KUMMAMURU	NS	0.96	1	2-ELECTRON	HPL	33031276	5-30A	1
207	VUYYURU	6711307001244	ANGANWADI WORKER	ANGANWADI SCHOOL I	NS	0.24	1	2-ELECTRON	HE	20029100	5-30A	1
208	VUYYURU	6711319000318	E.O. GRAM PANCHAYATH	PENAMAKURU	NS	1.32	1	2-ELECTRON	HPL	17241787	5-30A	1
209	VUYYURU	6711300000795	EXECUTIVE OFFICER,	THOTLAVALLURU	NS	20	1	2-ELECTRON	HPL	6285145	5-30A	1
210	VUYYURU	6711319001284	ANGANVADI WORKER	ANGANWADI SCHOOL BAZAR	NS	1	1	0	HPL	26950631		1
211	VUYYURU	6711309000242	HEAD MASTER M P U P SCHOOL	ILURU	NS	0.98	1	2-ELECTRON	NPL	4261483	5-30A	1
212	NUZVIDU	6622200009147	EXECUTIVE OFFICER		NS	1.34	1	2-ELECTRON	HPL	30833938	May-30	1
213	NUZVIDU	6622200001921	RWS DEP ENGG	TIRUVRUU	NS	0.26	1	2-ELECTRON	HPL	28342608	May-30	1
214	NUZVIDU	6622200013955	GOVT,GOVT JUNIOR COLLEGE	NADIM TIRUVURU	NS	5	3	DIGITAL	L AND T	16342260		1
215	NUZVIDU	6622200010873	EXECUTIVE OFFICER (MAJOR STL)	TIRUVURU	NS	0.24	1	2-ELECTRON	1	62309508	1	1
216	NUZVIDU	6622215000764	SURPANCH (MINOR STL)	MALLELA	NS	0.64	1	2-ELECTRON	NPL	4747574	530A	1
217	NUZVIDU	6622200010902	EXECUTIVE OFFICER (MAJOR STL)		NS	0.26	1	2-ELECTRON	HPL	10505778	May-30	1
218	NUZVIDU	6622214000629	ASSISI HEALTH CARE SOCIETY		NS	1	1	0	LNT	62310458	530	1
219	NUZVIDU	6622200010878	EXECUTIVE OFFICER (MAJOR STL)	TIRUVURU	NS	0.84	1	2-ELECTRON	HE	20962018	530A	1
220	NUZVIDU	6622200000296	VETERNARY HOSPITAL	TIRUVRUU	NS	0.26	1	2-ELECTRON	HPL	30976336	May-30	1
221	NUZVIDU	6622211000371	SURPANCH (MINOR STL)	KAKARLA	NS	0.9	1	2-ELECTRON	HPL	33172476	5.3	1
222	NUZVIDU	6622211000018	SURPANCH (MINOR STL)	KAKARLA	NS	1.8	1	2-ELECTRON	HPL	33243748	May-30	1
223	NUZVIDU	6622211000275	GRAM PANCHAYAT (MINOR) PWS		NS	3	3	2-ELECTRON	HPL	3379348	5.3	1
224	NUZVIDU	6622200011080	The Head Master	--	NS	1	1	2-ELECTRON	HPL	33502512	May-30	1
225	NUZVIDU	6622215001193	GRAMA PANCHAYATHI	LAKSHMI PURAM	NS	2	1	0	HPL	64600275	--	1
226	NUZVIDU	6622215000033	SURPANCH (MINOR STL)	MALLELA	NS	3.22	1	2-ELECTRON	NPL	4337791	May-30	1
227	NUZVIDU	6622200010888	EXECUTIVE OFFICER (MAJOR STL)		NS	0.26	1	2-ELECTRON	HPL	34626437	530A	1
228	NUZVIDU	6622200012830	Assistant Project Mangar	--	NS	2	1	2-ELECTRON	HPL	33502183	May-30	1
229	NUZVIDU	6622200010899	EXECUTIVE OFFICER (MAJOR STL)		NS	0.26	1	2-ELECTRON	HE	20024889	530A	1
230	GUDIVADA	6133412000439	M.P.P.School	--	NS	1	1	0	NPL	752268		1
231	GUDIVADA	6133431000124	ANGANWADI CENTER,ANGANWADI CENTER	RAJULA KOTTADA	NS	1	1	DIGITAL	HPL	33250473	--	1
232	GUDIVADA	6133439000269	THE EXECUTIVE OFFICER	KAIKALUR MANDAL	NS	12.5	3	2-ELECTRON	LnT	16397588	May-30	1
233	GUDIVADA	6133425000673	M.P.P.School	--	NS	1	1	2-ELECTRON	NPL	4431694	5-30A	1
234	GUDIVADA	6133410000048	M.P.P.School	--	NS	1	1	0	1	21202663	1	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
235	GUDIVADA	6133408000575	ANGANWADI CENTER CHATAKAI	CHATAKAI	SL	1	1	ELEC	HPL	34884981		1
236	GUDIVADA	6133417000002	SURPANCH,GRAMAPANCHAYAT,STL		NS	4.26	1	2-ELECTRON	HPL	29813944	May-30	1
237	GUDIVADA	6133441000719	SECRETARY GRAMA PANCHAYAT	--	NS	1	1	2-ELECTRON	HPL	31910759	5-30A	1
238	GUDIVADA	6133428000653	ANGANWADI CENTER	PENCHIKALAMARRU	NS	1	1	ELEC	HPL	34954030		1
239	GUDIVADA	6133418000002	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	32835390	May-30	1
240	GUDIVADA	6133432000350	SURPANCH, GP PWS		NS	12.5	3	2-ELECTRON	AVON	8071276	May-30	1
241	GUDIVADA	6133410000001	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	20036614	5-30A	1
242	GUDIVADA	6133409000122	SURPANCH GRAMAPANCHAYAT	CHINAKOTTADA	NS	5	3	2-ELECTRON	LNT	16344362	30	1
243	GUDIVADA	6133402000701	ANGANAWADI CENTRE	--	NS	1	1	2-ELECTRON	HPL	31289388	5-30A	1
244	GUDIVADA	6133420000010	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	33890471	5-30A	1
245	GUDIVADA	6133433000008	VETERNARY HOSPITAL		NS	0.48	1	2-ELECTRON	HPL	33507692	5-30A	1
246	GUDIVADA	6133100805474	HEAD MASTER GOVT.HIGH SCHOOL	KAIKALURU	NS	12	3	2-ELECTRON	GENUS	1505622	5-30A	1
247	GUDIVADA	6133137000030	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	NPL	4261395	5-30A	1
248	GUDIVADA	6133100010453	SECRETARY G.P PWS JC COLONY	KAIKALURU/JAGAN ANNA COLONY	NS	15	3	ELEC	AVON	3178277		1
249	GUDIVADA	6133100007818	Grandhalaya Samasta	--	NS	5	3	2-ELECTRON	AVON	3181510	5-30A	1
250	GUDIVADA	6133100000004	EXECUTIVE OFFICER, STL		NS	5.26	3	2-ELECTRON	AVON	3177397	3X5-30A	1
251	GUDIVADA	6133138000030	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.26	1	2-ELECTRON	HPL	34476048	5-30A	1
252	GUDIVADA	6133100009355	ANGANWADI BUILDING, VELAMPETA	KAIKALUR	NS	2	1	2-ELECTRON	HPL	32844982	5-30A	1
253	GUDIVADA	6133100010236	SECRETARY,GRAMA PANCHAYITHI KAIKALURU	YSR GREEN VILLAGE - KAIKALURU	NS	2	3	ELEC	HPL	3848612		1
254	GUDIVADA	6133100000005	EXECUTIVE OFFICER, STL		NS	9.26	3	2-ELECTRON	LNT	16331706	5-30A	1
255	GUDIVADA	6133138000054	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	30888153	5-30A	1
256	GUDIVADA	6133100005943	E.O GRAMAPANCHAYAT	KAIKALURU	NS	40	3	2-ELECTRON	HPL	16345504	5-30A	1
257	GUDIVADA	6133142000460	SURPANCH		NS	12.5	3	2-ELECTRON	GENUS	3062287	5-30A	1
258	GUDIVADA	6133100002444	PRINCIPAL DEGREE COLLEGE	KAIKALURU	NS	2.84	1	2-ELECTRON	HPL	32844833	5-30A	1
259	GUDIVADA	6133101000497	M P U P SCHOOLHEAD MASTER		NS	1	1	2-ELECTRON	VISIONTEK	9594107	5-30A	1
260	GUDIVADA	6133100005749	EXCUTIVE OFFICER--GRAMAPANCHAT	KAIKALURU.	NS	7	3	2-ELECTRON	HPL	3875339	3X5-30A	1
261	GUDIVADA	6133100003933	THE EXECUTIVE OFFICER		NS	6.032	3	2-ELECTRON	L&T	16221410	5-30A	1
262	GUDIVADA	6133100009090	PANCHAYAT SECRETARY KAIKALUR	KAIKALURU	NS	35	3	CT-METER	LANDIS	A0024920		1
263	GUDIVADA	6133100009116	PANCHAYAT SECRETARY KAIKALUR	KAIKALURU	NS	35	3	CT-METER	GENUS	7028137		1
264	GUDIVADA	6133130000557	SECRETARY GRAMA PANCHAYAT	--	NS	2	1	2-ELECTRON	HPL	32851231	5-30A	1
265	GUDIVADA	6133100001487	ASST.ENGINEER	KAIKALURU	NS	0.26	3	2-ELECTRON	HPL	6265712	3X5-30A	1
266	GUDIVADA	6133138000487	SURPANCH, GP PWS		NS	12.5	3	2-ELECTRON	LNT	16392912	5-30A	1
267	GUDIVADA	6133116000230	THE EXECUTIVE OFFICER	KAIKALUR MANDAL	NS	12.5	3	2-ELECTRON	GENUS	3061454	5-30A	1
268	GUDIVADA	6133100000301	GOVT.S.T.OFFICE	KAIKALURU	NS	1.42	1	2-ELECTRON	HPL	32844340	5-30A	1
269	GUDIVADA	6133100000628	Z.P.ORIANTAL SCHOOL	KAIKALURU	NS	0.36	1	2-ELECTRON	HPL	30320166	5-30A	1
270	GUDIVADA	6133101000782	SECRETARY GP ACHAVARAM	ACHAVARAM	NS	2	1	Electronic	VISIONTEK	9596001		1
271	GUDIVADA	6133106000026	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	64673934	May-30	1
272	GUDIVADA	6133100005377	J RAMA RAJU	KAIKALURU	NS	2	1	2-ELECTRON	NPL	4479383	5-30A	1
273	GUDIVADA	6133100005748	EXCUTIVE OFFICER--PANCHAYAT	KAIKALURU.	NS	3	1	2-ELECTRON	NPL	4429615	May-30	1
274	GUDIVADA	6133104000637	FOREST RANGE OFFICER	ATAPAKA	NS	0.76	1	2-ELECTRON	HPL	31313804	5-30A	1
275	GUDIVADA	6133100000300	POLICE STATION	KAIKALURU	NS	1.46	1	2-ELECTRON	HPL	32844332	5-30A	1
276	GUDIVADA	6133100000188	THE EXECUTIVE OFFICER	KKLR MANDAL	NS	20	3	2-ELECTRON	HPL	3713866	3X5-30A	1
277	GUDIVADA	6133104001639	Panchayat Secretary	--	NS	2	1	2-ELECTRON	HPL	34169906	5-30A	1
278	GUDIVADA	6133100003757	THE EXECUTIVE OFFICER	KAIKALUR MANDAL	NS	40	3	2-ELECTRON	HPL	3061967	5-30A	1
279	GUDIVADA	6133100000006	EXECUTIVE OFFICER, STL		NS	4.26	1	2-ELECTRON	NPL	29851722	5-30A	1
280	GUDIVADA	6133100007285	M.P.U.P.School	--	NS	1	1	2-ELECTRON	NPL	FFFFFFFF	5-30A	1
281	GUDIVADA	6133138000759	ANGANAWADI CENTER	TAMARAKOLLU	NS	1	1	2-ELECTRON	NPL	1108239	5-30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
282	GUDIVADA	6133100007242	Sarpanch Grama Panchythi	--	NS	4	1	2-ELECTRON	VISIONTEK	9585976	5-30A	1
283	GUDIVADA	6133104001638	Panchayat Secretary	--	NS	2	1	2-ELECTRON	HPL	34878259	May-30	1
284	GUDIVADA	6133130000343	SARPANCH		NS	12.5	3	2-ELECTRON	Genus	3004457	5-30A	1
285	GUDIVADA	6133116000591	Head Mastar		NS	1	1	2-ELECTRON	HPL	31647368	5-30A	1
286	GUDIVADA	6133100000003	EXECUTIVE OFFICER, STL		NS	6.26	3	2-ELECTRON	LNT	16392201	5-30A	1
287	GUDIVADA	6133104000064	PANCHAYAT	ATAPAKA	NS	0.66	1	2-ELECTRON	HPL	31936928	5-30A	1
288	GUDIVADA	6133104001692	FOREST RANGE OFFICER	--	NS	2	1	2-ELECTRON	HPL	21224121	5-30A	1
289	GUDIVADA	6133100004977	PRINCIPAL,		NS	6	3	2-ELECTRON	HPL	3843644	3X5-30A	1
290	GUDIVADA	6133138000062	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	32128752	5-30A	1
291	GUDIVADA	6133138000619	M.P.P.School	--	NS	1	1	2-ELECTRON	NPL	752445	5-30A	1
292	GUDIVADA	6133100005589	EXECUTIVE OFFICER	KIKALURU	NS	15.5	3	2-ELECTRON	Genus	3065835	5-30A	1
293	GUDIVADA	6133138000122	SURPUNCHGRAMA PANCHAYAT	Tamarakollu	NS	0.44	1	2-ELECTRON	HPL	27376438	5-30A	1
294	GUDIVADA	6133105000023	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	NPL	4747774	5-30A	1
295	GUDIVADA	6133106000071	Surpunch		NS	2	1	2-ELECTRON	GENUS	7101545	May-30	1
296	GUDIVADA	6133104001538	The Forest Officer	--	NS	1	1	2-ELECTRON	NPL	4339545	530	1
297	GUDIVADA	6133104000003	EXECUTIVE OFFICER, STL		NS	2.26	1	2-ELECTRON	HPL	30451782	5-30A	1
298	GUDIVADA	6133100007010	Y.V.N.R. Govt Degree College	--	NS	2	1	2-ELECTRON	HPL	27051897	5-30A	1
299	GUDIVADA	6133100002252	HEADMEASTER M.P.P.U.P. SCHOOL	KAIKALURU	NS	0.48	1	2-ELECTRON	HPL	62357642	5-30A	1
300	GUDIVADA	6133111000099	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	32839393	5-30A	1
301	GUDIVADA	6133104002000	SECRATRY GRAMA PANCHAYAT,SECRATRY GRAM	ATAPAKA	NS	13	3	2-ELECTRON	GENUS	3046895	5-30A	1
302	GUDIVADA	6133137000200	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	33176931	5-30A	1
303	GUDIVADA	6133104000289	EXECUTIVE OFFICER	KKLRMANDAL.MAJOR WATER WOR	NS	25	3	2-ELECTRON	Genus	3044354	5-30A	1
304	GUDIVADA	6133100001154	A.E.E.(I&P)	KAIKALURU	NS	0.42	1	2-ELECTRON	VISIONTEK	9596006	5-30A	1
305	GUDIVADA	6133100000299	J.S.C.M.MAGISTRAT COURT	KAIKALURU	NS	0.65	1	2-ELECTRON	HPL	31937167	5-30A	1
306	GUDIVADA	6133100001256	PRINCIPAL GOVT. COLLEGE	KAIKALURU	NS	0.26	1	2-ELECTRON	HPL	33305192	5-30A	1
307	GUDIVADA	6133100000280	TALUK OFFICE	KAIKALURU	NS	1.48	1	2-ELECTRON	HPL	32844335	5-30A	1
308	GUDIVADA	6133100001257	MEDICAL OFFICER	KAIKALURU	NS	43	3	CT-METER	LnT	18259205	May-30	1
309	GUDIVADA	6133100003935	SEL.GR.SECRETARY	KKLR MANDAL	NS	8.673	3	2-ELECTRON	HPL	3208685	3X5-30A	1
310	GUDIVADA	6133103000114	ANGANAWADI CENTRE	--	NS	1	1	2-ELECTRON	HPL	60894074	5-30A	1
311	GUDIVADA	6133138000031	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.26	1	2-ELECTRON	HE	20034801	5-30A	1
312	GUDIVADA	6133138000620	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	14365359	5-30A	1
313	GUDIVADA	6133105000001	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	LNT	10534140	May-30	1
314	GUDIVADA	6133129000012	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	LNT	10496592	May-30	1
315	GUDIVADA	6133130000026	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.26	1	2-ELECTRON	HPL	29941534	5-30A	1
316	GUDIVADA	6133137000159	SARPANCHSARPANCH		NS	1	1	2-ELECTRON	HPL	32844746	5-30A	1
317	GUDIVADA	6133100001121	THE EXECUTIVE OFFICER	KKLR MANDAL	NS	30	3	CT-METER	GENUS	7178372	125/05A	1
318	GUDIVADA	6133100006663	M.P.U.P. School		NS	1	1	2-ELECTRON	HPL	32522916	May-30	1
319	GUDIVADA	6133100000007	EXECUTIVE OFFICER, STL		NS	8.26	3	2-ELECTRON	AVON	3232427	03-05-30	1
320	GUDIVADA	6133100001827	THE FIRE OFFICER FIRE STATION	KAIKALURU	NS	0.58	1	2-ELECTRON	HPL	81463041	5-30A	1
321	GUDIVADA	6133130000564	ANGANAWADI CENTRE	--	NS	1	1	2-ELECTRON	LT	60893860	5-30A	1
322	GUDIVADA	6133100000474	SUB-REGISTRAR OFFICE	KAIKALURU	NS	2.38	1	2-ELECTRON	HPL	32844337	5-30A	1
323	VUYYURU	6733400000022	SECRETARY (STL)	MOPIDEVI	NS	4.49	3	2-ELECTRON	Genus	3035355	5-30A	1
324	VUYYURU	6733406000291	SURPANCH	MELAMARTHILANKA	NS	7.5	3	2-ELECTRON	HPL	3697415	5-30A	1
325	VUYYURU	6733423001782	The Secretary GP	harizanawada	NS	0.25	1	0	HPL	28013608		1
326	VUYYURU	6733400000111	VETERNARY HOSPITAL		NS	0.36	1	2-ELECTRON	HPL	31588689	5-30A	1
327	VUYYURU	6733417000459	The Secretary GP	0	NS	0.25	1	2-ELECTRON	HPL	64633289	May-30	1
328	VUYYURU	6733423000156	E O GRAMA PANCHAYATHI	PEDDAKALLEPALLI	NS	0.4	1	2-ELECTRON	HPL	31657623	May-30	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
329	VUYYURU	6733423000393	SECRETARY (STL)	PEDAKALLEPALLI	NS	0.24	1	2-ELECTRON	LNT	10540519	May-30	1
330	VUYYURU	6733405000641	Z P HIGH SCHOOL		NS	0.98	1	2-ELECTRON	HPL	64432516	May-30	1
331	VUYYURU	6733417800395	SecretaryGramapanchayat	Mopidevi	NS	5.595	3	ELECTRONIC	HPL	16213141	5-30A	1
332	VUYYURU	6733400001753	PRINCIPAL	Varpu	NS	2	1	2-ELECTRON	HPL	33193853	May-30	1
333	VUYYURU	6733423001264	SECRETARY (STL)	PEDAKALLEPALLI	NS	0.375	1	2-ELECTRON	HPL	28129947	May-30	1
334	VUYYURU	6733410000001	SURPANCH	N.CH.LANKA	NS	1.88	1	2-ELECTRON	HPL	64677887	May-30	1
335	VUYYURU	6733403001220	The Secretary	near Pothu Raju Chettu	NS	2	1	ELECTRONIC	HPL	28215414	5-30A	1
336	VUYYURU	6733401000470	Secretary Gramapanchayat	Bobbarlanka	NS	5	3	2-ELECTRON	HPL	6313274	5-30A	1
337	VUYYURU	6733403000765	HEAD MASTER		NS	1	1		HPL	32110396	5-30A	1
338	VUYYURU	6733403001377	The Secretary GP	harizanawada	NS	0.25	1	0	HPL	27881912		1
339	VUYYURU	6733423001437	The Head Master		NS	1	1	2-ELECTRON	HPL	33386624	5-30A	1
340	VUYYURU	6733407000492	The Secretary GP	0	NS	0.25	1	2-ELECTRON	HPL	32523123	5-30A	1
341	VUYYURU	6733422001208	RURAL LIVE STOCK UNIT,PEDAPROLU	PEDAPROLU	NS	1	1	ELEC	Holley	2731727	--	1
342	VUYYURU	6733407000358	HEADASTERM P U P SCHOOL		NS	1	1	2-ELECTRON	HPL	32129195	5-30A	1
343	VUYYURU	6733407000013	SURPANCH	MERAKANAPALLI	NS	0.92	1	2-ELECTRON	HPL	32130182	5-30A	1
344	VUYYURU	6733423001294	MEDICAL OFFICER (PHC)	PEDDAKALLEPALLI	NS	2.966	1	2-ELECTRON	HPL	32862599	5-30A	1
345	VUYYURU	6733403000955	The Head Master	0	NS	1	1	2-ELECTRON	HPL	32110399	5-30A	1
346	GUDIVADA	6133432000117	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.26	3	2-ELECTRON	GENUS	3072863	May-30	1
347	GUDIVADA	6133441000639	Surpanch Grama Pachyet	Varahapatnam	NS	10	3	2-ELECTRON	GENUS	3073760	May-30	1
348	GUDIVADA	6133407001180	SECRETARY GRAM PANCHAYAT	--	NS	5	1	2-ELECTRON	HE	19920089	30	1
349	GUDIVADA	6133433000484	M.P.P.School	--	NS	1	1	2-ELECTRON	AEW	4378222	May-30	1
350	GUDIVADA	6133407001103	M.P.P.School	--	NS	1	1	2-ELECTRON	NPL	4377555	30	1
351	GUDIVADA	6133441000765	ANGANAWADI CENTRE	--	NS	1	1	0	HPL	28017309		1
352	GUDIVADA	6133434000055	ANGANAWADI CENTRE	--	NS	1	1	0	L AND T	60887146		1
353	GUDIVADA	6133415000319	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	64659544	5-30A	1
354	GUDIVADA	6133428000005	SURPANCH,GRAMAPANCHAYAT,STL		NS	3.26	1	2-ELECTRON	HPL	26901627	May-30	1
355	GUDIVADA	6133407001281	ANGANAWADI CENTRE	--	NS	1	1	2-ELECTRON	HPL	30488550	30	1
356	GUDIVADA	6133432000264	MANDAL PARISHAT SCHOOL	RAMAVARAM	NS	0.74	1	2-ELECTRON	HPL	32837178	May-30	1
357	GUDIVADA	6133435000161	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.26	1	2-ELECTRON	HPL	32071603	5-30A	1
358	GUDIVADA	6133426000516	MEDICAL OFFICER		NS	0.9	1	2-ELECTRON	HPL	31648545	May-30	1
359	GUDIVADA	6133426000396	THE EXECUTIVE OFFICER	KAIKALUR MANDAL	NS	10	3	2-ELECTRON	HPL	3368628	3X5-30A	1
360	GUDIVADA	6133417000274	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	33890473	May-30	1
361	GUDIVADA	6133426000666	Sarpanch Grama Panchayti	--	NS	2	1	0	HPL	14343809		1
362	GUDIVADA	6133419800004	GOVT.SOCIAL WELFARE HOSTEL		NS	0.8	1	2-ELECTRON	HE	19858373	May-30	1
363	GUDIVADA	6133420000245	M.P.P.School	--	NS	1	1	2-ELECTRON	GENUS	5785790	May-30	1
364	GUDIVADA	6133419000130	M.P.P.School	--	NS	1	1	2-ELECTRON	LNT	10535722	May-30	1
365	GUDIVADA	6133434000039	M.P.P.School	--	NS	1	1	0	NPL	753379		1
366	GUDIVADA	6133417000288	SECRETARY GRAMA PANCHAYTHI	--	NS	2	1	0	HPL	26437683		1
367	GUDIVADA	6133412000299	HEADMASTER Z.P.HIGH SCHOOL		NS	0.9	1	2-ELECTRON	HPL	33176804	May-30	1
368	GUDIVADA	6133428000323	HEAD MASTER	PENCHIKALAMARRU	NS	1	1	2-ELECTRON	HPL	5785792	May-30	1
369	GUDIVADA	6133409000148	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	32837174	May-30	1
370	GUDIVADA	6133402000581	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	32839335	5-30A	1
371	GUDIVADA	6133440000231	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	32843719	May-30	1
372	GUDIVADA	6133431000099	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	33176856	May-30	1
373	GUDIVADA	6133433000324	SURPANCH GRAMPANCHYAT.		NS	5	3	2-ELECTRON	Genus	3073097	May-30	1
374	GUDIVADA	6133433000060	SURPANCH,GRAMAPANCHAYAT,STL		NS	3.26	1	2-ELECTRON	HPL	31348451	5-30A	1
375	GUDIVADA	6133408000282	THE EXECUTIVE OFFICER	KAIKALUR MANDAL	NS	5	3	2-ELECTRON	GENUS	3074565	May-30	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
376	GUDIVADA	6133407000915	SURPANCH GRAMAPANCHAYAT	B.B.PATNAM.	NS	2.54	1	2-ELECTRON	HPL	31271536	May-30	1
377	GUDIVADA	6133412000503	ANGANAWADI CENTRE	--	NS	1	1	0	HPL	27747122		1
378	GUDIVADA	6133428000325	SURPANCH	PENCHIKALAMARRU	NS	1	1	2-ELECTRON	HPL	32843714	May-30	1
379	GUDIVADA	6133419000005	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	VISIONTEK	9586618	5-30A	1
380	GUDIVADA	6133424000216	SURPANCH GRAMAPANCHYAT	NATTAGULLAPADU	NS	7.5	3	2-ELECTRON	GENUS	3072630	May-30	1
381	GUDIVADA	6133439000522	GRAMA PANCAHIT VADARLAPADU,GRAMA PANC	VADARLAPADU	NS	1	1	ELEC	HPL	33573105		1
382	GUDIVADA	6133439000433	Secretary Grama Panchaythi	--	NS	1	1	2-ELECTRON	HE	19923345	5-30A	1
383	GUDIVADA	6133439800381	NGM P UP School		NS	1	1	2-ELECTRON	HPL	32879328	5-30A	1
384	GUDIVADA	6133407000889	HEAD MASTER M P	BHUJABALAPATNAM	NS	0.98	1	2-ELECTRON	HPL	31648087	5-30A	1
385	GUDIVADA	6133407000289	THE EXECUTIVE OFFICER	KAIKALUR MANDAL	NS	7.6	3	2-ELECTRON	HPL	3388463	30	1
386	GUDIVADA	6133432000521	ANGANAWADI CENTRE	--	NS	1	1	2-ELECTRON	HPL	34850101	5-30A	1
387	GUDIVADA	6133407000137	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	0	HE	10372924	5-30A	1
388	GUDIVADA	6133433000041	PRIMARY HEALTH CENTRE		NS	1.52	1	2-ELECTRON	HPL	32839124	May-30	1
389	GUDIVADA	6133407000001	SURPANCH,GRAMAPANCHAYAT,STL		NS	3.26	1	2-ELECTRON	GENUS	7108158	May-30	1
390	GUDIVADA	6133433000575	ANGANAWADI CENTER	SEETNAPALLI	NS	1	1	DIGITAL	HPL	32831347		1
391	GUDIVADA	6133418000344	GRAMPANCHAIT KOTTADA	KOTTADA	NS	1	1	2-ELECTRON	NPL	4747542	5-30A	1
392	GUDIVADA	6133402000039	SURPANCH,GRAMAPANCHAYAT,STL		NS	4.26	1	2-ELECTRON	HPL	24399753	5-30A	1
393	GUDIVADA	6133425000744	SECRETARY GRAMA PANCHAYET	--	NS	1	1	0	VISSION	2152731		1
394	GUDIVADA	6133417000171	THE EXECUTIVE OFFICER	KKLR MANDAL	NS	10	3	2-ELECTRON	HPL	6363366	May-30	1
395	GUDIVADA	6133409000004	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	GENUS	5784852	May-30	1
396	GUDIVADA	6133425000026	SURPANCH,GRAMAPANCHAYAT,STL		NS	4.26	1	2-ELECTRON	HPL	32092215	May-30	1
397	GUDIVADA	6133412000238	THE EXECUTIVE OFFICER	KAIKALUR MANDAL	NS	17.5	3	2-ELECTRON	GENUS	3073904	May-30	1
398	GUDIVADA	6133402000624	SECRETARY GRAM PANCHAYAT	--	NS	3	1	2-ELECTRON	LnT	10536579	May-30	1
399	GUDIVADA	6133441000494	SARPANCH	KAIKALURU MANDALAM	NS	5	3	2-ELECTRON	Genus	3072448	May-30	1
400	GUDIVADA	6133426000665	M.P.P.School	--	NS	1	1	2-ELECTRON	GENUS	5785793	May-30	1
401	GUDIVADA	6133436000359	THE EXECUTIVE OFFICER	KKLR MANDAL	NS	10	3	2-ELECTRON	HPL	3851717	May-30	1
402	GUDIVADA	6133407000997	SURPANCH GRAMAPANCHAYAT		NS	10	3	2-ELECTRON	HPL	3191527	May-30	1
403	GUDIVADA	6133424000017	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	31671308	5-30A	1
404	GUDIVADA	6133441000049	SURPANCH,GRAMAPANCHAYAT,STL		NS	4.26	1	2-ELECTRON	HE	20025888	5-30A	1
405	GUDIVADA	6133412000067	PRESIDENTPANCHAYATI		NS	0.4	1	2-ELECTRON	LNT	10536431	May-30	1
406	GUDIVADA	6133436000582	SECRETARY -GRAMAPANCHAYAT	S.R.V.PADU	NS	2	1	2-ELECTRON	HE	20026250	May-30	1
407	GUDIVADA	6133441000636	Surpunch		NS	4	1	2-ELECTRON	HPL	34174355	5-30A	1
408	GUDIVADA	6133412000063	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	33061932	May-30	1
409	GUDIVADA	6133407001067	Sarpanch/Grampanchyat		NS	1.6	1	2-ELECTRON	HPL	4378646	30	1
410	GUDIVADA	6133423000145	ANGANAWADI CENTRE	--	NS	1	1	2-ELECTRON	HPL	30256762	30	1
411	GUDIVADA	6133415000465	SURPANCH GRAMAPANCHAYATHI STL	GONEPADU	NS	2	1	Electronic	HE	19921137		1
412	GUDIVADA	6133407000192	MEDICAL OFFICE		NS	0.26	1	2-ELECTRON	HPL	27305210	5-30A	1
413	GUDIVADA	6133415000407	GRAMA PANCAHIT GONEPADU	GONEPADU	NS	1	1	DIGITAL	HPL	33562075		1
414	GUDIVADA	6133419000123	Sarpanch		NS	2	1	0	0	26509175	0	1
415	GUDIVADA	6133407001129	Secretary Grama Panchythi	--	NS	1	1	0	HE	10163227		1
416	GUDIVADA	6133420000182	SARPANCH	KOTTADA	NS	1	1	2-ELECTRON	HPL	32516420	5-30A	1
417	GUDIVADA	6133414000068	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	32071841	May-30	1
418	GUDIVADA	6133436000079	ELEMENTARY SCHOOL	SRUNGAVARAPADU	NS	1.46	1	2-ELECTRON	HPL	27102294	5-30A	1
419	GUDIVADA	6133418000221	M.P.U.P. School	--	NS	1	1	2-ELECTRON	HOLLEY	2730852	5-30A	1
420	GUDIVADA	6133415000276	SURPANCH GRAMAPANCHYATI	GONEPADU	NS	5	3	2-ELECTRON	GENUS	3073585	May-30	1
421	GUDIVADA	6133428000562	GRAMA PANCHAIT PENCHIKALAMARRU,GRAMA I	PENCHIKALAMARRU	NS	1	1	ELEC	HPL	32163054	--	1
422	GUDIVADA	6133408000020	SURPANCH,GRAMAPANCHAYAT, STL		NS	2.26	1	2-ELECTRON	GENUS	7107026	May-30	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
423	GUDIVADA	6133441000764	ANGANAWADI CENTRE	--	NS	1	1	0	HPL	28015641		1
424	GUDIVADA	6133440000008	SURPANCH,GRAMAPANCHAYAT,STL		NS	4.26	1	2-ELECTRON	VISIONTEK	9591679	May-30	1
425	GUDIVADA	6133402000189	SARPANCH G.P	ALAPADU	NS	0.8	1	2-ELECTRON	VISIONTEK	9585950	May-30	1
426	GUDIVADA	6133419000099	HEAD MASTER Z P H SCHOOL	KOLLETIKOTA	NS	0.993	1	0	HPL	16911600	10	1
427	GUDIVADA	6133417000185	M.P.P.SCHOOL	GUMMALLAPADU	NS	0.9	1	2-ELECTRON	HPL	19917145	5-30A	1
428	GUDIVADA	6133439000106	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.26	1	2-ELECTRON	VISIONTEK	9575549	5-30A	1
429	GUDIVADA	6133436000062	SURPANCH,GRAMAPANCHAYAT,STL		NS	3.26	1	0	HPL	26507587	May-30	1
430	GUDIVADA	6133402000488	NGH M Z P H SCHOOL		NS	1	1	2-ELECTRON	HPL	33176809	5-30A	1
431	GUDIVADA	6133407000435	HEAD MASTER		NS	1.26	1	2-ELECTRON	HPL	30786752	30	1
432	GUDIVADA	6133425000731	Gramapanchayt	--	NS	2	1	2-ELECTRON	HPL	33470291	May-30	1
433	GUDIVADA	6133415000359	ANGANAWADI CENTRE	--	NS	1	1	0	L AND T	60887157		1
434	GUDIVADA	6133407000288	THE EXECUTIVE OFFICER	KAIKALUR MANDAL	NS	7.65	3	2-ELECTRON	AVON	3191545	30	1
435	GUDIVADA	6133433000624	MPP SCHOOL SEETHANAPALLI,MPP SCHOOL SEET	SEETHANAPALLI	NS	1	1	ELEC	Holley	2730860		1
436	GUDIVADA	6133435000409	STATION HOUSE OFFICER	--	NS	1	1	2-ELECTRON	LnT	10537942	5-30A	1
437	GUDIVADA	6133435000439	ANGANAWADI CENTRE	--	NS	1	1	0	HPL	27507348		1
438	GUDIVADA	6133424000058	MANDAL DEVELOPMENT OFFICER		NS	0.26	1	2-ELECTRON	HPL	32096785	May-30	1
439	GUDIVADA	6133439000463	ANGANAWADI CENTRE	--	NS	1	1	0	L AND T	60887971		1
440	GUDIVADA	6133421000112	Sarpanch Grama Panchayathi	--	NS	1	1	0	HE	10091509		1
441	GUDIVADA	6133423000021	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HE	20830374	5-30A	1
442	GUDIVADA	6133435000372	M.P.P.School	--	NS	1	1	0	NPL	752137		1
443	GUDIVADA	6133433000534	PRIMARY HEALTH CENTER	--	NS	3	1	2-ELECTRON	HPL	29381176	May-30	1
444	GUDIVADA	6133408000450	Secretary Grama Panchaythi	--	NS	8.043	3	2-ELECTRON	Genus	3072905	May-30	1
445	GUDIVADA	6133408000091	MANDAL DEVELOPMENT OFFICER		NS	0.26	1	2-ELECTRON	HPL	32841885	5-30A	1
446	GUDIVADA	6133412000502	ANGANAWADI CENTRE	--	NS	1	1	0	HPL	27748640	--	1
447	GUDIVADA	6133433000536	ANGANAWADI CENTRE	--	NS	1	1	2-ELECTRON	HPL	32843764	May-30	1
448	GUDIVADA	6133425000732	Gramapanchayt	--	NS	2	1	0	HE	10628213		1
449	GUDIVADA	6133412000062	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.26	1	0	HE	10160816	10	1
450	GUDIVADA	6133435000337	SECRETARY - GRAMAPANCHAYAT.STL	SOMESWARAM	NS	1	1	2-ELECTRON	VISIONTEK	9593510	May-30	1
451	GUDIVADA	6133439000428	Sarpanch Grama Panchythi	--	NS	7.5	3	2-ELECTRON	GENUS	3072933	May-30	1
452	GUDIVADA	6133441000514	HEAD MASTER		NS	1	1	2-ELECTRON	HPL	33177869	5-30A	1
453	GUDIVADA	6133419800029	EXECUTIVE OFFICER		NS	5.14	3	2-ELECTRON	HPL	6367644	May-30	1
454	GUDIVADA	6133426000001	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	31710098	May-30	1
455	GUDIVADA	6133415000023	SURPANCH,GRAMAPANCHAYAT,STL		NS	4.26	1	2-ELECTRON	HE	19923348	May-30	1
456	GUDIVADA	6133422000001	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	28264030	5-30A	1
457	GUDIVADA	6133431000001	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HE	20826719	5-30A	1
458	GUDIVADA	6133218000130	THE EXECUTIVE OFFICER	KLD MANDAL	NS	36	3	2-ELECTRON	AVON	3175708	3X5-30A	1
459	GUDIVADA	6133238000272	PANCHAYATHI,SUNNAMPUDI	SUNNAMPUDI PANCHAYATHI, THAI	NS	0.002	1	2-ELECTRON	HPL	27431534	5-30A	1
460	GUDIVADA	6133200003642	ANGANAWADI CENTRE	--	NS	1	1	0	HPL	29101839		1
461	GUDIVADA	6133223000151	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	33220495	5-30A	1
462	GUDIVADA	6133215000069	SURPANCH,GRAMAPANCHAYAT,STL		NS	3.68	1	2-ELECTRON	HPL	31457597	5-30A	1
463	GUDIVADA	6133207000001	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	24310647	5-30A	1
464	GUDIVADA	6133209000173	ANGANAWADI CENTRE	--	NS	1	1	2-ELECTRON	HPL	33176348	5-30A	1
465	GUDIVADA	6133220000134	P.W.D. STORE ROOM		NS	1.36	1	2-ELECTRON	LnT	10501188	5-30A	1
466	GUDIVADA	6133226000828	GRAMA PANCHAYATHI	PADAMATIPALEM	NS	1	1	ELEC	HPL	31837625		1
467	GUDIVADA	6133229000730	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.44	1	2-ELECTRON	HE	20110168	5-30A	1
468	GUDIVADA	6133211800012	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.64	1	0	HPL	29102083	5-30A	1
469	GUDIVADA	6133218000945	Z.P.H.SCHOOL	--	NS	1	1	2-ELECTRON	HE	20085198	5-30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
470	GUDIVADA	6133220002194	Govt.Junior college		NS	1	1	0	0	28218107	0	1
471	GUDIVADA	6133220002608	Project Director I.C.D.S	--	NS	1	1	2-ELECTRON	HE	20081945	5-30A	1
472	GUDIVADA	6133204000342	SECRETARY GRAM PANCHAYAT	--	NS	5	3	2-ELECTRON	HPL	3377837	5-30A	1
473	GUDIVADA	6133240001273	ANGANAWADI CENTRE	--	NS	1	1	DIGITAL	HPL	30380932		1
474	GUDIVADA	6133234000209	VETERNERY ASST SURGEN		NS	0.34	1	2-ELECTRON	HPL	31584342	5-30A	1
475	GUDIVADA	6133235000277	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	27544558	5-30A	1
476	GUDIVADA	6133212000725	SECRETARY GRAMA PANCHAYT	--	NS	2	1	2-ELECTRON	HPL	33184567	5-30A	1
477	GUDIVADA	6133224001005	Sarpanch Grama Panchayathi	--	NS	1	1	2-ELECTRON	HPL	31930091	5-30A	1
478	GUDIVADA	6133203000439	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	33198854	5-30A	1
479	GUDIVADA	6133200002726	M.P.P.School	--	NS	1	1	2-ELECTRON	HE	20033350	5-30A	1
480	GUDIVADA	6133212000026	SURPANCH,GRAMAPANCHAYAT,STL		NS	3.68	1	2-ELECTRON	HE	19920189	5-30A	1
481	GUDIVADA	6133229000593	M.P.P.School Main	--	NS	1	1	0	NPL	1021890		1
482	GUDIVADA	6133200002718	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	33513988	5-30A	1
483	GUDIVADA	6133210000645	M.P.P.School	--	NS	1	1	2-ELECTRON	HE	20034102	5-30A	1
484	GUDIVADA	6133241000551	ANGANAWADI CENTRE	--	NS	1	1	DIGITAL	HPL	30319579		1
485	GUDIVADA	6133224000545	THE EXECUTIVE OFFICER,	KLD MANDAL	NS	49.448	3	CT-METER	SECURE	X0686455	125/5	1
486	GUDIVADA	6133200000551	POLICE STATIONS.I.		NS	1.48	1	2-ELECTRON	HPL	64676969	5-30A	1
487	GUDIVADA	6133234000716	Surpanch		NS	3	1	2-ELECTRON	HPL	29102516	5-30A	1
488	GUDIVADA	6133218000034	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.26	1	2-ELECTRON	HPL	26389615	5-30A	1
489	GUDIVADA	6133201000288	M P U P SCHOOLM P U P SCHOOL	OPP KOTHURU	NS	1	1	2-ELECTRON	HPL	33202090	5-30A	1
490	GUDIVADA	6133235000039	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	31659006	5-30A	1
491	GUDIVADA	6133200000305	EXECUTIVE OFFICER, STL		NS	2.81	1	2-ELECTRON	VISIONTEK	9597953	5-30A	1
492	GUDIVADA	6133200000001	EXECUTIVE OFFICER, STL		NS	12.8	3	2-ELECTRON	Genus	3065092	5-30A	1
493	GUDIVADA	6133204000040	SURPANCH,GRAMAPANCHAYAT,STL		NS	3.52	1	2-ELECTRON	HOLLEY	2745419	5-30A	1
494	GUDIVADA	6133239800097	EXECUTIVE OFFICER, STL		NS	2.6	3	2-ELECTRON	HPL	3852156	3X5-30A	1
495	GUDIVADA	6133229000425	HEDA MASTER Z P H SCHOOL	PEDALANKA	NS	1	1	2-ELECTRON	HPL	33183285	5-30A	1
496	GUDIVADA	6133220001680	DY EXECUTIVEENGINEERIRRIGATION		NS	2	1	0	HE	10096751	N	1
497	GUDIVADA	6133221000039	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.36	1	2-ELECTRON	HPL	34419755	5-30A	1
498	GUDIVADA	6133200002135	HEAD MASTER	KALIDINDI	NS	1	1	2-ELECTRON	HPL	33177136	5-30A	1
499	GUDIVADA	6133219000207	SURPANCH		NS	0.68	1	2-ELECTRON	HPL	64659252	5-30A	1
500	GUDIVADA	6133231000001	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	LnT	10501189	5-30A	1
501	GUDIVADA	6133240001281	SECRETARY GRAMA PANCHYATH	MAIN ROAD	NS	75	3	6-HTCTMTR	Secure	X0420609	--	0.5
502	GUDIVADA	6133233000535	ANGANAWADI CENTRE	--	NS	1	1	2-ELECTRON	NPL	4342234	5-30A	1
503	GUDIVADA	6133210000043	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.26	1	2-ELECTRON	HPL	33172770	5-30A	1
504	GUDIVADA	6133240000953	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	32126468	5-30A	1
505	GUDIVADA	6133215000432	NGHEAD MASTER		NS	0.26	1	2-ELECTRON	HPL	64627076	5-30A	1
506	GUDIVADA	6133200002719	M.P.P.School	--	NS	1	1	0	NPL	749704		1
507	GUDIVADA	6133234000851	ANGANAWADI CENTRE	--	NS	1	1		YES	GENUES	5783974	1
508	GUDIVADA	6133234000730	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	33195905	5-30A	1
509	GUDIVADA	6133205000002	SURPANCH,GRAMAPANCHAYAT,STL		NS	4.26	1	2-ELECTRON	HPL	30856579	5-30A	1
510	GUDIVADA	6133217000305	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	24315306	5-30A	1
511	GUDIVADA	6133200004185	PANCHAYATI,SECRETARY KALIDINDI	KALIDINDI	NS	1	1	ELEC	HPL	34529361	--	1
512	GUDIVADA	6133224001054	M.P.P.School	--	NS	1	1	2-ELECTRON	Genus	5783569	5-30A	1
513	GUDIVADA	6133220002860	GRAM PANCHAIT KORUKOLLU,GRAM PANCHAIT I	KORUKOLLU	NS	2	1	2-ELECTRON	HPL	30563986	5-30A	1
514	GUDIVADA	6133210000004	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.26	1	0	HE	10083641	20	1
515	GUDIVADA	6133239000298	SECRETARY		NS	2	1	2-ELECTRON	HE	20104120	5-30A	1
516	GUDIVADA	6133200003644	ANGANAWADI CENTRE	--	NS	1	1	0	HPL	40505025	--	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
517	GUDIVADA	6133220000747	THE EXECUTIVE OFFICER	KLD MANDAL	NS	28.268	3	2-ELECTRON	AVON	3179754	3X5-30A	1
518	GUDIVADA	6133219000856	SECRETARY GRAMA PANCHYATH	--	NS	30	3	CT-METER	GENUS	7030561		1
519	GUDIVADA	6133212000908	ANGANVAADI KEDRAM,GURVAIPALEM	GURVAIPALEM	NS	1	1	DIGITAL	HPL	33213030		1
520	GUDIVADA	6133224000755	Medical Officer		NS	5	3	2-ELECTRON	HPL	3377833	5-30A	1
521	GUDIVADA	6133202000205	M.P.P.School	--	NS	1	1	0	NPL	752018		1
522	GUDIVADA	6133220000093	EXECUTIVE OFFICER, STL		NS	6.78	3	2-ELECTRON	HPL	3379778	5-30A	1
523	GUDIVADA	6133215000281	THE EXECUTIVE OFFICER	KLD MANDAL	NS	12.768	3	2-ELECTRON	HPL	3046741	5-30A	1
524	GUDIVADA	6133213000600	ANGANAWADI CENTRE	--	NS	1	1	DIGITAL	HPL	30379500		1
525	GUDIVADA	6133214000301	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	64659613	5-30A	1
526	GUDIVADA	6133223000384	MPUPSCHOOL	NG	NS	1	1	2-ELECTRON	HPL	32839676	5-30A	1
527	GUDIVADA	6133239000424	ANGANAWADI CENTRE	--	NS	1	1	DIGITAL	HPL	30380939		1
528	GUDIVADA	6133213000198	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.9	1	2-ELECTRON	HE	20030408	5-30A	1
529	GUDIVADA	6133212000662	M.P.P.School	--	NS	1	1	2-ELECTRON	Genus	7097929	5-30A	1
530	GUDIVADA	6133234000032	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.48	1	2-ELECTRON	HE	20084639	5-30A	1
531	GUDIVADA	6133220002341	Panchyathi Secretary	--	NS	2	1	0	NPL	20864027	5-20A	1
532	GUDIVADA	6133210000777	ANGANAWADI CENTRE	--	NS	1	1	2-ELECTRON	HE	20027558	5-30A	1
533	GUDIVADA	6133205000343	VETERNARY ASST.SURJAN		NS	0.46	1	2-ELECTRON	HPL	33564922	5-30A	1
534	GUDIVADA	6133240000866	SECRETARY		NS	5	3	2-ELECTRON	HPL	3361915	5-30A	1
535	GUDIVADA	6133229000114	THE EXECUTIVE OFFICER	KLD MANDAL	NS	12.5	3	2-ELECTRON	Genus	3072978	3X5-30A	1
536	GUDIVADA	6133212000719	SECRETARY GRAM PANCHAYAT	--	NS	3	1	2-ELECTRON	HPL	27152370	5-30A	1
537	GUDIVADA	6133203000433	SURPANCH, GRAMA PANCHAYAT		NS	12.5	3	2-ELECTRON	Genus	3061846	5-30A	1
538	GUDIVADA	6133224001272	SECRETARY GRAMAPANCHAYAT	MULAUPPARAGUDEM	NS	2	1	ELEC	HPL	32436536		1
539	GUDIVADA	6133200002036	WARDEN B C GIRLS HOSTEL		NS	2	1	2-ELECTRON	0	30320704	0	1
540	GUDIVADA	6133233000036	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.12	1	2-ELECTRON	HPL	33199910	5-30A	1
541	GUDIVADA	6133241000365	MM P UP SCHOOL		NS	1	1	0	HPL	30434447	5	1
542	GUDIVADA	6133223000616	ANGANWADI,KEDRAM	MATTAGUNTA	NS	1	1	2-ELECTRON	HPL	27806225	5-30A	1
543	GUDIVADA	6133236000520	ANGANAWADI CENTER	--	NS	1	1	DIGITAL	HPL	30975905	--	1
544	GUDIVADA	6133224001163	ANGANAWADI CENTRE	--	NS	1	1	2-ELECTRON	NPL	4860385	5-30A	1
545	GUDIVADA	6133235000232	HEAD MASTER	SANTHINAGAR	NS	2.78	1	2-ELECTRON	HPL	33513989	5-30A	1
546	GUDIVADA	6133200002063	MANDAL REVENU OFFICER		NS	2	1	2-ELECTRON	HPL	34534134	5-30A	1
547	GUDIVADA	6133224000981	MPP School		NS	1	1	0	HE	79104540	5-30A	1
548	GUDIVADA	6133219000599	SCHOOL	NA	NS	1	1	2-ELECTRON	HPL	32838514	5-30A	1
549	GUDIVADA	6133227000266	ANGANAWADI CENTRE		NS	1	1	2-ELECTRON	HPL	33811255	--	1
550	GUDIVADA	6133219000603	M P PSCHOOL		NS	1	1	2-ELECTRON	HPL	32838517	5-30A	1
551	GUDIVADA	6133234000029	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.08	1	2-ELECTRON	HE	11873280	5-30A	1
552	GUDIVADA	6133226000526	SARPANCH GRAMA PANCHAYTHI	--	NS	12.5	3	2-ELECTRON	AVON	8091720	3X5-30A	1
553	GUDIVADA	6133200002721	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	24056867	5-30A	1
554	GUDIVADA	6133220000002	EXECUTIVE OFFICER, STL		NS	5.26	3	2-ELECTRON	AVON	3181221	3X5-30A	1
555	GUDIVADA	6133207000125	M.P.P.School	--	NS	1	1	0	NPL	752671		1
556	GUDIVADA	6133211000257	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	31413231	5-30A	1
557	GUDIVADA	6133201000525	ANGANVADI,ANGANVADI	AMARAVATHI	NS	1	1	2-ELECTRON	HE	20108533	5-30A	1
558	GUDIVADA	6133224000001	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	HPL	33176287	5-30A	1
559	GUDIVADA	6133212000374	THE EXECUTIVE OFFICER	KLD MANDAL	NS	12.714	3	2-ELECTRON	HPL	6323713	3X5-30A	1
560	GUDIVADA	6133213000582	ANGANAWADI CENTER	--	NS	1	1	DIGITAL	HPL	30566815		1
561	GUDIVADA	6133229000679	ANGANAWADI CENTER	--	NS	1	1	2-ELECTRON	Genus	7097931	3X5-30A	1
562	GUDIVADA	6133230000412	HEAD MASTER	POTHUMARRU	NS	0.96	1	2-ELECTRON	HE	20838037	5-30A	1
563	GUDIVADA	6133232000001	SURPANCH,GRAMAPANCHAYAT,STL		NS	3.26	1	2-ELECTRON	HPL	31456456	5-30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
564	GUDIVADA	6133205000001	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.26	1	2-ELECTRON	HPL	33513985	5-30A	1
565	GUDIVADA	6133200003641	ANGANAWADI CENTRE	--	NS	1	1	0	HPL	29219195		1
566	GUDIVADA	6133214000069	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.06	1	2-ELECTRON	HPL	32868366	5-30A	1
567	GUDIVADA	6133221000408	ANGANAWADI CENTRE	--	NS	1	1	0	HPL	29200033		1
568	GUDIVADA	6133218000823	M.P.P.School	--	NS	1	1	2-ELECTRON	HE	20839158	5-30A	1
569	GUDIVADA	6133220000154	Z.P.H.SCHOOL	KORUKOLLU	NS	0.26	1	2-ELECTRON	Genus	7135560	5-30A	1
570	GUDIVADA	6133205000812	M.P.P.School	--	NS	1	1	2-ELECTRON	HE	20838035	5-30A	1
571	GUDIVADA	6133200001737	SRI.EXCUTIVE OFFICER		NS	30	3	2-ELECTRON	HPL	6380727	3X5-30A	1
572	GUDIVADA	6133218000021	SURPANCH,GRAMAPANCHAYAT,STL		NS	3.5	1	2-ELECTRON	HPL	30567915	5-30A	1
573	GUDIVADA	6133200002317	KALIDINDI,PANCHAYT SECRETARY	KALIDINDI	NS	2	1	Electronic	HE	20028048		1
574	GUDIVADA	6133207000110	E.O.-GRAMAPANCHAYAT	CHITANYAPURAM-KORUKOLLU-PAI	NS	3	1	2-ELECTRON	Genus	7098666	5-30A	1
575	GUDIVADA	6133221000376	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	33184563	5-30A	1
576	GUDIVADA	6133225000034	SURPANCH,GRAMAPANCHAYAT.STL		NS	1.26	1	2-ELECTRON	HPL	27161891	5-30A	1
577	GUDIVADA	6133202000062	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.4	1	2-ELECTRON	HPL	31591782	5-30A	1
578	GUDIVADA	6133200002847	Panchyathi Secretary	--	NS	2.681	1	0	NPL	1024920		1
579	GUDIVADA	6133238000215	Panchayat Secretary	0	NS	2	1	0	HE	10220009		1
580	GUDIVADA	6133200002720	M.P.P.School Urdhu	--	NS	1	1	0	NPL	752739		1
581	GUDIVADA	6133239000306	M P UPSCHOOL		NS	1	1	2-ELECTRON	HPL	41982080	5-30A	1
582	GUDIVADA	6133240000392	THE EXECUTIVE OFFICER	KLD MANDAL	NS	7.5	3	2-ELECTRON	HPL	3703383	3X5-30A	1
583	GUDIVADA	6133204000293	NGGRAMAPANCHYATY		NS	1	1	2-ELECTRON	HPL	53192875	5-30A	1
584	GUDIVADA	6133234000728	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	34398689	5-30A	1
585	GUDIVADA	6133222000148	ANGANVAADI KEDRAM,MADDAVANIGUDEM	GURVAIPALEM	NS	1	1	DIGITAL	HPL	33483368		1
586	GUDIVADA	6133200003643	ANGANAWADI CENTRE	--	NS	1	1	0	HPL	29201170		1
587	GUDIVADA	6133210000776	ANGANAWADI CENTRE	--	NS	1	1	0	HPL	29102087		1
588	GUDIVADA	6133200001479	Primary Health Centre		NS	1.16	1	2-ELECTRON	HPL	31762496	5-20A	1
589	GUDIVADA	6133208000001	SURPANCH,GRAMAPANCHAYAT,STL		NS	1.26	1	2-ELECTRON	NPL	4340593	5-30A	1
590	GUDIVADA	6133200003096	PANCHYAT SECRETARY	--	NS	3	1	2-ELECTRON	HPL	31672751	5-30A	1
591	GUDIVADA	6133217000008	SURPANCH,GRAMAPANCHAYAT,STL		NS	2.26	1	2-ELECTRON	Genus	7098836	5-30A	1
592	GUDIVADA	6133203000001	Z.P.H.SCHOOL		NS	6.76	3	2-ELECTRON	Genus	3066279	3X5-30A	1
593	GUNADALA	6521215027327	CDPO,ICDS PROJECT VIJAYAWADA I AND II	KANURU	NS	6.702	3	ELEC	HPL	6322220		1
594	GUNADALA	6521218019528	Commissioner,YSR Tadigadapa Municipality,Krish	--------	NS	1	1	0	HPL	27774600	May-30	1
595	GUNADALA	6521225000386	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	14.92	3	2-ELECTRON	AVON	8069786	May-30	1
596	GUNADALA	6521226010066	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	10	3	2-ELECTRON	AVON	8070489	30	1
597	GUNADALA	6521225013042	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	9.12	3	2-ELECTRON	Genus	3026809	5-30A	1
598	GUNADALA	6521214029337	ANGANWADI,SCHOOL	KANURU	NS	1	1	ELEC	HPL	30113700		1
599	GUNADALA	6521226000984	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	10.2	3	2-ELECTRON	Genus	3047307	5-30A	1
600	GUNADALA	6521222022717	MAGULURU,CHITTIBABU	BUNDAR ROAD NEAR SIRIS	NS	50	3	CT-METER	GENUS	7028356		1
601	GUNADALA	6521222022719	KANTAMANENI,VENKATESWARA RAO	BUNDAR ROAD NEAR SIRIS	NS	50	3	CT-METER	GENUS	7027916		1
602	GUNADALA	6521225013033	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	5.3	3	2-ELECTRON	Genus	3028004	1	1
603	GUNADALA	6521225009478	Commissioner,YSR Tadigadapa Municipality,Krish	SANATH NAGAR,	NS	3	3	6-HTCTMTR	Genus	3044818	5-30A	1
604	GUNADALA	6521222023166	SRI SAI LAKSHMI CONSTUCTIONS CO,K SWATANT	BUNDAR ROAD	NS	82.04	3	CT-METER	GENUS	7030835		1
605	GUNADALA	6521226000688	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	9.3	3	2-ELECTRON	LnT	16368412	5-30A	1
606	GUNADALA	6521225000956	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	22	3	2-ELECTRON	AEW	8070381	May-30	1
607	GUNADALA	6521225007881	Commissioner,YSR Tadigadapa Municipality,Krish	NEAR RAMALAYAM BOXWELL,	NS	21.448	3	2-ELECTRON	HPL	6280449	May-30	1
608	GUNADALA	6521222023164	ILAPURAM,ARUN KUMAR	BUNDAR ROAD	NS	50	3	CT-METER	GENUS	7030981		1
609	GUNADALA	6521213028253	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	5	3	ELEC	HPL	6419026	5-30A	1
610	GUNADALA	6521225013665	Commissioner,YSR Tadigadapa Municipality,Krish	-----	NS	20	3	2-ELECTRON	HPL	3894608	May-30	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
611	GUNADALA	6521226000004	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	12.2	3	2-ELECTRON	Genus	3046693	5-30A	1
612	GUNADALA	6521225000005	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	1.6	1	2-ELECTRON	HPL	31652316	5-30A	1
613	GUNADALA	6521401010200	Commissioner,YSR Tadigadapa Municipality,Krish	TADIGADAPA	NS	7	3	2-ELECTRON	AVON	3187669	3*5.30	1
614	GUNADALA	6521404022227	Commissioner,YSR Tadigadapa Municipality,Krish	INDIRA NAGAR 2 PUJITHA SCHOOL I	NS	5	3	ELEC	AVON	8072536		1
615	GUNADALA	6521403008197	Commissioner,YSR Tadigadapa Municipality,Krish	--------	NS	24	3	2-ELECTRON	HPL	6401025	5.30A	1
616	GUNADALA	6521421019221	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	2	1	DIGITAL	HPL	33188187		1
617	GUNADALA	6521225033215	MUNICIPAL COMMISSIONER	KANURU	NS	5	3	3-Electron	HPL	6405502		1
618	GUNADALA	6521217021469	Commissioner,YSR Tadigadapa Municipality,Krish	HINDU SMASANA WATIKA KAILASA	NS	5	3	DIGITAL	L AND T	16392125		1
619	GUNADALA	6521222024041	D P R C BULDING KANURU,D P R C BULDING KANU	D P R C BULDING KANURU	NS	50	3	CT-METER	L AND T	18259131		1
620	GUNADALA	6521225020429	Commissioner,YSR Tadigadapa Municipality,Krish	OLDAGE HOME CENTER	NS	9	3	0	L-T	16242002		1
621	GUNADALA	6521226000110	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	0.58	1	2-ELECTRON	HPL	31587348	5-30A	1
622	GUNADALA	6521211031826	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	2	3	3-Electron	HPL	3239338		1
623	GUNADALA	6521224000367	Veternary Hospital	NA	NS	0.52	1	2-ELECTRON	HPL	3531007	5-30A	1
624	GUNADALA	6521225009671	Commissioner,YSR Tadigadapa Municipality,Krish	SIDDIQUE NAGAR,	NS	13	3	2-ELECTRON	HPL	6280230	5-30A	1
625	GUNADALA	6521224025873	ANGANWADI SCHOOL,ANGANWADI SCHOOL	KANURU	NS	2	1	ELEC	HPL	33656591		1
626	GUNADALA	6521226000007	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	7.2	3	2-ELECTRON	HPL	3893461	May-30	1
627	GUNADALA	6521226008886	Panchayat Secretary	SMASANAM BUILDING,	NS	1	1	2-ELECTRON	HPL	31648235	5-30A	1
628	GUNADALA	6521226007614	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	55.95	3	CT-METER		35149	40	1
629	GUNADALA	6521226008463	Commissioner,YSR Tadigadapa Municipality,Krish	HARIJANAWADA,	NS	11	3	0	L-T	16241292	30	1
630	GUNADALA	6521222022718	GADDE,ANURADHA	BUNDAR ROAD NEAR SIRIS	NS	50	3	CT-METER	GENUS	7027939		1
631	GUNADALA	6521226009129	The Secretary	KANURU.	NS	1	1	2-ELECTRON	HPL	31648237	5-30A	1
632	GUNADALA	6521226017303	Secratary	NEAR 8-113	NS	21.448	3	1-MECHANIC	Genus	3044541	530A	1
633	GUNADALA	6521225009132	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	13	3	2-ELECTRON	HPL	3303576	May-30	1
634	GUNADALA	6521218019527	EO PANCHAYATHI SECRETARY	--------	NS	1	1	0	HPL	27775416	May-30	1
635	GUNADALA	6521225000009	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	15.3	3	2-ELECTRON	Genus	3002504	10-40A	1
636	GUNADALA	6521225008885	Commissioner,YSR Tadigadapa Municipality,Krish	O.H.S.R.	NS	5	3	2-ELECTRON	HPL	6380467	May-30	1
637	GUNADALA	6521221025895	EXECUTIVE OFFICER,APIIC IALA JRD TATA INDL ES	JRD TATA INDL ESTATE	NS	15	3	ELEC	AVON	3214755		1
638	GUNADALA	6521226028164	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	2	1	ELEC	L AND T	10495553		1
639	GUNADALA	6521225020430	Commissioner,YSR Tadigadapa Municipality,Krish	OLDAGE HOME CENTER	NS	11	3	0	L-T	16245460	0	1
640	GUNADALA	6521225003379	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	13.6	3	2-ELECTRON	Genus	3026334	5-30A	1
641	GUNADALA	6521225000010	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	21.5	3	2-ELECTRON	Genus	3052901	5-30A	1
642	GUNADALA	6521201012615	Paladugu,Govardhani	ASHOK NAGAR	NS	7.43	3	2-ELECTRON	Genus	3063310	3X5-30A	1
643	GUNADALA	6521225001157	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	2.32	1	2-ELECTRON	HPL	31652317	5-30A	1
644	GUNADALA	6521225033216	MUNICIPAL COMMISSIONER	KANURU	SL	5	3	3-Electron	HPL	3231804		1
645	GUNADALA	6521224027591	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	6.702	3	2-ELECTRON	HPL	6401803	5-30A	1
646	GUNADALA	6521226026305	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	13.405	3	ELEC	HPL	6242113		1
647	GUNADALA	6521208002368	M P P Ely School	NA	NS	4.2	1	2-ELECTRON	HPL	29089237	530	1
648	GUNADALA	6521225033218	MUNICIPAL COMMISSIONER	NEAR BHARATH PETROL BUNK PAN	NS	5	3	3-Electron	HPL	3691357		1
649	GUNADALA	6521226008469	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	12.3	3	2-ELECTRON	Genus	3046623	5-30A	1
650	GUNADALA	6521403012496	YSR TADIGADAPA,MUNICIPALITY	AMBEDKAR NAGAR	NS	6	3	3-Electron	HPL	6328660		1
651	GUNADALA	6521226010622	Commissioner,YSR Tadigadapa Municipality,Krish	HRAMA PANCHAYAT	NS	2	1	2-ELECTRON	HPL	94967215	30	1
652	GUNADALA	6521215025440	KANURU,GRAMA PANCHAYATHI	KANURU	NS	1	1	ELEC	HPL	33239494		1
653	GUNADALA	6521226022929	APCRDA,APCRDA	KANURU	NS	25	3	CT-METER	GENUS	7030811		1
654	GUNADALA	6521226000011	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	0.6	1	2-ELECTRON	HE	20830406	May-30	1
655	GUNADALA	6521222023163	POTLURI,BHARATHI	BUNDAR ROAD	NS	50	3	CT-METER	GENUS	7030803		1
656	GUNADALA	6521214005571	The Headmaster Z P Highsc	NA	NS	9	3	2-ELECTRON	HPL	6279749	30	1
657	GUNADALA	6521226009708	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	22.5	3	2-ELECTRON	Genus	3046053	5-30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
658	GUNADALA	6521222023168	VENKATA BHASKARA,ESTATES	BUNDAR ROAD	NS	50	3	CT-METER	GENUS	7030844		1
659	GUNADALA	6521225000006	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	4.2	1	2-ELECTRON	HPL	31652320	5-30A	1
660	GUNADALA	6521225003378	Commissioner,YSR Tadigadapa Municipality,Krish	VINAYAK NAGAR	NS	37	3	CT-METER	SECURE	APE35111	40	1
661	GUNADALA	6521226013031	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	7	3	2-ELECTRON	HPL	6347923	May-30	1
662	GUNADALA	6521225013400	Commissioner,YSR Tadigadapa Municipality,Krish	KRISHNA NAGAR	NS	17	3	2-ELECTRON	AVON	8069784	530	1
663	GUNADALA	6521225001158	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	6.9	3	2-ELECTRON	Genus	3045617	5-30A	1
664	GUNADALA	6521225007879	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU,	NS	6	3	2-ELECTRON	Genus	3027616	5-30A	1
665	GUNADALA	6521226009895	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	24	3	2-ELECTRON	Genus	3043798	5-30A	1
666	GUNADALA	6521226000018	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	8.6	3	2-ELECTRON	AVON	3230502	30	1
667	GUNADALA	6521226007880	Commissioner,YSR Tadigadapa Municipality,Krish	NEAR G. LAKSHMAIAH WELL,	NS	16	3	2-ELECTRON	Genus	3047296	5-30A	1
668	GUNADALA	6521223018168	EO IALA AUTO NAGAR KANURU	----------	NS	5	3	2-ELECTRON	Genus	3047022	5.3	1
669	GUNADALA	6521203028677	SECRETARY,C.V.L.S.R.V.PRASAD	KANURU	NS	2	1	ELEC	L AND T	10582795		1
670	GUNADALA	6521226005427	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	5.8	3	2-ELECTRON	HPL	3893466	May-30	1
671	GUNADALA	6521222025872	ANGANWADI SCHOOL,ANGANWADI SCHOOL	KANURU	NS	2	1	ELEC	HPL	33657875		1
672	GUNADALA	6521224002486	Head Master M P U P Schoo	NA	NS	0.6	1	0	HAVELLES	27677760		1
673	GUNADALA	6521225000720	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	5.35	3	2-ELECTRON	HPL	3894564	May-30	1
674	GUNADALA	6521225013032	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	2.6	1	2-ELECTRON	GENUS	7097988	530	1
675	GUNADALA	6521225025787	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	15	3	2-ELECTRON	AVON	8072467	30	1
676	GUNADALA	6521215023970	WDCW DEPT.,DWCD AGENCY	KANURU	NS	7.28	3	5-LTCTMTR	GENUS	3053023		1
677	GUNADALA	6521226010803	Commissioner,YSR Tadigadapa Municipality,Krish	PINNAMANENI TEACHERS COLONY,	NS	12	3	1-MECHANIC	Genus	3045327	5-30A	1
678	GUNADALA	6521301000458	Executive Officer	NA	NS	0.52	1	0	HPL	31556472	May-30	1
679	GUNADALA	6521302002821	SECRETARY GRAMA PANCHATHI,EXECUTIVE OFFI	GANGURU	NS	6.702	1	3-Electron	HPL	6370554		1
680	GUNADALA	6521305002898	Upper Primary School	NA	NS	0.255	1	2-ELECTRON	HPL	31334114	5	1
681	GUNADALA	6521300007424	ANGANVADI CENTER	--	NS	1	1	0	HPL	29054495		1
682	GUNADALA	6521303002601	Parishat Elementary Schoo	NA	NS	0.4	1	2-ELECTRON	HPL	31458016	5	1
683	GUNADALA	6521300004104	Executive Officer	PENAMALURU	NS	5.05	3	2-ELECTRON	HPL	3893610	May-30	1
684	GUNADALA	6521303004817	PANCHAYAT SECRATARY,GRAMA SACHIVALAYAM	GOSALA	NS	1.34	1	ELEC	HPL	34285512		1
685	GUNADALA	6521303003908	M P P School Telugu	---	NS	1	1	0	ICSA	557703		1
686	GUNADALA	6521302002434	GRAMAPANCHAYAT GANGURU,SECRETARY GP GA	GANGURU	NS	5	3	2-ELECTRON	HPL	6271696	3*5-30	1
687	GUNADALA	6521303003017	Executive Officer	GOSALA	NS	4	1	0	HPL	28331211	0	1
688	GUNADALA	6521305005194	EXCUTIVE OFFICER	VANUKURU	NS	1	1	ELEC	HPL	34821621		1
689	GUNADALA	6521305004574	Karyadarsi Gramapanchayati	----	NS	6.702	3	2-ELECTRON	HPL	6277442	30	1
690	GUNADALA	6521303005223	PANCHAYT SECRETARY,PANCHAYAT SECRETARY	PATHA SANTHA,GOSALA	NS	5	3	3-Electron	HPL	3839513		1
691	GUNADALA	6521303003952	Panchayat Secretary	------	NS	14	3	2-ELECTRON	HPL	3361964	03-05-30	1
692	GUNADALA	6521300007420	ANGANVADI CENTER	--	NS	1	1	2-ELECTRON	HPL	34821626	5-30A	1
693	GUNADALA	6521300002498	Veternery Hospital	NA	NS	0.44	1	2-ELECTRON	HPL	31455870	5.30A	1
694	GUNADALA	6521300002559	Radio Room	NA	NS	0.255	1	2-ELECTRON	HE	20082837	May-30	1
695	GUNADALA	6521302000399	Executive Officer	GANGURU	NS	1.93	1	2-ELECTRON	HPL	33191425	May-30	1
696	GUNADALA	6521300007903	PANCHAYATHI SECRATRY PENAMALUR,PANCHAY	PENAMALURU	NS	2	1	2-ELECTRON	HE	20085216	May-30	1
697	GUNADALA	6521303000002	Executive Officer	GOSALA	NS	1.16	1	2-ELECTRON	HPL	64663692	May-30	1
698	GUNADALA	6521300802290	H.M.Z P Higj School	NA	NS	8.4	3	7-SOLARNET	L	16487122	5-30A	1
699	GUNADALA	6521303004040	Secretary	---	NS	5.36	3	2-ELECTRON	HPL	3892973	03-05-30	1
700	GUNADALA	6521300804446	Head Master	NA	NS	0.4	1	2-ELECTRON	HPL	31456197	5.30A	1
701	GUNADALA	6521305005315	GRAM PANCHAYATI VANUKURU,SECRETARI M P I	VANUKURU	NS	2.681	1	ELEC	GENUS	7098148		1
702	GUNADALA	6521300005954	Secretary Grama Panchayat	NA	NS	8	3	2-ELECTRON	HPL	6378310	May-30	1
703	GUNADALA	6521300007421	ANGANVADI CENTER	--	NS	1	1	0	HPL	29056109		1
704	GUNADALA	6521305004497	Gazetted Head Master	HIGHSCHOOL	NS	2	1	0	HE	10173829		1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
705	GUNADALA	6521303003413	Panchayat Secretary(Pws)	NA	NS	5	1	2-ELECTRON	HPL	31705667	May-30	1
706	GUNADALA	6521303004899	PANCHAYAT,SECRETARY	GOSALA	NS	4.021	1	ELEC	L AND T	57730602		1
707	GUNADALA	6521303004328	ANGANAVADI CENTER	PENAMALURU	NS	1	1	0	HPL	29055821		1
708	GUNADALA	6521303005051	EXECUTIVE OFFICER	VGS NAGAR	NS	4.021	1	ELEC	GENUS	7100398		1
709	GUNADALA	6521300004272	Executive Officer	PENAMALURU	NS	25	3	2-ELECTRON	HPL	3873717	May-30	1
710	GUNADALA	6521303000004	Executive Officer	GOSALA	NS	1.8	1	2-ELECTRON	LnT	10581697	May-30	1
711	GUNADALA	6521301000499	Executive Officer	CHODAVARAM	NS	2.05	1	2-ELECTRON	VISIONTEK	9587065	May-30	1
712	GUNADALA	6521305005274	EXECUTIVE OFFICER	VANUKURU	NS	2.681	1	ELEC	L AND T	10506822		1
713	GUNADALA	6521300007487	PANCHATI SECRATARY	--	NS	8	3	0	L AND T	16240725		1
714	GUNADALA	6521305005768	EO PANCHAYATHI,VANUKURU	VANUKURU	NS	5	3	2-ELECTRON	HPL	3881480	5-30A	1
715	GUNADALA	6521305004576	Karyadarsi Gramapanchayati	----	NS	5	1	2-ELECTRON	HPL	34887711	5-30A	1
716	GUNADALA	6521300003409	Social Welfare Girls Host	NA	NS	5	3	2-ELECTRON	HPL	6240031	May-30	1
717	GUNADALA	6521303004329	ANGANAVADI CENTER	PENAMALURU	NS	1	1	0	HPL	29053564		1
718	GUNADALA	6521300007423	ANGANVADI CENTER	--	NS	1	1	2-ELECTRON	HPL	34088180	5-30A	1
719	GUNADALA	6521302001091	Executive Officer	GANGURU	NS	1.2	1	2-ELECTRON	GENUS	7133733	May-30	1
720	GUNADALA	6521300005158	The Secretary (Water Works)	NEAR PRIYA KOTLU,	NS	5	1	2-ELECTRON	HE	20831769	May-30	1
721	GUNADALA	6521305005701	COMMISSIONER,YSR TADIGADAPA MUNICIPALITY	VANUKURU	NS	5	3	3-Electron	HPL	3894198		1
722	GUNADALA	6521301001334	SECRATARY GP CHOWDAVARAM	Jan-45	NS	1	1	2-ELECTRON	HPL	32532764	5.30A	1
723	GUNADALA	6521302001882	Panchayat Secretary	----	NS	2	1	2-ELECTRON	VISIONTEK	9596060	30	1
724	GUNADALA	6521300007452	PANCHAYATHI SECRATARY	--	NS	2.238	1	2-ELECTRON	VISIONTEK	10483190	May-30	1
725	GUNADALA	6521301000802	Executive Officer	NA	NS	12	3	2-ELECTRON	Genus	3047479	5-30A	1
726	GUNADALA	6521303003018	Executive Officer	GOSALA	NS	1.48	1	2-ELECTRON	HPL	32532313	5-30A	1
727	GUNADALA	6521301000003	P P Board	NA	NS	0.44	1	2-ELECTRON	HPL	31459373	5.30A	1
728	GUNADALA	6521302001897	Panchayat Secretary	RS.No.115/2	NS	2	1	2-ELECTRON	LnT	10540943	May-30	1
729	GUNADALA	6521300003603	Executive Officer	PENAMALURU	NS	5.5	3	2-ELECTRON	HPL	6306510	5.30A	1
730	GUNADALA	6521305005386	PHMED EE VJA JAGANANNA COLONIES	VANUKURU	NS	5	3	2-ELECTRON	HPL	3414130	May-30	1
731	GUNADALA	6521302002646	KOPANATHI,PRASAD	Ganguru Panchayati	NS	4.021	1	ELEC	GENUS	7098119		1
732	GUNADALA	6521302001813	Panchayati Secretary Ganguru	----	NS	5	1	2-ELECTRON	HPL	34886147	5-30A	1
733	GUNADALA	6521303003881	Secretary	NA	NS	6	3	2-ELECTRON	HPL	3894461	May-30	1
734	GUNADALA	6521300007904	PANCHAYATHI SECRATRY PENAMALUR,PANCHAY	PENAMALURU	NS	2	1	2-ELECTRON	HPL	34421422	May-30	1
735	GUNADALA	6521302002663	EO,PANCHAYAT SECRETARY	INDIRAMMA COLONY GANGURU	NS	2	1	2-ELECTRON	GENUS	7096833	5.3	1
736	GUNADALA	6521305005392	PHMED EE VJA JAGANANNA COLONIES	VANUKURU	NS	5	3	ELEC	HPL	6401636		1
737	GUNADALA	6521305000002	Executive Officer	VANUKURU	NS	1.96	1	2-ELECTRON	VISIONTEK	9577264	30	1
738	GUNADALA	6521303005160	EO GOSALA	Gosala	NS	4.021	1	ELEC	VISIONTEK	9574401		1
739	GUNADALA	6521302000604	Executive Officer	GANGURU	NS	0.96	1	2-ELECTRON	HPL	34090509	5-30A	1
740	GUNADALA	6521302001797	Secretary	2-228	NS	10	3	6-HTCTMTR	L-T	16244331	0	1
741	GUNADALA	6521305005061	GRAMA PANCHAYATY,PANCHAYATY SECRECTARY	VANUKURU	NS	3	1	DIGITAL	HPL	31457168		1
742	GUNADALA	6521300005107	Deputy Director	NA	NS	5	3	2-ELECTRON	HPL	3360971	5.30A	1
743	GUNADALA	6521300004764	The Medical Officer	NA	NS	6.72	3	2-ELECTRON	Genus	3027347	5-30A	1
744	GUNADALA	6521305005178	EXECUTIVE OFFICER	VANUKURU	NS	2	1	2-ELECTRON	HE	20829620	30	1
745	GUNADALA	6521303002963	The Headmaster M P V P Sc	NA	NS	0.255	1	2-ELECTRON	HPL	34167715	May-30	1
746	GUNADALA	6521300002466	P P Board	NA	NS	0.26	1	2-ELECTRON	HPL	32523841	5-30A	1
747	GUNADALA	6521300007741	RACHAPOODI,REP BY PROVIGIL SURVEILLANCE LT	PENAMALURU HIGH SCHOOL CENTI	NS	1	1	DIGITAL	HPL	30711940		1
748	GUNADALA	6521305005319	PANCHAYATHI SECRETARY,PANCHAYATHI OFFICE	PRAKRUTHI HOMES	NS	3	1	ELEC	HPL	10538663		1
749	GUNADALA	6521305005364	EO VANUKURU	VANUKURU	NS	5	3	2-ELECTRON	HPL	6274842	May-30	1
750	GUNADALA	6521305003457	Executive Officer	VANUKURU	NS	10	3	2-ELECTRON	Genus	3046984	5-30A	1
751	GUNADALA	6521302001348	The Secretary	OPP. POWERPROJECT,	NS	16	3	1-MECHANIC	Genus	3062696	5-30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
752	GUNADALA	6521303003230	Sarpanch	NA	NS	25	3	2-ELECTRON	HPL	6306497	5-30A	1
753	GUNADALA	6521300003119	E O Panchayat	OPP.CHINNAGUDI	NS	15.5	3	2-ELECTRON	HPL	3873715	May-30	1
754	GUNADALA	6521352009107	EO PENAMALURU	PENAMALURU	NS	5	3	ELEC	HPL	6403401		1
755	GUNADALA	6521302001194	The Secretary	GANGOOR	NS	10.68	3	0	L-T	16238931	5L	1
756	GUNADALA	6521305005387	PHMED EE VJA JAGANANNA COLONIES	VANUKURU	NS	5	1	2-ELECTRON	AVON	3241872	30	1
757	GUNADALA	6521305000003	Executive Officer	VANUKURU	NS	6.8	3	2-ELECTRON	Genus	3043832	5-30A	1
758	GUNADALA	6521303004345	V R O OFFICE	PENAMALURU	NS	1	1	0	HPL	29274468		1
759	GUNADALA	6521302800001	Executive Officer	GANGURU	NS	3.96	1	2-ELECTRON	HPL	34089085	May-30	1
760	GUNADALA	6521302000061	Executive Officer	GANGURU	NS	1.54	1	0	HPL	19807107	0	1
761	GUNADALA	6521300003393	E O I Gram Panchayat	NA	NS	3.255	1	2-ELECTRON	HPL	31455865	5.30A	1
762	GUNADALA	6521305000001	Executive Officer	VANUKURU	NS	11.7	3	2-ELECTRON	HPL	6398420	5-30A	1
763	GUNADALA	6521302002633	PANCHAYATI SECRETARY,PANCHAYATI SECRETAR	AMBEDKAR NAGAR	NS	1.34	1	ELEC	L AND T	10542297		1
764	GUNADALA	6521305005700	COMMISSIONER,YSR TADIGADAPA MUNICIPALITY	VANUKURU	NS	5	3	3-Electron	HPL	3894196		1
765	GUNADALA	6521300005814	Panchayat Secretary	Jun-69	NS	5	3	2-ELECTRON	HPL	3883138	May-30	1
766	GUNADALA	6521302000298	E O Panchayat	NA	NS	12	3	2-ELECTRON	Genus	3062688	5-30A	1
767	GUNADALA	6521300006026	Secretary Grama Panchayat	ANNE BABU RAO ESTATE	NS	13.405	3	2-ELECTRON	HPL	6378312	May-30	1
768	GUNADALA	6521300009167	PANCHAYATHI SECRETARY,PENAMALURU PANCH	NEAR MRO OFFICE ROAD	NS	10	3	2-ELECTRON	HPL	6275961	May-30	1
769	GUNADALA	6521303000005	Executive Officer	GOSALA	NS	1.56	1	2-ELECTRON	HPL	64663698	May-30	1
770	GUNADALA	6521300006213	Panchayat Secretary	GRAMA PANCHAYAT	NS	1	1	2-ELECTRON	HE	20082170	May-30	1
771	GUNADALA	6521300004975	The Panchayat Secretary	NEAR PERAQNTALA CHERUVU	NS	30	3	2-ELECTRON	HPL	6406529	5-301	1
772	GUNADALA	6521305800363	Grandhalayam	NA	NS	0.255	1	2-ELECTRON	HPL	31334490	5-30A	1
773	GUNADALA	6521305005388	PHMED EE VJA JAGANANNA COLONIES	VANUKURU	NS	5	3	2-ELECTRON	AVON	3241317	30	1
774	GUNADALA	6521300006576	PACHAYATY SECRETARY	RSNO. 253/3	NS	20	3	2-ELECTRON	HPL	3371697	May-30	1
775	GUNADALA	6521302002217	PANCHAYATI SECRETARY	PENAMALURU	NS	7.5	3	5-LTCTMTR	L AND T	16394551		1
776	GUNADALA	6521302001631	Secretary	Panchayathi Office Road	NS	3	1	0	HPL	29918154	30	1
777	GUNADALA	6521302000009	President/Panchayat	NA	NS	0.255	1	2-ELECTRON	VISIONTEK	10482328	530	1
778	GUNADALA	6521300007488	PANCHATI SECRATARY	--	NS	5	3	0	L AND T	16244939		1
779	GUNADALA	6521305005767	EO PANCHAYATHI,VANUKURU	VANUKURU	NS	5	3	3-Electron	HPL	3894195		1
780	GUNADALA	6521305005766	EO PANCHAYATHI,VANUKURU	VANUKURU	NS	5	3	3-Electron	HPL	3894194		1
781	GUNADALA	6521303004693	GRAM PANCHAYAT SECRETARY GOSAL,GRAM PAI	GOSALA	NS	2.681	1	2-ELECTRON	HE	20082862	May-30	1
782	GUNADALA	6521305003853	Secretaary	S.C. COLONY	NS	1	1	2-ELECTRON	HPL	31334214	5.30A	1
783	GUNADALA	6521300002947	Asst Director Fisheries	NA	NS	17	3	7-SOLARNET	0	0	0	1
784	GUNADALA	6521305004054	The Secretary	NA	NS	3	1	0	HE	11858284	40	1
785	GUNADALA	6521305005359	EO VANUKURU	VANUKURU	NS	5	3	2-ELECTRON	HPL	6329527	30	1
786	GUNADALA	6521300004885	LINGALA PRASAD	NA	NS	0.342	1	2-ELECTRON	HPL	31269676	5-30A	1
787	GUNADALA	6521302000197	E O Panchayat	NA	NS	20.89	3	2-ELECTRON	HPL	3886156	5-30A	1
788	GUNADALA	6521301000092	Veternary Hospital	NA	NS	1.54	1	2-ELECTRON	HE	20082838	May-30	1
789	GUNADALA	6521302000258	Execuutive Officer	GANGURU	NS	1.04	1	2-ELECTRON	HPL	31455599	5-30A	1
790	GUNADALA	6521300005612	Panchayat Secretary	NA	NS	13.34	3	2-ELECTRON	HPL	3873718	May-30	1
791	GUNADALA	6521305004694	PANCHAYATHI SECRATARY	0	NS	2	1	2-ELECTRON	HPL	34881011	May-30	1
792	GUNADALA	6521300005106	Mandal Revenue Officer	NA	NS	1	1	0	0	26503213	0	1
793	GUNADALA	6521305004740	PANCHAYATHI SECRETARY	PENAMALURU	NS	2	1	0	HPL	27783298		1
794	GUNADALA	6521106000263	PANCHAYATHI SECRETARY	JAGANNADHAPURAM	NS	2.681	1	ELEC	HPL	28197884	--	1
795	GUNADALA	6521114000676	Hospital	NA	NS	1	1	2-ELECTRON	HPL	33204581	May-30	1
796	GUNADALA	6521116000533	MAREDUMAKA,PANCHAYATH SECRETARY	MAREDUMAKA GRAMA PANCHAYA	NS	5	3	Electronic	HPL	3879773		1
797	GUNADALA	6521108000259	Panchayathi Karyadarsi	Kesaraneni Vari Palem	NS	7	3	2-ELECTRON	HPL	3369750	5-30A	1
798	GUNADALA	6521501000002	Executive Officer	PORANKI	NS	13.3	3	2-ELECTRON	LnT	16389942	5-30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
799	GUNADALA	6521501008023	The Secretary	R.S.NO.424/3C,	NS	12	3	2-ELECTRON	Genus	3041887	5-30A	1
800	GUNADALA	6521501017287	FISHERIES,FISHERIES	PORANKI	NS	20	3	CT-METER	AVON	8371842	125/5A	1
801	GUNADALA	6521501018513	Commissioner,YSR Tadigadapa Municipality,Krish	poranki	NS	4.021	1	ELEC	L AND T	10501979		1
802	GUNADALA	6521505007249	The Head Master	NA	NS	1	1	2-ELECTRON	HPL	33581168	5.30A	1
803	GUNADALA	6521501018195	Commissioner,YSR Tadigadapa Municipality,Krish	SRINIVASA NAGAR PORANKI	NS	10.724	3	ELEC	HPL	6330795		1
804	GUNADALA	6521501019379	Commissioner,YSR Tadigadapa Municipality,Krish	100 FEET ROAD	NS	2.681	1	ELEC	AEW	10426786		1
805	GUNADALA	6521501002422	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	10	3	2-ELECTRON	Genus	3041151	5-30A	1
806	GUNADALA	6521501014066	COMMISSIONER OF FISHERIES AP	--	NS	49.68	3	CT-METER	L AND T	15684663		1
807	GUNADALA	6521501003319	E O Panchayat	NA	NS	25	3	2-ELECTRON	AVON	8079072	May-30	1
808	GUNADALA	6521501005171	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	23	3	2-ELECTRON	Genus	3041888	5-30A	1
809	GUNADALA	6521503013724	B CHOUDU RANI	1-23D	NS	51	3	CT-METER	L	15684568	125-5A	1
810	GUNADALA	6521501007437	Commissioner,YSR Tadigadapa Municipality,Krish	RAMA LAXMAN NAGAR COLONY,	NS	3	1	0	HPL	28334392	0	1
811	GUNADALA	6521501015136	Commissioner,YSR Tadigadapa Municipality,Krish	PADMAVATHI GARDENS PORANKI	NS	9.7	3	DIGITAL	L AND T	16230692		1
812	GUNADALA	6521501000006	Commissioner,YSR Tadigadapa Municipality,Krish	PORANKI	NS	5.42	3	2-ELECTRON	HPL	3893852	May-30	1
813	GUNADALA	6521501008422	The Secretary	KODU DONKA ROAD,	NS	1	1	2-ELECTRON	LnT	10500083	May-30	1
814	GUNADALA	6521100000002	Executive Officer	KANKIPADU	NS	18.2	3	2-ELECTRON	HPL	16348212	3530	1
815	GUNADALA	6521110001774	S Raja Ratnamma	NA	NS	0.56	1	0	0	29370622	0	1
816	GUNADALA	6521106000181	Secretary Gramapanchayat	-----	NS	5	3	2-ELECTRON	HPL	6425049	May-30	1
817	GUNADALA	6521108000237	Mandal Parishat Primary School	NG	NS	1	1	2-ELECTRON	HPL	24099924	May-30	1
818	GUNADALA	6521152008235	ANGANVADI CENTER	--	NS	1	1	0	HPL	28214657		1
819	GUNADALA	6521103005408	E.O. GRAMAPANCHAYAT	HARIJANAWADA	NS	2	1	DIGITAL	HPL	30610777		1
820	GUNADALA	6521103003625	H M M P Ely School	NA	NS	0.84	1	2-ELECTRON	HPL	33209437	May-30	1
821	GUNADALA	6521118003403	SECRETARY	---	NS	10	3	5-LTCTMTR	Genus	3043243	May-30	1
822	GUNADALA	6521103003387	V V Krishnarao	EDUPUGALLU	NS	54.7	3	CT-METER		75407039		1
823	GUNADALA	6521110003964	Secratary	KOLAVENNU	NS	3	1	2-ELECTRON	HPL	31725755	May-30	1
824	GUNADALA	6521101000199	Executive Officer	CHALIVENDRAPALEM	NS	2.2	1	2-ELECTRON	HE	20838298	5-30A	1
825	GUNADALA	6521103000003	Executive Officer	NA	NS	4	1	2-ELECTRON	HPL	27587511	May-30	1
826	GUNADALA	6521114001250	GRAM PANCHAYAT,MADDURU	KANAKADURGAPURAM	NS	5	3	3-Electron	HPL	6280178		1
827	GUNADALA	6521103005410	E.O. GRAMAPANCHAYAT	SRINIVASAPURAM COLONEY	NS	2	1	DIGITAL	HPL	89986076	--	1
828	GUNADALA	6521104004057	Panchayat secretary Godavarru	Godavarru	NS	5	3	3-Electron	HPL	3178385		1
829	GUNADALA	6521120000014	Executive Officer	NA	NS	3.2	1	2-ELECTRON	HPL	34284795	May-30	1
830	GUNADALA	6521154003263	E O/Panchayat	NA	NS	15	3	2-ELECTRON	HPL	6423728	530	1
831	GUNADALA	6521111000259	SECRETARY GRAMA PANCHAYAT,SECRETARY GRA	KONATHANAPADU	NS	5	1	Electronic	HE	20097159		1
832	GUNADALA	6521119802834	Animal Husbandry Officer	NA	NS	0.42	1	1-MECHANIC	HPL	31910649	May-30	1
833	GUNADALA	6521118000001	Executive Officer	PRODDATUR	NS	5.34	3	2-ELECTRON	Genus	3043526	May-30	1
834	GUNADALA	6521113000064	Secratary	------	NS	3	1	2-ELECTRON	HPL	31725756	May-30	1
835	GUNADALA	6521103003810	Special Grade Secretary	NA	NS	0.52	1	2-ELECTRON	HE	19917971	5-30A	1
836	GUNADALA	6521104004006	PANCHAYATI SECRETARY,PANCHAYATI SECRETAR	GODAVARRU	NS	1.34	1	ELEC	L AND T	34974319		1
837	GUNADALA	6521121002024	GRAMAPANCHAYTHI UPPULUR	--	NS	8	3	1-MECHANIC	HPL	16244028		1
838	GUNADALA	6521119000002	Executive Officer	NA	NS	0.4	1	0	HPL	20627697	0	1
839	GUNADALA	6521107800042	Ae/P W D/Lock	NA	NS	0.72	1	0		1024458		1
840	GUNADALA	6521121002540	SODEM,SRINU	KANKIPADU UPPULURU	NS	5	3	2-ELECTRON	HPL	6349029	3X5-30A	1
841	GUNADALA	6521114000643	Sarpanch Grampanchayat	MADDURU	NS	11	3	2-ELECTRON	HPL	6242107	5-30A	1
842	GUNADALA	6521107000276	C S I Elimentary School	7-71/1	NS	1	1	2-ELECTRON	HPL	33295572	May-30	1
843	GUNADALA	6521104802565	Surpanch Radio Room	NA	NS	0.255	1	2-ELECTRON	HPL	31725433	May-30	1
844	GUNADALA	6521122001254	JAGANANNA HOUSING COLONY,EEDUPUGALLU L	VELPURU	NS	3	1	Electronic	HE	20963727		1
845	GUNADALA	6521103006232	THE SECRETARY GRAMA PANCHAYATHI	KOTHUR ELEMANTARY SCHOOL OP	NS	2.681	1	ELEC	HPL	64600362		1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
846	GUNADALA	6521115001152	PANCHAYATSECRETARYMANTENA,PANCHAYAT SI	KOTHURU	NS	3	1	ELEC	HPL	64659924		1
847	GUNADALA	6521120000916	Mpp School	TENNERU	NS	1	1	2-ELECTRON	Genus	7101237	May-30	1
848	GUNADALA	6521117000001	Executive Officer	NEPPALLI	NS	1.74	1	2-ELECTRON	HPL	33751666	May-30	1
849	GUNADALA	6521123000095	GRAM PANCHYATI,PRODDUTURU	YARLAGADDA VARI GUDEM	NS	3	1	ELEC	VISIONTEK	9583738		1
850	GUNADALA	6521103005078	PANCHAYATHI SECRETARY	B.C.COLONY	NS	13.34	3	2-ELECTRON	GENUS	3041347	5-30A	1
851	GUNADALA	6521506013036	Commissioner,YSR Tadigadapa Municipality,Krish	0	NS	5	3	2-ELECTRON	Genus	3041240	5-30A	1
852	GUNADALA	6521501012606	Commissioner,YSR Tadigadapa Municipality,Krish	PRABHU NAGAR	NS	12	3	2-ELECTRON	Genus	3042054	5-30A	1
853	GUNADALA	6521503014330	RAMESH	poranki	NS	5	3	6-HTCTMTR	L AND T	16237703		1
854	GUNADALA	6521501016616	Commissioner,YSR Tadigadapa Municipality,Krish	poranki	NS	2	1	2-ELECTRON	HE	20031173	May-30	1
855	GUNADALA	6521501049324	Commissioner,YSR Tadigadapa Municipality,Krish	PORANKI	NS	1	1	0	HPL	20619506	8	1
856	GUNADALA	6521501012602	Commissioner,YSR Tadigadapa Municipality,Krish	PORANKI CENTRE	NS	13	3	2-ELECTRON	Genus	3041953	May-30	1
857	GUNADALA	6521403000002	Commissioner,YSR Tadigadapa Municipality,Krish	TADIGADAPA	NS	2.19	1	2-ELECTRON	HPL	31586615	5-30A	1
858	GUNADALA	6521403009391	Commissioner,YSR Tadigadapa Municipality,Krish	TADIGADAPA	NS	8	3	DIGITAL	GENUS	1504460		1
859	GUNADALA	6521404021231	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	6.702	3	2-ELECTRON	HPL	6353914	3X5.30A	1
860	GUNADALA	6521461018547	VARRE,KRUPA KUMAR	OPP KANAKA DURGAMMA TEMPLE	NS	2.681	1	DIGITAL	HPL	32543511		1
861	GUNADALA	6521404006350	Commissioner,YSR Tadigadapa Municipality,Krish	PWS	NS	4.476	3	2-ELECTRON	Genus	3035265	3X5-30A	1
862	GUNADALA	6521404009048	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	4.89	1	2-ELECTRON	Genus	7111321	5-30A	1
863	GUNADALA	6521404021928	GRAMA KARYADARSI,GRAMA KARYADARSI	CHINTHALA KATTA YANAMALAKUD	NS	5	3	2-ELECTRON	HPL	3880677	3X5-30A	1
864	GUNADALA	6521401010199	Commissioner,YSR Tadigadapa Municipality,Krish	TADIGADAPA	NS	3	1	2-ELECTRON	HPL	64625882	5.30A	1
865	GUNADALA	6521404005050	Executive Officer	YANAMALAKUDURU.	NS	27.5	3	2-ELECTRON	Genus	3035072	3X5-30A	1
866	GUNADALA	6521402003081	Panchayat Secretary	NA	NS	6	3	2-ELECTRON	HPL	6232215	3X5.30A	1
867	GUNADALA	6521401005983	Mpp Elimentery School	5-77/3	NS	1	1	0	NPL	27102384	5-20 A	1
868	GUNADALA	6521401006040	A W Centre	5-70/1	NS	1	1	2-ELECTRON	HPL	32105572	5-30A	1
869	GUNADALA	6521404009377	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	20.5	3	2-ELECTRON	HPL	6285940	3X5-30A	1
870	GUNADALA	6521404013189	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	1.492	1	2-ELECTRON	HPL	32107332	5-30A	1
871	GUNADALA	6521403004193	Commissioner,YSR Tadigadapa Municipality,Krish	TADIGADAPA	NS	14	3	0	HPL	16223742	5 3	1
872	GUNADALA	6521411019260	E.O,GRAMMA PANCHATATHI	NEAR CHINTALA KATTA YANAMALA	NS	2	1	ELEC	HPL	33578244		1
873	GUNADALA	6521402002747	The Secretary (Pws) Major	NA	NS	10	3	2-ELECTRON	Genus	3035084	3X5-30A	1
874	GUNADALA	6521404019730	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	3.73	3	ELEC	AVON	3215839		1
875	GUNADALA	6521402002938	Secretary	NA	NS	5	3	2-ELECTRON	Genus	3035205	3X5-30A	1
876	GUNADALA	6521403006752	Commissioner,YSR Tadigadapa Municipality,Krish	----	NS	24	3	2-ELECTRON	HPL	6421827	3X5.30A	1
877	GUNADALA	6521419020751	Commissioner,YSR Tadigadapa Municipality,Krish	CURRENT OFFICE ROAD	NS	4.021	1	ELEC	HPL	34877721		1
878	GUNADALA	6521404016598	PANCHAYAT SECRETARY	YANAMALA KUDURU	NS	10.724	3	2-ELECTRON	HPL	6362757	5.30A	1
879	GUNADALA	6521403008516	Commissioner,YSR Tadigadapa Municipality,Krish	--	NS	5	3	2-ELECTRON	HPL	6285615	3X5-30A	1
880	GUNADALA	6521404003227	E O P T Board	NA	NS	1	1	0	0	27101169	0	1
881	GUNADALA	6521456005434	H M M P Ely School	NA	NS	0.6	1	2-ELECTRON	HPL	31590988	5-30A	1
882	GUNADALA	6521403009228	Commissioner,YSR Tadigadapa Municipality,Krish	TADIGADAPA	NS	7	3	DIGITAL	LT	16395934		1
883	GUNADALA	6521117000003	Executive Officer	NEPPALLI	NS	1.2	1	2-ELECTRON	HPL	34677884	May-30	1
884	GUNADALA	6521115000732	Executive Officer	NA	NS	4.6	1	2-ELECTRON	HPL	33832065	530	1
885	GUNADALA	6521112001089	M P U P School Kundru	------	NS	1	1	2-ELECTRON	HPL	27245051	May-30	1
886	GUNADALA	6521117002477	Sarpanch Gramapanchayat	Works Neppalli	NS	10	3	2-ELECTRON	Genus	3043276	May-30	1
887	GUNADALA	6521120000242	Sarpanch Panchayat Board	NA	NS	0.255	1	6-HTCTMTR		27029817		1
888	GUNADALA	6521100000003	Executive Officer	KANKIPADU	NS	3.4	1	2-ELECTRON	HE	20962431	May-30	1
889	GUNADALA	6521404009823	M P P School	May-56	NS	1	1	0	0	28261073	0	1
890	GUNADALA	6521403007706	Commissioner,YSR Tadigadapa Municipality,Krish	RS NO:31	NS	8	3	0	0	16247364	0	1
891	GUNADALA	6521461018546	Commissioner,YSR Tadigadapa Municipality,Krish	OPP KANAKA DURGAMMA TEMPLE	NS	7	3	DIGITAL	GENUS	3064233		1
892	GUNADALA	6521404003821	Executive Officer	YANAMALAKUDURU	NS	3.56	1	0	HPL	26480575		1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
893	GUNADALA	6521403007959	T.VIJAYALAKSHMI	RSNO.12/1	NS	8	3	2-ELECTRON	GENUS	3047122	3X5-30A	1
894	GUNADALA	6521404013186	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	2	1	2-ELECTRON	HPL	33723920	5-30A	1
895	GUNADALA	6521403007962	T.VIJAYALAKSHMI	RSNO.12/1	NS	8	3	2-ELECTRON	GENUS	3043966	3X5-30A	1
896	GUNADALA	6521403012619	YSR TADIGADAPA,COMMISSIONER OF YSR TADIG/	NEAR OHSR KARMIKANAGAR TADIG	NS	8	3	3-Electron	HPL	3879713		1
897	GUNADALA	6521404000003	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	5.98	3	2-ELECTRON	HPL	7517581	3X5-30A	1
898	GUNADALA	6521404009191	Secretary	BC COLONY,	NS	10	3	2-ELECTRON	Genus	3035146	3X5-30A	1
899	GUNADALA	6521401008741	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	6.702	3	2-ELECTRON	HPL	6286049	3X5-30A	1
900	GUNADALA	6521404000007	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	4.4	1	2-ELECTRON	HE	19917390	5.30A	1
901	GUNADALA	6521404019582	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	5	3	2-ELECTRON	HPL	3366882	3X5.30A	1
902	GUNADALA	6521419014989	E O PANCHAYATH	26-54	NS	1	1	0		27885934		1
903	GUNADALA	6521404013192	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	4.491	1	2-ELECTRON	NPL	4865419	5.30A	1
904	GUNADALA	6521404010023	Commissioner,YSR Tadigadapa Municipality,Krish	30-01-01	NS	1	1	2-ELECTRON	HE	19871764	3X5-30A	1
905	GUNADALA	6521404013193	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	2	1	2-ELECTRON	HPL	32873407	5-30A	1
906	GUNADALA	6521403005697	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	3	1	2-ELECTRON	HPL	75409921	5-30A	1
907	GUNADALA	6521404003303	Mandala Prajaparishat	NA	NS	0.28	1	0	0	12411760	0	1
908	GUNADALA	6521402003991	GERAMA PANCHAYAT,PANCHAYAT SECRETARY	JAI SAI NAGAR PEDDAKATTA DOWN	NS	2	1	2-ELECTRON	NPL	4475760	5.30A	1
909	GUNADALA	6521421023969	COMMISSIONER,YSR TADIGADAPA	YANAMALAKUDURU	NS	7	3	3-Electron	HPL	3880878		1
910	GUNADALA	6521402003992	GERAMA PANCHAYAT,PANCHAYAT SECRETARY	NTR NAGAR PEDAPULIPAKA	NS	2	1	2-ELECTRON	HE	20035645	5.30A	1
911	GUNADALA	6521404021229	PANCHAYAT SECRETARY	YANAMALAKUDURU	NS	6.702	3	2-ELECTRON	HPL	6244500	5.30A	1
912	GUNADALA	6521404009014	Secretary	NA	NS	12.5	3	2-ELECTRON	Genus	3026438	3X5-30A	1
913	GUNADALA	6521100803844	Warden Govt Welfare	NA	NS	5	3	2-ELECTRON	HPL	3719549	May-30	1
914	GUNADALA	6521122001267	JAGANANNA HOUSING COLONY,EEDUPUGALLU L	VELPURU	NS	3	1	Electronic	HE	20838141		1
915	GUNADALA	6521122001143	PANCHAYAT SECRATARY		NS	7	3	2-ELECTRON	HPL	16238905	May-30	1
916	GUNADALA	6521103004456	Secretary	GRAM PANCHAYAT	NS	7	3	2-ELECTRON	HPL	3861209	3530	1
917	GUNADALA	6521103003942	Executive Officer(Water Tank)	NA	NS	12	3	6-HTCTMTR	HPL	16239882	0	1
918	GUNADALA	6521154007058	Secretary	----------	NS	8.04	3	2-ELECTRON	LnT	16379921	May-30	1
919	GUNADALA	6521115001097	SECRETARY,GRAMA PANCHAYATI MANTHENA	MANTHENA	NS	3	1	ELEC	HPL	33207064		1
920	GUNADALA	6521111000068	The Head Master M P E Sch	NA	NS	0.255	1	2-ELECTRON	HPL	33306149	May-30	1
921	GUNADALA	6521112001539	KUNDERU GRAMA PANCHAYAT,SWPC SHED	Kunderu Grama Panchayat SWPC SI	NS	2	1	Electronic	HPL	34088437		1
922	GUNADALA	6521105000493	PANCHAYATHI SECRETARY	gollagudem	NS	2.681	1	ELEC	GENUS	7110360	--	1
923	GUNADALA	6521103002006	K G K Ch High School	NA	NS	1.01	1	2-ELECTRON	HPL	33298137	May-30	1
924	GUNADALA	6521122000428	Sarpanch Gram Panchayat	NA	NS	14.661	3	5-LTCTMTR	Genus	3043597	May-30	1
925	GUNADALA	6521115001013	GUDAVALLI,RATNA KISHORE	HINDU BARIYAL GROUND MANTEN/	NS	2.681	1	DIGITAL	HPL	31314635		1
926	GUNADALA	6521116000433	ANGANAVADI CENTER	KANKIPADU	NS	1	1	2-ELECTRON	HPL	28096962	5.3	1
927	GUNADALA	6521108000230	The Secretary	NA	NS	1	1	2-ELECTRON	HPL	34455158	530	1
928	GUNADALA	6521104004058	Panchayat Secretary Godavarru	Godavarru	NS	5	3	3-Electron	HPL	8072645		1
929	GUNADALA	6521100803713	E O Panchayat Shop Vii	NA	NS	0.255	1	2-ELECTRON	HPL	31269085	May-30	1
930	GUNADALA	6521102002960	PANCHAYAT SECRETARY,DAVULURU CH SEKHAR	Davuluru	NS	5	1	2-ELECTRON	HE	20962434	5-30A	1
931	GUNADALA	6521110000001	Executive Officer	NA	NS	10	3	1-MECHANIC	Genus	3043329	May-30	1
932	GUNADALA	6521112800023	Panchayati Office	NA	NS	0.27	1	2-ELECTRON	HIMACHAL	31726003	May-30	1
933	GUNADALA	6521100006322	Executive Officer	NA	NS	3.6	1	0	HPL	30367285	0	1
934	GUNADALA	6521104003602	Mpp School	GUDAVARRY	NS	1	1	2-ELECTRON	NPL	4236928	5-30A	1
935	GUNADALA	6521104004055	Panchayat Secretary Godavarru	Godavarru	NS	5	3	3-Electron	HPL	3172701		1
936	GUNADALA	6521110000002	Executive Officer	NA	NS	2.5	1	2-ELECTRON	HPL	32527509	May-30	1
937	GUNADALA	6521154008315	ASST.PROJECTMANAGERVELUGUDRDA	--	NS	2	1	DIGITAL	HPL	29936328		1
938	GUNADALA	6521115000846	Executive Office	0	NS	1	1	0	0	30395850	0	1
939	GUNADALA	6521118002870	Head Master	NA	NS	0.255	1	2-ELECTRON	HPL	32102218	May-30	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
940	GUNADALA	6521115000731	Executive Officer	NA	NS	4.6	1	0	HPL	24099390	0	1
941	GUNADALA	6521121002025	GRAMAPANCHAYTHI UPPULUR	--	NS	9	3	0	LT	16243969		1
942	GUNADALA	6521154002851	Live Stock Officer	NA	NS	6.7	3	2-ELECTRON	HPL	6416353	5-30A	1
943	GUNADALA	6521101000001	Executive Officer	NA	NS	0.8	1	2-ELECTRON	HPL	64637757	May-30	1
944	GUNADALA	6521110004560	GP KOLAVENNU HOUSING,GP KOLAVENNU	KOLAVENNU	NS	3	1	Electronic	Rolex	10007369		1
945	GUNADALA	6521104003749	ANGANWADI CENTRE	KANKIPADU	NS	1	1	2-ELECTRON	HE	20027505	530	1
946	GUNADALA	6521114000871	Panchayat Secretary	---	NS	2	1	2-ELECTRON	NPL	4236925	May-30	1
947	GUNADALA	6521102000001	Executive Officer	DAVULURU	NS	3.24	1	0	HPL	17257623	0	1
948	GUNADALA	6521121002084	PANCAHATHI SECRATARY	KANKIPADU	NS	5	1	DIGITAL	HPL	26420054		1
949	GUNADALA	6521104004083	PANCHAYAT SECRETARY,PANCHAYAT SECRETARY	GODAVARRU	NS	3	1	Electronic	HE	20106167		1
950	GUNADALA	6521404018990	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	6	3	2-ELECTRON	HPL	7529186	3X5-30A	1
951	GUNADALA	6521404006363	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	11	3	2-ELECTRON	Genus	3035028	3X5-30A	1
952	GUNADALA	6521402003979	GRAMA PANCHAYAT,PANCHAYAT SECRETARY	PIPES COMPANY ROAD	NS	2	1	DIGITAL	HPL	33035481		1
953	GUNADALA	6521404013190	Panchayathi Secratary	YANAMALAKUDURU	NS	3.512	1	2-ELECTRON	HPL	33364078	5.30A	1
954	GUNADALA	6521466017177	EXECUTIVE ENGINEER K DT.,EXECUTIVE ENGINEER	NEW REGULATOR BESIDEK AND B L	NS	8	3	DIGITAL	LT	16222200		1
955	GUNADALA	6521403012525	MUNICIPAL COMMISSIONER,YSR TADIGADAPA M	BALAJI NAGAR TADIGADAPA	NS	5	3	3-Electron	HPL	7517658		1
956	GUNADALA	6521403008194	Commissioner,YSR Tadigadapa Municipality,Krish	RS No.168/2	NS	5	3	2-ELECTRON	Genus	3026462	3X5-30A	1
957	GUNADALA	6521403005262	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	0.52	1	2-ELECTRON	NPL	4428502	5.30A	1
958	GUNADALA	6521403008820	Commissioner,YSR Tadigadapa Municipality,Krish	TADIGADAPA	NS	5	3	DIGITAL	L-T	16237489		1
959	GUNADALA	6521403006303	M P Primary Urdu School	---	NS	1	1	0	HPL	14363851		1
960	GUNADALA	6521404013195	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	4.621	1	2-ELECTRON	HE	19917386	5.30A	1
961	GUNADALA	6521401010245	Commissioner,YSR Tadigadapa Municipality,Krish	tadigadapa	NS	7	1	2-ELECTRON	HPL	34230685	5.30A	1
962	GUNADALA	6521411019745	PANCHAYAT SECRETARY,PANCHAYAT SECRETARY	yanamalakuduru	NS	5	3	2-ELECTRON	Genus	3026901	3X5-30A	1
963	GUNADALA	6521404021929	GRAMA KARYADARSI,GRAMA KARYADARSI	CHINTHALA KATTA YANAMALAKUD	NS	5	3	ELEC	HPL	6271919		1
964	GUNADALA	6521404009015	Secretary	NA	NS	7.5	3	2-ELECTRON	Genus	3035281	3X5-30A	1
965	GUNADALA	6521404000001	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	5.79	3	2-ELECTRON	HPL	3035482	3X5-30A	1
966	GUNADALA	6521404014212	Commissioner,YSR Tadigadapa Municipality,Krish	---	NS	9	3	2-ELECTRON	Genus	3035251	3X5-30A	1
967	GUNADALA	6521402004017	GPPEDDAPULIPAKA,PANCHAYAT SECRETARY	PEDDAPULIPAKA	NS	5	3	ELEC	HPL	3704863		1
968	GUNADALA	6521403003235	Veternary Officer	NA	NS	0.44	1	2-ELECTRON	HPL	31586618	5-30A	1
969	GUNADALA	6521404013194	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	3.31	1	0	HPL	62319775	0	1
970	GUNADALA	6521411014990	E O PANCHAYATH	26-54	NS	1	1	0		27883217		1
971	GUNADALA	6521456017392	Commissioner,YSR Tadigadapa Municipality,Krish	GRAMA PANCHAYATHI YANAMALA	NS	6	3	2-ELECTRON	Genus	3035332	3X5-30A	1
972	GUNADALA	6521407005050	Head Master M P P School	NA	NS	1	1	2-ELECTRON	IB	24054730	May-30	1
973	GUNADALA	6521404013187	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	2.35	1	0	HE	10095346		1
974	GUNADALA	6521456018907	GRAMA PANCHAYAT,SECRETARY	YANAMALAKUDURU	NS	6	3	DIGITAL	HPL	3384588		1
975	GUNADALA	6521402003298	Panchayat Secratary	Apr-20	NS	10	3	2-ELECTRON	Genus	3035489	3X5-30A	1
976	GUNADALA	6521403000003	Commissioner,YSR Tadigadapa Municipality,Krish	TADIGADAPA	NS	7.24	3	2-ELECTRON	HPL	6350648	3X5-30A	1
977	GUNADALA	6521403006896	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	12	3	2-ELECTRON	Genus	3026463	3X5-30A	1
978	GUNADALA	6521404003822	Executive Officer	YANAMALAKUDURU	NS	8.7	3	2-ELECTRON	Genus	3035404	3X5-30A	1
979	GUNADALA	6521461018545	Commissioner,YSR Tadigadapa Municipality,Krish	OPP KANAKA DURGAMMA TEMPLE	NS	7	3	DIGITAL	GENUS	3063745		1
980	GUNADALA	6521404009049	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	1.89	1	2-ELECTRON	HPL	32872699	5-30A	1
981	GUNADALA	6521112001247	The Secretary	OHSR	NS	5	3	6-HTCTMTR	Genus	3043554	May-30	1
982	GUNADALA	6521120000855	Secretary	NA	NS	2.238	1	1-MECHANIC	HPL	17240431	0	1
983	GUNADALA	6521100003957	Asst Engiineer	NA	NS	0.36	1	2-ELECTRON	HPL	64600185	530	1
984	GUNADALA	6521104003990	PANCHAYATHI SECRETARY,PANCHAYATHI SECRET	GODAVARRU	NS	3	1	2-ELECTRON	L	10500010	5.3	1
985	GUNADALA	6521100805155	The Head Master Mp Ek Sch	NA	NS	1	1	2-ELECTRON	HE	20023665	530	1
986	GUNADALA	6521118003606	GRAMA PANCHAYATHI PRODDUTURU,GRAMA PA	prodduturu	NS	6	3	2-ELECTRON	AVON	3190173	530	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
987	GUNADALA	6521119004583	PUNADIPADU,SECRETARY GRAMA PANCHAYATI	PUNADIPADU	NS	2.681	1	ELEC	HPL	64602488		1
988	GUNADALA	6521117003296	GP NEPPALLI,GP NEPPALLI	NEAR WATER TANK,WEST HARIJAN,	NS	3	1	Electronic	HE	20099797		1
989	GUNADALA	6521121001959	MEDICAL OFFICER	----	NS	20	1	6-HTCTMTR	HPL	30883323	May-30	1
990	GUNADALA	6521115000874	Panchayat Secretary	-------	NS	5	3	2-ELECTRON	Genus	3043242	May-30	1
991	GUNADALA	6521104003747	ANGANWADI CENTRE	KANKIPADU	NS	1	1	2-ELECTRON	HPL	30606837	5	1
992	GUNADALA	6521112001538	GP KUNDERU,GP KUNDERU	Near Anganwadi,Kolavennu Road,K	NS	3	1	ELEC	HPL	64600365		1
993	GUNADALA	6521152008449	ANGANWADI CENTRE	--	NS	1	1	DIGITAL	LT	62304243		1
994	GUNADALA	6521112001248	The Secretary	OHSR VILLEGE KUNDURU	NS	5	3	2-ELECTRON	Genus	3043565	May-30	1
995	GUNADALA	6521110004093	ANGANAVADI CENTER	KANKIPADU	NS	1	1	0	HPL	28214651		1
996	GUNADALA	6521117003004	M P P School	02-01-02	NS	1	1	2-ELECTRON	HPL	34455130	May-30	1
997	GUNADALA	6521121002010	ANGANVADI CENTER	UPULLURU	NS	1	1	0	HPL	28212926		1
998	GUNADALA	6521121002212	GRAM PANCHAYAT UPPALURU,GRAM PANCHAYA	UPPALURU	NS	3	1	2-ELECTRON	GENUS	7101236	5-30A	1
999	GUNADALA	6521102802214	P P Board	NA	NS	0.44	1	2-ELECTRON	HPL	31931732	May-30	1
1000	GUNADALA	6521110002469	Z P H School	NA	NS	1.08	1	2-ELECTRON	HPL	32875333	May-30	1
1001	GUNADALA	6521118000002	Executive Officer	NA	NS	8.8	3	2-ELECTRON	HPL	3889614	May-30	1
1002	GUNADALA	6521101000434	Secretary	NA	NS	5	3	2-ELECTRON	HPL	7528377	5-30A	1
1003	GUNADALA	6521114000273	Warer Works	NA	NS	7.5	3	2-ELECTRON	HPL	3714707	3X5-30A	1
1004	GUNADALA	6521110002490	Panchayat Radio Room	NA	NS	0.255	1	2-ELECTRON	HPL	31725752	May-30	1
1005	GUNADALA	6521112000961	Executive Officer	NA	NS	1.492	1	2-ELECTRON	NPL	1371859	May-30	1
1006	GUNADALA	6521104004084	PANCHAYAT SECRETARY,PANCHAYAT SECRETARY	Kummarla Centar, Godavarru	NS	3	1	Electronic	HE	19921302		1
1007	GUNADALA	6521106000063	M P P School	NA	NS	0.255	1	2-ELECTRON	HPL	33305312	May-30	1
1008	GUNADALA	6521101000078	Sannala Pavani	NA	NS	0.255	1	2-ELECTRON	HPL	31931735	May-30	1
1009	GUNADALA	6521105000267	The Sarpanch Grampanchayat	NA	NS	7	3	2-ELECTRON	HPL	3707226	May-30	1
1010	GUNADALA	6521119802007	Z P H School	NA	NS	4	1	2-ELECTRON	HPL	31933553	May-30	1
1011	GUNADALA	6521120800096	Z P H School	NA	NS	0.28	1	2-ELECTRON	HPL	31910641	May-30	1
1012	GUNADALA	6521153009810	OGIRALA,RAMAKRISHNA	KANKIPADU	NS	5	3	3-Electron	HPL	6234132		1
1013	GUNADALA	6521114000985	ANGANVADI CENTER	--	NS	1	1	0	HPL	27993703		1
1014	GUNADALA	6521100004405	Executive Officer	KANKIPADU	NS	2.8	1	2-ELECTRON	HPL	30393937	May-30	1
1015	GUNADALA	6521114000001	Executive Officer	MADDURU	NS	5.8	3	2-ELECTRON	AVON	3234648	530	1
1016	GUNADALA	6521119003738	Mpp School	PUNADIPADU	NS	1	1	2-ELECTRON	HPL	70798335	May-30	1
1017	GUNADALA	6521121800002	Executive Officer	UPPULURU	NS	5.12	3	2-ELECTRON	HPL	6421986	3X5-30A	1
1018	GUNADALA	6521403002528	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	0.38	1	0	0	17240764	0	1
1019	GUNADALA	6521402003990	GERAMA PANCHAYAT,PANCHAYAT SECRETARY	SRINAGAR PEDDA KATTA	NS	2	1	2-ELECTRON	HPL	4478722	5.30A	1
1020	GUNADALA	6521402003499	PANCHAYAT SECRETARY	4-138	NS	1	1	2-ELECTRON	HPL	31348268	5-30A	1
1021	GUNADALA	6521403003053	Mandalprajaparishat Up Sc	NA	NS	0.94	1	2-ELECTRON	HPL	32854243	5-30A	1
1022	GUNADALA	6521404013188	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	1.492	1	2-ELECTRON	HPL	32528604	5-30A	1
1023	GUNADALA	6521402002351	Resident	NA	NS	11	3	2-ELECTRON	Genus	3035253	3X5-30A	1
1024	GUNADALA	6521404003151	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	47	3	2-ELECTRON	HPL	6424846	5.30A	1
1025	GUNADALA	6521403005698	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	3	1	0	HPL	20613085	5 2	1
1026	GUNADALA	6521404013191	Panchayathi Secratary	YANAMALAKUDURU	NS	3.04	1	0	HPL	20943295		1
1027	GUNADALA	6521425021024	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	5	3	2-ELECTRON	HPL	3706746	5.30A	1
1028	GUNADALA	6521404016600	PANCHAYAT SECRETARY	YANAMALA KUDURU	NS	8.043	3	2-ELECTRON	Genus	3062441	5.30A	1
1029	GUNADALA	6521401010246	Commissioner,YSR Tadigadapa Municipality,Krish	tadigadapa	NS	7	1	ELEC	HPL	33725948		1
1030	GUNADALA	6521403011102	Commissioner,YSR Tadigadapa Municipality,Krish	TADIGADAPA	NS	1.492	1	ELEC	L AND T	10542208		1
1031	GUNADALA	6521403004003	Commissioner,YSR Tadigadapa Municipality,Krish	TADIGADAPA	NS	1.4	1	0	VT	60894899	0	1
1032	GUNADALA	6521403000005	Commissioner,YSR Tadigadapa Municipality,Krish	TADIGADAPA	NS	5.36	3	2-ELECTRON	HPL	6350650	3X5-30A	1
1033	GUNADALA	6521404909050	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	4.303	1	2-ELECTRON	NPL	4750861	5.30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
1034	GUNADALA	6521461018544	VARRE,KRUPA KUMAR	OPP KANAKA DURGAMMA TEMPLE	NS	7	3	DIGITAL	GENUS	3064561		1
1035	GUNADALA	6521404002457	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	30	3	2-ELECTRON	GENUS	3063727	3X5-30A	1
1036	GUNADALA	6521403000001	Commissioner,YSR Tadigadapa Municipality,Krish	TADIGADAPA	NS	8.928	3	2-ELECTRON	HPL	3891575	3X5-30A	1
1037	GUNADALA	6521404016599	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALA KUDURU	NS	2.681	1	DIGITAL	HPL	30563098		1
1038	GUNADALA	6521403006862	Z P High School	----------	NS	1	1	2-ELECTRON	HPL	7132258	5.30A	1
1039	GUNADALA	6521404023414	Y S R TADIGADAPA,MUNICIPAL COMMISSIONER	DURGA NAGAR,YANAMALAKUDURU	NS	8	3	3-Electron	HPL	3716203	3X5.30A	1
1040	GUNADALA	6521430017176	EXECUTIVE ENGINEER K DT.,EXECUTIVE ENGINEEF	KEB COLONY YANAMALAKUDURU	NS	8	3	DIGITAL	LT	16222199		1
1041	GUNADALA	6521430023771	COMMISSIONER,YSR TADIGADAPA	YANAMALAKUDURU	NS	2	1	Electronic	Rolex	10003881		1
1042	GUNADALA	6521402002600	Grampanchayath	NA	NS	0.44	1	2-ELECTRON	LnT	60076059	5.30A	1
1043	GUNADALA	6521402003299	Panchayat Secratary	Apr-20	NS	12	3	2-ELECTRON	GENUS	3035378	3X5-30A	1
1044	GUNADALA	6521404009047	Secretary/Gp	NA	NS	2.27	1	0	HPL	27545945	20	1
1045	GUNADALA	6521404009190	Commissioner,YSR Tadigadapa Municipality,Krish	SKL PURAM,	NS	21.5	3	2-ELECTRON	Genus	3035060	3X5-30A	1
1046	GUNADALA	6521404011688	Z P High School	----	NS	1	1	0	NPL	1457521		1
1047	GUNADALA	6521404000060	Commissioner,YSR Tadigadapa Municipality,Krish	YANAMALAKUDURU	NS	2.45	1	2-ELECTRON	VISIONTEK	10482521	5.30A	1
1048	GUNADALA	6521404007797	Commissioner,YSR Tadigadapa Municipality,Krish	NA	NS	3.49	1	2-ELECTRON	HPL	31592749	5-30A	1
1049	GUNADALA	6521403008207	Commissioner,YSR Tadigadapa Municipality,Krish	----------	NS	5	3	2-ELECTRON	Genus	3027999	3X5-30A	1
1050	GUNADALA	6521119004627	GRAM PANCHAYAT,PUNADIPADU	Punadipadu	NS	5	3	2-ELECTRON	AVON	8081649	3530	1
1051	GUNADALA	6521103006550	PANCHAYATHI SECRETARY,EDUPUGALLU GRAM P	YJC LAYOUT CHINTHALATHOPU	NS	3	1	Electronic	Rolex	10007454		1
1052	GUNADALA	6521117002913	Executive Officer	NA	NS	4	1	0	HPL	20618512	0	1
1053	GUNADALA	6521152008243	PANCHAYATI SECRATARY	KPADU	NS	5	1	0	HPL	28012456		1
1054	GUNADALA	6521121002215	GRAM PANCHAYAT UPPALURU,GRAM PANCHAYA	UPPALURU	NS	8	3	2-ELECTRON	HPL	3705980	May-30	1
1055	GUNADALA	6521118002906	Surpunch G P Community C	NA	NS	1	1	2-ELECTRON	HPL	31727278	May-30	1
1056	GUNADALA	6521103005409	E.O. GRAMAPANCHAYAT	PUTTA KATTA	NS	2	1	2-ELECTRON	HPL	33306995	May-30	1
1057	GUNADALA	6521114000845	M P P S SCHOOL	MADDURU	NS	1	1	2-ELECTRON	HPL	32335718	530	1
1058	GUNADALA	6521118003304	SECRETARY	S.NO.28,30	NS	5	3	2-ELECTRON	HPL	6423730	530	1
1059	GUNADALA	6521104800840	P P B Office	NA	NS	0.48	1	2-ELECTRON	HPL	32306894	530	1
1060	GUNADALA	6521116000357	Secretary	NA	NS	8	3	2-ELECTRON	HPL	6244380	30	1
1061	GUNADALA	6521103003924	Secretary Gram Panchayat	NA	NS	7.46	3	2-ELECTRON	HPL	6373522	May-30	1
1062	GUNADALA	6521120001035	CSI PRIMARY SCHOOL	5-121	NS	1	1	0		27570698		1
1063	GUNADALA	6521103000001	Executive Officer	EDUPUGALLU	NS	21.1	3	2-ELECTRON	LnT	16329689	May-30	1
1064	GUNADALA	6521103003254	Executive Officer	EDUPUGALLU	NS	6.34	3	2-ELECTRON	HPL	7528379	Oct-40	1
1065	GUNADALA	6521114000984	ANGANVADI CENTER	--	NS	1	1	0	HPL	27994043		1
1066	GUNADALA	6521102002453	The Surpanch	DAVULURU	NS	10.18	3	2-ELECTRON	HPL	6276936	530	1
1067	GUNADALA	6521112000570	Executive Officer	KUNDERU	NS	7.822	3	2-ELECTRON	HPL	6362850	5-30A	1
1068	GUNADALA	6521109000172	Secretary	----	NS	3	1	0	HPL	14340106	--	1
1069	GUNADALA	6521154009172	VRO OFFICE KANKIPADU,VRO OFFICE KANKIPADU	KANKIPADU	NS	2.681	1	ELEC	HPL	34170147		1
1070	GUNADALA	6521119801534	Surpanch P P Board	NA	NS	0.9	1	2-ELECTRON	HPL	31935348	May-30	1
1071	GUNADALA	6521101000529	GRAM PANCHAYAT LIBRARY,GRAM PANCHAYAT I	CHALIVENDHRAPALEM	NS	2	1	DIGITAL	HPL	30662481	--	1
1072	GUNADALA	6521101000480	Panchayat Secretary	D NO. 1-32	NS	5	1	2-ELECTRON	HPL	26386175	530	1
1073	GUNADALA	6521110003858	M P Urdu Elementary School	---	NS	1	1	2-ELECTRON	LNT	62316122	5-30A	1
1074	GUNADALA	6521120000736	Hostel W O G S W Boys Hostel	NA	NS	12	3	1-MECHANIC	Genus	3042425	May-30	1
1075	GUNADALA	6521108800001	Executive Officer	K.S.N.PALEM	NS	4.28	1	2-ELECTRON	GENUS	7109051	May-30	1
1076	GUNADALA	6521112000952	Executive Officer	NA	NS	7.5	3	5-LTCTMTR	Genus	3042759	May-30	1
1077	GUNADALA	6521118003779	GRAMA PANCHAYATHI,GRAMA PANCHAYATHI PR	PRODDUTURU PANCHAYTHI	NS	3	1	2-ELECTRON	HPL	34776366	5-30A	1
1078	GUNADALA	6521110003861	M P P School	---	NS	1	1	2-ELECTRON	HPL	31725069	May-30	1
1079	GUNADALA	6521226025076	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	5	3	DIGITAL	L AND T	16241311		1
1080	GUNADALA	6521213030054	Commissioner,YSR Tadigadapa Municipality,Krish	NEAR SAI BABA TEMPLE, 100 FEET F	NS	2.681	1	ELEC	NPL	4243618		1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
1081	GUNADALA	6521225016598	M P P School	--	NS	1	1	2-ELECTRON	HPL	31333023	5-30A	1
1082	GUNADALA	6521217025358	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	2	1	DIGITAL	HPL	31723217		1
1083	GUNADALA	6521226016331	Commissioner,YSR Tadigadapa Municipality,Krish	--	NS	15	3	5-LTCTMTR	Genus	3046339	5-30A	1
1084	GUNADALA	6521214029338	ANGANWADI,SCHOOL	KANURU	NS	1	1	2-ELECTRON	HPL	32490578	5-30A	1
1085	GUNADALA	6521225000001	Commissioner,YSR Tadigadapa Municipality,Krish	KANURU	NS	5.4	3	2-ELECTRON	HPL	3892969	May-30	1
1086	GUNADALA	6512106037417	Commissioner	VIGNESWARA TEMPLE ROAD	NS	10	3	2-ELECTRON	Genus	3004524	3Q5-30A	1
1087	GUNADALA	6512108041199	COMMISSIONER JAWAHAR AUTONAGAR APIIC IA	jawahar autonagar vijayawada	NS	2	1	2-ELECTION	Holley	2658359	5-30A	1
1088	GUNADALA	6512109028031	The Commissioner	V.M.C.	NS	8.5	3	CT-METER	L&T	4892194	125/5A	1
1089	MACHILIPATNAM	6244125000068	SECRETARY(MAJOR STL)	KAMAKSHIPURAM-STL MAJOR	NS	0.24	1	2-ELECTRON	NPL	4668606	May-30	1
1090	MACHILIPATNAM	6244109000509	ANGANAWADI CENTER-II	NEAR ANGANAWADI CENTER	NS	0.24	1	0	HPL	28016799		1
1091	MACHILIPATNAM	6244109000342	H.M.Z.P.HIGH SCHOOL	KANCHADAM	NS	0.96	1	2-ELECTRON	HPL	31481745	5-30A	1
1092	MACHILIPATNAM	6244117000884	ANGANWADI CENTER MALESWARAM HW	NEAR ANGANWADI CENTER	NS	1	1	DIGITAL	HPL	31315021		1
1093	MACHILIPATNAM	6244100002753	PANCHAYATSECRATARY	BANTUMILLI-6244100	NS	5	1	0		10163964	5	1
1094	MACHILIPATNAM	6244116000651	GRAMA PANCHAYATHI,MALLAMPUDI	MALLAMPUDI	NS	12	3	2-ELECTRON	HPL	6406679	May-30	1
1095	MACHILIPATNAM	6244131800385	SARPANCH(MINOR PWS)	SATULURU-PWS MINOR	NS	8	3	2-ELECTRON	L	16388331	5-30A	1
1096	MACHILIPATNAM	6244100003189	A.E. HOUSING OFFICE BUILDING	0	NS	1	1	2-ELECTRON	HPL	32068768	5-30A	1
1097	MACHILIPATNAM	6244120000811	VHAK BALAJI G L ACHARYULU	MUNJULURU	NS	2	1	ELEC	VISIONTEK	9578831		1
1098	MACHILIPATNAM	6244117000878	ANGANWADI CENTER MALESWARAM I	NEAR ANGANWADI CENTER	NS	1	1	DIGITAL	HPL	30535420		1
1099	MACHILIPATNAM	6244116800001	SARPANCH(MINOR STL)	MALLAMPUDI-STL MINOR	NS	2.04	1	2-ELECTRON	HPL	34812185	5-30A	1
1100	MACHILIPATNAM	6244103800121	GRAMA PANCHAYATI OFFICE	OLD PANCHAYATHI OFFICE	NS	0.64	1	2-ELECTRON	HPL	27764838	5-30A	1
1101	MACHILIPATNAM	6244103001326	ANGANWADI CENTER	NEAR CHURCH	NS	1	1	DIGITAL	HPL	31932334		1
1102	MACHILIPATNAM	6244120000653	ANGANAWADI CENTER	NEAR ANGANAWADI CENTER	NS	0.24	1	0	HPL	27681249		1
1103	MACHILIPATNAM	6244125001293	MPPSCHOOL	0	NS	1	1	5-LTCTMTR	HPL	28283630	5	1
1104	MACHILIPATNAM	6244113000081	M.P.P.SCHOOL	0	NS	1	1	2-ELECTRON	HPL	32100291	5-30A	1
1105	MACHILIPATNAM	6244127800152	SARPANCH(MINOR STL)	R.V.MODI-STL MINOR	NS	0.68	1	2-ELECTRON	NPL	4431782	5-30A	1
1106	MACHILIPATNAM	6244127000492	ANGANWADI CENTER	NEAR RAMALAYAM	NS	1	1	DIGITAL	HPL	30611332		1
1107	MACHILIPATNAM	6244109000584	SECRETARY KANCHADAM,KANCHADAM GRAMA I	KANCHADAM	NS	5	1	Electronic	NPL	4867888		1
1108	MACHILIPATNAM	6244125001341	ANGANAWADI CENTER-I	NEAR ANGANAWADI CENTER	NS	0.24	1	0	HPL	28015999		1
1109	MACHILIPATNAM	6244117000877	ANGANWADI CENTER MALESWARAM II	NEAR ANGANWADI CENTER	NS	1	1	DIGITAL	HPL	31315784		1
1110	MACHILIPATNAM	6244116000285	SECRETARY(STL MINOR)	MALLAMPUDI-MINOR STL	NS	0.52	1	2-ELECTRON	HPL	30537967	5-30A	1
1111	MACHILIPATNAM	6244126000074	SARPANCH(MINOR STL)	PENDURU-STL MINOR	NS	3	1	2-ELECTRON	HPL	30802223	5-30A	1
1112	MACHILIPATNAM	6244100002745	M.P.P.SCHOOL	0	NS	1	1	0	0	29101071	0	1
1113	MACHILIPATNAM	6244103001325	ANGANWADI CENTER	NEAR ANGANWADI	NS	1	1	DIGITAL	HPL	31376765		1
1114	MACHILIPATNAM	6244100002301	SECRETARY(MAJOR STL)	BANTUMILLI(STL MAJOR)	NS	1.97	1	2-ELECTRON	HPL	32095633	5-30A	1
1115	MACHILIPATNAM	6244120000667	ANGANAWADI CENTER	NEAR ANGANAWADI CENTER	NS	0.24	1	0	HPL	27680267		1
1116	MACHILIPATNAM	6244119800001	SARPANCH(MINOR STL)	MULAPARRU-STL MINOR	NS	2.72	1	2-ELECTRON	Genus	5783503	5-30A	1
1117	MACHILIPATNAM	6244118800042	SARPANCH(MINOR STL)	MANIMESWARAM-STL MINOR	NS	0.76	1	2-ELECTRON	Genus	5781431	5-30A	1
1118	MACHILIPATNAM	6244114000129	SARPANCH(MINOR PWS)	MR.GUDEM-PWS MINOR	NS	9	3	2-ELECTRON	HPL	6261014	5-30A	1
1119	MACHILIPATNAM	6244125000862	SECRETARY(MAJOR STL)	PEDATUMIDI-STL MAJOR	NS	4.37	1	2-ELECTRON	HPL	29823053	5-30A	1
1120	MACHILIPATNAM	6244109000535	ANGANWADI CENTER KANCHADAM-I	NEAR ANGANWADICENTER	NS	1	1	DIGITAL	HPL	30024232		1
1121	MACHILIPATNAM	6244122000451	ANGANAWADI CENTER-I	NEAR ANGANAWADI CENER	NS	1	1	0	HPL	27679819		1
1122	MACHILIPATNAM	6244106000439	ANGANWADI CENTER ONE	NEAR PHC SUBCENTER	NS	1	1	DIGITAL	HPL	27687523		1
1123	MACHILIPATNAM	6244107000046	SECRETARY MINOR STL	J.R.PURAM,N.R.PETA	NS	0.56	1	2-ELECTRON	HPL	32092646	5-30A	1
1124	MACHILIPATNAM	6244109000371	SECRETARY(MINOR STL)	KANCHADAM-STL MINOR	NS	0.4	1	2-ELECTRON	HPL	30610395	5-30A	1
1125	MACHILIPATNAM	6244119000569	PANCHAYATHY SECRECTARY	0	NS	3	1	2-ELECTRON	HPL	2025285	5-30A	1
1126	MACHILIPATNAM	6244124000096	ANGANWADI CENTER NAGANACHERUVU	NEAR ANGANWADI CENTER	NS	1	1	DIGITAL	HPL	32517146		1
1127	MACHILIPATNAM	6244110000112	ELEMENTARY SCHOOL	KOTHI BOMMA CENTRE	NS	0.26	1	2-ELECTRON	HPL	31729872	5-30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
1128	MACHILIPATNAM	6244126000670	M.P.P.SCHOOL	0	NS	1	1	2-ELECTRON	HPL	19925018	530	1
1129	MACHILIPATNAM	6244108000106	M.P.P.SCHOOL	KAMAKSHIPURAM	NS	1	1	2-ELECTRON	HPL	16402535	5-30A	1
1130	MACHILIPATNAM	6244124000064	Z.P.H.SCHOOL	NEHRU NAGAR	NS	0.98	1	2-ELECTRON	HPL	33505391	5-30A	1
1131	MACHILIPATNAM	6244100003384	ANGANAWADI CENTER	NEAR ANGANAWADI CENTER	NS	0.24	1	2-ELECTRON	HPL	32238652	5-30A	1
1132	MACHILIPATNAM	6244100002170	CIVIL JUDGE COURT	BANTUMILLI-COURT	NS	3.175	3	2-ELECTRON	Genus	3064805	5-30A	1
1133	MACHILIPATNAM	6244131000405	MPPSCHOOL	0	NS	1	1	2-ELECTRON	HPL	33576571	May-30	1
1134	MACHILIPATNAM	6244106000266	SARPANCH(MINOR STL)	CHORAMPUDI-STL MINOR	NS	0.6	1	2-ELECTRON	HE	20099841	May-30	1
1135	MACHILIPATNAM	6244100003239	BHAVITH CENTER	0	NS	1	1	0	HPL	24183229		1
1136	MACHILIPATNAM	6244133000191	ANGANAWADI CENTER	NEAR ANGANAWADI CENTER	NS	0.24	1	0	--	27231831		1
1137	MACHILIPATNAM	6244134000241	ANGANWADI CENTER	NEAR MPP SCHOOL	NS	1	1	DIGITAL	HPL	30741765		1
1138	MACHILIPATNAM	6244126800109	PANCHAYAT OFFICE	NEAR WATER WORKS	NS	0.44	1	2-ELECTRON	HPL	31762592	5-30A	1
1139	MACHILIPATNAM	6244115000161	M.P.UP.SCHOOL	0	NS	1	1	2-ELECTRON	AEW	10428145	5-30A	1
1140	MACHILIPATNAM	6244126000803	ANGANAWADI CENTER-III	NEAR ANGANAWADI CENTER	NS	0.24	1	0	HPL	27679446		1
1141	MACHILIPATNAM	6244109000003	PANVCHAYAT OFFICE	KANCHADAM	NS	0.912	1	2-ELECTRON	HE	19926263	May-30	1
1142	MACHILIPATNAM	6244103001205	VETERNARY DISPENSARY	0	NS	1.34	1	2-ELECTRON	HPL	31354901	5-30A	1
1143	MACHILIPATNAM	6244114000271	ANGANAWADI CENTER-I	NEAR ANGANAWADI CENTER	NS	0.24	1	0	HPL	28016793		1
1144	MACHILIPATNAM	6244127000481	GRAMA PANCHYATHI	PALIKONDAVARI MODI EANTERANS	NS	5	3	DIGITAL	LT	16345047		1
1145	MACHILIPATNAM	6244100802236	WARDEN B.CBOYS HOSTEL	BANTUMILLI	NS	3.58	3	1-MECHANIC	LT	16331999	JX	1
1146	MACHILIPATNAM	6244135000025	SARPANCHMINOR STL	YADLALANKA-STL MINOR	NS	1	1	2-ELECTRON	HPL	33178597	5-30A	1
1147	MACHILIPATNAM	6244104000001	SARPANCH(MINOR STL)	BARRIPADU-STL MINOR	NS	1.77	1	2-ELECTRON	HPL	31728149	5-30A	1
1148	MACHILIPATNAM	6244114800001	SARPANCH(MINOR STL)	M.R.GUDEM-STL MINOR	NS	1.28	1	2-ELECTRON	HPL	29995041	5-30A	1
1149	MACHILIPATNAM	6244100000730	EXECUTIVE OFFICER(PWS MAJOR)	BANTUMILLI-PWS MAJOR	NS	30	3	CT-METER	UTL	APSO9489	125	1
1150	MACHILIPATNAM	6244103800133	Z P HIGH SCHOOL	MAIN ROAD	NS	12.34	3	2-ELECTRON	AVON	3181034	5-30A	1
1151	MACHILIPATNAM	6244128000161	ANGANWADI CENTER	RAMANNA MODI	NS	1	1	ELEC	HPL	34290833		1
1152	MACHILIPATNAM	6244103001174	PRIMARY HEALTH SUB CENTER	0	NS	1	1	2-ELECTRON	HPL	34531154	5-30A	1
1153	MACHILIPATNAM	6244109000372	SARPANCH (MINOR STL)	KANCHADAM-STL MINOR	NS	0.52	1	2-ELECTRON	HPL	34578647	May-30	1
1154	MACHILIPATNAM	6244125000863	SECRETARY(MAJOR STL)	NARASAPPACHERUVU-STL MAJOR	NS	0.76	1	2-ELECTRON	HPL	32108163	5-30A	1
1155	MACHILIPATNAM	6244100002302	SECRETARY(MAJOR STL)	BANTUMILLI(STL MAJOR)	NS	0.56	1	2-ELECTRON	HPL	32095640	5-30A	1
1156	MACHILIPATNAM	6244129000199	PANCHAYATHI SECRETARY,P RAAVIGUNTA	P RAAVIGUNTA	NS	1	1	DIGITAL	HPL	31482282		1
1157	MACHILIPATNAM	6244100002297	SECRETARY(MAJOR STL)	BANTUMILLI(STL MAJOR)	NS	7.65	1	2-ELECTRON	HPL	34758607	May-30	1
1158	MACHILIPATNAM	6244122000379	SARPANCH(MINOR STL)	L.N.PURAM-STL MINOR	NS	2.76	1	2-ELECTRON	HPL	19925019	May-30	1
1159	MACHILIPATNAM	6244117000196	EXCUTIVE OFFICER	MALLESWRAM	NS	1	1	2-ELECTRON	HPL	31761332	5-30A	1
1160	MACHILIPATNAM	6244125001279	VETERNORY DISPENSARY	0	NS	1	1	0	VISSION	2080794		1
1161	MACHILIPATNAM	6244100001998	ASSISTANT DIRECTOR OF AGRICULT	BANTUMILLI	NS	0.96	1	0	HPL	29101372	0	1
1162	MACHILIPATNAM	6244103000094	SECRETARY(MAJOR STL)	ARTHAMURU-STL MAJOR	NS	5.28	3	2-ELECTRON	AVON	16223703	5-30A	1
1163	MACHILIPATNAM	6244125000001	SECRETARY(MAJOR STL)	PEDATUMIDI-STL MAJOR	NS	1.8	1	2-ELECTRON	HPL	64367932	5-30A	1
1164	MACHILIPATNAM	6244109000467	M.P.P.SCHOOL	0	NS	1	1	2-ELECTRON	HOLLEY	2660120	May-30	1
1165	MACHILIPATNAM	6244100002754	PANCHAYATSECRATARY	BANTUMILLI-6244100	NS	1	1	2-ELECTRON	Genus	5783219	5-30A	1
1166	MACHILIPATNAM	6244100003381	ANGANAWADI CENTER	NEAR ANGANAWADI CENTER	NS	0.24	1	0	HPL	28012487		1
1167	MACHILIPATNAM	6244106000371	PRAIMARY HEALTH SUB CENTER	0	NS	1	1	2-ELECTRON	HE	19869438	May-30	1
1168	MACHILIPATNAM	6244117000093	INSPECTOR BANGLAW	MALLESWRAM	NS	0.26	1	0	0	14370643	0	1
1169	MACHILIPATNAM	6244104000151	THE HEAD MASTER	BARRIPADU	NS	0.26	1	2-ELECTRON	HPL	30293032	5-30A	1
1170	MACHILIPATNAM	6244101000292	ANGANWADI CENTER AMUDALAPALLI	NEAR RAMALAYAM	NS	1	1	DIGITAL	HPL	30497111		1
1171	MACHILIPATNAM	6244103000304	SECRETARY(MAJOR STL)	ARTHAMURU-STL MAJOR	NS	0.6	1	2-ELECTRON	HPL	30786890	5-30A	1
1172	MACHILIPATNAM	6244122000001	SARPANCH(MINORSTL)	N.R.PETA-STL MINOR	NS	2	1	2-ELECTRON	HPL	34816031	5-30A	1
1173	MACHILIPATNAM	6244125001146	M.P.P.SCHOOL	0	NS	1	1	0	HPL	30042314	5	1
1174	MACHILIPATNAM	6244101000305	SUB CENTER,AMUDALAPALLI	RAMALAYAM ROAD AMUDALAPALL	NS	1	1	DIGITAL	HPL	32130551		1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
1175	MACHILIPATNAM	6244118000432	Secretarygrampanchayatoffice	PANCHAYATHI OFFICE	NS	1	1	2-ELECTRON	HPL	31728143	5-30A	1
1176	MACHILIPATNAM	6244118000538	ANGANAWADI CENTER	NEAR ANGANAVADI CENTRE	NS	0.24	1	0	HPL	27679304		1
1177	MACHILIPATNAM	6244127000414	M.P.U.P.SCHOOL	0	NS	1	1	2-ELECTRON	HPL	34754966	5-30A	1
1178	MACHILIPATNAM	6244109000503	PANCHAYATHY SECRETARY	0	NS	3	1	2-ELECTRON	HPL	32861227	5-30A	1
1179	MACHILIPATNAM	6244125000072	SECRETARY(MAJOR STL)	PEDATUMIDI-STL MAJOR	NS	0.84	1	2-ELECTRON	HE	1132058	5-30A	1
1180	MACHILIPATNAM	6244120000665	ANGANAWADI CENTER-I	NEAR ANGANAWADI CENTER	NS	0.24	1	0	HPL	28017411		1
1181	MACHILIPATNAM	6244114000340	PANCHAYATHI SECRETARY	MALAPARAJU GUDEM	SL	1	1	Electronic	HE	20888725		1
1182	MACHILIPATNAM	6244101800122	SARPANCH(MINOR STL)	MADDETIPALLI-STL MINOR	NS	0.3	1	2-ELECTRON	HPL	34288723	5-30A	1
1183	MACHILIPATNAM	6244100001049	TREASURY OFFICE	PENDURU ROAD	NS	0.8	1	2-ELECTRON	HPL	32095881	5-30A	1
1184	MACHILIPATNAM	6244103001071	M.P.P.SCHOOL	0	NS	1	1	2-ELECTRON	HE	19923087	May-30	1
1185	MACHILIPATNAM	6244118000376	SARPANCH(MINOR PWS)	MANIMESWARAM-PWS MINOR	NS	5.67	3	2-ELECTRON	HPL	3887466	May-30	1
1186	MACHILIPATNAM	6244125000088	SECRETARY(MAJOR STL)	PEDATUMIDI-STL MAJOR	NS	1.56	1	2-ELECTRON	HPL	32868524	5-30A	1
1187	MACHILIPATNAM	6244100000453	VETERNARY HOSPITAL	BANTUMILLI	NS	0.78	1	0	HPL	30228054	0	1
1188	MACHILIPATNAM	6244105000287	SUB CENTER,CHINA TUMMIDI	CHINA TUMMIDI	NS	1	1	DIGITAL	HPL	33314723		1
1189	MACHILIPATNAM	6244100003385	ANGANAWADI CENTER	NEAR ANGANAWADI CENTER	NS	0.24	1	0	HPL	28011811		1
1190	MACHILIPATNAM	6244105800001	SARPANCH(MINOR STL)	CHINATUMIDI-STL MINOR	NS	1.32	1	2-ELECTRON	HE	20022715	May-30	1
1191	MACHILIPATNAM	6244127000421	M.P.P.SCHOOL	0	NS	1	1	2-ELECTRON	HE	19862037	May-30	1
1192	MACHILIPATNAM	6244114000285	GRAMAPANCHYATHI MALPARAJUGUDAM	NEAR DRINKING WATER CHERUVU	NS	10	3	5-LTCTMTR	LT	16241702		1
1193	MACHILIPATNAM	6244125001306	P H C PEDDATUMIDDI	0	NS	5	3	2-ELECTRON	HPL	3302858	5-30A	1
1194	MACHILIPATNAM	6244118000041	SARPANCH(MINOR STL)	MANIMESWARAM-STL MINOR	NS	2.8	1	2-ELECTRON	HPL	31728146	5-30A	1
1195	MACHILIPATNAM	6244100000269	PANCHAYAT OFFICE	BANTUMILLI	NS	0.26	1	2-ELECTRON	NPL	4755016	May-30	1
1196	MACHILIPATNAM	6244100003216	GRAMA PANCHAYAT	NEAR HINDU BURRIAL GROUND	NS	1	1	2-ELECTRON	Genus	5784399	5-30A	1
1197	MACHILIPATNAM	6244131000031	SARPANCH(MINOR STL)	SATULURU-STL MINOR	NS	0.48	1	2-ELECTRON	HPL	33773158	5-30A	1
1198	MACHILIPATNAM	6244100002777	Z.P.HIGH SCHOOL	NEAR SIVALAYAM	NS	1	1	2-ELECTRON	HPL	34541960	May-30	1
1199	MACHILIPATNAM	6244100800585	THASILDAR	PENDURU ROAD	NS	0.26	3	2-ELECTRON	HPL	3384891	5-30A	1
1200	MACHILIPATNAM	6244103001072	M.P.P.SCHOOL	0	NS	1	1	2-ELECTRON	HPL	30659567	5-30A	1
1201	MACHILIPATNAM	6244100002300	SECRETARY(MAJOR STL)	BANTUMILLI(STL MAJOR)	NS	6.38	1	2-ELECTRON	HE	20104684	530	1
1202	MACHILIPATNAM	6244131000471	ANGANAWADI CENTRE	sathuluru	NS	1	1	2-ELECTRON	Genus	5781500	5-30A	1
1203	MACHILIPATNAM	6244122000475	NAGESWARA RAO PETA,PANCHYATI NAGESWARA	NAGESWAA RAO PETA	NS	0.746	1	DIGITAL	HPL	31482099		1
1204	MACHILIPATNAM	6244127000493	ANGANWADI CENTER	NEAR CHURC	NS	1	1	DIGITAL	HPL	31315789		1
1205	MACHILIPATNAM	6244129000215	V RAVIGUNTA,ANGANWADI CENTER	Gramapanchayat	NS	2	1	ELEC	HPL	64675512		1
1206	MACHILIPATNAM	6244126000804	ANGANAWADI CENTER-II	NEAR ANGANAWADI CENTER	NS	0.24	1	2-ELECTRON	GENUS	7110149	May-30	1
1207	MACHILIPATNAM	6244103800192	M P P SCHOOL	NACHUGUNTA	NS	0.4	1	2-ELECTRON	HPL	32069061	5-30A	1
1208	MACHILIPATNAM	6244106000288	PRINCIPALZ.P.H.SCHOOL	MAIN ROAD	NS	1	1	5-LTCTMTR	HPL	31728695	5-30A	1
1209	MACHILIPATNAM	6244110000202	ANGANAVADI KENDRAM	PANCHAYET ROAD	NS	0.24	1	2-ELECTRON	HE	20826571	530	1
1210	MACHILIPATNAM	6244100001611	PRINCIPALDEGREECOLLEGE	BANTUMILLI	NS	0.92	1	2-ELECTRON	HPL	34965178	5-30A	1
1211	MACHILIPATNAM	6244125001204	PANCHAYATHY SECRECTARY	0	NS	2	1	2-ELECTRON	HPL	27786876	5-30A	1
1212	MACHILIPATNAM	6244120000053	GRAMA PANCHAYAT	MUNJULURU	NS	3	1	2-ELECTRON	HPL	31648933	5-30A	1
1213	MACHILIPATNAM	6244111000060	M.P.P.SCHOOL	0	NS	1	1	2-ELECTRON	HPL	32861230	5-30A	1
1214	MACHILIPATNAM	6244100002157	SECRETARY(MAJOR PWS)	BANTUMILLI-PWS MAJOR	NS	5.24	3	2-ELECTRON	HPL	3303547	May-30	1
1215	MACHILIPATNAM	6244123000086	MPUPSCHOOL	0	NS	1	1	2-ELECTRON	HPL	34529590	May-30	1
1216	MACHILIPATNAM	6244117000001	SECRETARY(MAJOR STL)	MALLESWARAM-STL MAJOR	NS	7.71	3	2-ELECTRON	HPL	6262527	5-30A	1
1217	MACHILIPATNAM	6244131000085	M.P.P.SCHOOL	HARIZANAWADA	NS	0.26	1	2-ELECTRON	HPL	32069062	5-30A	1
1218	MACHILIPATNAM	6244100800228	MANDAL DOVELOPMENT OFFICE	PENDURU ROAD	NS	5.26	3	2-ELECTRON	HPL	6312312	May-30	1
1219	MACHILIPATNAM	6244116000573	ANGANAWADI CENTER-II	NEAR ANGANAWADI CENTER	NS	0.24	1	0	HPL	27235834		1
1220	MACHILIPATNAM	6244109000340	HEADMASTER MPESCHOOL	KANCHADAM	NS	0.26	1	2-ELECTRON	HPL	32066851	5-30A	1
1221	MACHILIPATNAM	6244106000434	DEVI VERA LAKSHMI	0	NS	1	1	DIGITAL	HPL	29199815		1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
1222	MACHILIPATNAM	6244118000540	ANGANAWADICENTER	ANGANAWADI CENTER	NS	1	1	0	HPL	28013662		1
1223	MACHILIPATNAM	6244116000572	ANGANAWADI CENTER	NEAR ANGANAWADI CENTER	NS	0.24	1	0	HPL	27236199		1
1224	MACHILIPATNAM	6244125001126	M.P.P.SCHOOL	0	NS	1	1	0	HE	20612278	5-30A	1
1225	MACHILIPATNAM	6244110000022	SARPANCH(MINOR STL)	NARAYANAPURAM-STL MINOR	NS	0.64	1	0	HPL	27101735	5P	1
1226	MACHILIPATNAM	6244125800036	SECRETARY(MAJOR STL)	SUNKARAPALEM-STL MAJOR	NS	0.6	1	2-ELECTRON	HPL	30365652	5-30A	1
1227	MACHILIPATNAM	6244125000522	THE HEAD MASTER ZPHS	Z.P.H HIGH SCHOOL	NS	14.02	3	2-ELECTRON	HPL	3181484	5-30A	1
1228	MACHILIPATNAM	6244104000270	ANGANAWADI CENTER	NEAR ANGANAWADI CENTER	NS	0.24	1	0	HPL	28017417		1
1229	MACHILIPATNAM	6244129000228	PANCHYATH,SECRETARY	V RAVIGUNTA	NS	2	1	Electronic	HE	20888850		1
1230	MACHILIPATNAM	6244117000882	ANGANWADI CENTER	NEAR ANGANWADI CENTER	NS	1	1	2-ELECTRON	VISIONTEK	10481385	May-30	1
1231	MACHILIPATNAM	6244114000239	M.P.P.SCHOOL	0	NS	1	1	2-ELECTRON	HE	19870234	May-30	1
1232	MACHILIPATNAM	6244125001627	WATER WORKS,BANDLAGUDEM	PEDATUMMIDI	NS	8	3	2-ELECTRON	HPL	6266925	5-30A	1
1233	MACHILIPATNAM	6244114000188	Z.P.H. SCHOOL	M.R.GUDEM	NS	0.96	1	2-ELECTRON	HE	20103095	May-30	1
1234	MACHILIPATNAM	6244103001322	ANGANWADI CENTER NACHUGUNTA	NEAR ANGANWADICENTER	NS	1	1	2-ELECTRON	LnT	10535140	5-30A	1
1235	MACHILIPATNAM	6244100000001	SECRETARY(MAJOR STL)	BANTUMILLI-STL MAJOR	NS	5.29	3	2-ELECTRON	HPL	16242099	5-30A	1
1236	MACHILIPATNAM	6244116000668	MPUP SCHOOL,MALLAMPUDI	MALLAMPUDI	NS	1	1	ELEC	AEW	10428141		1
1237	MACHILIPATNAM	6244127000005	SARPANCH (MINOR STL)	R.V.MODI,BTL MDL.	NS	1.88	1	2-ELECTRON	NPL	4344260	5-30A	1
1238	MACHILIPATNAM	6244125000002	GRAMAPANCHAYAT OFFICE	GRAMAPANCHYAT OFFICE,	NS	0.36	1	1-MECHANIC	HPL	32092796	5-30A	1
1239	MACHILIPATNAM	6244103000645	EXECUTUVE OFFICER(MAJOR)	ATHAMURU-PWS MAJOR	NS	9.34	3	2-ELECTRON	AVON	3175341	5-30A	1
1240	MACHILIPATNAM	6244129800001	SARPANCH(MINOR STL)	RAVIGUNTA-STL MINOR	NS	1.16	1	0	0	887156	0	1
1241	MACHILIPATNAM	6244122800101	SURPANCH (GP)	GUDIVADA ROAD	NS	0.3	1	2-ELECTRON	HPL	32092460	5-30A	1
1242	MACHILIPATNAM	6244110000021	SARPANCH(MINOR STL)	KORLAPADU-STL MINOR	NS	0.64	1	2-ELECTRON	HE	19923083	530	1
1243	MACHILIPATNAM	6244120000077	Z P H SCHOOL	MAIN ROAD	NS	0.5	1	2-ELECTRON	HPL	32861226	May-30	1
1244	NUZVIDU	6622215000764	SURPANCH (MINOR STL)	MALLELA	NS	0.64	1	2-ELECTRON	NPL	4747574	530A	1
1245	NUZVIDU	6622200010902	EXECUTIVE OFFICER (MAJOR STL)		NS	0.26	1	2-ELECTRON	HPL	10505778	May-30	1
1246	NUZVIDU	6622214000629	ASSISI HEALTH CARE SOCIETY		NS	1	1	0	LNT	62310458	530	1
1247	NUZVIDU	6622200010878	EXECUTIVE OFFICER (MAJOR STL)	TIRUVURU	NS	0.84	1	2-ELECTRON	HE	20962018	530A	1
1248	NUZVIDU	6622200000296	VETERNARY HOSPITAL	TIRUVRUU	NS	0.26	1	2-ELECTRON	HPL	30976336	May-30	1
1249	NUZVIDU	6622211000371	SURPANCH (MINOR STL)	KAKARLA	NS	0.9	1	2-ELECTRON	HPL	33172476	5.3	1
1250	NUZVIDU	6622211000018	SURPANCH (MINOR STL)	KAKARLA	NS	1.8	1	2-ELECTRON	HPL	33243748	May-30	1
1251	NUZVIDU	6622211000275	GRAM PANCHAYAT (MINOR) PWS		NS	3	3	2-ELECTRON	HPL	3379348	5.3	1
1252	NUZVIDU	6622200011080	The Head Master	--	NS	1	1	2-ELECTRON	HPL	33502512	May-30	1
1253	NUZVIDU	6622215001193	GRAMA PANCHAYATHI	LAKSHMI PURAM	NS	2	1	0	HPL	64600275	--	1
1254	NUZVIDU	6622215000033	SURPANCH (MINOR STL)	MALLELA	NS	3.22	1	2-ELECTRON	NPL	4337791	May-30	1
1255	NUZVIDU	6622200010888	EXECUTIVE OFFICER (MAJOR STL)		NS	0.26	1	2-ELECTRON	HPL	34626437	530A	1
1256	NUZVIDU	6622200012830	Assistant Project Mangar	--	NS	2	1	2-ELECTRON	HPL	33502183	May-30	1
1257	NUZVIDU	6622200010899	EXECUTIVE OFFICER (MAJOR STL)		NS	0.26	1	2-ELECTRON	HE	20024889	530A	1
1258	NUZVIDU	6622211000341	SARPANCH,MINOR PWS	KAKARLA	NS	3	3	2-ELECTRON	HPL	6265248	530A	1
1259	NUZVIDU	6622200008867	MANDAL EDUCATIONAL	TIRUVURU - 1	NS	1	1	0	1	26504549	1	1
1260	NUZVIDU	6622214000708	M.P.P.School HW	--	NS	1	1	2-ELECTRON	NPL	4339441	May-30	1
1261	NUZVIDU	6622200012953	The Commissioner	--	NS	15	3	0	HPL	16224006		1
1262	NUZVIDU	6622200004742	V SANKARA RAO	TIRUVURU - 1	NS	0.523	1	2-ELECTRON	HPL	28154040	May-30	1
1263	NUZVIDU	6622200009969	SARPANCH,MAJOR STL	TIRUVURU	NS	2	1	2-ELECTRON	HPL	30976332	May-20	1
1264	NUZVIDU	6622200011801	The Executive officer	--	NS	12	3	0	1	16222977	1	1
1265	NUZVIDU	6622200802013	GOVT DEGREE COLLEGE	TIRUVURU	NS	3.92	3	2-ELECTRON	HPL	3379347	May-30	1
1266	NUZVIDU	6622215000229	SURPANCH (MINOR PWS)	MALLELA	NS	7.5	3	2-ELECTRON	HPL	6338324	May-30	1
1267	NUZVIDU	6622200015151	M P PRIMARY SCHOOL,M P P S TOKAPALLI	TIRUVURU	NS	1	1	ELEC	HPL	34534174		1
1268	NUZVIDU	6622303000818	SARPANCH,MINOR STL	ARLAPADDU	NS	1	1	2-ELECTRON	HPL	34773541	5-30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
1269	NUZVIDU	6622300002877	MPPS URDHU SCHOOL	--	NS	1	1	2-ELECTRON	HE	19857369	5-30A	1
1270	NUZVIDU	6622321001451	THE GRAMPANCHYTI	--	NS	5	3	2-ELECTRON	HPL	6370530	5-30A	1
1271	NUZVIDU	6622307000167	ANGANWADI CENTER	--	NS	0.25	1	2-ELECTRON	LnT	10499515	5-30A	1
1272	NUZVIDU	6622321000997	B.C.BOYS HOSTEL	--	NS	3	1	2-ELECTRON	HPL	33198622	5.30A	1
1273	NUZVIDU	6622302000622	SARPANCH,MINOR PWS	ANUMOLULANKA	NS	5	3	2-ELECTRON	LnT	16230523	5-30A	1
1274	NUZVIDU	6622330001247	ANGANWADI CENTRE,VINAGADAPA	Vinagadapa	NS	1	1	DIGITAL	HPL	32844859		1
1275	NUZVIDU	6622318000231	SURPANCH (MINOR PWS)	MEDURU	NS	7.5	1	2-ELECTRON	NPL	4668700	5-30A	1
1276	NUZVIDU	6622322001519	SURPANCH (MINOR PWS)	PENUGOLANU	NS	10	3	2-ELECTRON	LnT	16341076	5-30A	1
1277	NUZVIDU	6622331002066	ANGANWADI CENTER	--	NS	0.25	1	0	LT	60892929		1
1278	NUZVIDU	6622313000985	SECRETARY,GRAMAPANCHAYAT	GULLAPUDI	NS	2	1	DIGITAL	HPL	33450417		1
1279	NUZVIDU	6622322000038	H M Z P HIGHSCHOOL	PENUGOLANU	NS	0.34	1	2-ELECTRON	LnT	10506867	5-30A	1
1280	NUZVIDU	6622306000163	M.P.P.SChool	--	NS	1	1	2-ELECTRON	HPL	33199715	5-30A	1
1281	NUZVIDU	6622303001235	GRAMAPANCHAYAT,SECRETARY	ARLAPADU	NS	5	1	Electronic	HPL	34774496	1	1
1282	NUZVIDU	6622328000795	SARPANCH,MINOR PWS	TUNIKIPADU	NS	5	1	2-ELECTRON	AVON	3185242	5-30A	1
1283	NUZVIDU	6622314001146	M.P.P.School	--	NS	1	1	2-ELECTRON	NPL	4668503	5-30A	1
1284	NUZVIDU	6622324000040	PWS,SURPANCH,RAJULAPALEM	VUTUKURU	NS	5	1	0		27570714	5 3	1
1285	NUZVIDU	6622111000337	SARPANCH,MINOR STL	KUMMARIKUNTLA	NS	0.8	1	2-ELECTRON	HPL	29101088	530A	1
1286	NUZVIDU	6622118000034	M P P ELY SCHOOL	ZEELAKUNTALA	NS	0.6	1	2-ELECTRON	HPL	31580663	530A	1
1287	NUZVIDU	6622112000877	ANGANWADI CENTRE	--	NS	0.25	1	0	HPL	27994318		1
1288	NUZVIDU	6622105001250	ANGANWADI CENTRE	--	NS	0.25	1	0	HPL	27994816		1
1289	NUZVIDU	6622101001458	SARPANCH,MINOR STL	A.KONDURU	NS	0.6	1	2-ELECTRON	VISIONTEK	9582218	530A	1
1290	NUZVIDU	6622101000508	SURPANCH MINOR PWS.	A.KONDURU	NS	3	1	2-ELECTRON	AEW	10427770	530A	1
1291	NUZVIDU	6622103002145	GRAMAPANCHAYATHI,SECRETARY VENKATA THA	VENKATA THANDA	NS	3	1	2-ELECTRON	HPL	34348390	530A	1
1292	NUZVIDU	6622100001092	HEAD MASTERNMPE SCHOOL	KAMBHAMPADU	NS	0.26	1	2-ELECTRON	HPL	27651025	530A	1
1293	NUZVIDU	6622116000963	SARPANCH,MINOR PWS	REPUDI	NS	3	1	2-ELECTRON	HE	20829201	5-30A	1
1294	NUZVIDU	6622116000724	SARPANCH MINOR PWS	REPUDI	NS	3	3	2-ELECTRON	HPL	6302423	5-30A	1
1295	NUZVIDU	6622108000282	SARPANCH	Komatikunta	NS	5	1	2-ELECTRON	VISIONTEK	9587122	530A	1
1296	NUZVIDU	6622110800430	PRINCIPAL APSWR SCHOOL	KRISHNA RAO PALEM	NS	7.06	3	0	HPL	16243287	530	1
1297	NUZVIDU	6622110001036	ANGANWADI CENTRE	--	NS	0.25	1	0	HPL	27994445		1
1298	NUZVIDU	6622101001459	SARPANCH,MINOR STL	A.KONDURU	NS	0.6	1	0	0	65402324	0	1
1299	NUZVIDU	6622103001357	Grampantyati	--	NS	5	3	2-ELECTRON	HPL	3705465	530A	1
1300	NUZVIDU	6622110001475	PARVATHANENI,NAGAMALLESWARI	MANSNG THANDA	NS	1	1	Electronic	HE	20962072		1
1301	NUZVIDU	6622111000407	SARPANCH	Kummarikuntla	NS	1	1	2-ELECTRON	HPL	63763196	5-30A	1
1302	NUZVIDU	6622117000743	Surpanch gramapanchayat	VALLAMPATLA	NS	3	1	2-ELECTRON	HPL	27201482	May-30	1
1303	NUZVIDU	6622115000748	SURPANCH (MINOR STL)	RAMACHANDRAPURAM	NS	0.34	1	2-ELECTRON	HPL	32099289	530A	1
1304	NUZVIDU	6622200014958	MPPSCHOOL,HEADMASTER	TIRUVURU	NS	1	1	ELEC	HPL	33299280		1
1305	NUZVIDU	6622200010893	EXECUTIVE OFFICER (MAJOR STL)		NS	0.26	1	2-ELECTRON	HE	20035487	530A	1
1306	NUZVIDU	6622200010227	E.O.MAJOR STL	TIRUVURU	NS	1	1	2-ELECTRON	HPL	28344268	May-30	1
1307	NUZVIDU	6622200000624	A.K/PWD	TIRUVRUU	NS	0.48	1	2-ELECTRON	HPL	33230776	5-30A	1
1308	NUZVIDU	6622212000728	M.P.P.School	--	NS	1	1	2-ELECTRON	HPL	33172061	May-30	1
1309	NUZVIDU	6622200000363	TALUKA OFFICE	TIRUVRUU	NS	0.26	1	2-ELECTRON	HPL	33231408	5-30A	1
1310	NUZVIDU	6622200012744	The Commissioner	--	NS	15	3	2-ELECTRON	LnT	16343318	May-30	1
1311	NUZVIDU	6622200011228	M.P.P.SCHOOL	--	NS	1	1	2-ELECTRON	HPL	33500803	May-30	1
1312	NUZVIDU	6622200010891	EXECUTIVE OFFICER (MAJOR STL)		NS	0.26	1	2-ELECTRON	HPL	64626122	May-30	1
1313	NUZVIDU	6622212000642	SARPANCH,MINOR STL	KOKILAMPADU	NS	1	1	2-ELECTRON	HPL	33501759	May-30	1
1314	NUZVIDU	6622211000551	KAKARLA,VILLAGE HEALTH CLINIC	KAKARLA	NS	2.681	1	Electronic	HE	20100337		1
1315	NUZVIDU	6622214000020	SURPANCH (MINOR STL)	LAXMIPURAM	NS	1.22	1	2-ELECTRON	HPL	64676876	530A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
1316	NUZVIDU	6622200010870	EXECUTIVE OFFICER (MAJOR STL)	TIRUVURU	NS	0.36	1	2-ELECTRON	HE	19873638	May-30	1
1317	NUZVIDU	6622200014415	COMMISSIONER,COMMISSIONER	TIRUVURU	NS	5	3	2-ELECTRON	HPL	3819890	530A	1
1318	NUZVIDU	6622200008288	SURPANCH (MAJOR PWS)	TIUVURU	NS	5	3	2-ELECTRON	AVON	8095299	May-30	1
1319	VIJAYAWADA RURAL	6311210001033	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	L AND T	60893352		1
1320	VIJAYAWADA RURAL	6311241001125	MANDALAPRAJAPARISHADH	IBRAHIMPATNAM	NS	0.5	1	2-ELECTRON	HIMACHAL	32120752	5-30A	1
1321	VIJAYAWADA RURAL	6311207000105	SURPANCH GRAM PANCHAYAT	KACHAVARAM	NS	0.48	1	2-ELECTRON	HPL	30710680	May-30	1
1322	VIJAYAWADA RURAL	6311241011227	GRAMPANCHAYAT IBRAHIMPATNAM,GRAMPAN(	IBRAHIMPATNAM	NS	1	1	2-ELECTRON	HE	20832246	May-30	1
1323	VIJAYAWADA RURAL	6311221006269	E.O.GP(STL MAJOR)		NS	4	1	2-ELECTRON	HPL	32840055	May-30	1
1324	VIJAYAWADA RURAL	6311206001440	The Head Master	--	NS	1	1	2-ELECTRON	HPL	31724685	May-30	1
1325	VIJAYAWADA RURAL	6311241009444	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	LT	60893450		1
1326	VIJAYAWADA RURAL	6311261001187	M.O.PRIMARY HEALTH CENTRE	IBRAHIMPATNAM	NS	1.4	1	0	HPL	24274301	5-30A	1
1327	VIJAYAWADA RURAL	6311205002380	SARPANCH GP(STL MAJOR)		NS	8	3	2-ELECTRON	HPL	6272343	5-30A	1
1328	VIJAYAWADA RURAL	6311261008587	MANDAL AGRICULTURAL OFFICER	--	NS	2	1	2-ELECTRON	HPL	39222271	May-30	1
1329	VIJAYAWADA RURAL	6311208001306	SARPANCH(STL MINOR)		NS	2	1	2-ELECTRON	HPL	32846496	5-30A	1
1330	VIJAYAWADA RURAL	6311221009922	PROJECT DIRECTOR NHAI	--	NS	11	3	2-ELECTRON	AVON	3180079	3-5-30A	1
1331	VIJAYAWADA RURAL	6311206002279	JAGANANNA COLONY RWS	JUPUDI	NS	5	3	ELEC	HPL	3890403		1
1332	VIJAYAWADA RURAL	6311206000351	E.O.GP(STL MAJOR)		NS	4.12	1	2-ELECTRON	LnT	62333590	5-30A	1
1333	VIJAYAWADA RURAL	6311208001585	ANGANVADI SCHOOL	--	NS	1.34	1	2-ELECTRON	HPL	30660830	5-30AMP	1
1334	VIJAYAWADA RURAL	6311231006284	E.O.GP(STL MAJOR)		NS	4.26	1	0	HPL	28260908	5-30A	1
1335	VIJAYAWADA RURAL	6311212000659	EO/GRAMAPANCHAYAT(PWS)		NS	10	3	2-ELECTRON	Genus	3047955	5-30A	1
1336	VIJAYAWADA RURAL	6311201000323	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	L AND T	60887433		1
1337	VIJAYAWADA RURAL	6311211001954	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	2-ELECTRON	HE	20098004	May-30	1
1338	VIJAYAWADA RURAL	6311207000097	SURPANCH GRAMAPANCHAYAT	MINORWATER WORKS	NS	10	3	2-ELECTRON	Genus	3045103	5-30A	1
1339	VIJAYAWADA RURAL	6311212000949	APCRDA,COMMISSIONER	RTA CHEEK POST IBRAHIMPATNAM	NS	11.15	3	DIGITAL	L AND T	16331648		1
1340	VIJAYAWADA RURAL	6311212000979	SECRETARY GRAM PANCHAYAT	--	NS	5	3	DIGITAL	L AND T	16364001		1
1341	VIJAYAWADA RURAL	6311231013168	PARVATHANENI,SRIDHAR	VTPS ROAD	NS	5	3	ELEC	HPL	3873340		1
1342	VIJAYAWADA RURAL	6311205003656	SECRETARY GRAM PANCHAYAT	SMASANAVATIKA	NS	1	1	0	HPL	28255129		1
1343	VIJAYAWADA RURAL	6311241006276	E.O.GP(STL MAJOR)		NS	4.26	1	2-ELECTRON	HPL	32847290	5-30A	1
1344	VIJAYAWADA RURAL	6311211000032	RADIO ROOM PANCHAYAT	MULAPADU	NS	0.26	1	2-ELECTRON	HPL	64676785	May-30	1
1345	VIJAYAWADA RURAL	6311261001213	MANDAL DEVELOPMENT OFFICE		NS	6.8	3	2-ELECTRON	Genus	3048155	May-30	1
1346	VIJAYAWADA RURAL	6311210000976	EO GRAMPANCHAYAT(STL)	--	NS	2	1	0	HE	10623306	5-30A	1
1347	VIJAYAWADA RURAL	6311210000166	SURPANCH GRAMAPANCHAYATt	MINORWATER WORKS	NS	11.19	3	2-ELECTRON	HPL	3304896	3X5-30A	1
1348	VIJAYAWADA RURAL	6311207000738	PANCHAYATI SECRETERY,PANCHAYATI SECRETER\	MUDU GULLA CENTER	NS	1	1	DIGITAL	HPL	31413809		1
1349	VIJAYAWADA RURAL	6311210800878	E.O.GRAMAPANCHATI		NS	0.002	1	2-ELECTRON	HPL	30612256	5-30A	1
1350	VIJAYAWADA RURAL	6311211001955	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	HPL	28212917		1
1351	VIJAYAWADA RURAL	6311221010096	PROJECT DIRECTOR NHAI	--	NS	16	3	CT-METER	AVON	5025001	120-5-30A	1
1352	VIJAYAWADA RURAL	6311241006986	The Head Master	--	NS	1	1	2-ELECTRON	HPL	32113734	5-30A	1
1353	VIJAYAWADA RURAL	6311211001637	Mandal Parishid Primary School	S.C Colony	NS	1	1	0	HPL	28259979	5-30A	1
1354	VIJAYAWADA RURAL	6311221007497	SECRETARY-GRAMA PANCHAYAT	--	NS	5	3	2-ELECTRON	LnT	16242975	5-30A	1
1355	VIJAYAWADA RURAL	6311211001539	SURPENCH STL MINOR MULAPADU	MULAPADU	NS	3	1	0	HPL	26418772	5-30A	1
1356	VIJAYAWADA RURAL	6311211000303	SARPANCH	(MINOR WATER WORKS)	NS	40	3	CT-METER	LnT	13527373	3X10-40A	1
1357	VIJAYAWADA RURAL	6311208002005	STREET LIGHTS	KETHANAKONDA	NS	1	1	2-ELECTRON	NPL	4671849	5-30A	1
1358	VIJAYAWADA RURAL	6311206001457	Executive Officer	--	NS	2	1	2-ELECTRON	HPL	25620670	May-30	1
1359	VIJAYAWADA RURAL	6311212000194	SURPANCH G.P.O	TUMMALAPALEM	NS	0.6	1	2-ELECTRON	HPL	32110217	5-30A	1
1360	VIJAYAWADA RURAL	6311207000459	E.O.GP(STLMINOR)		NS	5	3	2-ELECTRON	HPL	6234657	3-5-30A	1
1361	VIJAYAWADA RURAL	6311205003363	ANGANVADI BHAVANAM	--	NS	1	1	0	HPL	26422787		1
1362	VIJAYAWADA RURAL	6311207000001	SARPANCH GP(STL MINOR)		NS	5	3	2-ELECTRON	HPL	3381314	3530	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
1363	VIJAYAWADA RURAL	6311241006273	E.O.GP(STL MAJOR)		NS	2.26	1	2-ELECTRON	HE	20836912	May-30	1
1364	VIJAYAWADA RURAL	6311221010653	ADCL,ADCL	PAVITHRA SANGAMAM	NS	15	3	DIGITAL	L AND T	16364012		1
1365	VIJAYAWADA RURAL	6311205000320	VETARNARY OFFICE	GUNTUPALLI	NS	0.36	1	0	LnT	60893423	5-30A	1
1366	VIJAYAWADA RURAL	6311221009920	PROJECT DIRECTOR NHAI	--	NS	11	3	2-ELECTRON	HPL	3861075	May-30	1
1367	VIJAYAWADA RURAL	6311241006278	E.O.GP(STL MAJOR)		NS	3.26	1	2-ELECTRON	HPL	34674715	5-30A	1
1368	VIJAYAWADA RURAL	6311231009441	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	L AND T	60893354		1
1369	VIJAYAWADA RURAL	6311202000034	SARPANCH GP(STL MINOR)		NS	5	3	2-ELECTRON	HPL	6234655	3-5-30A	1
1370	VIJAYAWADA RURAL	6311261002619	THE AGRICULTURAL OFFICER,		NS	23.76	3	2-ELECTRON	Genus	3061546	May-30	1
1371	VIJAYAWADA RURAL	6311221006280	E.O.GP(STL MAJOR)		NS	2.26	1	2-ELECTRON	HPL	29394852	5-30A	1
1372	VIJAYAWADA RURAL	6311241006270	E.O.GP(STL MAJOR)		NS	9.98	3	2-ELECTRON	Genus	3061422	5-30A	1
1373	VIJAYAWADA RURAL	6311205000365	MANDAL DEVELOPMENT OFFICE	GUNTUPALLI	NS	0.5	1	2-ELECTRON	LnT	62327212	5-30A	1
1374	VIJAYAWADA RURAL	6311231006457	CSI Primary School		NS	1	1	2-ELECTRON	HPL	31910457	May-30	1
1375	VIJAYAWADA RURAL	6311208001746	P.W.S,WATER WORKS MOTOR	Kethana Konda	NS	5	3	2-ELECTRON	HPL	6234659	3-5-30A	1
1376	VIJAYAWADA RURAL	6311210001031	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	2-ELECTRON	HPL	34172141	5-30AMP	1
1377	VIJAYAWADA RURAL	6311212000903	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	L AND T	60893355		1
1378	VIJAYAWADA RURAL	6311203000047	The Head Master	--	NS	1	1	2-ELECTRON	HPL	32841447	5-30A	1
1379	VIJAYAWADA RURAL	6311221006275	E.O.GP(STL MAJOR)		NS	3.26	1	2-ELECTRON	HE	20836910	May-30	1
1380	VIJAYAWADA RURAL	6311261002536	Z.P.H.SCHOOL	IBRAHIMPATNAM	NS	5	1	2-ELECTRON	HPL	31724721	5-30 A	1
1381	VIJAYAWADA RURAL	6311205000646	EXECUTIIIVE OFFICER,	(MAJOR WATER WORKS)	NS	61.6	3	CT-METER	L&G	P0075014	125/5A	1
1382	VIJAYAWADA RURAL	6311211002366	JAGANANNA COLONIES PWS	MULAPADU	NS	5	3	2-ELECTRON	HPL	6255240	May-30	1
1383	VIJAYAWADA RURAL	6311221007490	E O GRAMPANDHATI	--	NS	1	1	2-ELECTRON	HE	20031757	May-30	1
1384	VIJAYAWADA RURAL	6311207001047	JAGANANNA COLONIES PWS	KACHAVARAM	NS	5	3	2-ELECTRON	HPL	6263944	3-5-30A	1
1385	VIJAYAWADA RURAL	6311211002367	PANCHAYAT SECRETARY MULAPADU	TRILOCHANAPURAM	NS	5	3	ELEC	HPL	6330465		1
1386	VIJAYAWADA RURAL	6311211002367	PANCHAYAT SECRETARY MULAPADU	TRILOCHANAPURAM	NS	5	3	ELEC	HPL	6330465		1
1387	VIJAYAWADA RURAL	6311271011226	GRAMPANCHAYAT IBRAHIMPATNAM,GRAMPAN	IBRAHIMPATNAM	NS	1	1	DIGITAL	HPL	27879974		1
1388	VIJAYAWADA RURAL	6311221001718	ASST.EXECUTIVE ENGINEER,	IBRAHIMPATNAM.	NS	13.404	3	2-ELECTRON	Genus	3011454	5-30A	1
1389	VIJAYAWADA RURAL	6311210001032	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	L AND T	60893343		1
1390	VIJAYAWADA RURAL	6311210000885	The Head Master	--	NS	1	1	2-ELECTRON	HPL	29101922	5-30A	1
1391	VIJAYAWADA RURAL	6311211001773	EXECUTIVE OFFECER.STL	--	NS	2	1	0	HPL	20625998	5-30A	1
1392	VIJAYAWADA RURAL	6311212000025	SARPANCH GP(STL MINOR)		NS	5	3	2-ELECTRON	HPL	6285526	3-5-30A	1
1393	VIJAYAWADA RURAL	6311206001472	E O GRAMPANDHATI	--	NS	6	3	2-ELECTRON	HPL	6264312	May-30	1
1394	VIJAYAWADA RURAL	6311207000670	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	HPL	28216913		1
1395	VIJAYAWADA RURAL	6311210000715	E/O GRAMAPANCHATHI	KOTIKALAPUDI	NS	1	1	ELE	L	62313865	5-30 A	1
1396	VIJAYAWADA RURAL	6311205003705	PROJECT DIRECTOR NHAI	NEAR GAYATRI CEMENT WORKS	NS	16	3	CT-METER	HPL	581675	125/5A	1
1397	VIJAYAWADA RURAL	6311206001911	SECRETARY,GRAM PANCHAYAT	JUPUDI	NS	1	1	DIGITAL	HPL	31724690	5-30 A	1
1398	VIJAYAWADA RURAL	6311212000723	SECRETARY GRAMAPANCHAYAT	--	NS	3	1	2-ELECTRON	HE	20832372	May-30	1
1399	VIJAYAWADA RURAL	6311221012918	PARVATHINENI,SRIDHAR	YS JAGAN COLONY SADAK ROAD IBI	NS	18	3	ELEC	AVON	8066322		1
1400	VIJAYAWADA RURAL	6311221009919	PROJECT DIRECTOR NHAI	--	NS	11	3	DIGITAL	L AND T	16222662		1
1401	VIJAYAWADA RURAL	6311206001892	SECRETARY,GRAM PANCHAYAT	JUPUDI	NS	5	3	2-ELECTRON	LnT	16363788	3X5-30A	1
1402	VIJAYAWADA RURAL	6311206001734	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	L AND T	60887453		1
1403	VIJAYAWADA RURAL	6311211001536	E.O.GP(STL MINOR)		NS	10	3	2-ELECTRON	LnT	16397927	5-30A	1
1404	VIJAYAWADA RURAL	6311271004852	SECRETARY GRAMAPANCHAYAT	IBRAHIMPATNAM	NS	1	1	2-ELECTRON	HPL	64636676	May-30	1
1405	VIJAYAWADA RURAL	6311208002098	RWS AND PWS SCHEME,WATER WORKS MOTOR	KETHANAKONDA	NS	5	3	ELEC	HPL	6352670		1
1406	VIJAYAWADA RURAL	6311201000286	Head Master	--	NS	1	1	0	--	16375648		1
1407	VIJAYAWADA RURAL	6311212000954	SECRETARY GRAM PANCHAYAT	--	NS	0.25	1	DIGITAL	HPL	30800749		1
1408	VIJAYAWADA RURAL	6311205000333	E.O.GP(STL MAJOR)		NS	10	3	2-ELECTRON	AVON	3180449	5-30A	1
1409	VIJAYAWADA RURAL	6311212000965	APCRDA,COMMISSIONER	NEAR COLD STOREGE TUMMALAPA	NS	8.09	3	DIGITAL	L AND T	16238859		1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
1410	VIJAYAWADA RURAL	6311261006985	The Head Master	--	NS	1	1	2-ELECTRON	HPL	32884801	May-30	1
1411	VIJAYAWADA RURAL	6311210001105	SECRETARY,GRAM PANCHAYAT	KOTIKALAPUDI	NS	10	3	DIGITAL	GENUS	3047957		1
1412	VIJAYAWADA RURAL	6311210000850	E.O.GP(STLMINOR)		NS	3	1	0	HPL	27239618	5-30A	1
1413	VIJAYAWADA RURAL	6311261010998	GRAMA PANCHAYATHIIBRAHIMPATNAM,VILLAGE	KAJINAGAR	NS	1	1	DIGITAL	HPL	32841574		1
1414	VIJAYAWADA RURAL	6311205003367	ANGANVADI BHAVANAM	--	NS	1	1	0	HPL	26421173		1
1415	VIJAYAWADA RURAL	6311221000759	E.O.GP(STL MAJOR)		NS	10	3	0	L	16247252	5-30A	1
1416	VIJAYAWADA RURAL	6311221009915	PROJECT DIRECTOR NHAI	NEAR BHARAT PETROL BUNK	NS	14	3	DIGITAL	L AND T	16224090		1
1417	VIJAYAWADA RURAL	6311261001133	M.R.O.REVENUE,		NS	6.7	3	2-ELECTRON	Genus	3044545	May-30	1
1418	VIJAYAWADA RURAL	6311211001956	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	HPL	28219294		1
1419	VIJAYAWADA RURAL	6311206000572	M.P.D.OFFICE	JUPUDI	NS	1	1	2-ELECTRON	HPL	31558374	5-30A	1
1420	VIJAYAWADA RURAL	6311205002382	E.O.GP(STL MAJOR)		NS	12	3	2-ELECTRON	HPL	3412704	107603	1
1421	VIJAYAWADA RURAL	6311211002019	PHC MULAPADU	MULAPADU	NS	3	1	2-ELECTRON	HPL	32844751	5-30A	1
1422	VIJAYAWADA RURAL	6311211001229	EO SECRUTARY	MULAPADU	NS	1	1	0	HPL	1025270	NA	1
1423	VIJAYAWADA RURAL	6311205000771	E.O.GP(STL MAJOR)		NS	3	1	2-ELECTRON	HE	19875226	May-30	1
1424	VIJAYAWADA RURAL	6311210000851	EO/GP/STL(MINOR).KOTIKALAPUDI	KOTIKALAPUDI	NS	5	3	2-ELECTRON	HPL	6309734	3-5-30A	1
1425	VIJAYAWADA RURAL	6311205003593	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	LT	60890144		1
1426	VIJAYAWADA RURAL	6311211800207	VETERNARY HOSPITAL	MULAPADU	NS	0.4	1	2-ELECTRON	HPL	32113737	5-30A	1
1427	VIJAYAWADA RURAL	6311208001544	SECRETARY GRAM PANCHAYAT	--	NS	1	1	2-ELECTRON	HPL	31252654	5-30A	1
1428	VIJAYAWADA RURAL	6311221009442	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	LT	60893447		1
1429	VIJAYAWADA RURAL	6311221009918	PROJECT DIRECTOR NHAI	--	NS	5	3	DIGITAL	L AND T	16223302		1
1430	VIJAYAWADA RURAL	6311201000002	SARPANCH GP(STL MINOR)		NS	1.4	1	2-ELECTRON	HPL	24072167	5-30A	1
1431	VIJAYAWADA RURAL	6311207000740	PANCHAYAT SECRETARY,PANCHAYAT SECRETARY	Kachavaram	NS	1	1	DIGITAL	HPL	31415399		1
1432	VIJAYAWADA RURAL	6311206001368	E.O.GP(STL MAJOR)		NS	14	3	2-ELECTRON	HPL	6269913	3X5-30A	1
1433	VIJAYAWADA RURAL	6311205003706	PROJECT DIRECTOR NHAI	NEAR ROAD TRANSPORT OFFICE	NS	12	3	DIGITAL	L AND T	16222787	--	1
1434	VIJAYAWADA RURAL	6311206001730	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	L AND T	60893353		1
1435	VIJAYAWADA RURAL	6311205003704	PROJECT DIRECTOR NHAI	NEAR VIJAYA RESIDENCY	NS	5	3	DIGITAL	L AND T	16222663		1
1436	VIJAYAWADA RURAL	6311212000937	PROJECT DIRECTOR NHAI	NEAR TRIPURAMBA COLD STORAGE	NS	9	3	DIGITAL	L AND T	16224083		1
1437	VIJAYAWADA RURAL	6311211001538	SARPANCH(STL MINOR)		NS	2	1	2-ELECTRON	HPL	32110693	5-30A	1
1438	VIJAYAWADA RURAL	6311202000143	SURPANCH GRAMAPANCHAYAT	MINORWATER WORKS	NS	10	3	2-ELECTRON	HPL	6282587	3-5-30A	1
1439	VIJAYAWADA RURAL	6311221006281	E.O.GP(STL MAJOR)		NS	2.26	1	2-ELECTRON	HPL	31932323	5-30A	1
1440	VIJAYAWADA RURAL	6311201000010	SARPANCH GP(STL MINOR)		NS	2	1	2-ELECTRON	HPL	32847734	5-30A	1
1441	VIJAYAWADA RURAL	6311206001736	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	L AND T	60893349		1
1442	VIJAYAWADA RURAL	6311261008143	AE A P S HOUSING CORPORATION	--	NS	1	1	0	HPL	20863727		1
1443	VIJAYAWADA RURAL	6311241006734	E.O.GRAMPANCHATI	IBRAHIMPATNAM	NS	15	3	2-ELECTRON	HPL	6309737	3-5-30A	1
1444	VIJAYAWADA RURAL	6311208001307	SARPANCH GP(STL MINOR)		NS	3	1	2-ELECTRON	HPL	34480938	5-30AMP	1
1445	VIJAYAWADA RURAL	6311205003703	PROJECT DIRECTOR NHAI	NEAR VIJAYA RESIDENCY	NS	11	3	DIGITAL	L AND T	16222782		1
1446	VIJAYAWADA RURAL	6311212000341	SURPANCH,	(MINOR WATER WORKS)	NS	5	3	2-ELECTRON	AVON	3180290	3X5-30A	1
1447	VIJAYAWADA RURAL	6311207000456	SARPANCH GP(STLMINOR)		NS	5	3	2-ELECTRON	HPL	6234658	3-5-30A	1
1448	VIJAYAWADA RURAL	6311208000387	SARPANCHI GRAMA PANCHAYTH	KETHANA KONDA	NS	0.5	1	2-ELECTRON	HPL	32844759	5-30A	1
1449	VIJAYAWADA RURAL	6311205001265	E.O.GP(STL MAJOR)		NS	1	1	0	HPL	20627005	5-30A	1
1450	VIJAYAWADA RURAL	6311241000532	SECTION OFFICER R & B	IBRAHIMPATNAM	NS	0.72	1	2-ELECTRON	NPL	32113976	5-30A	1
1451	VIJAYAWADA RURAL	6311208001791	GRAMAPANCHAYATHI,S T L	KETHANAKONDA	NS	2	1	2-ELECTRON	HPL	20616044	5	1
1452	VIJAYAWADA RURAL	6311212000992	SECRETARY GRAM PANCHAYAT	--	NS	2	1	DIGITAL	HPL	31931023		1
1453	VIJAYAWADA RURAL	6311205002674	SOCIAL WELFARE BOYS HOSTEL	--	NS	2	1	2-ELECTRON	NPL	4754409	May-30	1
1454	VIJAYAWADA RURAL	6311205005130	EO,GRAMAPANCHAYATHI GUNTUPALLI	GUNTUPALLI	NS	1	1	ELEC	HPL	34298874		1
1455	VIJAYAWADA RURAL	6311205001264	E.O.GP(STL MAJOR)		NS	1	1	2-ELECTRON	HPL	29394203	5-30A	1
1456	VIJAYAWADA RURAL	6311205002385	SARPANCH GRAMAPANCHAYAT		NS	1	1	2-ELECTRON	HPL	29272219	5-30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CONLOAD	PHASE	MTTYPE	MTMAKE	MTNUMBER	MTCURRENT	MTMF
1457	VIJAYAWADA RURAL	6311231006271	E.O.GP(STL MAJOR)		NS	4.88	1	2-ELECTRON	HPL	30379535	5-30A	1
1458	VIJAYAWADA RURAL	6311201000314	HEAD MASTER M P U P SCHOOL	--	NS	1	1	0	HPL	29396453	30A	1
1459	VIJAYAWADA RURAL	6311261006283	E.O.GP(STL MAJOR)		NS	5.26	3	2-ELECTRON	HPL	6329050	3X5-30A	1
1460	VIJAYAWADA RURAL	6311202000352	SECRETARY,GP WW DAMULURU	DAMULURU	NS	6	3	2-ELECTRON	Genus	3062087	5-30A	1
1461	VIJAYAWADA RURAL	6311202000229	SARPANCH,	MINORWATER WORKS	NS	10	3	2-ELECTRON	Genus	3062132	5-30A	1
1462	VIJAYAWADA RURAL	6311207000531	The Head Master	--	NS	1	1	2-ELECTRON	HPL	31272370	May-30	1
1463	VIJAYAWADA RURAL	6311206001858	SECRETARY GRAM PANCHAYAT	--	NS	2	1	DIGITAL	LANDIS	29395461		1
1464	VIJAYAWADA RURAL	6311207000792	GRAMAPANCHAYATI,SECRETARY	KACHAVARAM	NS	3	1	2-ELECTRON	HPL	34776165	May-30	1
1465	VIJAYAWADA RURAL	6311207000503	E.O.GRAMAPANCHATI		NS	3	1	0	HPL	20651367	5-30A	1
1466	VIJAYAWADA RURAL	6311211000043	HEAD MASTER,		NS	4.72	3	2-ELECTRON	Genus	3045489	5-30A	1
1467	VIJAYAWADA RURAL	6311205000663	E.O.GP(STLMAJOR)		NS	1	1	2-ELECTRON	HE	19873901	May-30	1
1468	VIJAYAWADA RURAL	6311206001859	SECRETARY GRAM PANCHAYAT	--	NS	2	1	DIGITAL	HPL	29396467		1
1469	VIJAYAWADA RURAL	6311221009917	PROJECT DIRECTOR NHAI	--	NS	5	3	DIGITAL	L AND T	16223301		1
1470	VIJAYAWADA RURAL	6311221009921	PROJECT DIRECTOR NHAI	--	NS	11	3	CT-METER	L AND T	A0021086	125/5A	1
1471	VIJAYAWADA RURAL	6311208001584	ANGANAVADI SCHOOL	--	NS	1.34	1	0	HPL	26447548		1
1472	VIJAYAWADA RURAL	6311208002097	RWS AND PWS SCHEME,WATER WORKS MOTOR	KETHANAKONDA	NS	5	3	2-ELECTRON	HPL	6350146	May-30	1
1473	VIJAYAWADA RURAL	6311205000253	E.O.PANCHAYAT	GUNTUPALLI	NS	0.37	1	2-ELECTRON	LnT	62327219	5-30A	1
1474	VIJAYAWADA RURAL	6311221010097	PROJECT DIRECTOR NHAI	NEAR BALAJI AVENUE	NS	9	3	CT-METER	LnG	A0025860	125/5A	1
1475	VIJAYAWADA RURAL	6311221006274	E.O.GP(STL MAJOR)		NS	10.26	3	2-ELECTRON	HPL	3379750	3X5-30A	1
1476	VIJAYAWADA RURAL	6311203000046	The Head Master	--	NS	1	1	2-ELECTRON	HPL	32847738	5-30A	1
1477	VIJAYAWADA RURAL	6311221009916	PROJECT DIRECTOR NHAI	--	NS	5	3	DIGITAL	L AND T	16223309		1
1478	VIJAYAWADA RURAL	6311221013465	KONDAPALLI MUNICIPALITY,KONDAPALLI MUNIC	KONDAPALLI MUNICIPALITY	NS	10	3	2-ELECTRON	HPL	6268332	3-5-30A	1
1479	VIJAYAWADA RURAL	6311212800294	M.P.P.SCHOOL	TUMMALAPALEM	NS	0.48	1	2-ELECTRON	HPL	32110218	5-30A	1
1480	VIJAYAWADA RURAL	6311207001048	JAGANANNA COLONIES PWS	KACHAVARAM	NS	5	3	ELEC	HPL	6363107		1
1481	VIJAYAWADA RURAL	6311212000678	E.O.GRAMAPANCHATI		NS	1	1	2-ELECTRON	HPL	32839342	5-30A	1
1482	VIJAYAWADA RURAL	6311261006282	E.O.GP(STL MAJOR)		NS	5	3	2-ELECTRON	Genus	3061277	May-30	1
1483	VIJAYAWADA RURAL	6311208000298	M.P.P.SCHOOL	KETHANA KONDA	NS	0.255	1	2-ELECTRON	HPL	32844758	5-30A	1
1484	VIJAYAWADA RURAL	6311221000836	MANDAL OFFICER	IBRAHIMPATNAM	NS	0.5	1	0	HPL	27682734	30A	1
1485	VIJAYAWADA RURAL	6311202000466	SARPANCH GP(STL MINOR)		NS	2	1	2-ELECTRON	NPL	4748776	May-30	1
1486	VIJAYAWADA RURAL	6311205002660	SURPANCH GRAMPANCHATI	--	NS	5	3	2-ELECTRON	HPL	6267698	May-30	1
1487	VIJAYAWADA RURAL	6311221006279	E.O.GP(STL MAJOR)		NS	3.26	1	2-ELECTRON	AVON	89680121	5-30A	1
1488	VIJAYAWADA RURAL	6311231003759	MEDICAL OFFICER		NS	5	3	2-ELECTRON	HPL	3047968	May-30	1
1489	VIJAYAWADA RURAL	6311221008920	ANGANWADI BHAVANAM(3017)	--	NS	1	1	2-ELECTRON	LNT	10497746	5-30A	1
1490	VIJAYAWADA RURAL	6311241000215	PANCHAYAT RADIO	IBRAHIMPATNAM	NS	3.2	1	2-ELECTRON	HPL	27379748	5-30A	1
1491	VIJAYAWADA RURAL	6311206001729	SECRETARY GRAM PANCHYAT	--	NS	0.25	1	0	L AND T	60893441		1
1492	VIJAYAWADA RURAL	6311205000134	J.P.HIGH SCHOOL	GUNTUPALLI	NS	5.4	3	2-ELECTRON	HPL	3380776	3X5-30A	1
1493	VIJAYAWADA RURAL	6311206002258	JAGANANNA COLONIES PWS	JUPUDI	NS	5	3	2-ELECTRON	HPL	3306871	May-30	1
1494	VIJAYAWADA RURAL	6311202000230	SARPANCH,	MINORWATERWORKS	NS	10	3	2-ELECTRON	Genus	3047914	5-30A	1
1495	VIJAYAWADA RURAL	6311207000739	PANCHAYAT SECRETERY,PANCHAYAT SECRETERY	Mudu Gulla Center	NS	1	1	DIGITAL	HPL	31415397		1
1496	VIJAYAWADA TOWN	6425238241777	COMMISSIONER VMC	VMC M A E	NS	1.34	1	ELEC	HPL	34974152		1
1497	VIJAYAWADA TOWN	6425238081018	Stl-Bno-144	NA	NS	4.5	1	0	L&G	26952129	May-20	1
1498	VIJAYAWADA TOWN	6425238081005	Stl-Bno-143	NA	NS	3.5	3	2-ELECTRON	LnT	16396777	5-30A	1
1499	VIJAYAWADA TOWN	6425238239519	COMMISSIONER VMC,COMMISSIONER VMC	VIJAYAWADA	NS	2	1	2-ELECTRON	LnT	10540330	5-30A	1
1500	VIJAYAWADA TOWN	6425238220275	Sub Insp Of Police	NA	NS	6.3	3	2-ELECTRON	HPL	6349879	5-30A	1

Sample data of LT Industrial Services

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CON LOAD	PHASE	MT TYPE	MT MAKE	MT NUMBER	MT CURRENT	MT MF
1	VIJAYAWADA RURAL	6312315001231	MANDALA.VENKATA NARAYANA	--	NS	6	3	2-ELECTRO	HPL	6419314	5-30A	1
2	VIJAYAWADA RURAL	6312315001406	M/S G N R POULTRY FORM	--	NS	15	3	2-ELECTRO	HPL	6272496	5-30A	1
3	VIJAYAWADA RURAL	6312300000390	P VENKATA SWAMY		NS	9.063	3	2-ELECTRO	Genus	3027140	5-30A	1
4	VIJAYAWADA RURAL	6312304000165	KUMARA REDDY	CH V GUDEM	NS	5.362	3	2-ELECTRO	HPL	6350035	5-30A	1
5	VIJAYAWADA RURAL	6312304000257	K D M P M A P U LTD VJA	--	NS	25	3	CT-METER	GENUS	7028747	125/5A	1
6	VUYYURU	6722100000839	K SATYANARAYANA	AVANIGADDA	NS	11	3	2-ELECTRO	HPL	3377236	May-30	1
7	VUYYURU	6722100001171	A VEDAVATHI	AVANIGADDA	NS	80	3	CT-METER	Genus	7028704	125/5	1
8	VUYYURU	6722100001336	ADDEPALLI NAGARAJU	AVANIGADDA.	NS	17.5	3	2-ELECTRO	HPL	6412931	May-30	1
9	VUYYURU	6722100001827	N R K MURTY	AVANIGADDA	NS	16.5	3	2-ELECTRO	HPL	3027869	May-30	1
10	MACHILIPATNAM	6244100000305	RAHAMAN KHAN	BANTUMILLI-ICEPLANT	NS	8	3	2-ELECTRO	HPL	3704867	May-30	1
11	MACHILIPATNAM	6244126000106	CH BHASKARA RAO	PENDURU-RICEMILL	NS	22.02	3		HPL	3888499	5-30A	1
12	MACHILIPATNAM	6244100002889	PANCHAKARLA SRINIVASA RAO	RS NO: 155,	NS	32	3	CT-METER	LG	P0075049	125/5A	1
13	MACHILIPATNAM	6244100003511	M/S SRINIVASA ENGINEERING WOR	NEAR SUBSTATION	NS	7.77	3	2-ELECTRO	Genus	16365169	5-30A	1
14	MACHILIPATNAM	6244112000205	JAYALAKSHMI RICE MILL	LAKSHMINARAYANA PURAM	NS	128	3	CT-METER	Secure	X0419907		1
15	MACHILIPATNAM	6244125000851	M/S MURALIKRISHNA FLOURMILL	PEDATUMIDI-FLOURMILL	NS	10	3	5-LTCTMTR	LnT	16370950	5-30A	1
16	GUDIVADA	6133100000106	T. PRASADA RAO	KAIKALURU	NS	10.5	3	2-ELECTRO	HPL	6402412	May-30	1
17	GUDIVADA	6133100000743	G. BHASKARA RAO	KAIKALURU	NS	3.5	1	2-ELECTRO	LT	62374303	5-30A	1
18	GUDIVADA	6133100001540	MUVVALA.SRINIVASA RAO	KAIKALURU	NS	130.5	3	6-HTCTMT	SECURE	X1075752	10/05A	1
19	GUDIVADA	6133100003534	SRI.GUDURU.SRINIVASA RAO	KAIKAKURU MANDALAM	NS	22	3	2-ELECTRO	GENUS	3047391	May-30	1
20	GUDIVADA	6133100010791	JANATHA IRON SAFES	KAIKALUR	NS	49	3	CT-METER	AVON	9120867		1
21	GUDIVADA	6133142000015	SRI.M.R.RAO		NS	60	3	CT-METER	AVON	8002311	125-5	1
22	GUDIVADA	6133100000421	K. RAGHAVAIAH	KAIKALURU	NS	12.5	3	2-ELECTRO	HPL	3727303	3X5-30A	1
23	NUZVIDU	6622309000515	SRI VENKATESWARA RICE MILL	DUNDIRALAPADU	NS	40	3	CT-METER	HPL	622734	5-30A	1
24	NUZVIDU	6622309001330	KOMMINENI,VENKATESWARA RAO	DUNDIRALAPADU	NS	25	3	CT-METER	LnG	137002	5-30A	1
25	NUZVIDU	6622313001021	HARIBABU JILLELLA NAGABHUSHANAM	LANGALA	NS	20	3	CT-METER	HPL	8001405	125/5A	1
26	NUZVIDU	6622321001239	M/s ANU FLYASH BRICKS	--	NS	18	3	CT-METER	H4	49859	3	1
27	NUZVIDU	6622322001707	M/s SAI ANJANEYA RICE MILL	--	NS	45	3	CT-METER	T9L	45398	JXMX	1
28	NUZVIDU	6622330001124	Pasupuleti Nagaraju	--	NS	12.064	3	2-ELECTRO	AVON	3220456	5-30A	1
29	NUZVIDU	6622331000014	BALARAM RICE MILL	VUTUKURU	NS	48	3	CT-METER	11	1	1	1
30	NUZVIDU	6622300000079	S.VENKATA APPA RAO	GAMPALAGUDEM	NS	42	3	CT-METER		3690	15	1
31	VIJAYAWADA TOWN	6435114305298	PRIDE TRADING COMPANY	Patamata Vari Street	NS	20	3	0	L AND T	16245879		1
32	VIJAYAWADA TOWN	6435176240066	M\S Vijayadurga	PROP.B.CHANDRASEKHARARAO	NS	29.126	3	CT-METER		9627607	50	1
33	VIJAYAWADA TOWN	6435181261546	M/S Saleem Flour Mill	D.NO.75-5-16,MOSQUE STREET,	NS	9.8	3	2-ELECTRO	Genus	3047996	May-30	1
34	VIJAYAWADA TOWN	6435191000350	Sk Fareed Dall Mill	B PURAM	NS	56.68	3	CT-METER	AVON	8322240	125/5A	1
35	VIJAYAWADA TOWN	6435193243257	Smt Sk Ashabi	H.B.COLONY ROAD, B.H.PURAM	NS	14.08	3	2-ELECTRO	Genus	3045084	May-30	1
36	VIJAYAWADA TOWN	6435114247942	M/S Balaji Products	K.G.MARKET SECTION,	NS	18.14	3	0	0	16333036	0	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CON LOAD	PHASE	MT TYPE	MT MAKE	MT NUMBER	MT CURRENT	MT MF
37	VIJAYAWADA TOWN	6435114255940	M/S Srinivasa Waste Paper	PLOT.NO:375, IRON YARD,	NS	10	3	2-ELECTRO	LnT	16344633	5-30A	1
38	GUNADALA	6521223010059	M/S Ameerkhan Battery Works	NEW AUTONAGAR	NS	39	3	CT-METER	L G	4892478	125	1
39	GUNADALA	6521223010330	Paparao Electrical Works	NA	NS	57	3	CT-METER	L&G	P0075229	125/5A	1
40	GUNADALA	6521223010433	Sri Lakshmi Automobiles	NA	NS	13.81	3	2-ELECTRO	HPL	6352429	30	1
41	GUNADALA	6521223010724	Sk Kamaal	NA	NS	20	3	2-ELECTRO	Genus	3026603	3-5-30A	1
42	GUNADALA	6521223012400	A K Plastic Industry	Plot No.83/1,2,B-5	NS	49.14	3	CT-METER	LnG	4892646	1	1
43	GUNADALA	6521223013389	Sri Annapurna Food Products	PLOT NO.59,BLOCKA-3	NS	39.48	3	2-ELECTRO	Genus	3044276	530A	1
44	GUNADALA	6521223013465	M/S Lakshmi Prasuna Paper Prod	Plot.No.203,B-09,	NS	25	3	CT-METER	UTL	APS3180		1
45	GUNADALA	6521223013524	Md Rizwan	Plot.No.249,Bl.-C09	NS	10	3	2-ELECTRO	Genus	3048253	3X5-30A	1
46	GUNADALA	6512103030404	M/S Durgamalleswari Diesel	P;28,29 100FT ROAD,	NS	10	3	2-ELECTRO	Genus	3027352	3Q5-30A	1
47	GUNADALA	6512103031418	M/S Devraj Body Building	100FEET ROAD,	NS	24.745	3	2-ELECTRO	HPL	3028271	3Q5-30A	1
48	GUNADALA	6512103033105	M/S Monarch Traders	60FEET ROAD,	NS	26	3	0	0	16244949	30	1
49	GUNADALA	6512103034398	M/S Daniel Painting Works	PROP.N.DANIEL S/O.SOLMAN,	NS	25	3	CT-METER	0	35120	5	1
50	GUNADALA	6512103035826	M/S Mahaboob Body Building	PROP.SUBHANI, P-173,	NS	20	3	2-ELECTRO	Genus	3075257	3Q5-30A	1
51	GUNADALA	6512103037133	Auto General Works	PLOT 266&267 BLOCK A-XI	NS	29.43	3	2-ELECTRO	Genus	3072750	3Q5-30A	1
52	GUNADALA	6512103038650	PRASAD REDDY,CH	55-1-32	NS	21.836	3	2-ELECTRO	Genus	3027732	3Q5-30A	1
53	GUNADALA	6512103040604	UMA BODY BUILDING WORKS	0	NS	16.67	3	DIGITAL	GENUS	3003387		1
54	GUNADALA	6512103040631	DIESEL AUTOMOTIVE SERVICE CENTRE	0	NS	12	3	DIGITAL	GENUS	3062570		1
55	GUNADALA	6512104000146	S K Dada	NA	NS	33.23	3	2-ELECTRO	HPL	6229651	3Q5-30A	1
56	GUNADALA	6512104000152	Smt R V V L Subhashini	W/O.K.RAMA KRISHANA	NS	27	3	2-ELECTRO	Genus	3011686	3Q5-30A	1
57	GUNADALA	6512104000217	J V Rao	NA	NS	20	3	2-ELECTRO	HPL	6255297	3X5-30	1
58	NUZVIDU	6614203000633	SEETHARAMANJANEYA RICE &		NS	34.35	3	CT-METER	GENUS	7178533	3X125/5A	1
59	NUZVIDU	6614203001978	CHILUKURI SRINIVASARAO	--	NS	25	3	CT-METER	O62157	OIH Z HPL	4	1
60	NUZVIDU	6614200000160	VENKATESWARA RICE MILL	MUSUNURU MANDAL	NS	30.645	3	CT-METER	AVON	8003266	125/5A	1
61	NUZVIDU	6614200000380	G SUBBA RAO		NS	0.8	1	2-ELECTRO	HPL	32841616	5-30A	1
62	NUZVIDU	6614200000518	SRI LAXMI RICE MILL,		NS	21.34	3	CT-METER	--	APE33502	--	1
63	NUZVIDU	6614203001296	CHILUKURI VENKATESWARARAO		NS	30	3	CT-METER	LnG	A0043948	200/5A	1
64	NUZVIDU	6614206001708	KK VENKATESWARA FLYASH BRICKS	0	NS	12	3	2-ELECTRO	HPL	3832158	5-30A	1
65	NUZVIDU	6614211000254	D.VENKATESWARA RAO,		NS	7.821	3	2-ELECTRO	HPL	6349119	5-30A	1
66	NUZVIDU	6611306001286	M/SRI BALAJI FLY ASH BRICKS	GOLLAPALLI	NS	15	3	2-ELECTRO	Genus	3188905	5-30A	1
67	NUZVIDU	6611323001139	M/S S R FLYASH INDUSTRY	--	NS	18	3	2-ELECTRO	HPL	6420580	5-30A	1
68	NUZVIDU	6611323000203	VENKATESWARA GINNING MILL	NUZVIDUMANDAL	NS	63.111	3	CT-METER		AP007512		1
69	NUZVIDU	6611323000204	SHAIK MAHABOOB SUBHANI		NS	41.14	3	CT-METER	LnG	P0116029	125/5A	1
70	NUZVIDU	6611300001697	S.R.FLYASH BRICKS	--	NS	15	3	2-ELECTRO	Genus	1511624	5-30A	1
71	NUZVIDU	6611301000319	M.P.C.SOCIETY	PALLERLAMUDI.	NS	40.349	3		HPL	16244268	5-30A	1
72	NUZVIDU	6611301000365	GOPALA KRISHANA RICE MILL	PALLERLAMUDI.	NS	97.73	3	HT-METER	SECURE	APS15460	10/5A	1
73	NUZVIDU	6611300001911	G LOKESWARARAOSILKREELING IND.	--	NS	14.84	3	2-ELECTRO	HPL	6420314	May-30	1
74	NUZVIDU	6611300001975	SRI SAI BALAJI NOONE GANUGA	0	NS	17	3	2-ELECTRO	HPL	3698028	5-30A	1
75	NUZVIDU	6611300001987	Aasthick Roofings	Meerjapuram	NS	30	3	CT-METER	AVON	8001314		1
76	NUZVIDU	6611300002345	SRI BHAGAVAN VENKAIAH,SWAMY PLASTI	MEERJAPURAM	NS	45	3	CT-METER	VISIONTEK	1239297		1
77	NUZVIDU	6611305000483	M/S.SRI VENKAYAMMA OIL & FLOOR	MAEIBANDAM.	NS	21	3	2-ELECTRO	Genus	3073543	5-30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CON LOAD	PHASE	MT TYPE	MT MAKE	MT NUMBER	MT CURRENT	MT MF
78	NUZVIDU	6611305000699	M/s Sri Hanuman Flyash Brick	--	NS	15	3	2-ELECTRO	HPL	3392685	May-30	1
79	NUZVIDU	6611306001816	PRABHU KIRAN ENTERPRISES	--	NS	50	3	CT-METER	GENUS	7026964		1
80	NUZVIDU	6611300000159	KRISHNAVENI AGRO CHEMICAL	MEERAJAPURAM.	NS	53.36	3	CT-METER	L&G	4889936	125/5A	1
81	NUZVIDU	6611300001698	SRI SAI HANUMAN FLYASH BRICKS	--	NS	13	3	2-ELECTRO	Genus	3072922	5-30A	1
82	NUZVIDU	6614200000156	CH SATYANARAYANA RICE MIL	MUSUNURU MANDAL	NS	20.5	3	CT-METER	Genus	7026217	125/5A	1
83	NUZVIDU	6614203001452	M GIRI BABU	CHEKKAPALLI	NS	0.96	1	2-ELECTRO	HOLLEY	2725716	5-30A	1
84	NUZVIDU	6614200000285	P.VENKATESWARA RAO	RAMANAKKAPET	NS	4.744	1	0	VISION	2082350	30	1
85	NUZVIDU	6614203002149	M/s.Aruna Flyash Bricks & Cement Concre	--	NS	20	3	CT-METER	L AND T	A0018501		1
86	NUZVIDU	6614203002664	AKIL FLAYASH BRIKS	CHAKKAPALLI	NS	15	3	CT-METER	LG	A0030755	200/5	1
87	NUZVIDU	6614206000792	SAMBASIVA MODERN RICE MILL.	GUDIPADU.	NS	35	3	CT-METER	LT	18261017	125/5A	1
88	NUZVIDU	6614211000129	D NAGESWARA RAO		NS	0.28	1	2-ELECTRO	HPL	32093181	5-30A	1
89	NUZVIDU	6614203000509	GOPALA KRISHNA AGRO		NS	8	3	2-ELECTRO	LnT	16388326	30A	1
90	NUZVIDU	6614203000526	M/S RADHAKRISHANA MURTHY		NS	7.12	3	2-ELECTRO	HPL	6310404	5-30A	1
91	NUZVIDU	6614203800548	T RAMADEVI		NS	8.27	3	0	L	16241792	530	1
92	NUZVIDU	6614205000204	G.THIRAPATHAIAH.	MUSUNURU MANDAL	NS	3	1	2-ELECTRO	HPL	33235549	5-30A	1
93	NUZVIDU	6614200001107	M/S.SURYA POULTARY FIRM.	MUSUNURU MANDAL	NS	5	3	2-ELECTRO	HPL	3405976	5-30A	1
94	NUZVIDU	6614203000169	N MATTAIAH		NS	21.18	3	CT-METER	AVON	8000997	125/5A	1
95	NUZVIDU	6614200000193	K PURNACHANDRA RAO		NS	10.645	3	2-ELECTRO	HPL	3819655	5-30A	1
96	NUZVIDU	6614200001216	K.MALLIKARJUNA RAO.	R.K.PETA	NS	3	1	0	NPL	14340995	20	1
97	NUZVIDU	6614200001400	M/s D.GaneswaraRaoPoultryfarm	--	NS	3	1	0	HPL	26343711	30A	1
98	NUZVIDU	6614200001954	RAMA KRISHNA FLY ASH BRICKS	RAMANAKKAPETA	NS	20	3	CT-METER	AVON	9121988	125/5A	1
99	NUZVIDU	6614203001684	SRI CH.VENKATESWARA RAO	CHEKKAPALLI	NS	5.975	3	2-ELECTRO	AVON	3233018	5-30A	1
100	NUZVIDU	6614200000550	GOLLA RAMALINGA CHARY,		NS	15.322	3	2-ELECTRO	AVON	3174607	5-30A	1
101	NUZVIDU	6614203000181	M/D G K SUGARS		NS	6	3	6-HTCTMT	Genus	3026189	5-30A	1
102	NUZVIDU	6614206000178	M SUBBA RAO		NS	30.645	3	CT-METER	L	A0018562	125/5A	1
103	NUZVIDU	6614208000046	K V S S RAJA NARAYANA		NS	20.645	3	CT-METER	HPL	7028358	5-30A	1
104	NUZVIDU	6614200001718	LALITHAMICA DALL MILL,MATURI TULASI K	RAMANAKKAPETA	NS	25	3	CT-METER	GENUS	7030162		1
105	NUZVIDU	6614203000356	SREENIVASA SAW MILL	MUSUNURU MANDAL	NS	25.34	3	2-ELECTRO	HPL	6349121	5-30A	1
106	GUDIVADA	6111298007043	JASTI LAKSHMANASWAMY	RICE MILL	NS	85	3	CT-METER	--	AP015093	--	1
107	GUDIVADA	6111298011569	M/S NAVYA INDUSTRIES	NA	NS	30	3	CT-METER	--	AP007519	--	1
108	GUDIVADA	6111291003719	P.V. KUTUMBA RAO	WELDING SET	NS	36.5	3	2-ELECTRO	HPL	3843831	3X5-30A	1
109	GUDIVADA	6111291007151	CH. POORNA CHANDRA RAO	NA	NS	30	3		Genus	3043951	3X5/30A	1
110	GUDIVADA	6111291008784	B. MOHANA RAO	NA	NS	27.53	3		GENUS	3073123	May-30	1
111	GUDIVADA	6111291012491	M.S.R.ANJANEYULU	GUDIVADA	NS	18.322	3	2-ELECTRO	HPL	6415712	3X5-30A	1
112	GUDIVADA	6111291012568	CH.NAGESWARA RAO	AUTO NAGAR	NS	7.911	3		LnT	16329322	5/30A	1
113	GUDIVADA	6111291034934	M/S.BASHA LORRY BODY BUILDING	PLOT NO.C22, INDUSTRIAL ESTA	NS	9	3		Genus	3047881	3X5/30A	1
114	GUDIVADA	6111291035036	M/S. JPS INDUSTRIES	AUTONAGAR	NS	17	3		Genus	3074662	3X5/30A	1
115	GUDIVADA	6111292000362	K.V.CHALAPATHI RAO	NA	NS	6	3	2-ELECTRO	HPL	6423883	3X5-30A	1
116	GUDIVADA	6111292003488	T. PAPA RAO	NA	NS	7	3		Genus	3073895	3X5/30A	1
117	GUDIVADA	6111295002144	CHINTHALA KALYANI	FLOUR MILL	NS	15.992	3		Genus	3043942	5/30A	1
118	GUDIVADA	6111295004162	P. SATYANARAYANA	NA	NS	8.425	3		Genus	3044566	3X5/30A	1
119	GUDIVADA	6111295011151	AKURATI NAGESWARARAO	GEETA BHAVAM ROAD	NS	5.268	3		Genus	3027995	3X5/30A	1
120	GUDIVADA	6111295042236	M/S SNEHIKA AGRICULTURE	0	NS	9	3		L AND T	16240048		1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CON LOAD	PHASE	MT TYPE	MT MAKE	MT NUMBER	MT CURRENT	MT MF
121	GUDIVADA	6111298006652	P. RAM BABU	WORK SHOP	NS	28.27	3	CT-METER	GENUS	7178631	125/5A	1
122	GUDIVADA	6111298007667	P.V. RATHNAM	NA	NS	48.707	3	CT-METER	Genus	7028303	125/5A	1
123	GUDIVADA	6111298009160	SMT. S. PUSHPAVATHI	NA	NS	30.404	3	CT-METER	1	AP33454	1	1
124	GUDIVADA	6111298011473	CH ARUNDATI	MARVADI ST	NS	30.563	3	CT-METER	LG	955018	125	1
125	GUDIVADA	6111298014155	GRANDHI VENKATA HARI B	NA	NS	99.67	3	CT-METER	LG	4889657	125/5A	1
126	GUDIVADA	6111298024241	KOMALI METAL ROLLING WORKS	S/O VENKATESWARLU	NS	45	3	CT-METER		AP009105	20	1
127	GUDIVADA	6111298040986	M/S.EXPO SMALL SCALE,INDUSTRIES	RS.NO.417/3	NS	45	3	CT-METER	LG	4892627	125/5A	1
128	GUDIVADA	6111299045746	JAYALAKSHMI AQUA FEEDS1	0	NS	99	3	HT-METER	Secure	X1886512		1
129	GUDIVADA	6111291004309	V.V. SUBBA RAJU	NA	NS	17.75	3		GENUS	3073440	May-30	1
130	GUDIVADA	6111291011415	S.GIRIJA KUMARI	NA	NS	3.804	1	2-ELECTRO	HOLLEY	2728442	5-30A	1
131	GUDIVADA	6111291011536	J.NARASIMHA RAO	NA	NS	20.536	3		Genus	3073570	3X5/30A	1
132	GUDIVADA	6111291012235	K.VENKATA RAO	INDUSTRY	NS	5	3		HPL	3027606	5/30A	1
133	GUDIVADA	6111291033336	KHAN AUTO ENGINEERING WORKS	GUDIVADA	NS	5	3	2-ELECTRO	AVON	3177627	3X5-30A	1
134	GUDIVADA	6111291036364	M/S ALLA MAHAMAD LORRY BODY BU	0	NS	19.99	3		GENUS	3073445	May-30	1
135	GUDIVADA	6111291037294	M/s SAIMANIKANTA WELDING	1/667	NS	21	3		GENUS	3073032	May-30	1
136	GUDIVADA	6111291045000	SUBRAHMANYESWARA AGRO INDUSTRIES	0	NS	10	3	ELEC	HPL	6248551		1
137	GUDIVADA	6111292035716	M/S.SARAT INDUSTRIES	16/164	NS	10	3		GENUS	3073017	May-30	1
138	GUDIVADA	6111293001393	K.CH.BALA KOTAIAH	RICE MILL	NS	16	3		Genus	3044607	5/30A	1
139	GUDIVADA	6111293021779	IMMENANI KOTESWARA RAO	D.NO.16/17 S.N.PURAM	NS	13	3		GENUS	3073373	May-30	1
140	GUDIVADA	6111293042693	GOLLAPALLI RAMESH	0	NS	10	3	2-ELECTRO	HPL	6352574	3X5-30	1
141	GUDIVADA	6111295036599	M/S SRI LAKSHMI PAPER CUPS PRO	BANTUMILLI ROAD	NS	10	3		Genus	3044698	5/30A	1
142	GUNADALA	6511428002853	DONTHI REDDY,VENKATA KRUPA MANI	ALEAP INDUSTRIAL AREA SURAM	NS	65	3	HT METER	Secure	X0845913	20-May	0.5
143	GUNADALA	6511428003045	SYTIQHUB EV SOLUTIONS PRIVATE LIMITE	0	NS	40	3	CT-METER	AVON	8004746		1
144	GUNADALA	6511430003032	Calorie Care Cooking Sprays PVt. Ltd.	0	NS	18	3	ELEC	HPL	3816231		1
145	VIJAYAWADA TOWN	6436297223524	Sribandi Durga Rao	2ndcrossROAD	NS	31.483	3	2-ELECTRO	Genus	3013338	3X5-30A	1
146	VIJAYAWADA TOWN	6436297229261	Tadisetty Kasiviswanadham	R.T.C.WORKS SHOP ROAD	NS	7.011	3	2-ELECTRO	Genus	3028242	3X5-30A	1
147	VIJAYAWADA TOWN	6436297243830	M/S Sri Padmavathi Poly	KABELA 4TH CROSS ROAD,	NS	35.6	3	2-ELECTRO	HPL	6403634	May-30	1
148	VIJAYAWADA TOWN	6436297258246	M/S Ganesh Enterprises	KISHNA D.NO.76-13-92/114/1,	NS	45	3	2-ELECTRO	Genus	3026170	3X5-30A	1
149	VIJAYAWADA TOWN	6436297260893	M/S Padmavathi Polypackinds	4TH CROSS ROAD,	NS	26	3	2-ELECTRO	Genus	3012032	3X5-30A	1
150	VIJAYAWADA TOWN	6436297261948	MELIMI DURGA RAO	R.S.NO.408/6.	NS	39.475	3	2-ELECTRO	Genus	3013000	3X5-30A	1
151	VIJAYAWADA TOWN	6436297267715	M/S Apsara Turning Works	NEAR MASIJD,	NS	7	3	2-ELECTRO	Genus	3013165	3X5-30A	1
152	VIJAYAWADA TOWN	6436297269175	M/S Sk Gouse Turning Works	NEAR MASEED,KABELA ROAD,	NS	5	3	2-ELECTRO	Genus	3013012	3X5-30A	1
153	VIJAYAWADA TOWN	6436297270409	M/S Basha Turning Works	KUMMARIPALEM CENTER,	NS	5	3	2-ELECTRO	Genus	3026612	3X5-30A	1
154	VIJAYAWADA TOWN	6436297270764	M/S Vijay Lakshmi Casting	413/2,KABELA,RRNAGAR,	NS	13.91	3	2-ELECTRO	Genus	3013502	3X5-30A	1
155	VIJAYAWADA TOWN	6436297272167	Ch Vijaya Saradhi	75-7-24	NS	19	3	2-ELECTRO	Genus	3026602	3X5-30A	1
156	VIJAYAWADA TOWN	6436297272921	M/S Syed Mahaboob Basha	D.NO.76-16-28.	NS	14.07	3	2-ELECTRO	Genus	3026228	3X5-30A	1
157	VIJAYAWADA TOWN	6436297275288	M/S Sai Balaji Polymers	76-8/1-10	NS	28	3	2-ELECTRO	Genus	3027514	5-30A	1
158	VIJAYAWADA TOWN	6436297285005	DONDAPATI SARASWATHI	Vijayawada	NS	17	3	ELEC	HPL	6236731		1
159	VIJAYAWADA TOWN	6436210001340	Alankar Steel Products	Vijayawada Rural Mandalam	NS	73.27	3	CT-METER	LT	13526119	3	1
160	VIJAYAWADA TOWN	6436210001474	M/S Priya Chemicals	W/O.RAJASEKHARR.SNO.409/2	NS	36.536	3	CT-METER		811126		1
161	VIJAYAWADA TOWN	6436210001780	M/S Seven Hills Manufactu	RAOKABELA ROAD	NS	59.804	3	CT-METER		APE31653		1
162	VIJAYAWADA TOWN	6436210001946	Pilla Mohana Rao	KABELA	NS	74.5	3	CT-METER		APE35074	5	1
163	VIJAYAWADA TOWN	6436210247445	M/S Vijaya Resins & Coatings	KABELA, 4TH CROSS ROAD,	NS	47.68	3	CT-METER	AVON	8004765	125/5A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CON LOAD	PHASE	MT TYPE	MT MAKE	MT NUMBER	MT CURRENT	MT MF
164	VIJAYAWADA TOWN	6436210247447	M/S Sony Steels	3RD CROSS ROAD, KABELA,	NS	74.34	3	CT-METER	AVON	8321098	125/5A	1
165	VIJAYAWADA TOWN	6436210274344	Balaji Industries	RS NO:414/2	NS	61.49	3	CT-METER	GENUS	1566965		1
166	VIJAYAWADA TOWN	6436210276527	LAKSHMI URGAPLASTICS	418/3	NS	75.61	3	CT-METER	L&G	P0075055	125/5A	1
167	VIJAYAWADA TOWN	6436210280066	RAMDEV INDUSTRIES	--	NS	100	3	2-ELECTRO	Secure	X1988779	75/5A	1
168	VIJAYAWADA TOWN	6436297247443	M/S Krishna Floor Mill	GURUKRUPA ROAD,	NS	12.96	3	2-ELECTRO	Genus	3028201	3X5-30A	1
169	VIJAYAWADA TOWN	6436297249572	K Koti Rathnam	OPP SITARA	NS	15.22	3	2-ELECTRO	Genus	3013099	3X5-30A	1
170	VIJAYAWADA TOWN	6436297263603	Sri Vengamamba Traders	D.NO.3-1-216/2,	NS	16.7	3	2-ELECTRO	Genus	3026777	3X5-30A	1
171	VIJAYAWADA TOWN	6436297270765	M/S Rama Turning Works	5/1A,KABELA,RRNAGAR,	NS	8	3	2-ELECTRO	6	16213181	5	1
172	VIJAYAWADA TOWN	6436297271813	M/S Sri Rama Turning Works	3-1-29/16B	NS	12.64	3	2-ELECTRO	HPL	6416061	3X5-30A	1
173	VIJAYAWADA TOWN	6436297274584	Bhagavan Industries	25-50	NS	22	3	2-ELECTRO	Genus	3013499	3X5-30A	1
174	VIJAYAWADA TOWN	6436297278555	SWATHI INDUSTRIES	--	NS	17	3	DIGITAL	L AND T	16215426		1
175	VIJAYAWADA TOWN	6436210001398	M/S Sri Durga Plastic Ind	NA	NS	87.62	3	CT-METER	GENUS	7030890	125/5A	1
176	VIJAYAWADA TOWN	6436210001528	SUNKARA SUBBA RAO	MILK COLONY KABELACENTRE	NS	44.78	3	CT-METER	L&G	14892	125/5A	1
177	VIJAYAWADA TOWN	6436210001668	M/S V V S Paints	W/O.RAMBABU	NS	43.74	3	CT-METER		APE34950		1
178	VIJAYAWADA TOWN	6436210001839	M/S Sai Plastic Industries	KABELA, 4TH CROSSROAD,	NS	74.67	3	CT-METER	UTL	APS3391	125	1
179	VIJAYAWADA TOWN	6436210002190	Sri Vijaya Paints	KABELA, 4TH CROSS ROAD,	NS	50	3	CT-METER	L&G	P0075931	125/5A	1
180	VIJAYAWADA TOWN	6436210040940	Kanyaka Parameswari	V D PURAM	NS	60	3	CT-METER	L&T	4892350	125/5A	1
181	VIJAYAWADA TOWN	6436210244454	Ch Chenchi Reddy	URMILA NAGAR,	NS	40.06	3	CT-METER	LT	13526075	3	1
182	VIJAYAWADA TOWN	6436210250187	M/S Dedee Priya Paints	KABELA, VIDYADHARA PURAM.	NS	62	3	CT-METER	4	16200093	125	1
183	VIJAYAWADA TOWN	6436210255939	Smt T Saroja	R.A.NO 408/6,	NS	30	3	CT-METER		ADE31581	40	1
184	VIJAYAWADA TOWN	6436210255943	M/S S L K Resins	R.S.NO 410/1, KABELA ROAD,	NS	30	3	CT-METER		SP405094	5	1
185	VIJAYAWADA TOWN	6436210259675	M/S Shaleme Industries	D.NO. 1-50/2 4TH CROSS ROAD	NS	75.28	3	CT-METER	SECURE	APE35054	125/5A	1
186	VIJAYAWADA TOWN	6436210270688	M/S Venkateswara Poly Packs	R.S.NO.409/1,KABELA 4TH CROS	NS	75.568	3	CT-METER	1	621562	5	1
187	VIJAYAWADA TOWN	6436210272014	M/S Maya Foods	24-08-05	NS	87.19	3	CT-METER	AVON	8004045	125/5A	1
188	VIJAYAWADA TOWN	6436210273503	M/S Sri Rama Plastics	RSNO.1412	NS	84.75	3	CT-METER	AVON	8001429	125/5A	1
189	VIJAYAWADA TOWN	6436210278552	RJ ENTERPRISES	VIJAYAWADA	NS	20	3	CT-METER	L AND T	16201684		1
190	VIJAYAWADA TOWN	6436210279047	SRI RAM INDUSTRIES	NEAR VASAVI KALYANAMANDA	NS	29.593	3	CT-METER	L AND T	16200082		1
191	VIJAYAWADA TOWN	6436210286478	NEW,KAUVERY AGENCIES	KABELA CENTER	NS	18	3	CT-METER	VISIONTEK	1239248		1
192	VIJAYAWADA TOWN	6436288274545	Gopi Setty Mallaiah And Sons	RS NO:411	NS	90	3	CT-METER		B579534		1
193	VIJAYAWADA TOWN	6436297034113	V Sambasivaraju	R R NAGAR	NS	7	3	2-ELECTRO	Genus	3026179	3X5-30A	1
194	VIJAYAWADA TOWN	6436297216085	M/S V S R Products	D.No.76-16-27/2/4,	NS	34.235	3	2-ELECTRO	Genus	3013122	3X5-30A	1
195	VIJAYAWADA TOWN	6436297230643	GARLAPATI RAMAKRISHNA	D.NO.76-4-6	NS	23	3	1-MECHAN	Genus	3002967	5-30A	1
196	VIJAYAWADA TOWN	6436297230840	G Rama Naidu Plasticworks	D.NO.4-5-15	NS	17	3	2-ELECTRO	Genus	3013580	3X5-30A	1
197	VIJAYAWADA TOWN	6436297236558	M/S Srinivasa Wood Works	W/O KONDAIAH,	NS	16	3	2-ELECTRO	Genus	3026487	3X5-30A	1
198	VIJAYAWADA TOWN	6436297249354	Kalkibhagavan Chemical Indus-	VIDYADHARAPURAM,	NS	11.28	3	2-ELECTRO	Genus	3027535	3X5-30A	1
199	VIJAYAWADA TOWN	6436297257444	M/S Karimulla Turning Works	ICE FACTORY ROAD,	NS	11	3	1-MECHAN	Genus	3011938	3X5-30A	1
200	VIJAYAWADA TOWN	6436297259897	M/S Laxmi Srinivasa Metal	PROP:M. DEVI SUBBALAXMI,	NS	15	3	2-ELECTRO	Genus	3013327	3X5-30A	1
201	VIJAYAWADA TOWN	6436297262949	M/S Essence Agro Chemicals	1ST CROSS ROAD, R.S.NO.464/1	NS	8	3	2-ELECTRO	Genus	3026486	3X5-30A	1
202	VIJAYAWADA TOWN	6436297266169	M/S Real Foar Products	R.S.NO.408,	NS	15	3	2-ELECTRO	Genus	3013182	3X5-30A	1
203	VIJAYAWADA TOWN	6436297269176	M/S Laxmi Narasimha Plastic	RAO,RS.NO.412/3A,4TH CROSS	NS	32	3	2-ELECTRO	Genus	3013287	3X5-30A	1
204	VIJAYAWADA TOWN	6436297270966	M/S Shri Jyathirling Electro	BELA,INDL AREA,GOLLAPUDI(V)	NS	9	3	2-ELECTRO	Genus	3013276	3X5-30A	1
205	VIJAYAWADA TOWN	6436297272979	Sk Karimullah	D.No.26-97	NS	14	3	2-ELECTRO	Genus	3013240	3X5-30A	1
206	VIJAYAWADA TOWN	6436297273919	S Konda Reddy	25-37	NS	20.153	3	2-ELECTRO	HPL	6373367	3X5-30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CON LOAD	PHASE	MT TYPE	MT MAKE	MT NUMBER	MT CURRENT	MT MF
207	VIJAYAWADA TOWN	6436297275651	M/s. MANI INDUSTRIES,.	413-2	NS	14	3	2-ELECTRO	Genus	3013234	3X5-30A	1
208	VIJAYAWADA TOWN	6436297276855	,BALAJI METAL WORKS	25/32/4	NS	7	3	2-ELECTRO	Genus	3013164	3X5-30A	1
209	VIJAYAWADA TOWN	6436297279137	VINAYAKA PLASTICS	--	NS	10	3	DIGITAL	L AND T	16330851		1
210	VIJAYAWADA TOWN	6436297283232	SUBRAMANYESWARA ENTERPRISES	0	NS	18	3	ELEC	AVON	8072206		1
211	VIJAYAWADA TOWN	6436297284591	SRIPRIYA HOME PRODUCTS1	0	NS	5	3	ELEC	HPL	6414844	--	1
212	VIJAYAWADA TOWN	6436297285395	GAMPA DURGA RAO	VIJAYAWADA	NS	5	3	ELEC	AVON	3241087		1
213	VIJAYAWADA TOWN	6436297286634	VENKATA RATHNA BINDHU,ENEGINEERIN(	KABELA	NS	10	3	3-Electron	GENUS	7174889		1
214	VIJAYAWADA TOWN	6436210001338	Sri Laxmi Paints	GOLLAPUDI VILLAGE,	NS	85.5	3	CT-METER	AVON	8002683	125/5A	1
215	VIJAYAWADA TOWN	6436210001502	M/S Sriprakash Industries	GOLLAPUDI VILLAGE	NS	89.511	3	CT-METER	L&G	P0076415	125/5A	1
216	VIJAYAWADA TOWN	6436210001709	M/S Deluxe Ice And Cold	PROP.AZEES KHAN	NS	96	3	CT-METER	TTL	SP404053	3	1
217	VIJAYAWADA TOWN	6436210002191	M/S Venkata Durga Ramasai	KABELA, 4TH CROSS ROAD,	NS	97.06	3	CT-METER	LnG	A0030902	220/5A	1
218	VIJAYAWADA TOWN	6436210002344	M/S S V N Wire Nails	KABELA 4TH CROSS ROAD,	NS	45.69	3	CT-METER	L&G	P0074974	125/5A	1
219	VIJAYAWADA TOWN	6436210042508	Kandula Jyothi Lakshmi	KABELA ROAD	NS	74	3	CT-METER		APE31564		1
220	VIJAYAWADA TOWN	6436210230838	M/S Srikanth Engg Works	S/O.KONDALA RAO	NS	10.53	3	CT-METER		2195510		1
221	VIJAYAWADA TOWN	6436210250188	New Selvee Sweets	KABELA,	NS	31	3	CT-METER	HPL	P0076307	5-30A	1
222	VIJAYAWADA TOWN	6436210252437	M/S Eswar Plastics	S.F.NO:410/2, KABELA,	NS	28	3	CT-METER	GENUS	7177661	125/5A	1
223	VIJAYAWADA TOWN	6436210254544	M/S Indus Paints	5 TH CROSS ROAD	NS	57	3	CT-METER	U	15665900	3	1
224	VIJAYAWADA TOWN	6436210255335	M/S Sri Venkatadurgaramasaice	SY.NO.412/3A,	NS	45	3	CT-METER		APE35073	50	1
225	VIJAYAWADA TOWN	6436210255941	M/S Sri Rajeswari Engineering	4TH CROSS ROAD,	NS	30.63	3	CT-METER	SECURE	X0686495	125/A	1
226	VIJAYAWADA TOWN	6436210277672	,ALANKAR UPVCDOORSANDWINDOWS	28-241	NS	30	3	CT-METER		15665880		1
227	VIJAYAWADA TOWN	6436210278958	VENKATA NAGARAJU	GOLLAPUDI	NS	38	3	CT-METER	AVON	8003371	125/5A	1
228	VIJAYAWADA TOWN	6436210283269	SRI SARVANI INDUSTRIES ARTS AND CRAFT	0	NS	40	3	CT-METER	Genus	7177537	125/5	1
229	VIJAYAWADA TOWN	6436297001526	Sri Krishna Plastic Ind	W/O.VENKATESWARARAO	NS	15	3	2-ELECTRO	Genus	3013277	3X5-30A	1
230	VIJAYAWADA TOWN	6436297247038	M/S Vijayadurga Turninig Works	KABELA,VIDYADHARAPURAM,	NS	7.2	3	2-ELECTRO	LnT	16348510	3X5-30A	1
231	VIJAYAWADA TOWN	6436297247444	M/S Rajendra Wood Works	KABELA ROAD,	NS	17	3	2-ELECTRO	Genus	3013326	3X5-30A	1
232	VIJAYAWADA TOWN	6436210001275	M Udaya Bhaskar	NA	NS	74.11	3	CT-METER	L&G	4889922	125/5A	1
233	VIJAYAWADA TOWN	6436210001286	M/S Venkata Laxmi Paints	GOLLAPUDI,	NS	22.68	3	CT-METER		APE35248		1
234	VIJAYAWADA TOWN	6436210001537	M/S Siddi Vinayaka Containers	D.NO.25-23,KABELA ROAD,	NS	74.67	3	CT-METER	LnG	4892159	125/5A	1
235	VIJAYAWADA TOWN	6436210001687	Parekh Mukesh	MUKESH PAINTS COMPANY	NS	31.537	3	CT-METER	L&T	13526046	125/5A	1
236	VIJAYAWADA TOWN	6436210001784	SRI BALAJI MANUFACTURERS	KABELA 4th CROSS ROAD	NS	63.147	3	CT-METER		APE35037		1
237	VIJAYAWADA TOWN	6436210001836	M/S Venkatarama Poly Pack	NEYULU,KABELA,4TH CROSS	NS	49.1	3	CT-METER		APO12022	5	1
238	VIJAYAWADA TOWN	6436210001906	Mina Ice Foctory	NA	NS	98.5	3	CT-METER	SECURE	X0419906	10/5A	0.5
239	VIJAYAWADA TOWN	6436210203346	S Konda Reddy	V D PURAM	NS	65.519	3	CT-METER	UT	8077	1	1
240	VIJAYAWADA TOWN	6436210234139	Sri T Venkata Subba Rao	D.NO 25-32,	NS	56.26	3	CT-METER	LT	16200058	N	1
241	VIJAYAWADA TOWN	6436210245865	B N V RAGHAV AND B RAGHUVAR	BYPASS ROAD, BHPURAM,	NS	28.54	3	CT-METER	AVON	4889920	125/5A	1
242	VIJAYAWADA TOWN	6436210252436	M\S Sri Geethapolymers	NEAR KAABELA, R.R.NAGAR,	NS	50	3	CT-METER	AVON	8951475	125/5	1
243	VIJAYAWADA TOWN	6436210279030	GOKUL FOODS	--	NS	45.6	3	CT-METER	L AND T	16200001		1
244	VIJAYAWADA TOWN	6436297001535	M/S Sri Srinivasa Paint	M.P.T.SESHAGIRI RAO	NS	20	3	2-ELECTRO	Genus	3013197	3X5-30A	1
245	VIJAYAWADA TOWN	6436297001808	M/S Venkata Sai Paint	PROP.M.K.ANNAPURNAMMA	NS	23.6	3	2-ELECTRO	Genus	3012798	3X5-30A	1
246	VIJAYAWADA TOWN	6436297217783	A Balajisankararao	BHAVANIPURAM	NS	36.8	3	2-ELECTRO	Genus	3013322	3X5-30A	1
247	VIJAYAWADA TOWN	6436297255938	M/S Mani Engineering Works	76-13-92/11C,	NS	17.5	3	2-ELECTRO	Genus	3013195	3X5-30A	1
248	VIJAYAWADA TOWN	6436297265913	M/S Alivelu Manga Engg Works	MILK FACTORY EMPLOYEES COL	NS	5	3	2-ELECTRO	HPL	6236978	May-30	1
249	VIJAYAWADA TOWN	6436297269637	M/S Gv Satyanarayana Iror	NARAYANA,R.S.408/1,	NS	8	3	2-ELECTRO	Genus	3013238	3X5-30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CON LOAD	PHASE	MT TYPE	MT MAKE	MT NUMBER	MT CURRENT	MT MF
250	VIJAYAWADA TOWN	6436297271315	M/S Bhavani Industries	INDUSTRIAL AREA,R.R.NAGAR.	NS	15	3	2-ELECTRO	HPL	6280608	3X5-30A	1
251	VIJAYAWADA TOWN	6436297275360	S Ravindra	&FABRICATION WORKS	NS	10.616	3	2-ELECTRO	Genus	3026446	3X5-30A	1
252	VIJAYAWADA TOWN	6436297279819	MEDI VENKATA RAO	0	NS	15	3	2-ELECTRO	AVON	3211136	3X5-30A	1
253	VIJAYAWADA TOWN	6436297280330	GANAPATHI CARVING AND WORKS	0	NS	27	3	2-ELECTRO	GENUS	3011936	--	1
254	VIJAYAWADA TOWN	6436297285349	BHIMANA KRISHNA KIRAN	VIJAYAWADA	NS	10	3	ELEC	AVON	3241107		1
255	VIJAYAWADA TOWN	6436298270472	M/S Sri Padmavathi Metal Works	R.S.NO.412/2,KABELA,	NS	74	3	2-ELECTRO	Secure	X1988778	10/5A	0.5
256	VIJAYAWADA TOWN	6436298282826	MADEENA ICE AND COLD STORAGE	0	NS	90	3	CT-METER	HPL	X1076156		1
257	VIJAYAWADA TOWN	6436210000872	M/S Kaypee Industries	NA	NS	49.11	3	CT-METER	HPL	622976	125/5A	1
258	VIJAYAWADA TOWN	6436210001741	M/S Indus Paints	R.S.NO.408/6	NS	30.978	3	CT-METER	AVON	8002023	125/5A	1
259	VIJAYAWADA TOWN	6436210001778	M/S Sri Satya Resins	KABELA ROAD	NS	28	3	CT-METER		APE31569		1
260	VIJAYAWADA TOWN	6436210001838	M/S Sai Laguage Industries	KABELA 4TH CROSS ROAD,	NS	74.67	3	CT-METER		AP012029	5	1
261	VIJAYAWADA TOWN	6436210266967	M/S Durga Industries	R.S.NO.406/1,KABELA,	NS	25	3	CT-METER	AVON	8321758	125/5A	1
262	VIJAYAWADA TOWN	6436210270312	M/S Laxmi Industries	R.S.NO.413/2,5TH CROSS ROAD	NS	20	3	CT-METER	GENES	702780	125/5A	1
263	VIJAYAWADA TOWN	6436210272218	M/S Sri Ramya Plastics	3-1-154	NS	83	3	CT-METER	1	18548	1	1
264	VIJAYAWADA TOWN	6436210280216	VISWANADHUNI VEDA KUMARI	0	NS	20	3	CT-METER	Secure	APE31562		1
265	VIJAYAWADA TOWN	6436297040637	Sri Bandi Tatarao	KABELA	NS	16	3	2-ELECTRO	HPL	6266370	3X5-30A	1
266	VIJAYAWADA TOWN	6436297225534	M/S Sai Floor Mill And	PROP.K.PANDU RANGA RAO	NS	19.49	3	2-ELECTRO	Genus	3026183	3X5-30A	1
267	VIJAYAWADA TOWN	6436297251571	M/S Anjaneya Welding Works	OPP ALEKYA PAINTS,	NS	25	3	1-MECHAN	LnT	16394542	3X5-30A	1
268	VIJAYAWADA TOWN	6436297258514	M/S Kanakadurga Engg Works	R.S.NO. 412/3A	NS	10	3	2-ELECTRO	Genus	3026808	3X5-30A	1
269	VIJAYAWADA TOWN	6436297261801	M/S Sri Sita Rama Moulding	R.S.NO 409/4,	NS	33	3	2-ELECTRO	Genus	3064410	3X5-30A	1
270	VIJAYAWADA TOWN	6436297269253	M/S Hanuman Industry	D.NO.1-3-134,CHERUVU CENTEI	NS	46	3	2-ELECTRO	Genus	3011998	3X5-30A	1
271	VIJAYAWADA TOWN	6436297269638	M/S Chaitanya Enterprises	MILK COLONY SOCIETY,	NS	6.61	3	1-MECHAN	Genus	3013501	3X5-30A	1
272	VIJAYAWADA TOWN	6436297270641	M/S Vijaya Laxmi Plastics	R.S.NO.408/5A,4TH CROSS ROA	NS	40.5	3	2-ELECTRO	Genus	3013422	3X5-30A	1
273	VIJAYAWADA TOWN	6436297272324	M/S Sri Rama Turning Works	76-13-64/1	NS	14	3	2-ELECTRO	Genus	3027988	3X5-30A	1
274	VIJAYAWADA TOWN	6436297272543	M/S Pragathi Industries	23-22-66/A	NS	46.761	3	2-ELECTRO	6	16368034	6	1
275	VIJAYAWADA TOWN	6436297281473	SLDS PRODUCTS	0	NS	15	3	2-ELECTRO	HPL	6350315	3X5-30A	1
276	VIJAYAWADA TOWN	6436297282394	MAHABOOB SUBHANI FLOUR MILL	0	NS	19	3	ELEC	HPL	3028193		1
277	VIJAYAWADA TOWN	6436297284718	MOHAMMED AKRAM KURESHI	VIJAYAWADA	NS	25	3	ELEC	HPL	6236584		1
278	VIJAYAWADA TOWN	6436298270284	M/S Laxmi Venkateswaradall	KIRAN DALL MILL ROAD,KABELA	NS	90	3	CT-METER	SECURE	X1076190	10/5A	1
279	VIJAYAWADA TOWN	6436298281537	RAJESWAR POLYMERS	0	NS	80	3	CT-METER	Secure	X0793975		1
280	VIJAYAWADA TOWN	6436210001785	M/S Lakshmi Srinivasa	PROP.M.KESAVA RAO	NS	30.67	3	CT-METER		APE31627		1
281	VIJAYAWADA TOWN	6436210001934	M/S Sri Srinivasa Industries	KABELA IV CROSS ROAD,	NS	40	3	CT-METER	AVON	8003066	125/5A	1
282	VIJAYAWADA TOWN	6436210272400	Gmproducts	07-09-33	NS	37	3	CT-METER	AVON	621573	125/5A	1
283	VIJAYAWADA TOWN	6436210275649	Kailaasnath Poly Flex	25-49/1	NS	90.08	3	CT-METER	5	492185	5	1
284	VIJAYAWADA TOWN	6436210276277	M/s. VIJAY TECH,.	RS NO. 413/2	NS	40	3	CT-METER	HPL	5025123	125/5	1
285	VIJAYAWADA TOWN	6436210279442	NEW FLAME INDUSTRIES	--	NS	40	3	CT-METER	GENEUS	7027814	200/5A	1
286	VIJAYAWADA TOWN	6436210279472	ANJANEYA E F WORKS	--	NS	35.88	3	CT-METER	GENUS	7027670		1
287	VIJAYAWADA TOWN	6436297000097	Badarinath Agencies	GOLLAPUDI	NS	11.27	3	2-ELECTRO	Genus	3013500	3X5-30A	1
288	VIJAYAWADA TOWN	6436297001557	M/S Alankar Wood Crafts	K.T.ROADGOLLAPUDI	NS	24.5	3	2-ELECTRO	LnT	16215429	3X5-30A	1
289	VIJAYAWADA TOWN	6436297029458	V Kanakadurga Devi	V.D.PURAM	NS	36.2	3	2-ELECTRO	Genus	3028190	3X5-30A	1
290	VIJAYAWADA TOWN	6436297030652	Sk Hazimunnisa	KUMMARIPALEM CENTRE	NS	12.69	3	2-ELECTRO	Genus	3013236	3X5-30A	1
291	VIJAYAWADA TOWN	6436297225361	M/S Rama Floor Mill	D.NO.1-2-25 VIDYADHARAPUR	NS	22.85	3	2-ELECTRO	Genus	3026248	3X5-30A	1
292	VIJAYAWADA TOWN	6436297227360	Sri Saranam Ayyappa	PROP.KOLLA CHINAANKA RAO	NS	45	3	2-ELECTRO	Genus	3012749	3X5-30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CON LOAD	PHASE	MT TYPE	MT MAKE	MT NUMBER	MT CURRENT	MT MF
293	VIJAYAWADA TOWN	6436297259898	M/S Laxmi Manasa Engineering	M/P:C.R.V.SRINIVASA RAO.	NS	15.28	3	2-ELECTRO	Genus	3074083	3X5-30A	1
294	VIJAYAWADA TOWN	6436297266968	SHAIK RASHEEDA Industries	D.NO.3-1-291/4A,	NS	14.422	3	2-ELECTRO	Genus	3012049	3X5-30A	1
295	VIJAYAWADA TOWN	6436297267454	M/S Baji Baba Turning Works	D.NO.3-1-291/59,KABELA ROAD	NS	7	3	2-ELECTRO	Genus	3013434	3X5-30A	1
296	VIJAYAWADA TOWN	6436297268195	M/S Nagendra Engg Works	NEAR MASJID,	NS	21	3	2-ELECTRO	Genus	3011939	3X5-30A	1
297	VIJAYAWADA TOWN	6436297270314	M/S Ram Sai Products	2ND CROSS ROAD,KABELA,	NS	36	3	2-ELECTRO	Genus	3002455	3X5-30A	1
298	VIJAYAWADA TOWN	6436297273728	B V Anjana Devi	412/3	NS	8	3	2-ELECTRO	HPL	3884638	3X5-30A	1
299	VIJAYAWADA TOWN	6436297281046	MAHESH VARDHAN INDUSTRIES	0	NS	10	3	DIGITAL	HPL	3383621		1
300	VIJAYAWADA TOWN	6436297284281	Sri Naraharasetty Hanumantha	D.NO 12-12-90,	NS	8.31	3	2-ELECTRO	Genus	3044909	3 X 5-30A	1
301	VIJAYAWADA TOWN	6436297284597	SHAIK MASTHAN TURNIG WORKS	VIJAYAWADA	NS	5	3	ELEC	GENUS	3003997		1
302	VIJAYAWADA TOWN	6436298271237	M/S Sankar Industries	D.NO.41/2,KABELA INDUSTRIAL	NS	74	3	CT-METER	0	1658	125	0.5
303	VIJAYAWADA TOWN	6436298281039	SRI SRINIVASA PACLAGES	0	NS	55	3	CT-METER	Secure	X0419905		1
304	VIJAYAWADA TOWN	6436210001488	M/S Sree Vijaya Prasanna	MALLIKARJUNA RAO	NS	73.34	3	CT-METER	GENUS	7029907	125/5A	1
305	GUNADALA	6521223008942	DURGA ELECTRICALS	P.NO.256, BLOCK NO.11,	NS	32	3	CT-METER	AVON	8004904	125/5A	1
306	GUNADALA	6521223008943	M/S Azeez Valcanising Works	NA	NS	19	3	0	LT	16238625	30A	1
307	GUNADALA	6521223008955	M/S Lakshmi Ganesh Auto	P.NO.72	NS	20	3	6-HTCTMT	Genus	3045870	3X5-30A	1
308	GUNADALA	6521223009570	M/S Nagabhushanam Mechanical	P.NO.69,	NS	25	3	CT-METER	L&G	4889646	125/5A	1
309	GUNADALA	6521223009776	Sai Kiran Mech Works	NA	NS	15	3	1-MECHAN	Genus	3045196	3X5-30A	1
310	GUNADALA	6521223009779	Sai Baba Engg Works	NA	NS	27.5	3	CT-METER	0	A0017603	125	1
311	GUNADALA	6521223009894	G Sri Pranavi	PLOT 2 B-1,	NS	25	3	0	LT	16242241	30	1
312	GUNADALA	6521223010058	Sri K Venkateswararao	NA	NS	20	3	2-ELECTRO	HPL	6420308	30	1
313	GUNADALA	6521223010328	Sai Durga Rubber Industries	null	NS	45	3	CT-METER	SECURE	APE36308	125/5	1
314	GUNADALA	6521223010703	Vikram Industries	NA	NS	10	3	0	LT	16245921	30	1
315	GUNADALA	6521223010745	B Srilakshmi	258, B11	NS	10	3	2-ELECTRO	HPL	6401631	30	1
316	GUNADALA	6521223010927	K.VENKATA SATYANARAYANA	PENAMALURU	NS	21	3	2-ELECTRO	AVON	3229317	May-30	1
317	GUNADALA	6521223011535	M/S Kancharlavenkateswararao	PL.No.88,Bl.No-B-06	NS	10	3	2-ELECTRO	HPL	6401630	30	1
318	GUNADALA	6521223011536	M/S Ponnam Srinivas	PL.NO.317,BL.NO.B-14	NS	30	3	CT-METER	LT	15665967	125	1
319	GUNADALA	6521223011609	M/S Devi Enterprises	PLOT NO:174,B-8	NS	24	3	CT-METER	ELESTER	5042072		1
320	GUNADALA	6521223011656	M/S Balaji Mechanical Works	pl.no.258,	NS	39	3	CT-METER	UTL	15665984		1
321	GUNADALA	6521223011770	KODALI PALLAVA RAYUDU	P.No.4,B.No-2	NS	20	3	CT-METER	Elaster	5043031		1
322	GUNADALA	6521223012066	Sri Balaji Petro Chemicals	Plot No.2,A-1	NS	26	3	CT-METER	Elester	5043011		1
323	GUNADALA	6521223012119	Vasavi Engineering Enter Prise	PLOT NO.126,BLOCK C-4	NS	12	3	0	LT	16246835	30A	1
324	GUNADALA	6521223012990	K Suri Babu	PLOT NO.249 BLOCK NO.B-11	NS	25	3	CT-METER	L&G	75056	125/5A	1
325	GUNADALA	6521223013655	Venkateswara Soda Gas Company	B-08	NS	25	3	CT-METER	LNG	4889910	125	1
326	GUNADALA	6521223013787	Dhanalakshmi Body Building	Plot.No.53	NS	44	3	CT-METER	1	31657	1	1
327	GUNADALA	6521223013895	Sri Vijaya Durga Mech Works	PL.No.111	NS	20	3	CT-METER	AVON	8321634	125/5A	1
328	GUNADALA	6521223015055	Vijayalakshmi Mechanical Works	PLOT NO.230, BLOCK.C-8	NS	35.21	3	2-ELECTRO	HPL	3839423	May-30	1
329	GUNADALA	6521223015494	V Ramesh Babu	191/2, B-6	NS	14.25	3	1-MECHAN	Genus	3045511	3X5-30A	1
330	GUNADALA	6521223017111	S And S Tranformers	32&33	NS	40	3	CT-METER	LANDG	4889509	125/5A	1
331	GUNADALA	6521223017267	K V L Hanuman Prasad	4 TH LANE	NS	17.694	3	2-ELECTRO	Genus	3061641	530A	1
332	GUNADALA	6521223018213	GOODWILL ENGINEERINGS	BLOCK-B,PLOT No.120	NS	30	3	CT-METER	LG	4889509	125	1
333	GUNADALA	6521223018270	khalandar auto mobile works	PLOT No.31 BLOCK No.C-02	NS	40	3	CT-METER	Genus	7024345	125/5A	1
334	GUNADALA	6521223022760	Rama Mohana Rao V	0	NS	20	3	CT-METER	GENUS	7028398		1
335	GUNADALA	6521223022762	GUNTAMUKKALA SRINIVASA RAO	0	NS	95	3	6-HTCTMT	HPL	657661	--	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CON LOAD	PHASE	MT TYPE	MT MAKE	MT NUMBER	MT CURRENT	MT MF
336	GUNADALA	6521223023816	Manidhar Engineering Works	--	NS	20.72	3	2-ELECTRO	GENUS	3026125		1
337	GUNADALA	6521223026045	ALKABEER AUTOMOTIVE ENGINEERING W	0	NS	30	3	2-ELECTRO	HPL	6397788	30	1
338	GUNADALA	6521223028071	RIYA ESSENTIALS	0	NS	57	3	CT-METER	LANDIS	4889793		1
339	GUNADALA	6521223029315	OM SREE SAI RAM INDUSTRIES1	0	NS	10	3	ELEC	HPL	6366997		1
340	GUNADALA	6521223030639	S,RAMA RAO	NEW AUTO NAGAR	NS	7	3	ELEC	HPL	6254051		1
341	GUNADALA	6521223031200	TUGUTLA,BIKSHALU REDDY	NEW AUTO NAGAR	NS	16	3	CT-METER	GENUS	3285471		1
342	GUNADALA	6521223031408	K.V. R. ASSOCIATES1	0	NS	10.88	3	3-Electron	HPL	6350107		1
343	GUNADALA	6521221002007	M/S Vinayaka Plastic	KANURU.	NS	69.405	3	CT-METER	HPL	622407	125-5	1
344	GUNADALA	6521221004818	Srinivasa Fabrications	JRD TATA INDL EST	NS	36.5	3	CT-METER	LG	4892290	125-5	1
345	GUNADALA	6521221005529	Venkata Gopalakrishna Mecha-	NA	NS	40	3	CT-METER	0	35156	0	1
346	GUNADALA	6521221005588	M/S Deepti Engineering Works	J.R.D. TATA INDL.ESTATE	NS	18	3	2-ELECTRO	Genus	3045287	3X5-30A	1
347	GUNADALA	6521221005620	M/S Bhargavi Metal Works	KANURU	NS	53.81	3	CT-METER	UTL	1760	120	1
348	GUNADALA	6521221006029	M/S P V R Industries	RS.NO. 183/1, J.D.R. TATA	NS	11.75	3	2-ELECTRO	HPL	6323705	5-30A	1
349	GUNADALA	6521221006109	M/S Krimulla Stool Works	4S. NO. 182\18,	NS	16	3	2-ELECTRO	Genus	3043633	5-30A	1
350	GUNADALA	6521221006823	M/S Ajamathulla Tyre	PROP: MD. AZEEJULLAH,	NS	42	3	2-ELECTRO	HPL	6272813	5-30A	1
351	GUNADALA	6521221007269	M/S Venkataramana Industries	NA	NS	10	3	2-ELECTRO	Genus	3046810	5-30A	1
352	GUNADALA	6521221007804	M/S Usha Engineerinh Works	PLOT NO.22A,	NS	96	3	CT-METER	AVON	8064467	5/125A	1
353	GUNADALA	6521221008735	M/S Lakshmi Durga Body	P.NO.192/8B	NS	19	3	CT-METER	SECURE	X0686423	125/5A	1
354	GUNADALA	6521221008738	M/S Venkateswara Engineering	PLOT NO. 182/8B,	NS	13.74	3	2-ELECTRO	HPL	3710615	May-30	1
355	GUNADALA	6521221009056	Sri Suryanarayana Plastics	NA	NS	99	3	6-HTCTMT	Secure	X1076214	10/5A	1
356	GUNADALA	6521221010700	Venkata Sai Body Bulders	NA	NS	20	3	CT-METER	Genus	7027879	125/5A	1
357	GUNADALA	6521221010925	T Chakradhara Rao	NA	NS	79.16	3	CT-METER	CTMETER	P0076497	1255	1
358	GUNADALA	6521221012132	Prathibha Industries	RS No.184/1	NS	80	3	CT-METER	LnT	P0076012	125/5A	1
359	GUNADALA	6521221012297	Sri Sai Body Building Works	RS.No.190/7A	NS	41	3	CT-METER	Secure	X0686440	125/5A	1
360	GUNADALA	6521221012298	M/S G R Rao Electricals	---	NS	45	3	CT-METER	LG	4892275	125/5A	1
361	GUNADALA	6521221012993	Pujitha Engineering Works	R.S.NO.193/3	NS	10	3	2-ELECTRO	Genus	3045351	5-30A	1
362	GUNADALA	6521221013064	Annapurna Automobiles	PROP.B.VENKATARAMAIAH.	NS	54	3	CT-METER	0	A0021056	0	1
363	GUNADALA	6521221013126	M/S A L Farook Auto Engg Works	Rs.No. 178/3	NS	15	3	2-ELECTRO	LnT	16395504	5-30A	1
364	GUNADALA	6521221013238	N P Foods	PLOT NO.18	NS	100	3	CT-METER	LnG	P0075233	3X5-125A	1
365	GUNADALA	6521221014414	P Siva Prasad	RS NO:194/1	NS	39.295	3	CT-METER	AVON	8321884	125/5A	1
366	GUNADALA	6521221018276	BOKKA SATYANARAYANA	60a	NS	17	3	2-ELECTRO	Genus	3046271	5-30A	1
367	GUNADALA	6521221027331	SRI VENKATA SRINIVASA BODY BUILDING	0	NS	29	3	CT-METER	AVON	8321525		1
368	GUNADALA	6521221027439	SRI SURYA AGRO INDUSTRIES	0	NS	99	3	6-HTCTMT	Secure	x1076048	--	1
369	GUNADALA	6521221028573	SRI SAI DURGA TRAILOR BODY BUILDING W	0	NS	20	3	2-ELECTRO	AVON	3198315	May-30	1
370	GUNADALA	6521222005191	M/S Kodali Flyash Products	KANURU	NS	10	3	2-ELECTRO	Genus	3046058	3X5-30A	1
371	GUNADALA	6521222013049	B Ravi	NA	NS	30	3	2-ELECTRO	HPL	6419385	3530	1
372	GUNADALA	6521223008705	M/S Lakshmi Motor Mechanical	PLOT NO. 376,	NS	26	3	CT-METER	UTL	15664672	40	1
373	GUNADALA	6521223008957	KATURI KRISHNA PRASAD	P.NO.30,B.4,	NS	21	3	CT-METER	1	A0017512	10 4	1
374	GUNADALA	6521223009579	KOPANATHI SURESH	P.NO.7, B.NO.A1,	NS	33	3	2-ELECTRO	Genus	3046056	5-30A	1
375	GUNADALA	6521223010059	M/S Ameerkhan Battery Works	NEW AUTONAGAR	NS	39	3	CT-METER	L G	4892478	125	1
376	GUNADALA	6521223010330	Paparao Electrical Works	NA	NS	57	3	CT-METER	L&G	P0075229	125/5A	1
377	GUNADALA	6521223010433	Sri Lakshmi Automobiles	NA	NS	13.81	3	2-ELECTRO	HPL	6352429	30	1
378	GUNADALA	6521223010724	Sk Kamaal	NA	NS	20	3	2-ELECTRO	Genus	3026603	3-5-30A	1

S.No	DIVISION	SCNO	NAME	AREA	TYPE	CON LOAD	PHASE	MT TYPE	MT MAKE	MT NUMBER	MT CURRENT	MT MF
379	GUNADALA	6521223012400	A K Plastic Industry	Plot No.83/1,2,B-5	NS	49.14	3	CT-METER	LnG	4892646	1	1
380	GUNADALA	6521223013389	Sri Annapurna Food Products	PLOT NO.59,BLOCKA-3	NS	39.48	3	2-ELECTRO	Genus	3044276	530A	1
381	GUNADALA	6521223013465	M/S Lakshmi Prasuna Paper Prod	Plot.No.203,B-09,	NS	25	3	CT-METER	UTL	APS3180		1
382	GUNADALA	6521223013524	Md Rizwan	Plot.No.249,Bl.-C09	NS	10	3	2-ELECTRO	Genus	3048253	3X5-30A	1
383	GUNADALA	6521223013541	Sri K Chandrasekhar	Plot No. 281,Block.no. B-12	NS	26.268	3	2-ELECTRO	LnT	16338596	5-30A	1
384	GUNADALA	6521223013626	M/S Plas Pack Industries	Plot.No.173/1, BL.-B-06	NS	57	3	6-HTCTMT	L	5293509	--	1
385	GUNADALA	6521223013991	S GOPALA KRISHNA	PLOT 185	NS	13	3	2-ELECTRO	Genus	3045344	5-30A	1
386	GUNADALA	6521223015061	R V KISHORE	BLOCK C-01	NS	25	3	CT-METER	L&G	4889656	125/5A	1
387	GUNADALA	6521223015491	CHINTAGUNTA DURGA PRASAD	PL NO-198,C-06	NS	10	3	1-MECHAN	Genus	3048150	3X5-30A	1
388	GUNADALA	6521223015542	A.R.INDUSTRIES	PLOT NO 256 BLOCK NO C-10	NS	40.214	3	CT-METER	1	13526055	125	1
389	GUNADALA	6521223016163	M/S Wynn Chem Adhesives	PLOT29	NS	70	3	6-HTCTMT	111896	51011190	71	0.5
390	GUNADALA	6521223017572	M/S Rajak Automobile Eng Work	PLOT:108, BLOCK:C-04	NS	10	3	2-ELECTRO	AVON	3177370	30	1
391	GUNADALA	6521223018672	CH.VANAJA	PLOT 15	NS	12	3	2-ELECTRO	Genus	3048421	3X5-30A	1
392	GUNADALA	6521223022724	INSTA OXYGEN	--	NS	10	3	6-HTCTMT	Genus	3045563	3X5-30A	1
393	GUNADALA	6521223025915	KOLLURI,VASANTHA KUMAR	KANURU	NS	17.426	3	ELEC	AVON	3213013		1
394	GUNADALA	6521223026725	ADAPA,SRINIVASA RAO	NEW AUTONAGAR	NS	10	3	ELEC	HPL	6323213		1
395	GUNADALA	6521223027825	vijayawada auto cluster development com	0	NS	74	3	6-HTCTMT	Secure	X1076004	--	1
396	GUNADALA	6521223028652	MEKA,NARAYANA RAO	NEW AUTO NAGAR	NS	10	3	2-ELECTRO	HPL	6233250	5-30A	1
397	GUNADALA	6521223030390	NUTRISIGN INNOVATIONS,NUTRISIGN INN	NUTRISIGN INNOVATIONS NEW	NS	30	3	CT-METER	AVON	8065451		1
398	GUNADALA	6521224022838	PRAJIT WOODFAB PVT LTD	0	NS	95	3	6-HTCTMT	Secure	X10761224	10/5A	1
399	GUNADALA	6521221002260	M/S Sairam Industries	KANURU.	NS	30	3	CT-METER	HPL	7177460	125/5A	1
400	GUNADALA	6521221003633	M/S Baji Costing Works	NA	NS	10.883	3	2-ELECTRO	Genus	3045184	5-30A	1

ANNEXURE – 13

(Pro-forma)

General Information

1	**Name of the DISCOM**	CENTRAL POWER DISTRIBUTION CORPORATION OF ANDHRA PRADESH LIMITED			
2	**i) Year of Establishment**	2020			
	ii) Government/Public/Private	Public			
3	**DISCOM's Contact details & Address**				
i	City/Town/Village	Dr. Y.S.R Vidyuth Soudha, Corporate office, Besides Govt. Polytechnic College,ITI Road,Vijayawada-520 008			
ii	District	NTR			
iii	State	Andhra pradesh		Pin	520008
iv	Telephone			Fax	
4	**Registered Office**				
i	Company's Chief Executive Name	J.Padma Janardhan Reddy			
ii	Designation	Chairman and Managing director			
iii	Address	Dr.YSR Vidyuth Soudha, Corporate office Beside Govt.polytechnic college,ITI road,Vijayawada-520008			
iv	City/Town/Village	Vijayawada		P.O.	
v	District	NTR			
vi	State	Andhra pradesh		Pin	520008
vii	Telephone			Fax	
5	**Nodal Officer Details***				
i	Nodal Officer Name (Designated at DISCOM's)	D.Victoria Krupadanamma			
ii	Designation	Chief General Manager/PP&RAC			
iii	Address	Dr. Y.S.R Vidyuth Soudha, Corporate office, Besides Govt. Polytechnic College,ITI Road,Vijayawada-520 008			
iv	City/Town/Village	Vijayawada		P.O.	
v	District	NTR			
vi	State	Andhra pradesh		Pin	520008
vii	Telephone	8332999200		Fax	
6	**Energy Manager Details***				
i	Name	R.Sai srinivas			
ii	Designation	EE/IPC		Whether EA or EM	EM
iii	EA/EM Registration No.	EA-9066			
iv	Telephone			Fax	
v	Mobile	9440843079	E-mail ID	eeipcapcpdcl@gmail.com	
7	**Period of Information**				
	Year of (FY) information including Date and Month (Start & End)	1st APR, 2022__ 31th MAR, 2023			

Performance Summary of Electricity Distribution Companies			
1	Period of Information Year of (FY) information including Date and Month (Start & End)	1st APR, 2022__ 31th MAR, 2023	
2	**Technical Details**		
(a)	**Energy Input Details**		
(i)	Input Energy Purchase (From Generation Source)	Million kwh	15808.79
(ii)	Net input energy (at DISCOM Periphery after adjusting the transmission losses and energy traded)	Million kwh	15075.92
(iii)	Total Energy billed (is the Net energy billed, adjusted for energy traded))	Million kwh	13866.41
(b)	Transmission and Distribution (T&D) loss Details	Million kwh	1209.51
		%	8.02%
	Collection Efficiency	%	95.95%
(c)	Aggregate Technical & Commercial Loss	%	11.75%

I/We undertake that the information supplied in this Document and Pro-forma is accurate to the best of my knowledge and if any of the information supplied is found to be incorrect and such information result into loss to the Central Government or State Government or any of the authority under them or any other person affected, I/we undertake to indemnify such loss.

Authorised Signatory and Seal

Name of Authorised Signatory
Name of the DISCOM:
Full Address:

Signature:-
Name of Energy Manager*: R. SAI SRINIVAS
Registration Number: EA-9066

Form-Details of Input Infrastructure					
1	**Parameters**	**Total**	**Covered during in audit**	**Verified by Auditor in Sample Check**	**Remarks (Source of data)**
i	Number of circles	3	3		
ii	Number of divisions	21	21		
iii	Number of sub-divisions	68	68		
iv	Number of feeders	3904	3904		
v	Number of DTs	281356	281356		
vi	Number of consumers	5054193	5054193		
2	**Parameters**	**66kV and above**	**33kV**	**11/22kV**	**LT**
a. i.	Number of conventional metered consumers	24	302	4233	4627532
ii	Number of consumers with 'smart' meters	_	_	_	_
iii	Number of consumers with 'smart prepaid' meters	_	_	_	_
iv	Number of consumers with 'AMR' meters	_	_	_	_
v	Number of consumers with 'non-smart prepaid'	_	_	_	_
vi	Number of unmetered consumers	_	_	_	422102
vii	**Number of total consumers**	**24**	**302**	**4233**	**5049634**
b.i.	Number of conventionally metered Distribution	_	_	23815	_
ii	Number of DTs with communicable meters	_	_	0	_
iii	Number of unmetered DTs	_	_	257541	_
iv	**Number of total Transformers**	_	_	**281356**	_
c.i.	Number of metered feeders	30	412	3462	
ii	Number of feeders with communicable meters	0	0	3462	
iii	Number of unmetered feeders	30	412	0	
iv	**Number of total feeders**	**30**	**412**	**3462**	
d.	Line length (ct km)	138466.5331			
e.	Length of Aerial Bunched Cables	33569.290			
f.	Length of Underground Cables	80.025			

3	Voltage level	Particulars	MU	Reference	Remarks (Source of data)
i	66kV and above	Long-Term Conventional	5,253.15	Includes input energy for franchisees	Power purchase data
		Medium Conventional	0.00		Power purchase data
		Short Term Conventional	1,981.24		Power purchase data
		Banking	4.99		Power purchase data
		Long-Term Renewable energy	0.00		Power purchase data
		Medium and Short-Term RE	0.00	Includes power from bilateral/ PX/ DEEP	Power purchase data
		Captive, open access input	71.179	Any power wheeled for any purchase other than sale to DISCOM. Does not include input for franchisee	Power purchase data
		Sale of surplus power	-300.73		Exchange sale data
		Quantum of inter-state transmission loss	432.140	DISCOM_DISCOM energy setellement data	Power purchase data
		Power procured from inter-state sources	7,009.83		
		Power at state transmission boundary	6,577.69		
ii	33kV	Long-Term Conventional	5,459.90		Power purchase data
		Medium Conventional	0.00		Power purchase data
		Short Term Conventional	21.67		Power purchase data
		Banking	-4.99		Power purchase data
		Long-Term Renewable energy	2314.082		Power purchase data
		Medium and Short-Term RE	670.22		Power purchase data
		Captive, open access input	393.57		Power purchase data
		Sale of surplus power			Power purchase data
		Quantum of intra-state transmission loss	0		Power purchase data
		Power procured from intra-state sources	8,854.45		
iii		**Input in DISCOM wires network**	15,432.14		
iv	33 kV	Renewable Energy Procurement	23.303		Power purchase data
		Small capacity conventional/ biomass/ hydro plants Procurement	84.79		Power purchase data
		Captive, open access input	9.909		Power purchase data
v	11 kV	Renewable Energy Procurement	0.42		Power purchase data
		Small capacity conventional/ biomass/ hydro plants Procurement			
		Sales Migration Input	0.00		As per Accounts data
vi	LT	Renewable Energy Procurement			
		Sales Migration Input	0.00		As per Accounts data
vii		**Energy Embedded within DISCOM wires**	118.42		
viii		**Total Energy Available/ Input**	15550.57		

4	Voltage level	Energy Sales Particulars	MU	Reference	
i	LT Level	DISCOM' consumers	10,139.18	Include sales to consumers in franchisee areas, unmetered	As per Accounts data
		Demand from open access, captive	0	Non DISCOM's sales	As per Accounts data
		Embedded generation used at LT level	10,139.18	Demand from embedded generation at LT level	As per Accounts data
		Sale at LT level	10,139.18		As per Accounts data
		Quantum of LT level losses	361.76		
		Energy Input at LT level	10,500.936		
ii	11 kV Level	DISCOM' consumers	1,450.031	Include sales to consumers in franchisee areas, unmetered	As per Accounts data
		Demand from open access, captive	9.909	Non DISCOM's sales	As per Accounts data
		Embedded generation at 11 kV level used		Demand from embedded generation at 11kV level	As per Accounts data
		Sales at 11 kV level	1,459.940		
		Quantum of Losses at 11 kV	391.813		
		Energy input at 11 kV level	12,352.689		
iii	33 kV Level	DISCOM' consumers	1,362.18	Include sales to consumers in franchisee areas, unmetered	As per Accounts data
		Demand from open access, captive	393.566	Non DISCOM's sales	As per Accounts data
		Embedded generation at 33 kV or below level		This is DISCOM and OA demand met via energy generated at same voltage	As per Accounts data
		Sales at 33 kV level	1,755.750		
		Quantum of Losses at 33 kV	455.936		
		Energy input at 33kV Level	14564.375		
iv	> 33 kV	DISCOM' consumers	915.02	Include sales to consumers in franchisee areas, unmetered	As per Accounts data
		Demand from open access, captive	71.179	Non DISCOM's sales	
		Cross border sale of energy			
		Sale to other DISCOMs			
		Banking			
		Sales at 66kV and above (EHV)	986.194		
		Total Energy Requirement	**15,550.569**		
		Total Energy Sales	**14,341.060**	14,335.419	1215.147

Energy Accounting Summary					
5	**DISCOM**	**Input (in MU)**	**Sale (in MU)**	**Loss (in MU)**	**Loss %**
i	LT	10500.936	10139.177	361.759	3.45
ii	11 Kv	12352.689	11960.876	391.813	3.17
iii	33 kv	14564.38	14108.44	455.936	3.13
iv	> 33 kv	986.19	986.19	0	0
6	**Open Access, Captive**	**Input (in MU)**	**Sale (in MU)**	**Loss (in MU)**	
i	LT	0	0	0	
ii	11 Kv	9.91	9.91	0	
iii	33 kv	393.566	393.566	0	
iv	> 33 kv	71.179	71.179	0	

Loss Estimation for DISCOM	
T&D loss	1,641.646
D loss	1,209.506
T&D loss (%)	10.27
D loss (%)	7.78

Details of Division Wise Losses (See note below**)

Division Wise Losses

Period From APR 22 To MAR 23

S.No	Name of circle	Circle code	Name of Division	Consumer profile									Energy parameters					Losses		Commercial Parameter			AT & C loss (%)
														Billed energy (MU)									
				Consumer category	No of connection metered (Nos)	No of connection Un-metered (Nos)	Total Number of connections (Nos)	% of number of connections	Connected Load metered (MW)	Connected Load Un-metered (MW)	Total Connected Load (MW)	% of connected load	Input energy (MU)	Metered energy	Unmetered/assessment energy	Total energy	% of energy consumption	T&D loss (MU)	T&D loss (%)	Billed Amount in Rs. Crore	Collected Amount in Rs. Crore	Collection Efficiency	
1	Vijayawada	06	Vja Town	Residential	292119	0	292119	83%	758.94		758.94	70%	996.38	573.75	0.00	573.75	61%	52.31164	5%	310.21	308.53	99.46%	
				Agricultural	38		38	0%	0.27	0.00	0.27	0%		0.16	0.00	0.16	0%			0.01	0.01	86.74%	
				Commercial/Industrial-LT	58056	0	58056	16%	234.34		234.34	22%		186.40	0.00	186.40	20%			198.78	197.64	99.43%	
				Commercial/Industrial-HT	427		427	0%	76.16		76.16	7%		158.22	0.00	158.22	17%			141.95	139.75	98.45%	
				Others	2231	0	2231	1%	17.68		17.68	2%		25.54	0.00	25.54	3%			44.58	23.83	53.46%	
Sub-total					**352871**	**0**	**352871**	**100%**	**1087.38**	**0.00**	**1087.38**	**100%**	**996.38**	**944.07**	**0.00**	**944.07**	**100%**	**52.31**	**5.25%**	**695.52**	**669.76**	**96.30%**	**8.76%**
2	Vijayawada	06	Gunadala	Residential	264155	0	264155	85%	785.74		785.74	66%	1027.94	509.87		509.87	53%	62.07179	6%	274.46	272.41	99.25%	
				Agricultural	214	7976	8190	3%	1.29	41.85	43.14	4%		0.99	32.87	33.86	4%			24.19	25.11	100.00%	
				Commercial/Industrial-LT	35480	0	35480	11%	226.48		226.48	19%		155.92		155.92	16%			169.00	165.36	97.85%	
				Commercial/Industrial-HT	493		493	0%	121.40		121.40	10%		238.17		238.17	25%			219.32	213.92	97.54%	
				Others	2756		2756	1%	15.55		15.55	1%		28.03		28.03	3%			46.45	30.78	66.26%	
Sub-total					**303098**	**7976**	**311074**	**100%**	**1150.47**	**41.85**	**1192.33**	**100%**	**1027.94**	**932.99**	**32.87**	**965.86**	**100%**	**62.07**	**6.04%**	**733.42**	**707.59**	**96.48%**	**9.35%**
3	Vijayawada	06	Gudiwada	Residential	206259	0	206259	82%	268.42		268.42	28%	1425.63	265.09		265.09	21%	135.87	9.53%	127.21	123.37	96.98%	
				Agricultural	199	7157	7356	3%	1.50	66.60	68.10	7%		0.73	65.78	66.51	5%			48.01	133.88	100.00%	
				Commercial/Industrial-LT	23560	0	23560	9%	82.67		82.67	9%		57.85		57.85	4%			61.78	60.38	97.72%	
				Commercial/Industrial-HT	208		208	0%	115.90		115.90	12%		409.72		409.72	32%			327.88	322.53	98.37%	
				Others	15554		15554	6%	409.22		409.22	43%		490.58		490.58	38%			238.29	218.32	91.62%	
Sub-total					**245780**	**7157**	**252937**	**100%**	**877.70**	**66.60**	**944.30**	**100%**	**1425.63**	**1223.98**	**65.78**	**1289.76**	**100%**	**135.87**	**9.53%**	**803.18**	**858.47**	**100.00%**	**9.53%**
4	Vijayawada	06	VIJAYAWADA RURAL	Residential	229052	0	229052	81%	243.16		243.16	39%	898.58	278.01		278.01	33%	63.82	7.10%	127.52	124.49	97.63%	
				Agricultural	55	24263	24318	9%	1.23	101.01	102.24	16%		0.76	89.19	89.95	11%			65.63	67.97	100.00%	
				Commercial/Industrial-LT	24406	0	24406	9%	92.37		92.37	15%		67.34		67.34	8%			73.12	64.93	88.79%	
				Commercial/Industrial-HT	307		307	0%	172.11		172.11	28%		377.57		377.57	45%			307.16	284.86	92.74%	
				Others	4016		4016	1%	13.53		13.53	2%		21.88		21.88	3%			80.21	39.60	49.37%	
Sub-total					**257836**	**24263**	**282099**	**100%**	**522.39**	**101.01**	**623.41**	**100%**	**898.58**	**745.56**	**89.19**	**834.75**	**100%**	**63.82**	**7.10%**	**653.63**	**581.85**	**89.02%**	**17.31%**
5	Vijayawada	06	MACHILIPATNAM	Residential	189366	0	189366	84%	199.45		199.45	41%	626.12	235.77		235.77	41%	56.28	8.99%	114.24	111.38	97.49%	
				Agricultural	85	6224	6309	3%	0.59	30.14	30.73	6%		0.25	11.06	11.30	2%			8.30	19.13	100.00%	
				Commercial/Industrial-LT	20513	0	20513	9%	66.19		66.19	14%		52.12		52.12	9%			52.42	49.69	94.79%	
				Commercial/Industrial-HT	81		81	0%	21.34		21.34	4%		55.59		55.59	10%			42.26	40.90	96.79%	
				Others	9614		9614	4%	171.15		171.15	35%		215.04		215.04	38%			107.91	96.53	89.46%	
Sub-total					**219659**	**6224**	**225883**	**100%**	**458.72**	**30.14**	**488.86**	**100%**	**626.12**	**558.77**	**11.06**	**569.83**	**100%**	**56.28**	**8.99%**	**325.14**	**317.64**	**97.69%**	**11.09%**
6	Vijayawada	06	NUZVIDU	Residential	167125	0	167125	69%	154.18		154.18	26%	821.79	185.39		185.39	25%	87.96	11%	84.69	78.78	93.03%	
				Agricultural	168	51296	51464	21%	1.15	318.87	320.02	54%		0.64	365.87	366.51	50%			266.76	275.97	100.00%	
				Commercial/Industrial-LT	18118	0	18118	7%	61.54		61.54	10%		40.70		40.70	6%			43.34	42.48	98.00%	
				Commercial/Industrial-HT	100		100	0%	45.72		45.72	8%		109.37		109.37	15%			97.55	84.11	86.22%	
				Others	4867		4867	2%	16.70		16.70	3%		31.85		31.85	4%			45.02	9.67	21.47%	
Sub-total					**190378**	**51296**	**241674**	**100%**	**279.30**	**318.87**	**598.17**	**100%**	**821.79**	**367.96**	**365.87**	**733.83**	**100%**	**87.96**	**10.70%**	**537.37**	**491.00**	**91.37%**	**18.41%**

S.No	Name of circle	Circle code	Name of Division	Period From APR 22 To MAR 23																			
				Consumer profile									Energy parameters					Losses		Commercial Parameter			
														Billed energy (MU)									
				Consumer category	No of connection metered (Nos)	No of connection Un-metered (Nos)	Total Number of connections (Nos)	% of number of connections	Connected Load metered (MW)	Connected Load Un-metered (MW)	Total Connected Load (MW)	% of connected load	Input energy (MU)	Metered energy	Unmetered/assessment energy	Total energy	% of energy consumption	T&D loss (MU)	T&D loss (%)	Billed Amount in Rs. Crore	Collected Amount in Rs. Crore	Collection Efficiency	AT & C loss (%)
7	Vijayawada	06	VUYYURU	Residential	118935	0	118935	79%	122.56		122.56	40%	316.18	132.57	0.00	132.57	46%	30.26	10%	61.50	59.35	96.51%	
				Agricultural	73	15184	15257	10%	0.79	68.87	69.66	23%		0.51	35.72	36.23	13%			26.44	30.44	100.00%	
				Commercial/Industrial-LT	11461	0	11461	8%	34.45		34.45	11%		25.13	0.00	25.13	9%			25.99	25.47	98.01%	
				Commercial/Industrial-HT	48		48	0%	10.26		10.26	3%		13.42	0.00	13.42	5%			12.77	11.73	91.88%	
				Others	5040		5040	3%	65.87		65.87	22%		78.58	0.00	78.58	27%			40.57	34.97	86.21%	
Sub-total					**135557**	**15184**	**150741**	**100%**	**233.93**	**68.87**	**302.81**	**100%**	**316.18**	**250.20**	**35.72**	**285.92**	**100%**	**30.26**	**9.57%**	**167.25**	**161.96**	**96.83%**	**12.43%**
8	Guntur	01	GUNTUR-TOWN1	Residential	334809	0	334809	86%	739.83		739.83	67%	1123.23	612.58	0.00	612.58	58%	64.84	6%	324.61	322.86	99.46%	
				Agricultural	167	119	286	0%	0.85	0.52	1.36	0%		0.63	0.24	0.87	0%			0.24	0.25	100.00%	
				Commercial/Industrial-LT	51287	0	51287	13%	229.09		229.09	21%		178.05	0.00	178.05	17%			190.45	189.15	99.32%	
				Commercial/Industrial-HT	556		556	0%	121.49		121.49	11%		248.25	0.00	248.25	23%			193.40	186.60	96.49%	
				Others	4010		4010	1%	15.50		15.50	1%		18.64	0.00	18.64	2%			62.58	59.14	94.49%	
Sub-total					**390829**	**119**	**390948**	**100%**	**1106.76**	**0.52**	**1107.27**	**100%**	**1123.23**	**1058.15**	**0.24**	**1058.39**	**100%**	**64.84**	**5.77%**	**771.28**	**758.01**	**98.28%**	**7.39%**
9	Guntur	01	TENALI	Residential	251204	0	251204	81%	337.57		337.57	54%	713.98	321.20	0.00	321.20	48%	50.06	7.0%	150.67	146.09	96.96%	
				Agricultural	148	21997	22145	7%	0.74	79.36	80.10	13%		0.60	39.21	39.81	6%			29.86	36.59	100.00%	
				Commercial/Industrial-LT	29399	0	29399	10%	101.63		101.63	16%		65.64	0.00	65.64	10%			69.55	69.26	99.57%	
				Commercial/Industrial-HT	127		127	0%	67.85		67.85	11%		192.24	0.00	192.24	29%			142.00	132.58	93.36%	
				Others	5880		5880	2%	38.81		38.81	6%		45.03	0.00	45.03	7%			55.41	46.72	84.32%	
Sub-total					**286758**	**21997**	**308755**	**100%**	**546.60**	**79.36**	**625.96**	**100%**	**713.98**	**624.71**	**39.21**	**663.92**	**100%**	**50.06**	**7.01%**	**447.50**	**431.23**	**96.36%**	**10.39%**
10	Guntur	01	NARASARAOPET	Residential	265498	0	265498	78%	252.64		252.64	38%	809.56	308.46	0.00	308.46	42%	83.37	10.3%	145.38	141.62	97.41%	
				Agricultural	165	36440	36605	11%	1.26	208.29	209.56	32%		0.43	190.12	190.55	26%			142.22	144.67	100.00%	
				Commercial/Industrial-LT	31702	0	31702	9%	116.17		116.17	18%		82.98	0.00	82.98	11%			86.61	86.08	99.39%	
				Commercial/Industrial-HT	231		231	0%	68.32		68.32	10%		129.84	0.00	129.84	18%			70.28	68.17	96.99%	
				Others	4182		4182	1%	12.03		12.03	2%		14.36	0.00	14.36	2%			59.81	48.10	80.42%	
Sub-total					**301778**	**36440**	**338218**	**100%**	**450.43**	**208.29**	**658.72**	**100%**	**809.56**	**536.07**	**190.12**	**726.19**	**100%**	**83.37**	**10.30%**	**504.30**	**488.64**	**96.89%**	**13.08%**
11	Guntur	01	MACHERLA	Residential	190112	0	190112	73%	142.27		142.27	21%	965.81	186.76	0.00	186.76	21%	96.50	10.0%	89.81	83.90	93.41%	
				Agricultural	42	45699	45741	18%	0.40	319.12	319.52	47%		0.14	255.06	255.20	29%			190.64	194.24	100.00%	
				Commercial/Industrial-LT	19339	0	19339	7%	80.07		80.07	12%		67.68	0.00	67.68	8%			65.90	64.56	97.97%	
				Commercial/Industrial-HT	147		147	0%	116.95		116.95	17%		331.29	0.00	331.29	38%			250.67	233.12	93.00%	
				Others	4529		4529	2%	18.66		18.66	3%		28.37	0.00	28.37	3%			73.22	43.32	59.16%	
Sub-total					**214169**	**45699**	**259868**	**100%**	**358.34**	**319.12**	**677.46**	**100%**	**965.81**	**614.24**	**255.06**	**869.30**	**100%**	**96.50**	**9.99%**	**670.24**	**619.14**	**92.38%**	**16.85%**
12	Guntur	01	BAPATLA	Residential	188871	0	188871	85%	176.36		176.36	44%	546.80	205.43	0.00	205.43	41%	43.03	7.9%	95.95	93.03	96.97%	
				Agricultural	4100	4802	8902	4%	5.86	21.61	27.47	7%		5.39	28.76	34.15	7%			21.91	29.38	100.00%	
				Commercial/Industrial-LT	18448	0	18448	8%	54.70		54.70	14%		38.84	0.00	38.84	8%			41.07	40.87	99.49%	
				Commercial/Industrial-HT	133		133	0%	52.05		52.05	13%		124.76	0.00	124.76	25%			55.44	51.10	92.18%	
				Others	6099		6099	3%	88.33		88.33	22%		100.59	0.00	100.59	20%			99.33	82.53	83.09%	
Sub-total					**217651**	**4802**	**222453**	**100%**	**377.31**	**21.61**	**398.92**	**100%**	**546.80**	**475.01**	**28.76**	**503.77**	**100%**	**43.03**	**7.87%**	**313.69**	**296.91**	**94.65%**	**12.80%**

S.No	Name of circle	Circle code	Name of Division	Period From APR 22 To MAR 23																			
				Consumer profile									Energy parameters					Losses		Commercial Parameter			
														Billed energy (MU)									
				Consumer category	No of connection metered (Nos)	No of connection Un-metered (Nos)	Total Number of connections (Nos)	% of number of connections	Connected Load metered (MW)	Connected Load Un-metered (MW)	Total Connected Load (MW)	% of connected load	Input energy (MU)	Metered energy	Unmetered/assessment energy	Total energy	% of energy consumption	T&D loss (MU)	T&D loss (%)	Billed Amount in Rs. Crore	Collected Amount in Rs. Crore	Collection Efficiency	AT & C loss (%)
13	CRDA	09	GUNTUR-TOWN2	Residential	152552	0	152552	87%	153.49		153.49	37%	682.71	186.16	0.00	186.16	29%	48.05	7.04%	84.47	82.81	98.04%	
				Agricultural	167	2256	2423	1%	1.41	10.13	11.54	3%		0.68	13.45	14.14	2%			10.10	10.27	100.00%	
				Commercial/Industrial-LT	16105	0	16105	9%	69.59		69.59	17%		52.93	0.00	52.93	8%			54.03	53.56	99.14%	
				Commercial/Industrial-HT	358		358	0%	177.25		177.25	42%		369.95	0.00	369.95	58%			392.62	369.40	94.09%	
				Others	3060		3060	2%	8.11		8.11	2%		11.48	0.00	11.48	2%			17.69	7.75	43.81%	
Sub-total					**172242**	**2256**	**174498**	**100%**	**409.87**	**10.13**	**419.99**	**100%**	**682.71**	**621.21**	**13.45**	**634.66**	**100%**	**48.05**	**7.04%**	**558.91**	**523.80**	**93.72%**	**12.88%**
14	CRDA	09	AMARAVATHI	Residential	199395	0	199395	87%	310.94		310.94	59%	646.28	281.00	0.00	281.00	47%	52.35	8.1%	134.11	131.82	98.29%	
				Agricultural	105	6375	6480	3%	0.63	24.63	25.27	5%		0.29	16.54	16.83	3%			12.57	12.76	100.00%	
				Commercial/Industrial-LT	20310	0	20310	9%	73.76		73.76	14%		55.60	0.00	55.60	9%			59.78	60.06	100.00%	
				Commercial/Industrial-HT	189		189	0%	107.48		107.48	20%		224.26	0.00	224.26	38%			88.87	89.59	100.80%	
				Others	2883		2883	1%	10.01		10.01	2%		16.24	0.00	16.24	3%			112.44	108.28	96.30%	
Sub-total					**222882**	**6375**	**229257**	**100%**	**502.83**	**24.63**	**527.46**	**100%**	**646.28**	**577.39**	**16.54**	**593.93**	**100%**	**52.35**	**8.10%**	**407.77**	**402.50**	**98.71%**	**9.29%**
15	Ongole	04	KANIGIRI	Residential	72798	0	72798	69%	55.71		55.71	28%	183.74	60.10	0.00	60.10	36%	16.90	9.2%	28.73	27.35	95.18%	
				Agricultural	28	23697	23725	22%	0.13	112.70	112.83	56%		0.26	75.13	75.39	45%			54.87	57.26	100.00%	
				Commercial/Industrial-LT	7391	0	7391	7%	21.89		21.89	11%		18.37	0.00	18.37	11%			18.42	18.74	100.00%	
				Commercial/Industrial-HT	29		29	0%	5.66		5.66	3%		8.28	0.00	8.28	5%			7.08	6.98	98.52%	
				Others	1794		1794	2%	4.15		4.15	2%		4.70	0.00	4.70	3%			7.25	2.28	31.48%	
Sub-total					**82040**	**23697**	**105737**	**100%**	**87.54**	**112.70**	**200.24**	**100%**	**183.74**	**91.70**	**75.13**	**166.84**	**100%**	**16.90**	**9.20%**	**116.35**	**112.61**	**96.78%**	**12.12%**
16	Ongole	04	MARKAPURAM	Residential	188625	0	188625	67%	139.78		139.78	19%	736.93	165.62	0.00	165.62	25%	72.02	10%	84.24	79.56	94.44%	
				Agricultural	52	66380	66432	24%	0.34	478.76	479.10	66%		0.02	368.35	368.37	55%			267.45	278.66	100.00%	
				Commercial/Industrial-LT	19579	0	19579	7%	59.98		59.98	8%		43.78	0.00	43.78	7%			45.55	42.77	93.90%	
				Commercial/Industrial-HT	45		45	0%	31.71		31.71	4%		64.48	0.00	64.48	10%			19.37	16.60	85.67%	
				Others	5150		5150	2%	15.89		15.89	2%		22.65	0.00	22.65	3%			75.24	42.97	57.11%	
Sub-total					**213451**	**66380**	**279831**	**100%**	**247.69**	**478.76**	**726.45**	**100%**	**736.93**	**296.56**	**368.35**	**664.91**	**100%**	**72.02**	**9.77%**	**491.86**	**460.56**	**93.64%**	**15.52%**
17	Ongole	04	ONGOLE	Residential	202149	0	202149	84%	347.75		347.75	50%	762.91	275.22	0.00	275.22	38%	47.21	6.2%	137.69	133.46	96.93%	
				Agricultural	281	8415	8696	4%	1.14	41.52	42.66	6%		1.03	27.44	28.47	4%			20.25	37.24	100.00%	
				Commercial/Industrial-LT	25708	0	25708	11%	119.82		119.82	17%		94.31	0.00	94.31	13%			95.77	93.75	97.89%	
				Commercial/Industrial-HT	296		296	0%	98.95		98.95	14%		223.54	0.00	223.54	31%			145.76	137.26	94.17%	
				Others	4365		4365	2%	88.92		88.92	13%		94.17	0.00	94.17	13%			97.61	84.01	86.07%	
Sub-total					**232799**	**8415**	**241214**	**100%**	**656.58**	**41.52**	**698.10**	**100%**	**762.91**	**688.26**	**27.44**	**715.71**	**100%**	**47.21**	**6.19%**	**497.08**	**485.72**	**97.72%**	**8.33%**
18	Ongole	04	CHIRALA	Residential	147863	0	147863	88%	159.06		159.06	55%	368.86	167.23	0.00	167.23	49%	26.51	7.2%	76.59	75.37	98.41%	
				Agricultural	726	1785	2511	1%	5.17	7.64	12.82	4%		3.29	9.49	12.78	4%			7.23	9.52	100.00%	
				Commercial/Industrial-LT	14191	0	14191	8%	43.01		43.01	15%		33.73	0.00	33.73	10%			34.38	33.50	97.44%	
				Commercial/Industrial-HT	83		83	0%	28.05		28.05	10%		67.48	0.00	67.48	20%			57.23	51.51	90.02%	
				Others	2917		2917	2%	46.79		46.79	16%		61.13	0.00	61.13	18%			30.42	21.41	70.38%	
Sub-total					**165780**	**1785**	**167565**	**100%**	**282.09**	**7.64**	**289.73**	**100%**	**368.86**	**332.86**	**9.49**	**342.35**	**100%**	**26.51**	**7.19%**	**205.85**	**191.32**	**92.94%**	**13.74%**

Period From APR 22 To MAR 23

S.No	Name of circle	Circle code	Name of Division	Consumer profile: Consumer category	No of connection metered (Nos)	No of connection Un-metered (Nos)	Total Number of connections (Nos)	% of number of connections	Connected Load metered (MW)	Connected Load Un-metered (MW)	Total Connected Load (MW)	% of connected load	Energy parameters: Input energy (MU)	Billed energy (MU): Metered energy	Billed energy (MU): Unmetered/assessment energy	Billed energy (MU): Total energy	% of energy consumption	Losses: T&D loss (MU)	Losses: T&D loss (%)	Commercial Parameter: Billed Amount in Rs. Crore	Collected Amount in Rs. Crore	Collection Efficiency	AT & C loss (%)
19	Ongole	04	KANDUKUR	Residential	133283	0	133283	80%	124.36		124.36	40%	336.66	122.31	0.00	122.31	40%	27.46	8.2%	57.93	53.96	93.15%	
				Agricultural	142	19062	19204	11%	0.34	88.44	88.77	29%		0.35	44.52	44.87	15%			32.78	37.35	100.00%	
				Commercial/Industrial-LT	11808	0	11808	7%	40.08		40.08	13%		31.01	0.00	31.01	10%			32.26	29.64	91.85%	
				Commercial/Industrial-HT	62		62	0%	28.77		28.77	9%		75.70	0.00	75.70	24%			57.66	55.71	96.61%	
				Others	3286		3286	2%	28.64		28.64	9%		35.31	0.00	35.31	11%			26.47	17.15	64.80%	
Sub-total					**148581**	**19062**	**167643**	**100%**	**222.18**	**88.44**	**310.62**	**100%**	**336.66**	**264.68**	**44.52**	**309.20**	**100%**	**27.46**	**8.16%**	**207.11**	**193.81**	**93.58%**	**14.06%**
20	Ongole	04	ADDANKI	Residential	114608	0	114608	76%	115.99		115.99	29%	497.70	117.54	0.00	117.54	26%	41.31	8.3%	48.23	44.56	92.40%	
				Agricultural	13	22436	22449	15%	0.09	113.40	113.49	28%		0.00	46.52	46.52	10%			34.23	35.36	100.00%	
				Commercial/Industrial-LT	10867	0	10867	7%	62.88		62.88	15%		58.62	0.00	58.62	13%			54.96	52.82	96.11%	
				Commercial/Industrial-HT	412		412	0%	107.91		107.91	27%		227.41	0.00	227.41	50%			204.72	190.48	93.04%	
				Others	1652		1652	1%	6.24		6.24	2%		6.30	0.00	6.30	1%			7.49	2.35	31.44%	
Sub-total					**127552**	**22436**	**149988**	**100%**	**293.11**	**113.40**	**406.51**	**100%**	**497.70**	**409.87**	**46.52**	**456.39**	**100%**	**41.31**	**8.30%**	**349.62**	**325.57**	**93.12%**	**14.61%**
21	Ongole	04	DARSI	Residential	133047	0	133047	66%	108.41		108.41	20%	588.14	124.37	0.00	124.37	23%	51.31	8.7%	57.31	54.72	95.49%	
				Agricultural	61	50539	50600	25%	0.67	259.02	259.68	47%		0.13	199.15	199.28	37%			145.05	151.18	100.00%	
				Commercial/Industrial-LT	14387	0	14387	7%	115.14		115.14	21%		128.25	0.00	128.25	24%			111.94	108.52	96.95%	
				Commercial/Industrial-HT	227		227	0%	56.95		56.95	10%		77.67	0.00	77.67	14%			68.80	65.66	95.43%	
				Others	2678		2678	1%	7.06		7.06	1%		7.26	0.00	7.26	1%			22.88	5.23	22.86%	
Sub-total					**150400**	**50539**	**200939**	**100%**	**288.23**	**259.02**	**547.24**	**100%**	**588.14**	**337.68**	**199.15**	**536.83**	**100%**	**51.31**	**8.72%**	**405.97**	**385.31**	**94.91%**	**13.37%**
76	Total		APCPDCL	Residential	4041825	0	4041825	80%	5696.60	0.00	5696.60	44%	15075.92	5314.43	0.00	5314.43	38%	1209.51	8.02%	2615.54	2549.42	97.47%	
				Agricultural	7029	422102	429131	8%	25.87	2392.47	2418.34	19%		17.27	1914.48	1931.75	14%			1408.74	1587.24	100.00%	
				Commercial/Industrial-LT	482115	0	482115	10%	1985.86	0.00	1985.86	15%		1535.25	0.00	1535.25	11%			1585.11	1549.23	97.74%	
				Commercial/Industrial-HT	4559	0	4559	0%	1632.30	0.00	1632.30	13%		3727.23	0.00	3727.23	27%			2902.79	2752.56	94.82%	
				Others	96563	0	96563	2%	1098.82	0.00	1098.82	9%		1357.74	0.00	1357.74	10%			1350.86	1024.95	75.87%	
77	At company level				**4632091**	**422102**	**5054193**	**100%**	**10439.45**	**2392.47**	**12831.92**	**100%**	**15075.92**	**11951.93**	**1914.48**	**13866.41**	**100%**	**1209.51**	**8.02%**	**9863.04**	**9463.39**	**95.95%**	**11.75%**

** Note - It shall be mandatory to record the energy supplied separately for each category of consumers which is being provided a separate rate of subsidy in the tariff, by the state government, so that the subsidy due for the electricity distribution company is quarterly calculated by multiplying the energy supplied to each of such category of consumers by the applicable rate of subsidy notified by the state government.

I/We undertake that the information supplied in this Document and Pro-forma is accurate to the best of my knowledge and if any of the information supplied is found to be incorrect and such information result into loss to the Central Government or State Government or any of the authority under them or any other person affected, I/we undertake to indemnify such loss.

Authorised Signatory and Seal

Name of Authorised Signatory: [redacted]

Name of the DISCOM: NAC, APCPDCL

Full Address: VIJAYAWADA

Seal

Signature:- RM

Name of Energy Manager: R. Sai Srinivas

Registration Number: EA-9066

Form-Input energy(Details of Input energy & Infrastructure)

A. Summary of energy input & Infrastructure

S.No	Parameters	Period From Apr 22 To MAR 23	Remarks (Source of data)
A.1	Input Energy purchased (MU)	15808.79	Power purchese data certified by APPCC
A.2	Transmission loss (%)	2.734%	
A.3	Transmission loss (MU)	432.14	Calculation of tranmission loss viz difference in total energy purchased and total energy drawl at distribution periphery.
A.4	Energy sold outside the periphery(MU)	300.73	Energy Drawls through swapsales 113.89 IEX sales: 414.62 Net sold out side the perifery: 300.73
A.5	Open access sale (MU)	474.65	OA sales communicated by accounts wing of APCPDCL
A.6	EHT sale	915.02	EHT sales communicated by accounts wing of APCPDCL
A.7	Net input energy (received at DISCOM periphery or at distribution point)-(MU)	15075.92	
A.8	Is 100% metering available at 66/33 kV (Select yes or no from list)	Yes	Communicated by District level officers of APCPDCL
A.9	Is 100% metering available at 11 kV (Select yes or no from list)	Yes	Communicated by District level officers of APCPDCL
A.10	% of metering available at DT	0%	Communicated by District level officers of APCPDCL
A.11	% of metering available at consumer end	100%	Communicated by District level officers of APCPDCL
A.12	No of feeders at 66kV voltage level	0	
A.13	No of feeders at 33kV voltage level	412	Communicated by District level officers of APCPDCL
A.14	No of feeders at 11kV voltage level	3462	Communicated by District level officers of APCPDCL
A.15	No of LT feeders level	337627	Communicated by District level officers of APCPDCL
A.16	Line length (ckt. km) at 66kV voltage level	0	
A.17	Line length (ckt. km) at 33kV voltage level	7994.95	Communicated by District level officers of APCPDCL
A.18	Line length (ckt. km) at 11kV voltage level	84101.72	Communicated by District level officers of APCPDCL
A.19	Line length (km) at LT level	46369.86	Communicated by District level officers of APCPDCL
A.20	Length of Aerial Bunched Cables	33569.29	Communicated by District level officers of APCPDCL
A.21	Length of Underground Cables	80.03	Communicated by District level officers of APCPDCL
A.22	HT/LT ratio	1.15	

B. Meter reading of Input energy at injection points

S.No	Circle	Voltge Level (KVA)	Division (KVA)	Sub-Division (KVA)	Feeder ID	Feeder Name	Feeder Metering Status (Metered/ unmetered/ AMI/AMR)	Status of Meter (Functional/Non-functional)	Metering Date	Feeder Type (Agri/ Industrial/Mixed)	Status of	Period from APR-22 toMAR-23				Remarks (Source of data)
									Date of last actual meter reading/ communication		% data received through automatically if feeder AMR/AMI	Meter S.No	CT/PT ratio	Import (MU)	Export (MU)	
B.1	Vijayawada	220/132/33KV	Gunadala	Gunadala	Gunadala	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15461985	1000	149.55		MRI data downloaded at Transco and Discom Boundary Points
B.2	Vijayawada	220/132/33KV	Gunadala	Gunadala	Gunadala	50MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15461986	1000	139.01		MRI data downloaded at Transco and Discom Boundary Points
B.3	Vijayawada	220/132/33KV	Gunadala	Gunadala	Gunadala	80MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15461984	1666.67	245.64		MRI data downloaded at Transco and Discom Boundary Points
B.4	Vijayawada	220/132/33KV	Vijayawada Rural	Ibrahimpatnam	Kondapalli	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP903150	1000	89.44		MRI data downloaded at Transco and Discom Boundary Points
B.5	Vijayawada	132kV Fdr	Vijayawada Rural	Ibrahimpatnam	Kondapalli	132 kV Kondapalli Rly. Traction#1	Metered	Functional	31st Mar2023 24:00	Traction feeder	AMR/AMI fecility is not available	AP906722	1000	25.06		MRI data downloaded at Transco and Discom Boundary Points
B.6	Vijayawada	132kV Fdr	Vijayawada Rural	Ibrahimpatnam	Kondapalli	132 kV Kondapalli Rly. Traction#2	Metered	Functional	31st Mar2023 24:00	Traction feeder	AMR/AMI fecility is not available	AP906769	1000	24.87		MRI data downloaded at Transco and Discom Boundary Points
B.7	Vijayawada	220/132/33KV	Vijayawada Rural	Ibrahimpatnam	Kondapalli	31.5MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE410647	1000	98.16		MRI data downloaded at Transco and Discom Boundary Points
B.8	Vijayawada	220/132/33KV	Vijayawada Rural	Ibrahimpatnam	Kondapalli	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462043	1500	147.71		MRI data downloaded at Transco and Discom Boundary Points
B.9	Vijayawada	220/132/33KV	Gunadala	Gunadala	Nunna	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462067	1000	93.88		MRI data downloaded at Transco and Discom Boundary Points
B.10	Vijayawada	220/132/33KV	Gunadala	Gunadala	Nunna	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15461999	1000	154.97		MRI data downloaded at Transco and Discom Boundary Points
B.11	Vijayawada	220/132/33KV	Gunadala	Gunadala	Nunna	31.5MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	Y0310594	1000	96.81		MRI data downloaded at Transco and Discom Boundary Points
B.12	Vijayawada	220/132/33KV	Vijayawada Rural	Chillakallu	Chillakallu	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP903199	1125	6.97		MRI data downloaded at Transco and Discom Boundary Points
B.13	Vijayawada	220/132/33KV	Vijayawada Rural	Chillakallu	Chillakallu	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP903107	1500	131.30		MRI data downloaded at Transco and Discom Boundary Points
B.14	Vijayawada	132kV Fdr	Vijayawada Rural	Chillakallu	Chillakallu	132 kV Madras Cements	Metered	Functional	31st Mar2023 24:00	Industrial	AMR/AMI fecility is not available	APX00007	3000	0.12		MRI data downloaded at Transco and Discom Boundary Points
B.15	Vijayawada	220/132/33KV	Vijayawada Rural	Chillakallu	Chillakallu	31.5MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462078	500	80.52		MRI data downloaded at Transco and Discom Boundary Points
B.16	Vijayawada	132kV Fdr	Vijayawada Rural	Chillakallu	Chillakallu	132 kV Jaypee Cements	Metered	Functional	31st Mar2023 24:00	Industrial	AMR/AMI fecility is not available	AP911567	1000	49.62		MRI data downloaded at Transco and Discom Boundary Points
B.17	Vijayawada	132/33kv	Gudiwada	Hanuman Junction	Kanumolu	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462053	1000	53.14		MRI data downloaded at Transco and Discom Boundary Points
B.18	Vijayawada	132/33kv	Gudiwada	Hanuman Junction	Kanumolu	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462054	1500	90.33		MRI data downloaded at Transco and Discom Boundary Points
B.19	Vijayawada	132/33kv	Gudiwada	Hanuman Junction	Kanumolu	50MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE411375	1500	87.18		MRI data downloaded at Transco and Discom Boundary Points
B.20	Vijayawada	132/33kv	Machilipatnam	Pamarru	Pamarru	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15461937	3000	165.35		MRI data downloaded at Transco and Discom Boundary Points
B.21	Vijayawada	132/33kv	Machilipatnam	Pamarru	Pamarru	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15461987	1500	159.94		MRI data downloaded at Transco and Discom Boundary Points
B.22	Vijayawada	220/132/33KV	Nuzvidu	Nuzvidu Town	Nuzividu	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XD551504	1000	109.77		MRI data downloaded at Transco and Discom Boundary Points
B.23	Vijayawada	220/132/33KV	Nuzvidu	Nuzvidu Town	Nuzividu	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XD550699	1000	103.54		MRI data downloaded at Transco and Discom Boundary Points
B.24	Vijayawada	220/132/33KV	Nuzvidu	Nuzvidu Town	Nuzividu	50MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XD551510	1000	113.07		MRI data downloaded at Transco and Discom Boundary Points
B.25	Vijayawada	220/132/33KV	Nuzvidu	Nuzvidu Town	Nuzividu	50MVA 132/33 kV Transformer#4	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	18088520	3000	118.65		MRI data downloaded at Transco and Discom Boundary Points
B.26	Vijayawada	132/33KV	Machilipatnam	Machilipatnam	Machilipatnam	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462251	3000	220.28		MRI data downloaded at Transco and Discom Boundary Points
B.27	Vijayawada	132/33KV	Machilipatnam	Machilipatnam	Machilipatnam	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462057	1500	210.29		MRI data downloaded at Transco and Discom Boundary Points

S.No	Circle	Voltge Level (KVA)	Division (KVA)	Sub-Division (KVA)	Feeder ID	Feeder Name	Feeder Metering Status (Metered/ unmetered/ AMI/AMR)	Status of Meter (Functional/Non-functional)	Metering Date	Feeder Type (Agri/ Industrial/Mixed)	Status of	Period from APR-22 toMAR-23				Remarks (Source of data)
									Date of last actual meter reading/ communication		% data received through automatically if feeder AMR/AMI	Meter S.No	CT/PT ratio	Import (MU)	Export (MU)	
B.28	Vijayawada	132/33KV	Vijayawada	Vijayawada	Vijayawada	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	Y0310601	1500	134.07		MRI data downloaded at Transco and Discom Boundary Points
B.29	Vijayawada	132/33KV	Vijayawada	Vijayawada	Vijayawada	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE410643	1500	123.37		MRI data downloaded at Transco and Discom Boundary Points
B.30	Vijayawada	132/33KV	Vijayawada	Vijayawada	Vijayawada	50MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE485692	1500	129.92		MRI data downloaded at Transco and Discom Boundary Points
B.31	Vijayawada	132/33KV	Gunadala	Kanuru	Gungoor	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462066	1000	103.08		MRI data downloaded at Transco and Discom Boundary Points
B.32	Vijayawada	132/33KV	Gunadala	Kanuru	Gungoor	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462065	1500	162.39		MRI data downloaded at Transco and Discom Boundary Points
B.33	Vijayawada	132/33KV	Nuzvidu	Tiruvuru	Kambhampadu	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462047	1000	68.84		MRI data downloaded at Transco and Discom Boundary Points
B.34	Vijayawada	132/33KV	Nuzvidu	Tiruvuru	Kambhampadu	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462046	1500	104.78		MRI data downloaded at Transco and Discom Boundary Points
B.35	Vijayawada	132/33KV	Nuzvidu	Tiruvuru	Kambhampadu	31.5MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462045	1000	71.94		MRI data downloaded at Transco and Discom Boundary Points
B.36	Vijayawada	220/132/33KV	Gudivada	Gudivada Town	Gudivada	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462244	1500	152.25		MRI data downloaded at Transco and Discom Boundary Points
B.37	Vijayawada	220/132/33KV	Gudivada	Gudivada Town	Gudivada	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462056	3000	146.74		MRI data downloaded at Transco and Discom Boundary Points
B.38	Vijayawada	132kV Fdr	Gudivada	Gudivada Town	Gudivada	132KVGudivada Rly. Traction -I	Metered	Functional	31st Mar2023 24:00	Traction feeder	AMR/AMI fecility is not available	15461938	1000	20.14		MRI data downloaded at Transco and Discom Boundary Points
B.39	Vijayawada	220/132/33KV	Gudivada	Gudivada Town	Gudivada	50MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15461939	1500	146.60		MRI data downloaded at Transco and Discom Boundary Points
B.40	Vijayawada	132/33KV	Vijayawada Rural	Nandigama	Nandigama	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462058	1000	79.38		MRI data downloaded at Transco and Discom Boundary Points
B.41	Vijayawada	132/33KV	Vijayawada Rural	Nandigama	Nandigama	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462243	3000	130.24		MRI data downloaded at Transco and Discom Boundary Points
B.42	Vijayawada	132/33KV	Vuyyuru	Avanigadda	Avanigadda	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462246	2000	86.24		MRI data downloaded at Transco and Discom Boundary Points
B.43	Vijayawada	132/33KV	Vuyyuru	Avanigadda	Avanigadda	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462245	2000	86.87		MRI data downloaded at Transco and Discom Boundary Points
B.44	Vijayawada	132/33KV	Gunadala	Patamata	Autonagar	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462064	1500	163.31		MRI data downloaded at Transco and Discom Boundary Points
B.45	Vijayawada	132/33KV	Gunadala	Patamata	Autonagar	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462063	1500	138.25		MRI data downloaded at Transco and Discom Boundary Points
B.46	Vijayawada	132kV Fdr	Vijayawada Rural	Chillakallu	Sitapuram(Nalgonda)	132KV KCP	Metered	Functional	31st Mar2023 24:00	Industrial	AMR/AMI fecility is not available	KAU99218	500	102.25		MRI data downloaded at Transco and Discom Boundary Points
B.47	Vijayawada	132/33KV	Vijayawada Town	D1 OLD Town	Bhavanipuram SS	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	KA906691	1000	95.75		MRI data downloaded at Transco and Discom Boundary Points
B.48	Vijayawada	132/33KV	Vijayawada Town	D1 OLD Town	Bhavanipuram SS	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP914542	1500	141.32		MRI data downloaded at Transco and Discom Boundary Points
B.49	Vijayawada	132/33KV	Gudiwada	Kaikaluru	Chigurukota	31.5MVA 132/33KV Transformer #2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XD511989	666.66	116.43		MRI data downloaded at Transco and Discom Boundary Points
B.50	Vijayawada	132/33KV	Gudiwada	Kaikaluru	Chigurukota	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XD511983	1000	183.08		MRI data downloaded at Transco and Discom Boundary Points
B.51	Vijayawada	132/33KV	Gudiwada	Kaikaluru	Chigurukota	50MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	X1356415	1125	179.04		MRI data downloaded at Transco and Discom Boundary Points
B.52	Vijayawada	132/33KV	Gudiwada	Hanuman.Jn	Rangannagudam	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XB545557	2000	67.20		MRI data downloaded at Transco and Discom Boundary Points
B.53	Vijayawada	132/33KV	Gudiwada	Hanuman.Jn	Rangannagudam	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	TSS03369	1000	69.17		MRI data downloaded at Transco and Discom Boundary Points
B.54	Vijayawada	132/33KV	Gudiwada	Hanuman.Jn	Rangannagudam	132KV Mohan Spintex Textiles Feeder	Metered	Functional	31st Mar2023 24:00			XE485979	1000	83.43		MRI data downloaded at Transco and Discom Boundary Points

S.No	Circle	Voltge Level (KVA)	Division (KVA)	Sub-Division (KVA)	Feeder ID	Feeder Name	Feeder Metering Status (Metered/ unmetered/ AMI/AMR)	Status of Meter (Functional/Non-functional)	Metering Date Date of last actual meter reading/ communication	Feeder Type (Agri/ Industrial/Mixed)	Status of % data received through automatically if feeder AMR/AMI	Period from APR-22 toMAR-23 Meter S.No	CT/PT ratio	Import (MU)	Export (MU)	Remarks (Source of data)
B.55	Vijayawada	132/33KV	Nuzvidu	Vissannapeta	132KV SS Narasapuram(Krishna)	16MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	18088529	1000	52.07		MRI data downloaded at Transco and Discom Boundary Points
B.56	Vijayawada	132/33KV	Nuzvidu	Vissannapeta	132KV SS Narasapuram(Krishna)	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	18088513	2000	62.11		MRI data downloaded at Transco and Discom Boundary Points
B.57	Vijayawada	132/33KV	Nuzvidu	Tiruvuru	220KV SS Tiruvuru	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	X1677981	1000	0.00		MRI data downloaded at Transco and Discom Boundary Points
B.58	Vijayawada	132/33KV	Vijayawada Town		Moghalrajpuram GIS	31.5 MVA 132/33KV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	18088521	1000	3.81		MRI data downloaded at Transco and Discom Boundary Points
B.59	Vijayawada			Private Developers (CP)	KCP S&I Ltd, Lakshmipuram(Chellapalli)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	TSS03239	1000	-0.24		MRI data downloaded at Transco and Discom Boundary Points
B.60	Vijayawada			Private Developers (CP)	Balaji Agro Oils Ltd.		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX01409	1000	10.00		MRI data downloaded at Transco and Discom Boundary Points
B.65	Vijayawada			Private Developers (CP)	Amplus Andhra Power Pvt Ltd.		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX01742	1000	3.00		MRI data downloaded at Transco and Discom Boundary Points
B.69	Vijayawada			Private Developers (CP)	KCP S&I Ltd, Vuyyur		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	X1174644	1000	3.76		MRI data downloaded at Transco and Discom Boundary Points
B.71	Vijayawada				**Open Access Consumption & IEX consuption (VJA)**		Metered	Functional	31st Mar2023 24:00	Industrial	AMR/AMI fecility is not available				100.025	OA sales communicated by accounts wing of APCPDCL
B.73	Vijayawada				**Auxilary Consumption (VJA)**		Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available				1.340	Communicated by EBC/SLDC
B.74	Vijayawada			Inter Discom (CP)		11KV Appannaveedu	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	From APEPDCL		0.15		Communicated by EBC/SLDC
B.75	Vijayawada			Inter Discom (CP)		33 kV Eluru-Kaikaluru	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	From APEPDCL		27.32		Communicated by EBC/SLDC
B.76	Vijayawada			Inter Discom (CP)		11 kV Koppaka Fdr	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	From APEPDCL		0.43		Communicated by EBC/SLDC
B.77	Vijayawada			Inter Discom (CP)		11 kV Apuru Rural	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	From APEPDCL		0.22		Communicated by EBC/SLDC
B.78	Vijayawada			Inter Discom (EP)		11KV Nadipalli	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	From APEPDCL		0.21		Communicated by EBC/SLDC
B.79	Vijayawada			Inter Discom (EP)		11 KV Mudcherla rural	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	To APEPDCL			0.083	Communicated by EBC/SLDC
B.80	Vijayawada			Inter Discom (SP)		33 kV Wadapalli-Nadiku	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	To APSPDCL			0.00	Communicated by EBC/SLDC
B.81	Vijayawada			Inter Discom (SP)		11 kV Paranpally	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	To APSPDCL			0.00	Communicated by EBC/SLDC
B.82	Guntur	132/33kV	Guntur	Guntur	Guntur	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	TSS03388	1500	180.66		MRI data downloaded at Transco and Discom Boundary Points
B.83	Guntur	132/33kV	Guntur	Guntur	Guntur	50MVA 132/33 kV Transformer #2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	TSS03409	1500	142.40		MRI data downloaded at Transco and Discom Boundary Points
B.84	Guntur	132/33kV	Guntur	Guntur	Guntur	80MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	TSS03353	2500	325.80		MRI data downloaded at Transco and Discom Boundary Points
B.85	Guntur	132kV Fdr	Amaravathi	Mangalagiri	Tadepalli	132 kV Tadepally Rly. Traction#1	Metered	Functional	31st Mar2023 24:00	Traction feeder	AMR/AMI fecility is not available	20007125	1000	40.20		MRI data downloaded at Transco and Discom Boundary Points
B.86	Guntur	132kV Fdr	Amaravathi	Mangalagiri	Tadepalli	132 kV Tadepally Rly. Traction#2	Metered	Functional	31st Mar2023 24:00	Traction feeder	AMR/AMI fecility is not available	20007130	1000	54.86		MRI data downloaded at Transco and Discom Boundary Points
B.87	Guntur	132/33kV	Amaravathi	Mangalagiri	Tadepalli	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP906678	2000	88.27		MRI data downloaded at Transco and Discom Boundary Points
B.88	Guntur	132/33kV	Amaravathi	Mangalagiri	Tadepalli	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP906696	1500	97.58		MRI data downloaded at Transco and Discom Boundary Points
B.89	Guntur	132/33kV	Amaravathi	Mangalagiri	Tadepalli	50MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP906697	3000	141.12		MRI data downloaded at Transco and Discom Boundary Points

S.No	Circle	Voltge Level (KVA)	Division (KVA)	Sub-Division (KVA)	Feeder ID	Feeder Name	Feeder Metering Status (Metered/ unmetered/ AMI/AMR)	Status of Meter (Functional/Non-functional)	Metering Date	Feeder Type (Agri/ Industrial/Mixed)	Status of	Period from APR-22 toMAR-23				Remarks (Source of data)
									Date of last actual meter reading/ communication		% data received through automatically if feeder AMR/AMI	Meter S.No	CT/PT ratio	Import (MU)	Export (MU)	
B.90	Guntur	132kV Fdr	Amaravathi	Mangalagiri	Tadepalli	132 KV Kondaveeti vagu-II	Metered	Functional	31st Mar2023 24:00	Lift Irrigation Fd	AMR/AMI fecility is not available	Y0505361	1000	0.78		MRI data downloaded at Transco and Discom Boundary Points
B.91	Guntur	132/33kV	Bapatla	Bapatla	Bapatla	16MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	TN904928	333.33	54.67		MRI data downloaded at Transco and Discom Boundary Points
B.92	Guntur	132kV Fdr	Bapatla	Bapatla	Bapatla	132 kV Bapatla Rly. Traction#1	Metered	Functional	31st Mar2023 24:00	Traction feeder	AMR/AMI fecility is not available	20007141	1000	29.55		MRI data downloaded at Transco and Discom Boundary Points
B.93	Guntur	132kV Fdr	Bapatla	Bapatla	Bapatla	132 kV Bapatla Rly. Traction#2	Metered	Functional	31st Mar2023 24:00	Traction feeder	AMR/AMI fecility is not available	20007147	1000	26.89		MRI data downloaded at Transco and Discom Boundary Points
B.94	Guntur	132/33kV	Bapatla	Bapatla	Bapatla	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE485726	1000	84.47		MRI data downloaded at Transco and Discom Boundary Points
B.95	Guntur	132/33kV	Bapatla	Bapatla	Bapatla	31.5MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XB545551	2000	90.32		MRI data downloaded at Transco and Discom Boundary Points
B.96	Guntur	132kV Fdr	Macherla	Macherla	Macherla	132 kV KCP Cements	Metered	Functional	31st Mar2023 24:00	Industrial	AMR/AMI fecility is not available	12287786	166.67	33.74		MRI data downloaded at Transco and Discom Boundary Points
B.97	Guntur	132/33kV	Macherla	Macherla	Macherla	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP903202	1500	90.48		MRI data downloaded at Transco and Discom Boundary Points
B.98	Guntur	132/33kV	Macherla	Macherla	Macherla	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP903174	1500	64.88		MRI data downloaded at Transco and Discom Boundary Points
B.99	Guntur	132/33kV	Macherla	Macherla	Macherla	31.5MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	Y0310556	1000	59.98		MRI data downloaded at Transco and Discom Boundary Points
B.100	Guntur	132/33kV	Narasaraopeta	Macherla	Piduguralla	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	X1927651	1000	64.49		MRI data downloaded at Transco and Discom Boundary Points
B.101	Guntur	132kV Fdr	Narasaraopeta	Macherla	Piduguralla	132 kV Piduguralla-Wadapalli (Andhra Cements)	Metered	Functional	31st Mar2023 24:00	Industrial	AMR/AMI fecility is not available	12287763	1000	0.06		MRI data downloaded at Transco and Discom Boundary Points
B.102	Guntur	132/33kV	Narasaraopeta	Macherla	Piduguralla	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	X1927654	1500	111.41		MRI data downloaded at Transco and Discom Boundary Points
B.103	Guntur	132/33kV	Gnt Town2 Dvn	Chilakaluripeta	Chilakaluripeta	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE485701	1500	119.12		MRI data downloaded at Transco and Discom Boundary Points
B.104	Guntur	132/33kV	Gnt Town2 Dvn	Chilakaluripeta	Chilakaluripeta	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	TSS03404	1500	157.20		MRI data downloaded at Transco and Discom Boundary Points
B.105	Guntur	132/33kV	Gnt Town2 Dvn	Chilakaluripeta	Chilakaluripeta	50MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP925011	6000	99.30		MRI data downloaded at Transco and Discom Boundary Points
B.106	Guntur	132kV Fdr	Tenali	Tenali	Tenali	132 kV Tenali Rly. Traction#1	Metered	Functional	31st Mar2023 24:00	Traction feeder	AMR/AMI fecility is not available	20008224	1000	19.90		MRI data downloaded at Transco and Discom Boundary Points
B.107	Guntur	132kV Fdr	Tenali	Tenali	Tenali	132 kV Tenali Rly. Traction#2	Metered	Functional	31st Mar2023 24:00	Traction feeder	AMR/AMI fecility is not available	20008226	1000	21.05		MRI data downloaded at Transco and Discom Boundary Points
B.108	Guntur	132/33kV	Tenali	Tenali	Tenali	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XC548869	400	64.86		MRI data downloaded at Transco and Discom Boundary Points
B.109	Guntur	132/33kV	Tenali	Tenali	Tenali	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XC548867	600	110.16		MRI data downloaded at Transco and Discom Boundary Points
B.110	Guntur	132/33kV	Tenali	Tenali	Tenali	50MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XC548887	600	106.90		MRI data downloaded at Transco and Discom Boundary Points
B.111	Guntur	132/33kV	Tenali	Repalli	Repalli	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE485700	1000	95.57		MRI data downloaded at Transco and Discom Boundary Points
B.112	Guntur	132/33kV	Tenali	Repalli	Repalli	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE485722	1500	143.51		MRI data downloaded at Transco and Discom Boundary Points
B.113	Guntur	132/33kV	Narasaraopeta	Vinukonda	Vinukonda	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	Y0310557	1000	53.90		MRI data downloaded at Transco and Discom Boundary Points
B.114	Guntur	132/33kV	Narasaraopeta	Vinukonda	Vinukonda	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP914620	1000	48.18		MRI data downloaded at Transco and Discom Boundary Points
B.115	Guntur	132kV Fdr	Narasaraopeta	Vinukonda	Vinukonda	132KV Railway Traction	Metered	Functional	31st Mar2023 24:00	Traction feeder	AMR/AMI fecility is not available	XD520976	1000	22.20		MRI data downloaded at Transco and Discom Boundary Points
B.116	Guntur	132/33kV	Narasaraopeta	Vinukonda	Vinukonda	31.5MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE411373	1500	77.29		MRI data downloaded at Transco and Discom Boundary Points

S.No	Circle	Voltge Level (KVA)	Division (KVA)	Sub-Division (KVA)	Feeder ID	Feeder Name	Feeder Metering Status (Metered/ unmetered/ AMI/AMR)	Status of Meter (Functional/Non-functional)	Metering Date	Feeder Type (Agri/ Industrial/Mixed)	Status of	Period from APR-22 toMAR-23				Remarks (Source of data)
									Date of last actual meter reading/ communication		% data received through automatically if feeder AMR/AMI	Meter S.No	CT/PT ratio	Import (MU)	Export (MU)	
B.117	Guntur	220/132/33kV	Narsaraopet	Narsaraopet	Narsaraopet	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	KA901860	1000	91.41		MRI data downloaded at Transco and Discom Boundary Points
B.118	Guntur	220/132/33kV	Narsaraopet	Narsaraopet	Narsaraopet	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE485729	4000	94.87		MRI data downloaded at Transco and Discom Boundary Points
B.119	Guntur	220/132/33kV	Narsaraopet	Narsaraopet	Narsaraopet	31.5MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	Y0310591	1000	101.55		MRI data downloaded at Transco and Discom Boundary Points
B.121	Guntur	220/132/33kV	Amaravathi	Amaravathi	Tadikonda	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP906605	2000	160.57		MRI data downloaded at Transco and Discom Boundary Points
B.122	Guntur	220/132/33kV	Amaravathi	Amaravathi	Tadikonda	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP906734	2000	120.38		MRI data downloaded at Transco and Discom Boundary Points
B.123	Guntur	220/132/33kV	Amaravathi	Amaravathi	Tadikonda	50MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE411353	2000	118.23		MRI data downloaded at Transco and Discom Boundary Points
B.124	Guntur	132/33kV	Guntur town 1	Nallapadu	Nallapadu	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	KA905382	666.7	43.78		MRI data downloaded at Transco and Discom Boundary Points
B.125	Guntur	132/33kV	Guntur town 1	Nallapadu	Nallapadu	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	KA905358	666.7	123.12		MRI data downloaded at Transco and Discom Boundary Points
B.126	Guntur	132kV Fdr	Guntur town 1	Nallapadu	Nallapadu	132 kV Nallapadu Rly. Traction#1	Metered	Functional	31st Mar2023 24:00	Traction feeder	AMR/AMI fecility is not available	XD520985	1000	30.02		MRI data downloaded at Transco and Discom Boundary Points
B.127	Guntur	132/33kV	Guntur town 1	Nallapadu	Nallapadu	31.5MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	Y0326894	4000	46.17		MRI data downloaded at Transco and Discom Boundary Points
B.128	Guntur	132kV Fdr	Macherla	Gurazala	Rentachintala	132 kV Parasakti Cements	Metered	Functional	31st Mar2023 24:00	Industrial	AMR/AMI fecility is not available	12287761	166.67	71.32		MRI data downloaded at Transco and Discom Boundary Points
B.129	Guntur	132/33kV	Macherla	Gurazala	Rentachintala	16MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	Y0310595	500	23.81		MRI data downloaded at Transco and Discom Boundary Points
B.130	Guntur	132/33kV	Macherla	Gurazala	Rentachintala	16MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	Y0310553	500	24.22		MRI data downloaded at Transco and Discom Boundary Points
B.131	Guntur	132kV Fdr	Macherla	Gurazala	Rentachintala	132KV Chettinadu feeder	Metered	Functional	31st Mar2023 24:00	Industrial	AMR/AMI fecility is not available	XC477784	333.33	70.75		MRI data downloaded at Transco and Discom Boundary Points
B.132	Guntur	132/33kV	Macherla	Gurazala	Rentachintala	15MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE485703	500	29.32		MRI data downloaded at Transco and Discom Boundary Points
B.133	Guntur	132kV Fdr	Macherla	Gurazala	Rentachintala	132KV Rentachintala - RTSS GURAZALA	Metered	Functional	31st Mar2023 24:00	Traction feeder	AMR/AMI fecility is not available	XE486678	333.33	18.61		MRI data downloaded at Transco and Discom Boundary Points
B.134	Guntur	132/33kV	Guntur town 2	Guntur Rural 1	Marripalem	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462048	1000	77.47		MRI data downloaded at Transco and Discom Boundary Points
B.135	Guntur	132/33kV	Guntur town 2	Guntur Rural 1	Marripalem	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462050	1000	85.81		MRI data downloaded at Transco and Discom Boundary Points
B.136	Guntur	132/33kV	Guntur town 2	Guntur Rural 1	Marripalem	31.5MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE411370	1000	83.77		MRI data downloaded at Transco and Discom Boundary Points
B.137	Guntur	132/33kV	Macherla	Gurajala	Karampudi	31.5MVA 132/33 kV Transformer	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	KA906143	1000	77.85		MRI data downloaded at Transco and Discom Boundary Points
B.138	Guntur	132/33kV	Macherla	Gurajala	Karampudi	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP903117	2000	80.68		MRI data downloaded at Transco and Discom Boundary Points
B.139	Guntur	132kV Fdr	Macherla	Dachepalli	Thangeda (SWS)	132KV Bhavya Cements	Metered	Functional	31st Mar2023 24:00	Industrial	AMR/AMI fecility is not available	12287760	500	42.48		MRI data downloaded at Transco and Discom Boundary Points
B.140	Guntur	132/33kV	Macherla	Dachepalli	Thangeda (SWS)	16MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP903191	500	33.89		MRI data downloaded at Transco and Discom Boundary Points
B.141	Guntur	132/33kV	Macherla	Dachepalli	Thangeda (SWS)	16MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP903222	500	39.18		MRI data downloaded at Transco and Discom Boundary Points
B.142	Guntur	132/33kV	Macherla	Dachepalli	Thangeda (SWS)	16MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	KA906137		10.47		MRI data downloaded at Transco and Discom Boundary Points
B.143	Guntur	132/33kV	Narasaraopeta	Sattenapalli	Rentapalla	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	KA907712	2000	24.10		MRI data downloaded at Transco and Discom Boundary Points
B.144	Guntur	132/33kV	Narasaraopeta	Sattenapalli	Rentapalla	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	KA907713	2000	94.85		MRI data downloaded at Transco and Discom Boundary Points

S.No	Circle	Voltge Level (KVA)	Division (KVA)	Sub-Division (KVA)	Feeder ID	Feeder Name	Feeder Metering Status (Metered/ unmetered/ AMI/AMR)	Status of Meter (Functional/Non-functional)	Metering Date	Feeder Type (Agri/ Industrial/Mixed)	Status of	Period from APR-22 toMAR-23				Remarks (Source of data)
									Date of last actual meter reading/ communication		% data received through automatically if feeder AMR/AMI	Meter S.No	CT/PT ratio	Import (MU)	Export (MU)	
B.145	Guntur	132/33kV	Narasaraopeta	Sattenapalli	Rentapalla	16MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	X1819659	1000	58.04		MRI data downloaded at Transco and Discom Boundary Points
B.146	Guntur	132kV Fdr	Narasaraopeta	Sattenapalli	Rentapalla	132 KV RTSS Feeder	Metered	Functional	31st Mar2023 24:00	Traction feeder	AMR/AMI fecility is not available	X0390736	1000	20.74		MRI data downloaded at Transco and Discom Boundary Points
B.147	Guntur	132/33kV	Guntur Town1	Town 2	Gujjanagundla	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP907561	2000	67.29		MRI data downloaded at Transco and Discom Boundary Points
B.148	Guntur	132/33kV	Guntur Town1	Town 2	Gujjanagundla	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP910353	2000	68.06		MRI data downloaded at Transco and Discom Boundary Points
B.149	Guntur	132/33kV	Guntur Town1	Town 2	Gujjanagundla	31.5MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	18088468	2000	63.92		MRI data downloaded at Transco and Discom Boundary Points
B.150	Guntur	132/33kV	Tenali	Tenali Rural1	Chakrayapalem	16MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP911293	1000	61.35		MRI data downloaded at Transco and Discom Boundary Points
B.151	Guntur	132/33kV	Tenali	Tenali Rural1	Chakrayapalem	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP914611	500	106.01		MRI data downloaded at Transco and Discom Boundary Points
B.152	Guntur	132/33kV	Guntur Town2	Chilakaluripeta	Yedavalli	16MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	Y0511120	500	36.07		MRI data downloaded at Transco and Discom Boundary Points
B.153	Guntur	132/33kV	Guntur Town2	Chilakaluripeta	Yedavalli	16MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XC450994	1000	66.02		MRI data downloaded at Transco and Discom Boundary Points
B.154	Guntur	132/33kV	Macherla	Macherla	Veldhurthy	16MVA 132/11 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	Y0280307	500	34.51		MRI data downloaded at Transco and Discom Boundary Points
B.155	Guntur	132/33kV	Macherla	Macherla	Veldhurthy	16MVA 132/11 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	Y0280345	500	33.65		MRI data downloaded at Transco and Discom Boundary Points
B.156	Guntur	132/33kV	Macherla	Macherla	Veldhurthy	31.5MVA 132/11 kV Tra	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	X1819644		4.23		MRI data downloaded at Transco and Discom Boundary Points
B.157	Guntur	132/33kV	Bapatla	Ponnur	Ponnur	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	18088518	2000	63.27		MRI data downloaded at Transco and Discom Boundary Points
B.158	Guntur	132/33kV	Bapatla	Ponnur	Ponnur	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	18088526	2000	64.51		MRI data downloaded at Transco and Discom Boundary Points
B.159	Guntur	132/33kV	Amaravathi	Mangalagiri	AIIMS	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	18129694	3000	66.30		MRI data downloaded at Transco and Discom Boundary Points
B.160	Guntur			Private Developers (CP)	Dhanalaxmi Cotton & Rice Mills Ltd. (Phase 1)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX01358	1000	8.93		MRI data downloaded at Transco and Discom Boundary Points
B.161	Guntur			Private Developers (CP)	Sagar Power Ltd. (Guntur)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX01842	1000	23.05		MRI data downloaded at Transco and Discom Boundary Points
B.162	Guntur			Private Developers (CP)	KCP Ltd. (Phase 1)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX01946	1000	8.94		MRI data downloaded at Transco and Discom Boundary Points
B.163	Guntur			Private Developers (CP)	Dhanalaxmi Cotton & Rice Mills Ltd. (Phase 3)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX01363	1000	10.97		MRI data downloaded at Transco and Discom Boundary Points
B.164	Guntur			Private Developers (CP)	KCP Ltd. (Phase 2)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX01880	1000	5.58		MRI data downloaded at Transco and Discom Boundary Points
B.165	Guntur			Private Developers (CP)	Tirumala Hydel Projects Ltd. (Phase 1)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX02458	1000	2.28		MRI data downloaded at Transco and Discom Boundary Points
B.166	Guntur			Private Developers (CP)	Esparpak Ltd. (Phase 1)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX02254	1000	3.66		MRI data downloaded at Transco and Discom Boundary Points
B.167	Guntur			Private Developers (CP)	KCP Ltd. (Phase 3)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX01882	1000	4.80		MRI data downloaded at Transco and Discom Boundary Points
B.168	Guntur			Private Developers (CP)	Trident Power Systems Ltd. (Phase 2) (Guntur)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APZ00535	1000	7.08		MRI data downloaded at Transco and Discom Boundary Points
B.169	Guntur			Private Developers (CP)	Akshay Profiles Ltd. (Phase 1)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX02509	1000	1.88		MRI data downloaded at Transco and Discom Boundary Points
B.170	Guntur			Private Developers (CP)	Trident Power Systems Ltd. (Phase 1) (Guntur)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX02065	1000	7.26		MRI data downloaded at Transco and Discom Boundary Points
B.171	Guntur			Private Developers (CP)	Deccan Cements Ltd. (Mini Hydel)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX00383	1000	19.98		MRI data downloaded at Transco and Discom Boundary Points

S.No	Circle	Voltge Level (KVA)	Division (KVA)	Sub-Division (KVA)	Feeder ID	Feeder Name	Feeder Metering Status (Metered/ unmetered/ AMI/AMR)	Status of Meter (Functional/Non-functional)	Metering Date Date of last actual meter reading/ communication	Feeder Type (Agri/ Industrial/Mixed)	Status of % data received through automatically if feeder AMR/AMI	Period from APR-22 toMAR-23 Meter S.No	CT/PT ratio	Import (MU)	Export (MU)	Remarks (Source of data)
B.172	Guntur			Private Developers (CP)	Akshay Profiles Ltd. (Phase 2)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX02512	1000	1.58		MRI data downloaded at Transco and Discom Boundary Points
B.173	Guntur			Private Developers (CP)	Tirumala Hydel Projects Ltd. (Phase 3)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX02464	1000	2.49		MRI data downloaded at Transco and Discom Boundary Points
B.174	Guntur			Private Developers (CP)	Tirumala Hydel Projects Ltd. (Phase 2)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX02461	1000	1.95		MRI data downloaded at Transco and Discom Boundary Points
B.175	Guntur			Private Developers (CP)	Esparpak Ltd. (Phase 2)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX00347	1000	1.52		MRI data downloaded at Transco and Discom Boundary Points
B.176	Guntur			Private Developers (CP)	KCP Ltd. (Phase 4)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX01885	1000	4.18		MRI data downloaded at Transco and Discom Boundary Points
B.177	Guntur			Private Developers (CP)	Kishore Electro Infra Pvt.Limited (Solar Power Plant)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	7886014	666.67	0.65		MRI data downloaded at Transco and Discom Boundary Points
B.178	Guntur			Private Developers (CP)	Jayalaxmi Power Projects Ltd. (Phase 1)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APZ00646	1000	6.06		MRI data downloaded at Transco and Discom Boundary Points
B.179	Guntur			Private Developers (CP)	Greenco Energies Pvt. Ltd., (KMS Power 010511)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	KAB01305	1000	0.00		MRI data downloaded at Transco and Discom Boundary Points
B.180	Guntur			Private Developers (CP)	Palnadu solar plant(2.75 MW)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX00535	1000	7.26		MRI data downloaded at Transco and Discom Boundary Points
B.181	Guntur			Private Developers (CP)	Jayalaxmi Power Projects Ltd. (Phase 2)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APZ00649	1000	6.16		MRI data downloaded at Transco and Discom Boundary Points
B.182	Guntur			Private Developers (CP)	KCP Ltd. (Phase 5)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX01261	1000	6.16		MRI data downloaded at Transco and Discom Boundary Points
B.183	Guntur			Private Developers (CP)	Dhanalaxmi Cotton & Rice Mills Ltd. (Phase 2)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX01360	1000	6.53		MRI data downloaded at Transco and Discom Boundary Points
B.184	Guntur			Private Developers (CP)	Rayalaseema Power Projects (RPP) Ltd.		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APZ00718	1000	11.06		MRI data downloaded at Transco and Discom Boundary Points
B.185	Guntur			Private Developers (CP)	PMC Power Ltd.		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX02585	1000	1.72		MRI data downloaded at Transco and Discom Boundary Points
B.186	Guntur			Private Developers (CP)	Shivani Power Spinners Ltd.		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX02378	1000	1.33		MRI data downloaded at Transco and Discom Boundary Points
B.189	Guntur			Private Developers (CP)	Satya Maharshi Power Corpn. Ltd.		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	XB583177	1000	9.20		MRI data downloaded at Transco and Discom Boundary Points
B.190	Guntur			Private Developers (CP)	Savitha Renewable Energy Ltd.		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX01404	1000	1.03		MRI data downloaded at Transco and Discom Boundary Points
B.192	Guntur			Private Developers (CP)	JOCIL Ltd.		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APZ00903	1000	5.23		MRI data downloaded at Transco and Discom Boundary Points
B.193	Guntur			Private Developers (CP)	Bhavani HydroPower Projects Ltd		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	AP914355	1000	1.33		MRI data downloaded at Transco and Discom Boundary Points
B.194	Guntur			Private Developers (CP)	Jindal Waste management Ltd		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APZ00796	1000	109.00		MRI data downloaded at Transco and Discom Boundary Points
B.195	Guntur				**Open Access Consumption & IEX consuption (GNT)**		Metered	Functional	31st Mar2023 24:00	Industrial	AMR/AMI fecility is not available				350.218	OA sales communicated by accounts wing of APCPDCL
B.197	Guntur				**Auxilary Consumption (GNT)**		Metered	Functional	31st Mar2023 24:00		AMR/AMI fecility is not available				2.474	Communicated by EBC/SLDC
B.198	Ongole	132/33kV	Ongole	Ongole	Ongole (132kV)	16MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462352	1000	47.32		MRI data downloaded at Transco and Discom Boundary Points
B.199	Ongole	132/33kV	Ongole	Ongole	Ongole (132kV)	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462354	2000	80.47		MRI data downloaded at Transco and Discom Boundary Points
B.200	Ongole	220/132/33kV	Kanigiri	Podili	Podili	31.5MVA 220/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462158	400	117.61		MRI data downloaded at Transco and Discom Boundary Points
B.201	Ongole	220/132/33kV	Kanigiri	Podili	Podili	50MVA 220/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462230	2000	208.18		MRI data downloaded at Transco and Discom Boundary Points
B.202	Ongole	220/132/33kV	Kanigiri	Podili	Podili	31.5MVA 220/33 kV Transformer#23	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	KA908150	1000	0.00		MRI data downloaded at Transco and Discom Boundary Points

S.No	Circle	Voltge Level (KVA)	Division (KVA)	Sub-Division (KVA)	Feeder ID	Feeder Name	Feeder Metering Status (Metered/ unmetered/ AMI/AMR)	Status of Meter (Functional/Non-functional)	Metering Date	Feeder Type (Agri/ Industrial/Mixed)	Status of	Period from APR-22 toMAR-23				Remarks (Source of data)
									Date of last actual meter reading/ communication		% data received through automatically if feeder AMR/AMI	Meter S.No	CT/PT ratio	Import (MU)	Export (MU)	
B.203	Ongole	132/33kV	Markapur	Cumbum	Cumbum	16MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462347	1000	22.39		MRI data downloaded at Transco and Discom Boundary Points
B.204	Ongole	132/33kV	Markapur	Cumbum	Cumbum	31.5MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462160	1000	36.41		MRI data downloaded at Transco and Discom Boundary Points
B.205	Ongole	132/33kV	Markapur	Cumbum	Cumbum	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462351	1000	34.41		MRI data downloaded at Transco and Discom Boundary Points
B.206	Ongole	132/33kV	Kanigiri	Kanigiri	Kanigiri	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462162	1000	53.92		MRI data downloaded at Transco and Discom Boundary Points
B.207	Ongole	132/33kV	Kanigiri	Kanigiri	Kanigiri	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462161	1500	87.96		MRI data downloaded at Transco and Discom Boundary Points
B.208	Ongole	132/33kV	Chirala	Chirala	Chirala	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462167	1000	82.66		MRI data downloaded at Transco and Discom Boundary Points
B.209	Ongole	132/33kV	Chirala	Chirala	Chirala	16MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462390	1000	54.90		MRI data downloaded at Transco and Discom Boundary Points
B.210	Ongole	132/33kV	Chirala	Chirala	Chirala	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462165	1000	86.77		MRI data downloaded at Transco and Discom Boundary Points
B.211	Ongole	132/33kV	Markapur	Erragondapalem	Erragondapalem	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462020	1000	92.79		MRI data downloaded at Transco and Discom Boundary Points
B.212	Ongole	132/33kV	Markapur	Erragondapalem	Erragondapalem	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462153	1500	83.16		MRI data downloaded at Transco and Discom Boundary Points
B.213	Ongole	220/132/33kV	Chirala	Parachuru	Parachuru	16MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462350	1000	28.98		MRI data downloaded at Transco and Discom Boundary Points
B.214	Ongole	220/132/33kV	Chirala	Parachuru	Parachuru	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462391	2000	49.21		MRI data downloaded at Transco and Discom Boundary Points
B.215	Ongole	132/33kV	Kandukuru	Kandukuru	Kandukuru	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462169	1000	105.67		MRI data downloaded at Transco and Discom Boundary Points
B.216	Ongole	132/33kV	Kandukuru	Kandukuru	Kandukuru	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462355	3000	169.62		MRI data downloaded at Transco and Discom Boundary Points
B.217	Ongole	132/33kV	Markapur	Giddaluru	Giddaluru	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462155	2000	52.43		MRI data downloaded at Transco and Discom Boundary Points
B.218	Ongole	132/33kV	Markapur	Giddaluru	Giddaluru	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	TN903906	1000	53.99		MRI data downloaded at Transco and Discom Boundary Points
B.219	Ongole	132/11kV	Addanki	Addanki	Medarametla	50MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE411345	1500	72.06		MRI data downloaded at Transco and Discom Boundary Points
B.220	Ongole	132/33kV	Addanki	Addanki	Medarametla	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462164	1000	73.14		MRI data downloaded at Transco and Discom Boundary Points
B.221	Ongole	132kV Fdr	Addanki	Addanki	Medarametla	132kV TEAMEC feeder	Metered	Functional	31st Mar2023 24:00	Industrial	AMR/AMI fecility is not available	7886073	750	0.09		MRI data downloaded at Transco and Discom Boundary Points
B.222	Ongole	132/33kV	Addanki	Addanki	Medarametla	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462168	1000	76.83		MRI data downloaded at Transco and Discom Boundary Points
B.223	Ongole	220/132/33kV	Markapur	Markapur	Markapur	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462156	2000	70.31		MRI data downloaded at Transco and Discom Boundary Points
B.224	Ongole	220/132/33kV	Markapur	Markapur	Markapur	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462349	1000	65.17		MRI data downloaded at Transco and Discom Boundary Points
B.225	Ongole	132kV Fdr	Ongole	Ongole	Ongole (220kV)	132 kV Ongole Rly. Traction#1	Metered	Functional	31st Mar2023 24:00	Traction Feeder	AMR/AMI fecility is not available	12287788	333.33	28.04		MRI data downloaded at Transco and Discom Boundary Points
B.226	Ongole	132kV Fdr	Ongole	Ongole	Ongole (220kV)	132 kV Ongole Rly. Traction#2	Metered	Functional	31st Mar2023 24:00	Traction Feeder	AMR/AMI fecility is not available	12287789	333.33	33.49		MRI data downloaded at Transco and Discom Boundary Points
B.227	Ongole	220/132/33kV	Ongole	Ongole	Ongole (220kV)	50MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462157	1500	105.72		MRI data downloaded at Transco and Discom Boundary Points
B.228	Ongole	220/132/33kV	Ongole	Ongole	Ongole (220kV)	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462154	1500	105.56		MRI data downloaded at Transco and Discom Boundary Points
B.229	Ongole	220/132/33kV	Ongole	Ongole	Ongole (220kV)	50MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE410651	1500	103.99		MRI data downloaded at Transco and Discom Boundary Points

S.No	Circle	Voltge Level (KVA)	Division (KVA)	Sub-Division (KVA)	Feeder ID	Feeder Name	Feeder Metering Status (Metered/ unmetered/ AMI/AMR)	Status of Meter (Functional/Non-functional)	Metering Date	Feeder Type (Agri/ Industrial/Mixed)	Status of	Period from APR-22 toMAR-23				Remarks (Source of data)
									Date of last actual meter reading/ communication		% data received through automatically if feeder AMR/AMI	Meter S.No	CT/PT ratio	Import (MU)	Export (MU)	
B.230	Ongole	132/33kV	Markapur	Markapur	P.Dornala	16MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462353	1000	29.22		MRI data downloaded at Transco and Discom Boundary Points
B.231	Ongole	132/33kV	Markapur	Markapur	P.Dornala	16MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462387	1000	22.87		MRI data downloaded at Transco and Discom Boundary Points
B.232	Ongole	132kV Fdr	Chirala	Parchuru	InKollu	132 kV JVIL	Metered	Functional	31st Mar2023 24:00	Industrial	AMR/AMI fecility is not available	12287790	500	40.37		MRI data downloaded at Transco and Discom Boundary Points
B.233	Ongole	132/33kV	Chirala	Parchuru	InKollu	16MVA 132/33KV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	TSS03356	500	44.65		MRI data downloaded at Transco and Discom Boundary Points
B.234	Ongole	132/33kV	Chirala	Parchuru	InKollu	16MVA 132/33KV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	TSS03052	500	45.31		MRI data downloaded at Transco and Discom Boundary Points
B.235	Ongole	132/33kV	Addanki	Marturu	Marturu	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462166	1000	86.91		MRI data downloaded at Transco and Discom Boundary Points
B.236	Ongole	132kV Fdr	Addanki	Marturu	Marturu	132KV Amaravathi feeder	Metered	Functional	31st Mar2023 24:00	Industrial	AMR/AMI fecility is not available	APZ01076	1000	34.77		MRI data downloaded at Transco and Discom Boundary Points
B.237	Ongole	132/33kV	Addanki	Marturu	Marturu	50MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462170	1500	143.77		MRI data downloaded at Transco and Discom Boundary Points
B.238	Ongole	132/33kV	Kanigiri	Pamuru	Pamuru	31.5MVA 132/33 kV Transformer	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462163	1000	38.21		MRI data downloaded at Transco and Discom Boundary Points
B.239	Ongole	132/33kV	Kanigiri	Pamuru	Pamuru	16MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462389	1000	23.80		MRI data downloaded at Transco and Discom Boundary Points
B.240	Ongole	132/33kV	Ongole	Ongole Rural2	Tangutur	16MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462348	1000	66.62		MRI data downloaded at Transco and Discom Boundary Points
B.241	Ongole	132/33kV	Ongole	Ongole Rural2	Tangutur	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	15462388	2000	100.91		MRI data downloaded at Transco and Discom Boundary Points
B.242	Ongole	132/33kV	Addanki	Addanki	Addanki	31.5 MVA 132/33KV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	SCH00007	666.67	52.85		MRI data downloaded at Transco and Discom Boundary Points
B.243	Ongole	132/33kV	Addanki	Addanki	Addanki	31.5 MVA 132/33KV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	SCH00001	666.67	52.08		MRI data downloaded at Transco and Discom Boundary Points
B.244	Ongole	132/33kV	Addanki	Addanki	Addanki	10/16 MVA 132/33KV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	UPP41580	2000	31.16		MRI data downloaded at Transco and Discom Boundary Points
B.245	Ongole	132/33kV	Darsi	Darsi	Darsi	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	AP907548	2000	40.08		MRI data downloaded at Transco and Discom Boundary Points
B.246	Ongole	132/33kV	Darsi	Darsi	Darsi	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	TN903919	2000	35.80		MRI data downloaded at Transco and Discom Boundary Points
B.247	Ongole	132/33kV	Darsi	Darsi	Darsi	50MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	TN903932	3000	59.61		MRI data downloaded at Transco and Discom Boundary Points
B.248	Ongole	132/33kV	Kandukuru	Kandukuru Rural	Lingasamudram	16MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	XE410658	500	19.42		MRI data downloaded at Transco and Discom Boundary Points
B.249	Ongole	132/33kV	Kandukuru	Kandukuru Rural	Lingasamudram	16MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	TN903928	1000	19.95		MRI data downloaded at Transco and Discom Boundary Points
B.250	Ongole	132/33kV	Markapur	Y.Palem	Kesineni Palli(132KV)	31.5MVA 132/33 kV Transformer#2	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	UPP41154	666.67	35.00		MRI data downloaded at Transco and Discom Boundary Points
B.251	Ongole	132/33kV	Markapur	Y.Palem	Kesineni Palli(132KV)	16MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	UPP41155	333	21.02		MRI data downloaded at Transco and Discom Boundary Points
B.252	Ongole	132/33kV	Markapur	Y.Palem	Kesineni Palli(132KV)	31.5MVA 132/33 kV Transformer#3	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	X1356416	1000	32.28		MRI data downloaded at Transco and Discom Boundary Points
B.253	Ongole	132kV Fdr	Markapur	Y.Palem	Kesineni Palli(132KV)	132 KV Gajjalakonda Railway Traction	Metered	Functional	31st Mar2023 24:00	Traction Feeder	AMR/AMI fecility is not available	APX01437	1000	24.39		MRI data downloaded at Transco and Discom Boundary Points
B.254	Ongole	132/33kV	Markapur	Giddaluru	Anumalapalle	31.5MVA 132/33 kV Transformer#1	Metered	Functional	31st Mar2023 24:00	Mixed	AMR/AMI fecility is not available	18117137	1000	36.76		MRI data downloaded at Transco and Discom Boundary Points
B.255	Ongole	132kV Fdr	Markapur	Giddaluru	Anumalapalle	132KV Satyavalli RTSS	Metered	Functional	31st Mar2023 24:00	Industrial	AMR/AMI fecility is not available	APX01651	1000	25.77		MRI data downloaded at Transco and Discom Boundary Points
B.256	Ongole			Private Developers (CP)	Trident Power Systems Ltd. (Phase 3) (Prakasam)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APZ00537	1000	5.37		MRI data downloaded at Transco and Discom Boundary Points

S.No	Circle	Voltge Level (KVA)	Division (KVA)	Sub-Division (KVA)	Feeder ID	Feeder Name	Feeder Metering Status (Metered/ unmetered/ AMI/AMR)	Status of Meter (Functional/Non-functional)	Metering Date: Date of last actual meter reading/ communication	Feeder Type (Agri/ Industrial/Mixed)	Status of: % data received through automatically if feeder AMR/AMI	Period from APR-22 toMAR-23: Meter S.No	CT/PT ratio	Import (MU)	Export (MU)	Remarks (Source of data)
B.257	Ongole			Private Developers (CP)	Renew Solar energy Pvt Ltd.-2(33KV)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	BES80423	1000	17.72		MRI data downloaded at Transco and Discom Boundary Points
B.258	Ongole			Private Developers (CP)	Renew Solar energy Pvt Ltd.-1(33KV)		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	BES80420	1000	17.26		MRI data downloaded at Transco and Discom Boundary Points
B.259	Ongole			Private Developers (CP)	SKJ Power Projects Ltd.		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	13194244	1000	4.56		MRI data downloaded at Transco and Discom Boundary Points
B.260	Ongole			Private Developers (CP)	Agri Gold Projects Ltd.		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available		1000	0.00		MRI data downloaded at Transco and Discom Boundary Points
B.261	Ongole			Private Developers (CP)	Singaraya Hills Green Power Genco (P) ltd.		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available		1000	0.00		MRI data downloaded at Transco and Discom Boundary Points
B.262	Ongole			Private Developers (CP)	Solar plant of Power mech infra Ltd.		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX02204	1000	2.83		MRI data downloaded at Transco and Discom Boundary Points
B.263	Ongole			Private Developers (CP)	Jyothi Bio energy Ltd.		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available		1000	0.00		MRI data downloaded at Transco and Discom Boundary Points
B.264	Ongole			Private Developers (CP)	Jyothi Bio energy Ltd.-6MW		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available		1000	0.00		MRI data downloaded at Transco and Discom Boundary Points
B.265	Ongole			Private Developers (CP)	Slylandro Solar Power Plant		Metered	Functional	31st Mar2023 24:00	Embeded Generator	AMR/AMI fecility is not available	APX02029	1000	4.47		MRI data downloaded at Transco and Discom Boundary Points
B.266	Ongole				Open Access Consumption & IEX consuption (ONG)		Metered	Functional	31st Mar2023 24:00	Industrial	AMR/AMI fecility is not available				24.410	OA sales communicated by accounts wing of APCPDCL
B.268	Ongole				Auxilary Consumption (ONG)		Metered	Functional	31st Mar2023 24:00		AMR/AMI fecility is not available				1.827	Communicated by EBC/SLDC
B.269																
B.13403														15556.29	480.377	
B.13404																15075.916

APCPDCL is considering PTR LV's in 220/132/33KV substations as Transco-Discom boundary points. Discom Input will be arrived through MRI data collected at Transco-Discom boundary ponts. MRI data directly gives the Gross discom drawls after deducting export energy from the import energy duly considering the MF value. Hence export energy is shown as "0" at T-D boundary points. However OA sales, Auxillary consumption are ashown as export energy for arriving net discom energy drawls. There are no franchise sales with in the discom. Hence sales under part-B are shown as '0'. However energy sold at out side the periphery through exchanges are mentioned under part-A. Data was presented as per the above lines in the revised report.

I/We undertake that the information supplied in this Document and Pro-forma is accurate to the best of my knowledge and if any of the information supplied is found to be incorrect and such information result into loss to the Central Government or State Government or any of the authority under them or any other person affected, I/we undertake to indemnify such loss.

Authorised Signatory and Seal

Name of Authorised Signatory:
Name of the DISCOM:
Full Address:

CHIEF GENERAL MANAGER
RAC, APCPDCL
VIJAYAWADA

Seal

Signature:- RM
Name of Energy Manager*: R. SAISRINIVAS
Registration Number: EA 9066

Details of Input Energy Sources

Period From Apr-22 To Mar-23

A. Generation at Transmission Periphery (Details)

S.No.	Name of Generation Station	Generation Capacity (In MW)	Type of Station Generation (Based- Solid (Coal ,Lignite)/Liquid/Gas/Renewable (biomass-bagasse)/Others)	Type of Contract (in years/months/days)	Type of Grid (Intra-state/Inter-state)	Point of Connection (POC) Loss MU	Voltage Level (At input)	Remarks (Source of data)
1	Dr. NTTPS(VTPS)	6x210+1x500	Solid	years	Intra state		66KV and above	
2	RTPP	5x210+1x600	Solid	years	Intra state		66KV and above	
3	Sri Damodharam Sanjeevayya Power Station	3x800Mw	Solid	years	Intra state		66KV and above	
4	Srisailam RBPH	710	Liquid	years	Intra state		66KV and above	
5	NSRCPH	90	Liquid	years	Intra state		66KV and above	
6	N Sagar Tailpond Hydro Electric Station	50	Liquid	years	Intra state		66KV and above	
7	Upper Sileru Hydel Station	240	Liquid	years	Intra state		66KV and above	
8	Lower Sileru Hydel Station	460	Liquid	years	Intra state		66KV and above	
9	Machkund Hydel Station	84	Liquid	years	Intra state		66KV and above	
10	Hampi & T.B.Dam Hydel Station	57.6	Liquid	years	Intra state		66KV and above	
11	Donkarayi Hydel Station	25	Liquid	years	Intra state		66KV and above	
12	Minihydel(Chettipet)	1	Liquid	years	Intra state		66KV and above	
13	Penna Ahobilam(Balancing Reservoir) Hydel Station	20	Liquid	years	Intra state		66KV and above	
14	APGPCL(Andhra Pradesh Gas Power Corporation Ltd) (VGTS) Stage 1	100	Gas	years	Intra state		66KV and above	
15	APGPCL(Andhra Pradesh Gas Power Corporation Ltd) (VGTS) Stage II	172	Gas	years	Intra state		66KV and above	
16	NCL Energy Ltd., Hospet(T.B.Dam)		Liquid	years	Intra state		66KV and above	
17	Lanco Kondapalli Power Project		Gas	months	Intra state		66KV and above	
18	Spectrum Kakinada Power Project		Gas	months	Intra state		66KV and above	

S.No.	Name of Generation Station	Generation Capacity (In MW)	Type of Station Generation (Based- Solid (Coal ,Lignite)/Liquid/Gas/Renewable (biomass-bagasse)/Others)	Type of Contract (in years/months/days)	Type of Grid (Intra-state/Inter-state)	Point of Connection (POC) Loss MU	Voltage Level (At input)	Remarks (Source of data)
19	Thermal Powertech Corporation	1240	Solid	years	Intra state		66KV and above	
20	Hinduja National Power Corp Ltd Stage1	377	Solid	years	Intra state		66KV and above	
21	Srivathsa Power Project		Gas	years	Intra state		66KV and above	
22	Godavari Gas Power Plant	216	Gas	years	Intra state		66KV and above	
23	NTPC(SR) Ramagundam I,II&III	1x2100+1x500	Solid	years	Inter state		66KV and above	
24	NTPC(SR) Simhadri Stage-I	2x1000	Solid	years	Inter state		66KV and above	
25	NTPC(SR) Talcher Stage-II	1x2000	Solid	years	Inter state		66KV and above	
26	NTPC Kudgi Stage-I	1x2400	Solid	years	Inter state		66KV and above	
27	NTECL Valluru Thermal Power	1x1500	Solid	years	Inter state		66KV and above	
28	NLC Stage-I	1x630	Solid	years	Inter state	221.98	66KV and above	
29	NLC Stage-II	1x840	Solid	years	Inter state		66KV and above	
30	NPC(MAPS)	440	Solid	years	Inter state		66KV and above	
31	NPC(KAIGA unit I,II,III,IV)	880	Solid	years	Inter state		66KV and above	
32	NTPL(NLC TamilNadu)	1000	Solid	years	Inter state		66KV and above	
33	NLC NNTPS	1000	Solid	years	Inter state		66KV and above	

B. Embedded Generation in DISCOM Area

S.No	Name of Generation Station	Generation Capacity (In MW)	Tytpe of Station (Generation Based-Solid/Liquid/Gas/Renewable/Others)	Type of Contract	Type of Grid	Voltage Level (KVA)	Received at Circle (In MU)	Received at Division Level (KVA)	Received at Division Level (In MU)
1	Satyamaharshi	6	Biomass	20years	Renewable Source	33	Guntur	Amaravathi	9.292
2	Balaji Agro	4.5	Biomass	20 years	Renewable Source	33	Vijayawada	Gunadala	6.628
3	KCP sugars Vuyyuru	3	Bagasse	20 years	Renewable Source	33	Vijayawada	Vuyyuru	1.814
4	Jindal Urban waste Management	15	Industrial Waste	25 years	Renewable Source	33	Guntur	Town I Guntur	66.421
5	Bhavani Hydro	0.55	Mhydel	20 years	Renewable Source	33	Guntur	Narasaraopeta	0.631
6	Kishore Infra	1	Solar	25 years	Renewable Source	11	Guntur	Guntur Town-II	0.420
7	Palnadu Power 33KV	5	Solar	20 years	Renewable Source	33	Guntur	Narasaraopeta	4.355
8	Renew Solar 21MW 33KV	6.53	Solar	25 years	Renewable Source	33	Ongole	Markapur	18.155
9	Sri Lakshmi Venkateswara Green Energy Pvt Ltd 33KV	1	Solar	20 years	Renewable Source	33	Vijayawada	Nuzvid	0.793

(Details of Consumers)						
Summary of Energy						
Period From APR-22 To MAR-23						
S.No	Type of Consumers	Category of Consumers (EHT/HT/LT/Others)	Voltage Level (In Voltage)	No of Consumers	Total Consumption (In MU)	Remarks (Source of data)
1	Domestic	LT	Lt Cat-1	4041825	5314.384	
2	Hor. & Nur. & Coffee/Tea & Rubber (Metered)	LT	Lt-VA V	4243	3.470	
3	Mixed Load	LT	LT VA (i),(ii),(i	2641	8.659	
4	IP Sets	LT	Lt-VA II	422102	1914.479	
5	Commercial	LT	Lt Cat-II	462717	1065.685	
6	Industrial (Small)	LT	LT IIIB,D	1873	10.699	
7	Industrial (Medium)	LT	LT IIIA	17525	458.780	
8	Hor. & Nur. & Coffee/Tea & Rubber (Flat)	HT	11KV		0.000	
9	Heating and Motive Power	HT	11KV	2	1.036	Ht 3c
10	HT Water Supply	HT	11KV	96	79.125	HT IV A
11	HT Industrial	HT	11kv	2168	878.124	HT IIIA
12	HT Commercial	HT	11kv	1364	376.472	HT II A1
13	Applicable to Government Hospitals & Hospitals	HT	11kv	101	42.314	Ht IV B
14	Lift Irrigation Schemes/Lift Irrigation Societies	HT	11kv	271	33.026	HT V E
15	HT Res. Apartments Applicable to all areas	HT	11KV	32	11.528	HT I B
16	Function Halls/Auditoria	HT	11KV	144	9.991	HT2 A3
17	Startup power	HT	11KV	1	0.014	HT2 B
18	Religious Places	HT	11KV	8	1.778	Ht 4c
19	Railway Traction	EHT	132KV	12	458.431	Ht 4D
20	Aqua culture&Animal Husbandry	HT	11KV	45	15.934	Ht 5 B
21	HT Industrial	HT	33kv	205	1216.835	HT IIIA
22	HT Industrial	EHT	132kv	10	455.608	HT IIIA
23	HT Commercial	HT	33kv	31	93.524	HT II A1
24	Applicable to Government Hospitals & Hospitals	HT	33kv	6	23.825	Ht IV B
25	Lift Irrigation Schemes/Lift Irrigation Societies	HT	33kv	16	23.942	HT V E
26	Lift Irrigation Schemes/Lift Irrigation Societies	EHT	132kv	1	0.754	HT V E
27	HT Res. Apartments Applicable to all areas	HT	33KV	5	2.030	HT I B
28	Startup power	HT	33KV	38	1.019	HT2 B

S.No	Type of Consumers	Category of Consumers (EHT/HT/LT/Others)	Voltage Level (In Voltage)	No of Consumers	Total Consumption (In MU)	Remarks (Source of data)
29	Startup power	EHT	132KV	1	0.222	HT2 B
30	Electric Vehicles/Charging Stations	HT	11KV	1	0.081	Ht 2C
31	Energy Intensive Industries(Ferro Alloy Indu, PV ingots)	HT	33KV	1	1.618	Ht 3c
32	Others-5 (if any , specify in remarks)	LT	LT IV B	29213	67.751	Government offices and depar
33	Others-5 (if any , specify in remarks)	LT	LT IVA	32640	237.204	Water Supply &Public Lighting
34	Others-5 (if any , specify in remarks)	LT	5(A)(iv)	11	0.002	Sugarcane Crushing
35	Others-5 (if any , specify in remarks)	LT	Lt 4(c)(i)	11542	15.966	Religious places
36	Others-5 (if any , specify in remarks)	LT	Lt 5(B)	22880	1039.301	Aquaculture&Animal Husband
37	Others-5 (if any , specify in remarks)	LT	Lt 5(A)(vi)	13	0.312	Floriculture in Green House
38	Others-5 (if any , specify in remarks)	LT	Lt 4(A)	267	1.686	NTR SUJALA PADAKAM
39	Others-5 (if any , specify in remarks)	LT	LT 5D	140	0.592	Agro Based cottage industries
40	Others-5 (if any , specify in remarks)	LT		2	0.207	Temp
			Total	5054193	13866.409	

Format-2

Subsidy billing and collection (Quarterly Submission) for FY 2022-23

Format 2 - Subsidy Billing and Collection (Quarterly Submission) for 1st Quarter for FY 2022-23

Sl.No	Consumer Category	Per unit Subsidy declared by the State Govt.	Total energy forecasted for the category	Total advance subsidy Amount raised to the State Government	Actual electricity supplied based on measurement through meters*	Actual subsidy required from the State Government	Difference in Advance and Actual subsidy	Reconciled subsidy bill raised to the State Government	Actual received
		(Rs./Kwh)	(MU)	(Rs. Cr)	(MU)	(Rs. Cr)	(Rs. Cr)	(Rs. Cr)	
	1	2	3	4=(2)*(3)	5	6=(2)*(5)	7=(6)-(4)	8	
	APCPDCL								
I	LT Cat -I: Domestic:								
	0-30	1.47	340.58	49.93	315.32	46.24	-3.70	46.24	
	31-75	1.10	448.66	49.35	383.48	42.18	-7.17	42.18	
	76-125	0.26	364.97	9.49	290.69	7.56	-1.93	7.56	
	Total		**1154.20**	**108.79**	**989.49**	**95.99**	**-12.81**	**95.99**	
V	**LT Cat-V : Agricultural & Related**								
	(A): Agriculture								
	(i) Corporate farmers	3.22	1.07	0.34	0.89	0.29	-0.06	0.29	761.16
	(ii) Non-Corporate Farmers	6.88	479.72	329.82	450.00	309.38	-20.43	309.38	
	(iii) Salt farming	4.34	0.66	0.28	0.68	0.30	0.01	0.30	
	(iv) sugar crushing	6.97	1.27	0.89	0.00	0.00	-0.89	0.00	
	(v) Rural Horticulture	6.65	1.40	0.93	1.42	0.94	0.01	0.94	
	(vi) Floriculture in Green House	0.00	0.00	0.00				0.00	
	(B): Aquaculture and Animal Husbandry	2.88	287.32	82.72	126.13	36.31	-46.41	36.31	
	(D): Agro Based Cottage Industries upto 10HP	3.19	3.26	1.04	0.14	0.04	-1.00	0.04	
	(E) Govt LI schemes	0.55	2.09	0.11	0.62	0.03	-0.08	0.03	
	(F) True Down			-11.42					
	Total		**776.79**	**404.72**	**579.88**	**347.30**	**-68.84**	**347.30**	**761.16**
	Tariff Concessions								
V	Aquaculture	2.35	287.32	73.85	126.13	29.64	-44.20	29.64	54.30
I	Subsidies to SC Domestic Consumers upto 200 units p.m	Up to 30 units Rs.1.90 per unit/31to 75 units Rs.3.00 per unit/ 76 to 125 Rs.4.50 per unit/ 126 to 225 Rs 6.00 per unit	137.18	47.03	130.65	48.13	1.10	48.13	0.00
I	Subsidies to ST Domestic Consumers upto 200 units p.m	Up to 30 units Rs.1.90 per unit/31to 75 units Rs.3.00 per unit/ 76 to 125 Rs.4.50 per unit/ 126 to 225 Rs 6.00 per unit	19.40	6.89	18.47	6.73	-0.16	6.73	0.00
	Others		0.78	0.20	0.74	0.23	0.03	0.23	0.00
	Tariff Concessions- Total		**444.68**	**127.97**	**275.99**	**84.73**	**-43.24**	**84.73**	**54.30**
	Total Subsidy		**2,375.68**	**641.48**	**1845.36**	**528.02**	**-124.88**	**528.02**	**815.46**

GENERAL MANAGER (EXP)
APCPDCL :: VIJAYAWADA

Format-2

Subsidy billing and collection (Quarterly Submission) for FY 2022-23

Format 2 - Subsidy Billing and Collection (Quarterly Submission) for 2nd Quarter for FY 2022-23

Sl.No	Consumer Category	Per unit Subsidy declared by the State Govt.	Total energy forecasted for the category	Total advance subsidy Amount raised to the State Government	Actual electricity supplied based on measurement through meters*	Actual subsidy required from the State Government	Difference in Advance and Actual subsidy	Reconciled subsidy bill raised to the State Government	Actual received
	1	(Rs./Kwh) 2	(MU) 3	(Rs. Cr) 4=(2)*(3)	(MU) 5	(Rs. Cr) 6=(2)*(5)	(Rs. Cr) 7=(6)-(4)	(Rs. Cr) 8	
	APCPDCL								
I	**LT Cat -I: Domestic:**								
	0-30	1.47	340.58	49.95	318.07	46.65	-3.30	46.65	
	31-75	1.10	453.64	49.90	388.94	42.78	-7.12	42.78	
	76-125	0.26	369.58	9.61	286.04	7.44	-2.17	7.44	
	Total		**1,163.79**	**109.46**	**993.05**	**96.87**	**-12.59**	**96.87**	
V	**LT Cat-V : Agricultural & Related**								
	(A): Agriculture								
	(i) Corporate farmers	3.22	1.35	0.44	0.34	0.11	-0.33	0.11	
	(ii) Non-Corporate Farmers	6.88	418.20	287.52	361.27	248.38	-39.14	248.38	
	(iii) Salt farming	4.34	0.21	0.09	0.17	0.07	-0.02	0.07	
	(iv) sugar crushing	6.97	0.61	0.43	0.00	0.00	-0.42	0.00	
	(v) Rural Horticulture	6.65	1.30	0.86	0.72	0.48	-0.39	0.48	
	(vi) Floriculture in Green House	0.00	-	-				0.00	143.02
	(B): Aquaculture and Animal Husbandry	2.88	270.82	77.97	27.56	7.93	-70.03	7.93	
	(D): Agro Based Cottage Industries upto 10HP	3.19	3.71	1.18	0.12	0.04	-1.15	0.04	
	(E) Govt LI schemes	0.55	2.18	0.12	0.36	0.02	-0.10	0.02	
	(F) True Down			-11.42					
	Total		**698.38**	**357.18**	**390.54**	**257.03**	**-100.15**	**257.03**	**143.02**
	Tariff Concessions								
V	Aquaculture	2.35	270.82	73.84	27.56	6.48	-67.37	6.48	100.85
I	Subsidies to SC Domestic Consumers upto 200 units p.m	Up to 30 units Rs.1.90 per unit 31to 75 units Rs 3.00 per unit 76 to 125 Rs 4.50 per unit 126 to 225 Rs 6.00 per unit	122.55	47.03	116.72	47.61	0.58	47.61	0.00
I	Subsidies to ST Domestic Consumers upto 200 units p.m	Up to 30 units Rs.1.90 per unit 31to 75 units Rs.3.00 per unit 76 to 125 Rs.4.50 per unit 126 to 225 Rs 6.00 per unit	17.04	6.89	16.23	6.54	-0.35	6.54	0.00
	Others		0.88	0.20	0.83	0.27	0.07	0.27	0.00
	Tariff Concessions- Total		**411.30**	**127.97**	**161.34**	**60.90**	**-67.08**	**60.90**	**100.85**
	Total Subsidy		**2,273.47**	**594.61**	**1544.93**	**414.80**	**-179.82**	**414.80**	**243.87**

GENERAL MANAGER (EXP)
APCPDCL :: VIJAYAWADA

Format-2

Subsidy billing and collection (Quarterly Submission) for FY 2022-23

Format 2 - Subsidy Billing and Collection (Quarterly Submission) for 3rd Quarter for FY 2022-23

Sl.No	Consumer Category	Per unit Subsidy declared by the State Govt.	Total energy forecasted for the category	Total advance subsidy Amount raised to the State Government	Actual electricity supplied based on measurement through meters*	Actual subsidy required from the State Government	Difference in Advance and Actual subsidy	Reconciled subsidy bill raised to the State Government	Actual received
		(Rs./Kwh)	(MU)	(Rs. Cr)	(MU)	(Rs. Cr)	(Rs. Cr)	(Rs. Cr)	
	1	2	3	4=(2)*(3)	5	6=(2)*(5)	7=(6)-(4)	8	
	APCPDCL								
I	LT Cat -I: Domestic:								
	0-30	1.47	340.58	49.95	312.70	45.86	-4.09	45.86	
	31-75	1.10	464.98	51.15	344.34	37.88	-13.27	37.88	
	76-125	0.26	367.58	9.56	232.18	6.04	-3.52	6.04	
	Total		**1173.14**	**110.65**	**889.22**	**89.77**	**-20.88**	**89.77**	
V	LT Cat-V : Agricultural & Related								
	(A): Agriculture								
	(i) Corporate farmers	3.22	1.44	0.46	0.46	0.15	-0.31	0.15	
	(ii) Non-Corporate Farmers	6.88	495.05	340.36	424.09	291.57	-48.79	291.57	
	(iii) Salt farming	4.34	0.12	0.05	0.19	0.08	0.03	0.08	
	(iv) sugar crushing	6.97	0.51	0.36	0.00	0.00	-0.35	0.00	
	(v) Rural Horticulture	6.65	1.20	0.80	0.54	0.36	-0.44	0.36	
	(vi) Floriculture in Green House	0.00	0.00	0.00	0.01	0.00	0.00	0.00	70.34
	(B) Aquaculture and Animal Husbandry	2.88	282.77	81.41	49.83	14.35	-67.06	14.35	
	(D) Agro Based Cottage Industries upto 10HP	3.19	2.66	0.85	0.16	0.05	-0.80	0.05	
	(E) Govt LI schemes	0.55	2.95	0.16	1.61	0.09	-0.07	0.09	
	(F) True Down			-11.42					
	Total		**786.71**	**413.03**	**476.89**	**306.65**	**-106.38**	**306.65**	**70.34**
	Tariff Concessions								
V	Aquaculture	2.35	282.77	73.84	49.83	11.71	-62.13	11.71	0.00
I	Subsidies to SC Domestic Consumers upto 200 units p.m	Up to 30 units Rs 1.90 per unit/31to 75 units Rs 3.00 per unit/ 76 to 125 Rs.4.50 per unit/ 126 to 225 Rs 6.00 per unit	124.34	47.03	118.42	48.49	1.46	48.49	0.00
I	Subsidies to ST Domestic Consumers upto 200 units p.m	Up to 30 units Rs 1.90 per unit/31to 75 units Rs 3.00 per unit/ 76 to 125 Rs.4.50 per unit/ 126 to 225 Rs 6.00 per unit	17.57	6.89	16.73	6.75	-0.14	6.75	0.00
	Others		0.86	0.20	0.81	0.27	0.06	0.27	0.00
	Tariff Concessions- Total		**425.54**	**127.97**	**185.79**	**67.22**	**-60.76**	**67.22**	**0.00**
	Total Subsidy		**2385.38**	**651.65**	**1551.91**	**463.64**	**-188.01**	**463.64**	**70.34**

GENERAL MANAGER (EXP)
APCPDCL :: VIJAYAWADA

Subsidy billing and collection (Quarterly Submission) for FY 2022-23

Format 2 - Subsidy Billing and Collection (Quarterly Submission) for 4th Quarter for FY 2022-23 (final)

Sl.No	Consumer Category	Per unit Subsidy declared by the State Govt.	Total energy forecasted for the category	Total advance subsidy Amount raised to the State Government	Actual electricity supplied based on measurement through meters*	Actual subsidy required from the State Government	Difference in Advance and Actual subsidy	Reconciled subsidy bill raised to the State Government	Actual received
		(Rs./Kwh)	(MU)	(Rs. Cr)	(MU)	(Rs. Cr)	(Rs. Cr)	(Rs. Cr)	
	1	2	3	4=(2)*(3)	5	6=(2)*(5)	7=(6)-(4)	8	
	APCPDCL								
I	**LT Cat -I: Domestic:**								
	0-30	1.47	340.58	49.95	314.37	46.11	-3.84	46.11	
	31-75	1.10	456.64	50.23	348.14	38.30	-11.94	38.30	
	76-125	0.26	320.51	8.33	224.99	5.85	-2.48	5.85	
	Total		**1117.73**	**108.51**	**887.50**	**90.25**	**-18.26**	**90.25**	372.88
V	**LT Cat-V : Agricultural & Related**								
	(A): Agriculture								
	(i) Corporate farmers	3.22	1.23	0.39	0.59	0.19	-0.20	0.19	
	(ii) Non-Corporate Farmers	6.88	677.61	465.87	679.13	466.92	1.05	466.92	
	(iii) Salt farming	4.34	0.54	0.23	0.68	0.30	0.06	0.30	
	(iv) sugar crushing	6.97	0.54	0.38	0.00	0.00	-0.38	0.00	
	(v) Rural Horticulture	6.65	1.44	0.96	1.18	0.79	-0.17	0.79	
	(vi) Floriculture in Green House	0.00	0.00	0.00	0.02	0.00	0.00	0.00	
	(B) Aquaculture and Animal Husbandry	2.88	286.41	82.45	44.88	12.92	-69.53	12.92	
	(D) Agro Based Cottage Industries upto 10HP	3.19	2.50	0.80	0.17	0.05	-0.74	0.05	
	(E) Govt LI schemes	0.55	2.74	0.15	0.89	0.05	-0.10	0.05	
	(F) True Down			22.84					
	Total		**973.00**	**574.07**	**727.54**	**481.21**	**-92.85**	**481.21**	**465.82**
	Tariff Concessions								
V	Aquaculture	2.35	286.41	73.85	44.88	10.81	-63.03	10.81	35.75
I	Subsidies to SC Domestic Consumers upto 200 units p.m	Up to 30 units Rs 1.90 per unit 31 to 75 units Rs 3.00 per unit 76 to 125 Rs 4.50 per unit 126 to 225 Rs 6.00 per unit	115.52	47.03	105.83	43.02	-4.02	43.02	187.25
I	Subsidies to ST Domestic Consumers upto 200 units p.m	Up to 30 units Rs 1.90 per unit 31 to 75 units Rs 3.00 per unit 76 to 125 Rs 4.50 per unit 126 to 225 Rs 6.00 per unit	16.48	6.89	15.21	5.95	-0.95	5.95	25.97
	Others		1.08	0.20	0.83	0.20	0.00	0.20	0.97
	Tariff Concessions- Total		**419.49**	**127.97**	**166.76**	**59.98**	**-68.00**	**59.98**	**249.93**
	Total Subsidy		**2510.22**	**810.56**	**1781.80**	**631.44**	**-179.11**	**631.44**	**1088.63**

GENERAL MANAGER (E&IA)
APCPDCL :: VIJAYAWADA

Format-2

Format 2 - Subsidy Billing and Collection for FY 2022-23 (Final)

Sl.No	Consumer Category	Per unit Subsidy declared by the State Govt.	Total energy forecasted for the category	Total advance subsidy Amount raised to the State Government	Actual electricity supplied based on measurement through meters*	Actual subsidy required from the State Government	Difference in Advance and Actual subsidy	Reconciled subsidy bill raised to the State Government	Actual received
		(Rs./Kwh)	(MU)	(Rs. Cr)	(MU)	(Rs. Cr)	(Rs. Cr)	(Rs. Cr)	
	1	2	3	4=(2)*(3)	5	6=(2)*(5)	7=(6)-(4)	8	
	APCPDCL								
I	LT Cat -I: Domestic:								
	0-30	1.47	1362.30	199.79	1260.46	184.86	-14.94	184.86	
	31-75	1.10	1823.92	200.63	1464.90	161.14	-39.49	161.14	
	76-125	0.26	1422.64	36.99	1033.90	26.88	-10.11	26.88	
	Total		**4608.86**	**437.41**	**3759.25**	**372.88**	**-64.54**	**372.88**	372.88
V	**LT Cat-V : Agricultural & Related**								
	(A): Agriculture								
	(i) Corporate farmers	3.22	5.08	1.64	2.29	0.74	-0.90	0.74	
	(ii) Non-Corporate Farmers	6.88	2070.58	1423.56	1914.49	1316.25	-107.31	1316.25	
	(iii) Salt farming	4.34	1.53	0.66	1.72	0.75	0.09	0.75	
	(iv) sugar crushing	6.97	2.93	2.04	0.00	0.00	-2.04	0.00	
	(v) Rural Horticulture	6.65	5.35	3.56	3.87	2.57	-0.98	2.57	
	(vi) Floriculture in Green House	0.00	0.00	0.00	0.02	0.00	0.00	0.00	
	(B) Aquaculture and Animal Husbandry	2.88	1127.33	324.54	248.41	71.51	-253.03	71.51	
	(D) Agro Based Cottage Industries upto 10HP	3.19	12.13	3.87	0.59	0.19	-3.68	0.19	
	(E) Govt LI schemes	0.55	9.96	0.55	3.48	0.19	-0.36	0.19	
	(F) True Down		0.00	-45.68					
	Total		**3234.87**	**1714.74**	**2174.86**	**1392.20**	**-322.54**	**1392.20**	**1440.34**
	Tariff Concessions								
V	Aquaculture	2.35	1127.33	295.38	248.41	58.64	-236.74	58.64	190.90
I	Subsidies to SC Domestic Consumers upto 200 units p.m	Up to 30 units Rs.1.90 per unit 31to 75 units Rs.3.00 per unit 76 to 125 Rs.4.50 per unit 126 to 225 Rs.6.00 per unit	499.59	188.13	471.62	187.25	-0.89	187.25	187.25
I	Subsidies to ST Domestic Consumers upto 200 units p.m	Up to 30 units Rs.1.90 per unit 31to 75 units Rs.3.00 per unit 76 to 125 Rs.4.50 per unit 126 to 225 Rs.6.00 per unit	70.49	27.57	66.65	25.97	-1.61	25.97	25.97
	Others		3.60	0.81	3.21	0.97	0.16	0.97	0.97
	Tariff Concessions- Total		**1701.01**	**511.89**	**789.88**	**272.82**	**-239.07**	**272.82**	**405.08**
	Total Subsidy		**9544.75**	**2664.04**	**6723.99**	**2037.90**	**-626.15**	**2037.90**	**2218.30**

Note : 1. Net subsidy from Distribution business and Retail Supply Business forego FY2019-20 & FY2020-21 to be adjusted : -45.69 crs

2. 45.69crs is also reduced from Non-Corporate Farmers Actual Subsidy required from SG 466.92crs in Q4 = 421.23 Crs

GENERAL MANAGER (E&IA)
APCPDCL :: VIJAYAWADA

(Details of Feeder-wise losses)															
Period From APR 22 To MAR 23															
SI No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Autonagar SubSta	301111140101	11KV RTC COLONY	Urban	AMR	4.750	4.621	4.750	2.719	3.351	100%	
2	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Autonagar SubSta	301111140102	11KV AUTONAGAR	Urban	AMR	3.964	3.770	3.964	4.897	6.551	100%	
3	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Autonagar SubSta	301111140103	11KV Ramannapudi-I	INDL	AMR	2.676	2.534	2.676	5.288	18.834	100%	
4	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Autonagar SubSta	301111140104	11KV Ramannapudi-II	Mixed	AMR	1.100	0.973	1.100	11.535	16.556	100%	
5	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV GUDIVADA (PEDA	301111140201	11KV BANTUMILLI ROAD	Urban	AMR	9.204	8.807	9.204	4.310	5.500	100%	
6	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV GUDIVADA (PEDA	301111140202	11KV NTR COLONY	Urban	AMR	6.708	6.467	6.708	3.591	3.863	100%	
7	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV GUDIVADA (PEDA	301111140203	11KV MUNICIPAL OFFICI	Urban	AMR	9.221	8.868	9.221	3.831	3.865	100%	
8	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV GUDIVADA (PEDA	301111140204	11KV SATYANARAYANA	Urban	AMR	9.561	9.098	9.561	4.838	4.501	100%	
9	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV GUDIVADA (PEDA	301111140205	11KV Rajendra Nagar	Urban	AMR	4.581	4.340	4.581	5.265	5.826	100%	
10	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Gudiwada SubSta	301111240101	11KV Bethavolu	Urban	AMR	5.626	5.378	5.626	4.409	15.146	100%	
11	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Gudiwada SubSta	301111240102	11KV Town-I	Urban	AMR	5.714	5.489	5.714	3.940	4.888	100%	
12	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Gudiwada SubSta	301111240103	11KV Town-II	Urban	AMR	7.639	7.354	7.639	3.725	3.539	100%	
13	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Gudiwada SubSta	301111240104	11KV Town-III	Urban	AMR	6.646	6.314	6.646	5.003	3.577	100%	
14	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Gudiwada SubSta	301111240105	11 KV HT feeder	Urban	AMR	4.443	4.207	4.443	5.306	6.711	100%	
15	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Gudiwada SubSta	301111240106	11KV Janardanapuram	Mixed	AMR	1.202	1.157	1.202	3.740	2.226	100%	
16	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV GDV(WaterWorks	301111240201	11KV water works HT	Urban	AMR	2.224	2.224	2.224	0.014	0.014	100%	
17	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV GDV(WaterWorks	301111240202	11KV Pedayeruka padu	Urban	AMR	10.848	10.414	10.848	3.996	4.079	100%	
18	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV GDV(WaterWorks	301111240203	11KV Mandapadu	Urban	AMR	2.359	2.277	2.359	3.482	1.904	100%	
19	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV GDV(WaterWorks	301111240204	11KV Thattivarru	Mixed	AMR	0.849	0.809	0.849	4.733	23.583	100%	
20	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Rudrapaka SubSta	301111340101	11KV Polukonda	Rural	AMR	6.013	5.828	6.013	3.069	4.360	100%	
21	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Rudrapaka SubSta	301111340102	11KV Rudrapaka	Rural	AMR	8.097	8.304	8.097	-2.562	-2.522	100%	
22	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Rudrapaka SubSta	301111340103	11KV Unikili	Rural	AMR	11.009	10.885	11.009	1.132	3.145	100%	
23	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Rudrapaka SubSta	301111340104	11KV GAJULAPADU FEEI	Rural	AMR	11.372	10.733	11.372	5.624	6.225	100%	
24	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11 KV Nandivada Sub-S	301111340201	11KV Nandivada	Rural	AMR	20.194	19.691	20.194	2.487	3.098	100%	
25	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11 KV Nandivada Sub-S	301111340202	11KV Puttagunta	Mixed	AMR	4.994	4.993	4.994	0.010	7.837	100%	
26	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11 KV Nandivada Sub-S	301111340203	11KV Tamirisha	Rural	AMR	18.935	18.535	18.935	2.114	3.978	100%	
27	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11 KV Nandivada Sub-S	301111340204	11KV Tummalapalli	Rural	AMR	18.906	18.132	18.906	4.096	8.948	100%	
28	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Pedavirivada Sub	301111340301	11KV Ramapuram	Rural	AMR	14.065	13.796	14.065	1.915	6.285	100%	
29	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Pedavirivada Sub	301111340302	11KV L N Puram	Rural	AMR	8.872	8.269	8.872	6.787	11.625	100%	
30	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Pedavirivada Sub	301111340303	11KV Pedavirivada	Rural	AMR	11.476	11.087	11.476	3.393	5.405	100%	
31	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Dondapadu SubSt	301111440101	11KV Industrial	INDL	AMR	6.526	6.216	6.526	4.761	10.337	100%	
32	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Dondapadu SubSt	301111440102	11KV Town - IV Valivarth	INDL	AMR	17.120	16.190	17.120	5.436	11.598	100%	
33	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Dondapadu SubSt	301111440103	11KV Town-V	Urban	AMR	4.994	4.825	4.994	3.375	3.936	100%	
34	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV Dondapadu SubSt	301111440104	11KV Moturu	Mixed	AMR	2.705	2.547	2.705	5.825	9.006	100%	
35	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Kothapalli SubSta	301122140101	11 KV Devapudi	Rural	AMR	10.880	9.893	10.880	9.074	13.080	100%	
36	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Kothapalli SubSta	301122140102	11KV Narayanapuram	Rural	AMR	10.735	9.970	10.735	7.119	11.668	100%	
37	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Kothapalli SubSta	301122140103	11KV Pedagonnuru	Rural	AMR	6.926	6.583	6.926	4.960	10.297	100%	
38	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Kothapalli SubSta	301122140104	11kv Kothapalli	Rural	AMR	8.279	7.922	8.279	4.311	7.118	100%	
39	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Mudinepalli SubS	301122140201	11KV Mudinepalli	Rural	AMR	7.993	7.669	7.993	4.059	7.912	100%	
40	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Mudinepalli SubS	301122140202	11KV Vadali	Mixed	AMR	3.847	3.687	3.847	4.140	7.923	100%	
41	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Mudinepalli SubS	301122140203	11KV Dakaram	Mixed	AMR	1.542	1.504	1.542	2.432	16.359	100%	
42	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Mudinepalli SubS	301122140204	11KV Guraja	Rural	AMR	2.785	2.602	2.785	6.578	10.952	100%	
43	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Mudinepalli SubS	301122140205	11KV ANNAVARAM	Rural	AMR	4.766	4.524	4.766	5.072	8.446	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
44	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Singarayapalem S	301122140301	11KV Singarayapalem	Rural	AMR	4.635	4.427	4.635	4.468	5.626	100%	
45	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Singarayapalem S	301122140302	11KV Chevuru	Rural	AMR	4.402	4.319	4.402	1.879	3.012	100%	
46	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Singarayapalem S	301122140303	11KV Indstrial (Or) Inam	Rural	AMR	6.409	6.120	6.409	4.507	7.222	100%	
47	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Chigurukota SS	301122140401	11KV Chigurukota	Rural	AMR	8.027	7.657	8.027	4.610	4.857	100%	
48	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Chigurukota SS	301122140402	11KV Pedakamanapudi	Rural	AMR	9.810	9.389	9.810	4.287	5.256	100%	
49	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Chigurukota SS	301122140403	11KV Bomminampadu	Rural	AMR	13.589	12.706	13.589	6.499	6.408	100%	
50	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV PEDAPALAPARRU	301122140501	11KV PEDAPALAPARRU	Rural	AMR	1.393	1.279	1.393	8.184	20.133	100%	
51	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV PEDAPALAPARRU	301122140502	11KV PERURU	Rural	AMR	7.764	7.296	7.764	6.035	12.551	100%	
52	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV PEDAPALAPARRU	301122140503	11KV KODURU	Rural	AMR	2.555	2.338	2.555	8.507	11.931	100%	
53	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV PEDAPALAPARRU	301122140504	11KV CHOWTAPALLI	Rural	AMR	3.189	2.886	3.189	9.521	13.055	100%	
54	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV kowthavaram Sub	301122240101	11KV Gudlavalleru	Rural	AMR	11.691	10.789	11.691	7.716	10.478	100%	
55	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV kowthavaram Sub	301122240102	11KV Vadalamannadu+ I	Rural	AMR	4.225	4.029	4.225	4.636	6.431	100%	
56	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV kowthavaram Sub	301122240103	11KV Angaluru	Mixed	AMR	4.070	3.897	4.070	4.247	14.238	100%	
57	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV kowthavaram Sub	301122240104	11KV Dokiparru	Rural	AMR	3.297	3.101	3.297	5.965	6.348	100%	
58	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV kowthavaram Sub	301122240105	11KV Vinnakota	Mixed	AMR	2.443	2.304	2.443	5.696	16.906	100%	
59	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Pedaparupudi Sul	301122340101	11KV Pedaparupudi	Rural	AMR	2.827	2.672	2.827	5.467	13.303	100%	
60	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Pedaparupudi Sul	301122340102	11KV ZEMIDINTAKURU	Mixed	AMR	1.905	1.782	1.905	6.434	34.076	100%	
61	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Pedaparupudi Sul	301122340103	11KV Dosapadu	Mixed	AMR	3.318	3.076	3.318	7.282	25.509	100%	
62	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Pedaparupudi Sul	301122340104	11KV Elamarru	Mixed	AMR	2.217	2.050	2.217	7.528	40.298	100%	
63	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV VENTRAPRAGADA	301122340201	11KV PAMULAPADU	Mixed	AMR	1.324	1.285	1.324	2.931	32.677	100%	
64	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV VENTRAPRAGADA	301122340202	11KV VANAPAMULA	Mixed	AMR	0.121	0.114	0.121	5.991	0.441	100%	
65	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV VENTRAPRAGADA	301122340203	11KV VENTRAPRAGADA	Mixed	AMR	2.627	2.451	2.627	6.696	12.359	100%	
66	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Arugolana SubSta	301131140101	11KV Ogirala	Mixed	AMR	1.917	1.706	1.917	10.993	12.318	100%	
67	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Arugolana SubSta	301131140102	11KV ARUGOLANU	Rural	AMR	4.701	3.969	4.701	15.589	17.462	100%	
68	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Arugolana SubSta	301131140103	11KV Fish Tank	Rural	AMR	13.830	12.653	13.830	8.514	10.608	100%	
69	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Arugolana SubSta	301131140104	11KV Mulpuri	Rural	AMR	7.941	7.010	7.941	11.726	14.050	100%	
70	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Hanumanjunctior	301131140201	11KV Indl Feeder	INDL	AMR	2.963	2.914	2.963	1.648	5.015	100%	
71	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Hanumanjunctior	301131140202	11KV BAPULAPADU -I	Rural	AMR	8.585	8.022	8.585	6.564	19.073	100%	
72	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Hanumanjunctior	301131140203	11KV SN Palem Feeder	Mixed	AMR	1.869	1.764	1.869	5.614	3.816	100%	
73	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Hanumanjunctior	301131140204	11KV HanumanJunction	Agricultura	AMR	1.080	0.985	1.080	8.867	78.904	100%	
74	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Hanumanjunctior	301131140205	11KV BAPULAPADU -II	Rural	AMR	6.811	6.132	6.811	9.964	22.715	100%	
75	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Hanumanjunctior	301131140206	11KV Kanumolu Feeder	Mixed	AMR	2.866	2.565	2.866	10.496	25.846	100%	
76	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Remalle SubStatic	301131140301	11KV Remalle town	Mixed	AMR	3.670	3.383	3.670	7.805	45.166	100%	
77	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Remalle SubStatic	301131140302	11KV Remalle Rural	Agricultura	AMR	4.692	4.190	4.692	10.694	10.733	100%	
78	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Remalle SubStatic	301131140303	11KV MALLAVALLI	Mixed	AMR	5.583	5.026	5.583	9.976	18.513	100%	
79	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Remalle SubStatic	301131140304	11KV Industrial feeder	INDL	AMR	0.782	0.772	0.782	1.316	50.807	100%	
80	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11 KV Madicherla Sub-S	301131140401	11KV Madicherla Water	Rural	AMR	1.717	1.608	1.717	6.331	54.096	100%	
81	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11 KV Madicherla Sub-S	301131140402	11KV MADICHERLA AGL	Agricultura	AMR	1.894	1.714	1.894	9.510	93.599	100%	
82	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11 KV Madicherla Sub-S	301131140403	11KV MADICHERLA VILL	Agricultura	AMR	4.303	3.882	4.303	9.798	60.088	100%	
83	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11 KV Madicherla Sub-S	301131140405	11KV MADICHERLA RUR	Agricultura	AMR	1.214	1.101	1.214	9.333	92.209	100%	
84	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Kothapalli SS	301131140501	11KV Kothapalli	Agricultura	AMR	3.646	3.356	3.646	7.960	16.170	100%	
85	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Kothapalli SS	301131140502	11KV Billanapalli	Agricultura	AMR	3.520	3.179	3.520	9.689	83.696	100%	
86	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Kothapalli SS	301131140503	11KV Asramam	Agricultura	AMR	3.686	3.391	3.686	8.009	40.530	100%	
87	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Bommuluru SS	301131140601	11KV BOMMULURU	Rural	AMR	8.549	7.820	8.549	8.526	17.558	100%	
88	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Bommuluru SS	301131140602	11KV Bommuluru rural	Mixed	AMR	4.456	4.105	4.456	7.869	19.214	100%	

SI No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
89	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Veeravalli SubSta	301131240101	11KV Ampapuram Indl	INDL	AMR	5.126	4.627	5.126	9.735	15.547	100%	
90	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Veeravalli SubSta	301131240102	11KV Veeravalli Indl	INDL	AMR	1.995	1.892	1.995	5.152	10.010	100%	
91	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Veeravalli SubSta	301131240103	11KV Ampapuram Rural	Mixed	AMR	2.541	2.328	2.541	8.386	9.765	100%	
92	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Veeravalli SubSta	301131240104	11KV Veeravalli rural	Mixed	AMR	7.901	7.098	7.901	10.167	25.379	100%	
93	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Rangannagudem	301131240201	11KV Rangannagudem R	Mixed	AMR	3.181	2.871	3.181	9.765	43.874	100%	
94	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Rangannagudem	301131240202	11KV SBN Puram	Agricultura	AMR	2.334	2.074	2.334	11.150	65.793	100%	
95	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Rangannagudem	301131240203	11KV R G GudemSS HQ F	Rural	AMR	6.562	6.251	6.562	4.736	4.687	100%	
96	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Veleru SS	301131240301	11KV Veleru Indl	INDL	AMR	1.844	1.668	1.844	9.579	34.135	100%	
97	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Veleru SS	301131240302	11KV veleru town	INDL	AMR	4.631	4.238	4.631	8.481	19.101	100%	
98	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Veleru SS	301131240303	11KV veleru rural	Mixed	AMR	4.352	3.939	4.352	9.499	38.153	100%	
99	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV MALLAVALLI SS	301131240401	11KV ASHOK LEYLAND	INDL	AMR	1.479	1.469	1.479	0.724	0.632	100%	
100	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV MALLAVALLI SS	301131240402	11KV SURYA HOME FOO	INDL	AMR	0.056	0.054	0.056	4.578	4.578	100%	
101	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV MALLAVALLI SS	301131240403	11KV MALLAVALLI AGL	Agricultura	AMR	1.823	1.618	1.823	11.269	18.457	100%	
102	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV MALLAVALLI SS	301131240404	11KV V C NUTRIVET FEE	INDL	AMR	0.863	0.813	0.863	5.782	9.852	100%	
103	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Nandamuru SubS	301131340101	11KV Indupalli	Mixed	AMR	2.975	2.698	2.975	9.305	16.466	100%	
104	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Nandamuru SubS	301131340102	11KV Manikonda	Mixed	AMR	4.887	4.359	4.887	10.798	18.768	100%	
105	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Nandamuru SubS	301131340103	11KV Nandamuru	Rural	AMR	1.511	1.364	1.511	9.695	12.905	100%	
106	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Nandamuru SubS	301131340104	11KV Chikinala	Mixed	AMR	2.573	2.309	2.573	10.277	25.878	100%	
107	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Unguturu SubSta	301131340201	11KV Unguturu	Rural	AMR	2.887	2.761	2.887	4.345	8.463	100%	
108	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Unguturu SubSta	301131340202	11KV Tarigoppula	Mixed	AMR	2.781	2.538	2.781	8.737	24.641	100%	
109	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Unguturu SubSta	301131340203	11KV Lankapalli	Mixed	AMR	2.730	2.479	2.730	9.198	26.657	100%	
110	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Pedaoutpalli Sub	301131440101	11KV Industrial Feeder	INDL	AMR	3.182	3.034	3.182	4.639	0.303	100%	
111	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Pedaoutpalli Sub	301131440102	11KV PO palli	Rural	AMR	5.155	4.721	5.155	8.418	23.007	100%	
112	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Pedaoutpalli Sub	301131440103	11KV P O PALLI AGL	Agricultura	AMR	1.740	1.599	1.740	8.089	10.401	100%	
113	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Pedaoutpalli Sub	301131440104	11KV HITECH	INDL	AMR	2.307	2.288	2.307	0.842	0.879	100%	
114	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Seetarampuram (	301131440201	11KV Telaprolu Rural	Mixed	AMR	3.634	3.447	3.634	5.149	53.789	100%	
115	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Seetarampuram (	301131440202	11KV Telaprolu MHQ	Rural	AMR	7.930	7.459	7.930	5.940	13.863	100%	
116	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV ATKURU SUB STA	301131440301	11KV Atkur town	Rural	AMR	3.592	3.226	3.592	10.181	23.629	100%	
117	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV ATKURU SUB STA	301131440302	11KV Atkur agl	Mixed	AMR	3.445	3.091	3.445	10.296	44.093	100%	
118	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV ATKURU SUB STA	301131440303	11KV SwarnaBharathi tr	INDL	AMR	0.118	0.118	0.118	0.711	0.713	100%	
119	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Kaikalur SubStatic	301141140101	11KV NGO s colony	Rural	AMR	6.788	6.475	6.788	4.612	7.761	100%	
120	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Kaikalur SubStatic	301141140102	11KV Bypass Road	Rural	AMR	7.056	6.827	7.056	3.248	6.420	100%	
121	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Kaikalur SubStatic	301141140103	11KV BHIRAVAPATNAM	Rural	AMR	10.231	9.832	10.231	3.900	3.427	100%	
122	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Kaikalur SubStatic	301141140104	11KV GOPAVARAM	Rural	AMR	14.725	14.050	14.725	4.585	6.392	100%	
123	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Kaikalur SubStatic	301141140105	11KV Atapaka	Rural	AMR	10.409	9.973	10.409	4.189	10.640	100%	
124	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Kaikalur SubStatic	301141140106	11KV Syamalamba Temp	Rural	AMR	8.377	7.783	8.377	7.095	10.452	100%	
125	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Kaikalur SubStatic	301141140107	11KV BRUNDAVANAM	Rural	AMR	0.160	0.150	0.160	6.019	23.725	100%	
126	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Kaikalur SubStatic	301141140108	11KV CHAVALIPADU	Rural	AMR	0.771	0.740	0.771	3.980	13.797	100%	
127	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Kalidindi SubStati	301141240101	11KV Kalidindi	Rural	AMR	7.383	7.122	7.383	3.533	6.866	100%	
128	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Kalidindi SubStati	301141240102	11KV Venkatapuram	Rural	AMR	15.028	14.957	15.028	0.470	2.825	100%	
129	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Kalidindi SubStati	301141240103	11KV Gollagudam	Rural	AMR	9.759	8.583	9.759	12.056	12.281	100%	
130	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Kalidindi SubStati	301141240104	11KV Guravaipalem	Rural	AMR	12.172	10.197	12.172	16.226	16.979	100%	
131	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Kalidindi SubStati	301141240105	11KV KONDANGI	Rural	AMR	11.482	10.907	11.482	5.010	17.132	100%	
132	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11 KV Moolanka Sub-St	301141240201	11KV Amaravathi	Rural	AMR	9.114	8.468	9.114	7.088	8.988	100%	
133	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11 KV Moolanka Sub-St	301141240202	11KV Mulalanka	Rural	AMR	8.827	8.066	8.827	8.616	13.122	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
134	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11 KV Moolanka Sub-St	301141240203	11KV PUTLAPUDI	Rural	AMR	6.859	6.169	6.859	10.066	10.479	100%	
135	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Korukollu SS	301141240301	11KV KORUKOLLU	Rural	AMR	6.617	6.449	6.617	2.528	7.580	100%	
136	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Korukollu SS	301141240302	11KV SRP Agraharam	Rural	AMR	12.582	12.138	12.582	3.534	4.957	100%	
137	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Korukollu SS	301141240303	11KV Tamarakollu	Rural	AMR	8.176	7.977	8.176	2.426	4.596	100%	
138	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Korukollu SS	301141240304	11KV Chaitanyapuram	Rural	AMR	11.736	10.629	11.736	9.436	11.314	100%	
139	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV POTHUMARRU SS	301141240401	11KV Pothumarru	Rural	AMR	3.417	3.369	3.417	1.405	1.965	100%	
140	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV POTHUMARRU SS	301141240402	11KV Sunnampudi	Rural	AMR	8.887	8.227	8.887	7.430	8.894	100%	
141	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV POTHUMARRU SS	301141240403	11KV Tadinada	Rural	AMR	10.537	9.699	10.537	7.957	10.085	100%	
142	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV POTHUMARRU SS	301141240404	11KV KONDURU	Rural	AMR	12.438	12.086	12.438	2.829	5.237	100%	
143	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Pallewada SubSta	301141340201	11KV Industrial	Rural	AMR	16.256	15.283	16.256	5.985	8.204	100%	
144	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Pallewada SubSta	301141340202	11KV Kolletikota	Rural	AMR	11.752	11.323	11.752	3.651	6.902	100%	
145	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV Pallewada SubSta	301141340203	11KV GONEPADU	Rural	AMR	12.835	13.143	12.835	-2.397	2.868	100%	
146	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11 KV Perikagudem(Ma	301141340301	11KV Korlapadu	Rural	AMR	12.251	11.728	12.251	4.266	7.182	100%	
147	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11 KV Perikagudem(Ma	301141340302	11KV M T padu	Rural	AMR	11.153	11.128	11.153	0.228	1.093	100%	
148	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11 KV Perikagudem(Ma	301141340303	11KV Kanukollu	Rural	AMR	8.922	8.636	8.922	3.208	6.860	100%	
149	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11 KV Perikagudem(Ma	301141340304	11KV Vics	Rural	AMR	10.614	9.623	10.614	9.336	8.782	100%	
150	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11 KV Perikagudem(Ma	301141340305	11KV Mandavalli MHQ	Rural	AMR	6.168	5.915	6.168	4.103	11.652	100%	
151	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV PULAPARRU SS	301141340401	11KV Chinthapadu	Rural	AMR	7.278	6.830	7.278	6.155	6.684	100%	
152	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV PULAPARRU SS	301141340402	11KV Pulaparru	Rural	AMR	7.266	6.864	7.266	5.536	5.101	100%	
153	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV PULAPARRU SS	301141340403	11KV Nutchimilli	Rural	AMR	8.508	8.085	8.508	4.977	8.580	100%	
154	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV PUTTA CHERUVU	301141340501	11KV SUBBARAO PETA	Rural	AMR	6.918	6.568	6.918	5.066	9.465	100%	
155	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV PUTTA CHERUVU	301141340502	11KV MODUGUMUDI	Rural	AMR	7.422	7.045	7.422	5.090	5.749	100%	
156	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11KV PUTTA CHERUVU	301141340503	11KV PUTLACHERUVU	Rural	AMR	10.109	9.539	10.109	5.644	7.297	100%	
157	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11 KV Varahapatnam S	301141440101	11KV Varahapatnam	Rural	AMR	11.152	10.523	11.152	5.639	7.440	100%	
158	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11 KV Varahapatnam S	301141440102	11KV seethanapalli	Rural	AMR	9.043	8.779	9.043	2.923	6.345	100%	
159	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11 KV Varahapatnam S	301141440103	11KV Someswaram	Rural	AMR	11.965	11.099	11.965	7.233	7.976	100%	
160	VIJAYAWADA	GUDIVADA	KAIKALURU	33/11 KV Varahapatnam S	301141440104	11KV VADARLAPADU	Rural	AMR	13.729	12.767	13.729	7.006	7.672	100%	
161	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV Saradanagar SubS	301211140101	11KV Inuguduru	Urban	AMR	11.713	11.245	11.713	4.001	3.876	100%	
162	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Saradanagar SubS	301211140102	11KV RAITUMITRA FEED	Rural	AMR	8.360	7.941	8.360	5.012	11.846	100%	
163	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Saradanagar SubS	301211140103	11KV RUDRAVARAM	Rural	AMR	4.268	4.022	4.268	5.774	11.030	100%	
164	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Saradanagar SubS	301211140104	11KV GUNDUPALEM	Rural	AMR	5.545	5.269	5.545	4.985	4.169	100%	
165	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV Inugudurupeta Su	301211140201	11KV VAREGUDEM	Urban	AMR	0.601	0.486	0.601	19.119	21.133	100%	
166	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV Inugudurupeta Su	301211140202	11KV NEW INAGUDURU	Urban	AMR	0.922	0.900	0.922	2.317	2.551	100%	
167	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV Inugudurupeta Su	301211140203	11KV CHINTHAGUNTA P	Urban	AMR	0.977	0.939	0.977	3.845	3.632	100%	
168	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MTM(H.B) SubSta	301211240101	11KV Industrial Estate -1	Urban	AMR	6.118	5.693	6.118	6.947	8.601	100%	
169	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MTM(H.B) SubSta	301211240102	11KV Radar	Urban	AMR	3.292	3.116	3.292	5.366	7.171	100%	
170	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MTM(H.B) SubSta	301211240103	11KV Ring-II	Urban	AMR	1.582	1.491	1.582	5.773	7.029	100%	
171	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MTM(H.B) SubSta	301211240104	11KV MTM Town-1	Urban	AMR	1.871	1.747	1.871	6.626	7.127	100%	
172	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MTM(H.B) SubSta	301211240106	11KV MTM Town-2	Urban	AMR	4.297	4.026	4.297	6.300	8.745	100%	
173	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV Ullingapalem Sub	301211240201	11KV Bandarkota	Urban	AMR	6.367	5.946	6.367	6.613	8.075	100%	
174	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV Ullingapalem Sub	301211240202	11KV Fort Road	Urban	AMR	7.457	7.121	7.457	4.508	6.714	100%	
175	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV Ullingapalem Sub	301211240203	11KV Jalalpeta	Urban	AMR	7.143	6.696	7.143	6.244	7.899	100%	
176	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV Ullingapalem Sub	301211240204	11KV Malkapatnam	Urban	AMR	6.642	6.348	6.642	4.432	5.885	100%	
177	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MDO Office SS	301211240301	11KV EDEPALLI	Urban	AMR	3.134	2.900	3.134	7.464	9.336	100%	
178	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MDO Office SS	301211240302	11KV RTC	Urban	AMR	8.813	8.199	8.813	6.961	7.272	100%	

SI No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
179	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MDO Office SS	301211240303	11KV SHAKTHIGUDI	Urban	AMR	6.884	6.465	6.884	6.086	7.733	100%	
180	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MDO Office SS	301211240304	11KV Zilla court	Urban	AMR	3.682	3.395	3.682	7.810	7.941	100%	
181	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV Bhaskarapuram S	301211340101	11KV Karagraharam	Urban	AMR	6.853	6.417	6.853	6.371	7.865	100%	
182	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV Bhaskarapuram S	301211340102	11KV Govt Hospital	Urban	AMR	7.232	6.850	7.232	5.282	6.627	100%	
183	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV Bhaskarapuram S	301211340103	11KV Railway Station	Urban	AMR	8.061	7.707	8.061	4.394	5.645	100%	
184	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV Bhaskarapuram S	301211340104	11KV EXPRESS	Urban	AMR	1.403	1.344	1.403	4.168	85.695	100%	
185	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MACHILIPATNAM	301211340201	11KV FRENCH PETA	Urban	AMR	6.605	6.290	6.605	4.773	7.847	100%	
186	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MACHILIPATNAM	301211340202	11KV GANDHINAGAR	Urban	AMR	3.755	3.594	3.755	4.291	7.087	100%	
187	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MACHILIPATNAM	301211340203	11KV COLLEGE	Urban	AMR	1.807	1.733	1.807	4.104	5.513	100%	
188	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MACHILIPATNAM	301211340204	11KV Sarkar thota	Urban	AMR	1.708	1.652	1.708	3.302	4.045	100%	
189	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MACHILIPATNAM	301211340205	11KV PANDU RANGA	Urban	AMR	6.401	6.146	6.401	3.980	6.278	100%	
190	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Chinnapuram Sub	301211440101	11KV Chinnapuam	Rural	AMR	8.685	8.240	8.685	5.127	12.326	100%	
191	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Chinnapuram Sub	301211440102	11KV Vadagoyyi	Rural	AMR	0.890	0.819	0.890	7.958	8.030	100%	
192	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Chinnapuram Sub	301211440103	11KV Pedayadara	Rural	AMR	9.405	8.795	9.405	6.484	11.682	100%	
193	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Jewellery Park Su	301211440201	11KV Jewellary Park	Urban	AMR	2.731	2.595	2.731	4.965	8.543	100%	
194	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Jewellery Park Su	301211440202	11KV Industrial Estate-II	Urban	AMR	2.759	2.568	2.759	6.930	5.044	100%	
195	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Jewellery Park Su	301211440203	11KV Gopavanipalem	Urban	AMR	5.420	5.011	5.420	7.560	12.668	100%	
196	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Jewellery Park Su	301211440204	11KV AUTO NAGAR	Urban	AMR	0.570	0.559	0.570	1.930	1.930	100%	
197	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Manginapudi Bea	301211440301	11KV Talapalem(Town)	Rural	AMR	6.617	6.252	6.617	5.513	9.422	100%	
198	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Manginapudi Bea	301211440302	11KV KANURU	Rural	AMR	1.975	1.849	1.975	6.377	15.272	100%	
199	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Manginapudi Bea	301211440303	11KV Gokavaram	Rural	AMR	5.228	4.962	5.228	5.080	7.453	100%	
200	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Manginapudi Bea	301211440304	11KV LIGHT HOUSE FEEI	Rural	AMR	0.049	0.047	0.049	4.251	4.738	100%	
201	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MTM Old Power I	301211440401	11KV North	Urban	AMR	7.209	6.822	7.209	5.370	6.928	100%	
202	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MTM Old Power I	301211440402	11KV Sivaganga	Urban	AMR	7.446	7.019	7.446	5.738	7.175	100%	
203	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MTM Old Power I	301211440403	11KV Water works	Urban	AMR	1.851	1.742	1.851	5.905	5.905	100%	
204	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MTM Old Power I	301211440404	11KV Arisepalli	Urban	AMR	6.127	5.690	6.127	7.126	33.508	100%	
205	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MTM Old Power I	301211440405	11KV South	Urban	AMR	6.770	6.349	6.770	6.218	7.122	100%	
206	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MTM Old Power I	301211440406	11KV Sulthanagar	Urban	AMR	4.186	3.958	4.186	5.446	7.184	100%	
207	VIJAYAWADA	MACHILIPATNAM	MACHILIPATNAM	33/11KV MTM Old Power I	301211440407	11KV RING-1	Urban	AMR	6.753	6.389	6.753	5.403	6.894	100%	
208	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Kona SS	301211440501	11KV NEW KONA	Rural	AMR	4.566	4.331	4.566	5.131	12.039	100%	
209	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Kona SS	301211440502	11KV POLATITIPPA	Rural	AMR	8.624	8.088	8.624	6.212	6.572	100%	
210	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Kona SS	301211440503	11KV BHARATSALT	Rural	AMR	4.200	3.917	4.200	6.756	7.141	100%	
211	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Kona SS	301211440504	11KV NELITIPPA	Rural	AMR	8.351	7.774	8.351	6.906	2.939	100%	
212	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV VADAPALEM SS	301211440601	11KV VADAPALEM	Rural	AMR	3.745	3.476	3.745	7.183	9.464	100%	
213	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV VADAPALEM SS	301211440602	11KV V D PURAM	Rural	AMR	5.658	5.261	5.658	7.024	16.178	100%	
214	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV VADAPALEM SS	301211440603	11KV KPT PALEM	Rural	AMR	7.709	7.115	7.709	7.712	10.883	100%	
215	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV PEDAPATNAM SS	301211440701	11KV PEDAPATNAM FEE	Rural	AMR	8.724	8.049	8.724	7.737	8.514	100%	
216	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV PEDAPATNAM SS	301211440702	11KV PARVATHIPURAM	Rural	AMR	4.615	4.243	4.615	8.066	8.398	100%	
217	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV PEDAPATNAM SS	301211440703	11KV NARAYANAPURAM	Rural	AMR	4.020	3.732	4.020	7.173	11.979	100%	
218	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV PEDAPATNAM SS	301211440704	11KV KOTTURU	Rural	AMR	0.345	0.323	0.345	6.435	9.555	100%	
219	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Tarakaturu SubSt	301221140101	11KV Guduru Rural	Rural	AMR	8.038	7.489	8.038	6.833	9.464	100%	
220	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Tarakaturu SubSt	301221140102	11KV Tarakaturu Rural	Rural	AMR	0.822	0.772	0.822	6.117	21.118	100%	
221	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Tarakaturu SubSt	301221140103	11KV INDUSTRIAL WATE	Rural	AMR	4.436	4.151	4.436	6.445	62.866	100%	
222	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Mallavollu SS	301221140201	11KV Mallavollu	Rural	AMR	2.809	2.664	2.809	5.168	7.431	100%	
223	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Mallavollu SS	301221140202	11KV Rayavaram	Mixed	AMR	2.083	1.991	2.083	4.439	17.323	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
224	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV Mallavollu SS	301221140203	11KV Polavaram	Mixed	AMR	2.102	1.983	2.102	5.621	15.896	100%	
225	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Chevendra SubSta	301221240101	11KV Chevendra	Rural	AMR	0.588	0.550	0.588	6.522	12.848	100%	
226	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Chevendra SubSta	301221240102	11KV Chennuru	Rural	AMR	11.842	10.712	11.842	9.548	13.973	100%	
227	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Chevendra SubSta	301221240103	11KV G V Gunta	Rural	AMR	1.437	1.323	1.437	7.880	11.927	100%	
228	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Pedana SubStatio	301221240201	11KV Pedana Town1	Urban	AMR	2.314	2.194	2.314	5.148	5.503	100%	
229	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Pedana SubStatio	301221240202	11KV Pedana Town2	Urban	AMR	0.581	0.542	0.581	6.796	6.430	100%	
230	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Pedana SubStatio	301221240203	11KV Pedana Town 3	Urban	AMR	5.214	4.865	5.214	6.698	7.685	100%	
231	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Pedana SubStatio	301221240204	11KV Pedana Rural	Mixed	AMR	4.807	4.383	4.807	8.834	19.287	100%	
232	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Pedana SubStatio	301221240205	11KV Nandamuru	Mixed	AMR	4.527	4.217	4.527	6.842	12.344	100%	
233	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV BRHMAPURAM S	301221240301	11KV BRAHMAPURAM	Urban	AMR	3.354	3.153	3.354	5.992	7.744	100%	
234	VIJAYAWADA	MACHILIPATNAM	MTM_RURAL	33/11KV BRHMAPURAM S	301221240302	11KV KAPPALADODDI	Rural	AMR	2.596	2.477	2.596	4.582	30.272	100%	
235	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV BRHMAPURAM S	301221240303	11KV PEDANA WATER W	Urban	AMR	3.502	3.280	3.502	6.350	6.350	100%	
236	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Pedana Govt Hos	301221240401	11KV DADAGUNTA FEED	Urban	AMR	2.134	1.973	2.134	7.518	10.983	100%	
237	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Pedana Govt Hos	301221240402	11KV GUDIVADA ROAD I	Urban	AMR	2.495	2.305	2.495	7.618	8.409	100%	
238	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Pedana Govt Hos	301221240403	11 KV KONKEPUDI	Urban	AMR	0.253	0.245	0.253	3.324	7.125	100%	
239	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Pedana Govt Hos	301221240404	11KVINDUSTRIAL FEEDE	Rural	AMR	0.201	0.192	0.201	4.472	3.352	100%	
240	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Bantumilli SubSta	301221340101	11 KV PENDURU	Rural	AMR	3.739	3.430	3.739	8.258	15.449	100%	
241	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Bantumilli SubSta	301221340102	11KV BANTUMILLI RURA	Rural	AMR	20.554	19.197	20.554	6.601	9.977	100%	
242	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Bantumilli SubSta	301221340103	11 KV MALLAMPUDI	Rural	AMR	8.052	7.471	8.052	7.215	7.399	100%	
243	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Bantumilli SubSta	301221340104	11KV PEDATUMMIDI	Rural	AMR	13.380	12.466	13.380	6.834	6.833	100%	
244	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Bantumilli SubSta	301221340105	11KV BATUMILLI MHQ	Rural	AMR	5.779	5.477	5.779	5.224	9.726	100%	
245	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Arthamuru SS	301221340201	11KV ARTHAMURU	Rural	AMR	1.644	1.528	1.644	7.071	17.157	100%	
246	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Arthamuru SS	301221340202	11KV KORLAPADU	Rural	AMR	4.705	4.377	4.705	6.973	11.797	100%	
247	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Arthamuru SS	301221340204	11KV MUNJULURU	Rural	AMR	5.384	5.021	5.384	6.748	10.751	100%	
248	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Krutivennu SubSt	301221440101	11 KV GUDIDIBBA	Rural	AMR	4.772	4.581	4.772	4.002	19.877	100%	
249	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Krutivennu SubSt	301221440102	11KV GARISAPUDI	Rural	AMR	9.441	9.114	9.441	3.464	4.462	100%	
250	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Krutivennu SubSt	301221440103	11KV Cherukumilli	Rural	AMR	11.642	11.242	11.642	3.434	5.867	100%	
251	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Krutivennu SubSt	301221440104	11KV INDL KVN	Rural	AMR	0.908	0.893	0.908	1.642	8.330	100%	
252	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Krutivennu SubSt	301221440105	11KV KRUTHIVENNU MH	Rural	AMR	1.796	1.748	1.796	2.702	4.355	100%	
253	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Lakshmipuram (K	301221440201	11KV CHINA GOLLAPALE	Rural	AMR	12.211	11.765	12.211	3.645	6.132	100%	
254	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Lakshmipuram (K	301221440202	11KV U G TIPPA	Rural	AMR	11.285	10.857	11.285	3.798	3.207	100%	
255	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Lakshmipuram (K	301221440205	11KV LAXMIPURAM(KRV	Rural	AMR	8.819	8.488	8.819	3.751	3.568	100%	
256	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Lakshmipuram (K	301221440206	11KV CHANDALA FEEDEI	Rural	AMR	5.498	5.209	5.498	5.256	6.240	100%	
257	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Cherukumilli SS	301221440301	11KV new cherukumilli	Rural	AMR	0.542	0.514	0.542	5.046	9.006	100%	
258	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Cherukumilli SS	301221440302	11KV VALANKA FEEDER	Rural	AMR	0.805	0.775	0.805	3.734	4.767	100%	
259	VIJAYAWADA	MACHILIPATNAM	PEDANA	33/11KV Cherukumilli SS	301221440303	11KV PACHAPURAM FEE	Rural	AMR	0.083	0.081	0.083	2.515	7.083	100%	
260	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Jameegollepalli Su	301231140101	11KV Zemmigolvepalli	Rural	AMR	1.216	1.155	1.216	4.982	22.681	100%	
261	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Jameegollepalli Su	301231140102	11KV Zameegolvepalli ru	Mixed	AMR	0.037	0.036	0.037	3.103	12.933	100%	
262	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Jameegollepalli Su	301231140103	11KV Pedamaddali	Mixed	AMR	1.385	1.309	1.385	5.447	15.047	100%	
263	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Nimmaluru SubSt	301231140201	11KV Nimmaluru	Rural	AMR	0.645	0.615	0.645	4.713	28.604	100%	
264	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Nimmaluru SubSt	301231140202	11KV Korimerla	Mixed	AMR	0.916	0.872	0.916	4.814	15.407	100%	
265	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Nimmaluru SubSt	301231140203	11KV Nimmakuru	Mixed	AMR	3.628	3.452	3.628	4.827	17.528	100%	
266	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Pamarru SubStati	301231140301	11KV Pamarru Rural	Mixed	AMR	0.441	0.418	0.441	5.093	7.230	100%	
267	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Pamarru SubStati	301231140302	11KV Pamarru (Town1)	Rural	AMR	5.557	5.351	5.557	3.703	12.233	100%	
268	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Pamarru SubStati	301231140303	11kv Raparla feeder	Mixed	AMR	0.997	0.949	0.997	4.878	24.748	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
269	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Pamarru SubStati	301231140304	11KV Chaitanya Indl	INDL	AMR	10.608	10.240	10.608	3.472	4.558	100%	
270	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Pamarru SubStati	301231140305	11KV IMFL	INDL	AMR	2.971	2.841	2.971	4.362	12.334	100%	
271	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Pamarru SubStati	301231140306	11KV Pamarru Town-II	Rural	AMR	8.097	7.813	8.097	3.504	17.926	100%	
272	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Ayyanki SubStatio	301231140401	11KV AYYANKI	Rural	AMR	6.452	6.116	6.452	5.209	7.868	100%	
273	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Ayyanki SubStatio	301231140402	11KV Pedasanagallu	Mixed	AMR	2.318	2.173	2.318	6.260	15.592	100%	
274	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Ayyanki SubStatio	301231140403	11KV Chinamuthevi	Mixed	AMR	0.880	0.827	0.880	6.050	4.989	100%	
275	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Ayyanki SubStatio	301231140404	11KV RWS WORKS	Rural	AMR	0.520	0.493	0.520	5.132	5.132	100%	
276	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Kanumuru SS	301231140501	11KV Kanumuru Town	Rural	AMR	1.084	1.044	1.084	3.646	4.175	100%	
277	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Kanumuru SS	301231140502	11KV velpuru	Mixed	AMR	2.173	2.073	2.173	4.609	22.352	100%	
278	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV KOMARAVOLU SS	301231140601	11KV KOMARAVOLU TO	Rural	AMR	1.704	1.618	1.704	5.056	24.298	100%	
279	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV KOMARAVOLU SS	301231140602	11KV ADDADA RURAL	Mixed	AMR	1.876	1.783	1.876	4.947	29.571	100%	
280	VIJAYAWADA	GUDIVADA	GUDIVADA TOWN	33/11KV KOMARAVOLU SS	301231140603	11kv Gandhi ashramam	INDL	AMR	1.899	1.826	1.899	3.857	4.923	100%	
281	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Krishnapuram Sul	301231240101	11KV Krishnapuram	Rural	AMR	0.570	0.550	0.570	3.394	11.983	100%	
282	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Krishnapuram Sul	301231240102	11KV Srirangapuram	Mixed	AMR	3.766	3.544	3.766	5.902	23.401	100%	
283	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Krishnapuram Sul	301231240103	11KV Choragudi	Mixed	AMR	3.377	3.184	3.377	5.691	17.787	100%	
284	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Krishnapuram Sul	301231240104	11KV ILURU RWS	Rural	AMR	0.234	0.227	0.234	2.627	14.520	100%	
285	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Pamidimukkala Su	301231240201	11KV Aginiparru	Mixed	AMR	1.572	1.477	1.572	6.051	14.878	100%	
286	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Pamidimukkala Su	301231240202	11KV Veerankilock	Rural	AMR	2.319	2.195	2.319	5.350	11.869	100%	
287	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Pamidimukkala Su	301231240203	11KV Meduru	Mixed	AMR	4.122	3.822	4.122	7.276	22.040	100%	
288	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Pamidimukkala Su	301231240204	11KV KPL Puram	Mixed	AMR	5.065	4.767	5.065	5.880	15.272	100%	
289	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Kaja SubStation	301231340101	11KV Kaza(Town)	Rural	AMR	2.128	1.993	2.128	6.340	10.575	100%	
290	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Kaja SubStation	301231340102	11KV Kosuru	Mixed	AMR	3.512	3.290	3.512	6.321	10.499	100%	
291	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Kaja SubStation	301231340103	11KV Kaza(Rural)	Mixed	AMR	2.190	2.060	2.190	5.929	14.072	100%	
292	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Movva SubStation	301231340201	11KV Vemulamada	Mixed	AMR	1.521	1.410	1.521	7.301	24.529	100%	
293	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Movva SubStation	301231340202	11KV Kodali	Mixed	AMR	0.549	0.514	0.549	6.409	24.671	100%	
294	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Movva SubStation	301231340203	11KV MOVVA (TOWN)	Rural	AMR	2.875	2.711	2.875	5.696	8.717	100%	
295	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Movva SubStation	301231340204	11KV Kuchipudi	Mixed	AMR	0.731	0.693	0.731	5.253	13.022	100%	
296	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Donabanda SubSt	301311140101	11KV Chilukuru	Rural	AMR	2.131	2.066	2.131	3.052	41.128	100%	
297	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Donabanda SubSt	301311140102	11KV Kethanakonda	Rural	AMR	5.868	5.645	5.868	3.797	14.875	100%	
298	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Donabanda SubSt	301311140103	11KV Kachavaram	Rural	AMR	4.316	4.120	4.316	4.541	23.167	100%	
299	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Donabanda SubSt	301311140104	11KV KOTIKALAPAUDI A	Mixed	AMR	2.614	2.471	2.614	5.474	35.861	100%	
300	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Ibrahimpatnam S	301311140201	11KV Ramco	Urban	AMR	3.811	3.588	3.811	5.840	6.165	100%	
301	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Ibrahimpatnam S	301311140202	11KV VJA ROAD	Urban	AMR	6.065	5.762	6.065	5.009	4.832	100%	
302	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Ibrahimpatnam S	301311140203	11KV Thummalapalem	Rural	AMR	3.290	3.140	3.290	4.577	33.791	100%	
303	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Ibrahimpatnam S	301311140204	11kv FERRY	Urban	AMR	6.926	6.727	6.926	2.874	7.585	100%	
304	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Ibrahimpatnam S	301311140205	11KV East IBPM-I	Urban	AMR	4.681	4.427	4.681	5.442	5.203	100%	
305	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Ibrahimpatnam S	301311140206	11KV PAVITRA SANGAM	Urban	AMR	0.087	0.083	0.087	4.240	80.819	100%	
306	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Ibrahimpatnam S	301311140207	11KV West IBPM	Urban	AMR	3.493	3.428	3.493	1.840	3.422	100%	
307	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Ibrahimpatnam S	301311140208	11KV East IBPM-II	Urban	AMR	2.079	1.995	2.079	4.036	7.252	100%	
308	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Ibrahimpatnam S	301311140209	11KV WATER WORKS	Urban	AMR	2.834	2.738	2.834	3.373	99.197	100%	
309	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Moolapadu SS	301311140301	11KV Mulapadu	Rural	AMR	8.238	7.892	8.238	4.202	4.737	100%	
310	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Moolapadu SS	301311140302	11KV Lanka AGL	Mixed	AMR	1.685	1.613	1.685	4.240	29.966	100%	
311	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Moolapadu SS	301311140303	11KV MULAPADU LI SCH	Rural	AMR	0.096	0.091	0.096	4.927	99.620	100%	
312	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV GUNTUPALLI Sub	301311140401	11KV HIGHWAY	Rural	AMR	6.392	6.228	6.392	2.580	3.127	100%	
313	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV GUNTUPALLI Sub	301311140402	11KV GUNTUPALLI	Rural	AMR	6.098	5.904	6.098	3.179	3.756	100%	

SI No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
314	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV GUNTUPALLI Sub	301311140403	11KV WORK SHOP	Rural	AMR	3.566	3.473	3.566	2.603	2.564	100%	
315	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV GUNTUPALLI Sub	301311140404	11KV AGL GUNTUPALLI	Agricultura	AMR	0.082	0.075	0.082	7.483	70.872	100%	
316	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV G.Konduru SubSta	301311240101	11KV G Konduru	Rural	AMR	9.804	9.409	9.804	4.026	13.203	100%	
317	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV G.Konduru SubSta	301311240102	11KV G KONDURU RURA	Mixed	AMR	0.532	0.490	0.532	7.912	36.579	100%	
318	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV G.Konduru SubSta	301311240103	11KV GAIL seminar batte	INDL	AMR	2.869	2.773	2.869	3.327	2.686	100%	
319	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV G.Konduru SubSta	301311240104	11KV kavuluru	Mixed	AMR	3.252	3.110	3.252	4.361	6.938	100%	
320	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV G.Konduru SubSta	301311240105	11KV VELAGALERU	Mixed	AMR	6.255	5.913	6.255	5.464	19.951	100%	
321	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV G.Konduru SubSta	301311240106	11KV Tarakarama	Rural	AMR	0.214	0.205	0.214	4.346	31.722	100%	
322	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Kuntamukkala Su	301311240201	11KV Kuntamukkala Tow	Rural	AMR	4.180	3.992	4.180	4.499	62.343	100%	
323	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Kuntamukkala Su	301311240202	11KV Kuntamukkala Rur	Mixed	AMR	3.674	3.390	3.674	7.734	20.521	100%	
324	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Kuntamukkala Su	301311240203	11KVKoduru	Mixed	AMR	4.917	4.635	4.917	5.720	22.741	100%	
325	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Kuntamukkala Su	301311240204	11KV Venkata puram	Mixed	AMR	3.028	2.892	3.028	4.513	16.032	100%	
326	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Gaddamanugu SS	301311240301	11KV Duggiralapadu	Mixed	AMR	3.079	2.896	3.079	5.925	20.190	100%	
327	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Gaddamanugu SS	301311240302	11KV Loya	INDL	AMR	5.644	5.351	5.644	5.198	4.506	100%	
328	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Gaddamanugu SS	301311240303	11KV Gaddamanugu	Rural	AMR	1.098	1.046	1.098	4.797	4.797	100%	
329	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Gaddamanugu SS	301311240304	11KV CH Madhavaram	Mixed	AMR	3.859	3.641	3.859	5.658	18.360	100%	
330	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Mylavaram SubSt	301311340101	11KV Mylavaram	Rural	AMR	9.538	9.078	9.538	4.823	11.436	100%	
331	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Mylavaram SubSt	301311340102	11KV Mylavaram Rural	Mixed	AMR	2.559	2.386	2.559	6.752	38.942	100%	
332	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Mylavaram SubSt	301311340103	11KV Pondugala	Mixed	AMR	3.253	3.010	3.253	7.462	37.451	100%	
333	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Mylavaram SubSt	301311340104	11KVChandragudem	Mixed	AMR	4.861	4.548	4.861	6.441	29.273	100%	
334	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Mylavaram SubSt	301311340105	11KV Mylavaram Bypass	Rural	AMR	8.542	8.005	8.542	6.279	8.367	100%	
335	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Ganapavaram Sul	301311340201	11KV Nallachelu	Mixed	AMR	1.641	1.535	1.641	6.445	22.302	100%	
336	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Ganapavaram Sul	301311340202	11KV Ganapavaram R	Mixed	AMR	1.908	1.819	1.908	4.638	14.108	100%	
337	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Ganapavaram Sul	301311340203	11KV Ganapavaram T	Rural	AMR	3.797	3.487	3.797	8.166	16.519	100%	
338	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Pulluru SS	301311340301	11KV Morsumalli	Mixed	AMR	4.698	4.356	4.698	7.284	27.157	100%	
339	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Pulluru SS	301311340302	11KV Kothagudem	Mixed	AMR	3.138	2.924	3.138	6.816	40.067	100%	
340	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Pulluru SS	301311340303	11KV pulluru	Rural	AMR	0.242	0.228	0.242	5.651	5.651	100%	
341	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Pulluru SS	301311340304	11KV BADAVA FEEDER	Mixed	AMR	3.441	3.215	3.441	6.553	29.024	100%	
342	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kondapalli SubSta	301311440101	11KV Chemical Zone	Rural	AMR	13.984	13.608	13.984	2.694	8.490	100%	
343	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kondapalli SubSta	301311440102	11KV IDA	INDL	AMR	6.755	6.436	6.755	4.711	5.456	100%	
344	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kondapalli SubSta	301311440103	11KV Elaprolu	Rural	AMR	5.360	5.260	5.360	1.875	17.172	100%	
345	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kondapalli SubSta	301311440104	11KV Adavi Quary	INDL	AMR	6.650	6.501	6.650	2.242	0.971	100%	
346	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kondapalli SubSta	301311440105	11KV K K Steel	INDL	AMR	10.578	10.379	10.578	1.876	3.574	100%	
347	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kondapalli(APHM	301311440201	11KV Kotaiah Nagar	Rural	AMR	5.470	5.263	5.470	3.790	4.216	100%	
348	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kondapalli(APHM	301311440202	11KV KDPL KILLA ROAD	Urban	AMR	6.369	6.094	6.369	4.316	4.316	100%	
349	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kondapalli(APHM	301311440203	11KV RCM Colony	Urban	AMR	5.276	5.006	5.276	5.109	6.369	100%	
350	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kondapalli(APHM	301311440204	11KV MARKET FEEDER	Rural	AMR	3.466	3.299	3.466	4.813	4.371	100%	
351	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Velvadam SS	301311540101	11KV Velvadam Rural	Mixed	AMR	2.798	2.571	2.798	8.126	39.881	100%	
352	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Velvadam SS	301311540102	11KV Tholukodu	Mixed	AMR	1.068	0.990	1.068	7.303	47.182	100%	
353	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Velvadam SS	301311540103	11KV Velvadam Town	Rural	AMR	3.415	3.179	3.415	6.918	26.415	100%	
354	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV Velvadam SS	301311540104	11KV RWS	Rural	AMR	0.471	0.445	0.471	5.467	66.896	100%	
355	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV CHANDRALA SS	301311540201	11KV Chandrala Feeder	Rural	AMR	3.048	2.855	3.048	6.328	16.748	100%	
356	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV CHANDRALA SS	301311540202	11KV Chandrala Rural Fe	Mixed	AMR	3.331	3.058	3.331	8.179	24.370	100%	
357	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV CHANDRALA SS	301311540203	11KV Edurubedem Feed	Mixed	AMR	2.601	2.383	2.601	8.375	56.952	100%	
358	VIJAYAWADA	VIJAYAWADA RURAL	MYLAVARAM	33/11KV CHANDRALA SS	301311540204	11KV T Gannavaram Fee	Mixed	AMR	1.047	0.974	1.047	6.906	51.324	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
359	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Nandigama SubSt	301321140101	11KV Nandigama (T-1)	Urban	AMR	8.195	7.761	8.195	5.298	3.561	100%	
360	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Nandigama SubSt	301321140102	11KV Nandigama (T-2)	Urban	AMR	3.481	3.267	3.481	6.152	16.750	100%	
361	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Nandigama SubSt	301321140103	11KV Nandigama (T-3)	Urban	AMR	7.610	7.375	7.610	3.099	26.595	100%	
362	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Nandigama SubSt	301321140104	11KV Nandigama (T-4)	Urban	AMR	9.093	8.843	9.093	2.748	4.660	100%	
363	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Nandigama SubSt	301321140105	11KV Nandigama (T-5)	Urban	AMR	7.708	7.395	7.708	4.053	4.610	100%	
364	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Nandigama SubSt	301321140106	11KV MUNAGACHERLA(	Mixed	AMR	1.125	1.079	1.125	4.120	1.898	100%	
365	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Nandigama SubSt	301321140107	11KV ITHAVARAM	Mixed	AMR	5.990	5.815	5.990	2.912	6.384	100%	
366	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Nandigama SubSt	301321140108	11KV water works	Rural	AMR	2.124	2.014	2.124	5.190	67.045	100%	
367	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV ANASAGARAM SS	301321140201	11KV Anasagaram	Rural	AMR	1.215	1.151	1.215	5.279	6.381	100%	
368	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV ANASAGARAM SS	301321140202	11KV Adaviravulapadu f	Mixed	AMR	5.003	4.842	5.003	3.213	4.103	100%	
369	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV ANASAGARAM SS	301321140203	11KV Highway feeder	INDL	AMR	2.857	2.726	2.857	4.583	1.244	100%	
370	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV ANASAGARAM SS	301321140204	11KV Housing Colony Fe	Rural	AMR	1.776	1.674	1.776	5.730	8.861	100%	
371	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Chandarlapadu Su	301321240101	11KV Chandarlapadu	Rural	AMR	4.443	4.298	4.443	3.269	3.277	100%	
372	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Chandarlapadu Su	301321240102	11KV MUPALLA	Mixed	AMR	2.469	2.364	2.469	4.256	11.226	100%	
373	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Chandarlapadu Su	301321240103	11KV Muppalla Industria	Rural	AMR	2.394	2.336	2.394	2.420	8.296	100%	
374	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Chandarlapadu Su	301321240104	11KV V K Palem LI schen	Rural	AMR	1.462	1.411	1.462	3.514	99.763	100%	
375	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Chandarlapadu Su	301321240105	11KV V K Palem	Mixed	AMR	2.850	2.788	2.850	2.196	3.384	100%	
376	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Chandarlapadu Su	301321240106	11KV Ustepalli LI scheme	Rural	AMR	0.844	0.824	0.844	2.391	96.567	100%	
377	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Chintalapadu Sub	301321240201	11KV Chitalapadu	Rural	AMR	1.608	1.544	1.608	3.954	21.742	100%	
378	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Chintalapadu Sub	301321240202	11KV Eturu LI Scheme	Rural	AMR	0.762	0.735	0.762	3.505	98.289	100%	
379	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Chintalapadu Sub	301321240203	11KV Eturu	Mixed	AMR	2.330	2.188	2.330	6.061	11.818	100%	
380	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Chintalapadu Sub	301321240204	11KV TURLAPADU	Mixed	AMR	4.617	4.311	4.617	6.621	11.439	100%	
381	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Chintalapadu Sub	301321240205	11KV Chintalapadu LI Sc	Rural	AMR	0.289	0.281	0.289	2.663	98.475	100%	
382	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Gudimetla SS	301321240301	11KV Gudimetla	Rural	AMR	0.762	0.738	0.762	3.106	13.338	100%	
383	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Gudimetla SS	301321240302	11KV Gudimetla LI Scher	Rural	AMR	0.452	0.445	0.452	1.620	99.817	100%	
384	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Gudimetla SS	301321240303	11KV Lakshmi Puram	Mixed	AMR	5.419	5.083	5.419	6.211	8.686	100%	
385	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Gudimetla SS	301321240304	11KV Gudimetla RWS	Rural	AMR	1.656	1.587	1.656	4.164	87.088	100%	
386	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kanchikacherla Su	301321340101	11KV Kanchikacharla-To	Rural	AMR	6.239	5.956	6.239	4.537	1.980	100%	
387	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kanchikacherla Su	301321340102	11KV Kanchikacharla-To	Rural	AMR	9.331	9.004	9.331	3.497	7.743	100%	
388	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kanchikacherla Su	301321340103	11KV Ponnavaram	Mixed	AMR	3.215	3.056	3.215	4.959	14.825	100%	
389	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kanchikacherla Su	301321340104	11KV Kanchikacherla To	Rural	AMR	0.155	0.149	0.155	4.425	4.425	100%	
390	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kanchikacherla Su	301321340105	11KV chevitaklallu LI SCH	Rural	AMR	0.361	0.345	0.361	4.588	98.461	100%	
391	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kanchikacherla Su	301321340106	11KV Gottimukkala	Mixed	AMR	1.943	1.890	1.943	2.705	4.206	100%	
392	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kesara SubStation	301321340201	11KV Tolgate	INDL	AMR	0.167	0.161	0.167	3.792	3.351	100%	
393	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kesara SubStation	301321340202	11KV keesara	INDL	AMR	4.604	4.410	4.604	4.213	5.381	100%	
394	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kesara SubStation	301321340203	11KV Pendyala LI schem	Rural	AMR	1.320	1.257	1.320	4.746	99.466	100%	
395	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kesara SubStation	301321340204	11KV Gandepalli	Mixed	AMR	3.054	2.883	3.054	5.604	7.627	100%	
396	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kesara SubStation	301321340205	11KV Nandaluru LI scher	Rural	AMR	0.089	0.085	0.089	4.557	69.484	100%	
397	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kesara SubStation	301321340206	11KV Sentini industrial	INDL	AMR	1.301	1.244	1.301	4.397	3.848	100%	
398	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Kesara SubStation	301321340207	11KV S AMARAVARAM	Mixed	AMR	3.499	3.280	3.499	6.241	11.506	100%	
399	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Moguluru SS	301321340301	11KV Moguluru	Rural	AMR	2.075	2.016	2.075	2.849	7.098	100%	
400	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Moguluru SS	301321340302	11KV Moguluru LI Schen	Rural	AMR	0.163	0.155	0.163	4.570	99.598	100%	
401	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Moguluru SS	301321340303	11KV Ganiatkuru	Mixed	AMR	4.787	4.540	4.787	5.164	16.459	100%	
402	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Moguluru SS	301321340304	11KV Water works	Rural	AMR	0.584	0.561	0.584	4.053	96.620	100%	
403	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Paritala SS	301321340401	11KV Green Way	INDL	AMR	0.840	0.810	0.840	3.557	6.997	100%	

SI No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
404	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Paritala SS	301321340402	11KV Uma Holly Day	Rural	AMR	2.884	2.723	2.884	5.553	6.711	100%	
405	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Paritala SS	301321340403	11KV SVEC	INDL	AMR	11.690	11.148	11.690	4.637	5.587	100%	
406	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Paritala SS	301321340404	11KV Paritala Town	Rural	AMR	5.147	4.863	5.147	5.529	6.811	100%	
407	VIJAYAWADA	VIJAYAWADA RURAL	IBRAHIMPATNAM	33/11KV Paritala SS	301321340405	11KV paritala agl	Mixed	AMR	0.390	0.376	0.390	3.759	4.486	100%	
408	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Allur SubStation	301321440101	11KV G Madavaram	Mixed	AMR	5.622	5.227	5.622	7.022	16.943	100%	
409	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Allur SubStation	301321440102	11KV RWS	Rural	AMR	2.564	2.411	2.564	5.966	18.303	100%	
410	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Allur SubStation	301321440103	11KV Visaka	INDL	AMR	3.152	3.097	3.152	1.744	1.823	100%	
411	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Allur SubStation	301321440104	11KV jujjuru	Mixed	AMR	3.019	2.835	3.019	6.100	9.469	100%	
412	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Veerulapadu Sub	301321440201	11KV Veerulapadu	Rural	AMR	1.190	1.115	1.190	6.308	39.217	100%	
413	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Veerulapadu Sub	301321440202	11KV D D Padu	Mixed	AMR	3.932	3.682	3.932	6.344	27.418	100%	
414	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Veerulapadu Sub	301321440203	11KV Li schem DD padu	Rural	AMR	0.567	0.551	0.567	2.914	99.396	100%	
415	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Veerulapadu Sub	301321440204	11KV Pallampalli	Mixed	AMR	3.268	3.041	3.268	6.925	9.374	100%	
416	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Torragudipadu Su	301321540101	11KV RAGHAVAPURAM	Agricultura	AMR	4.456	4.176	4.456	6.271	13.717	100%	
417	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Torragudipadu Su	301321540102	11KV Konduru	Mixed	AMR	5.631	5.295	5.631	5.954	13.053	100%	
418	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Torragudipadu Su	301321540103	11KV LI Scheme	Rural	AMR	1.583	1.505	1.583	4.933	98.775	100%	
419	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Torragudipadu Su	301321540105	11kv konatatmukuru	Mixed	AMR	1.550	1.443	1.550	6.899	23.169	100%	
420	VIJAYAWADA	VIJAYAWADA RURAL	NANDIGAMA	33/11KV Torragudipadu Su	301321540106	11KV Torragudipadu	Rural	AMR	0.264	0.256	0.264	3.057	8.809	100%	
421	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Jaggaiahpeta Sub	301331140101	11KV Jaggaiahpeta Feed	Urban	AMR	2.864	2.686	2.864	6.198	5.423	100%	
422	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Jaggaiahpeta Sub	301331140102	11KV Jaggaiahpeta Feed	Urban	AMR	0.778	0.728	0.778	6.375	5.814	100%	
423	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Jaggaiahpeta Sub	301331140103	11KV Jaggaiahpeta Feed	Urban	AMR	4.078	3.812	4.078	6.527	7.838	100%	
424	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Jaggaiahpeta Sub	301331140104	11KV Jaggaiahpeta Feed	Urban	AMR	1.754	1.631	1.754	6.974	0.971	100%	
425	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Jaggaiahpeta Sub	301331140105	11KV Muktyala Feeder	Mixed	AMR	3.293	3.017	3.293	8.374	12.000	100%	
426	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV JAGGAIAHPET SEI	301331140201	11KV seetharampuram f	Urban	AMR	5.627	5.209	5.627	7.428	7.666	100%	
427	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV JAGGAIAHPET SEI	301331140202	11KV DVR NAGER FEEDE	Urban	AMR	3.318	3.072	3.318	7.426	5.553	100%	
428	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV JAGGAIAHPET SEI	301331140203	11KV NTR circle	Urban	AMR	6.269	5.830	6.269	7.010	6.270	100%	
429	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV JAGGAIAHPET SEI	301331140204	11KV AMBEDKAR CIRCLE	Urban	AMR	3.231	2.848	3.231	11.870	13.395	100%	
430	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV JAGGAIAHPET SEI	301331140205	11KV SHANTHINAGER FE	Urban	AMR	2.349	2.210	2.349	5.943	6.419	100%	
431	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV AnumanchiPalle S	301331240101	11KV ANUMANCHIPALLI	Mixed	AMR	4.968	4.793	4.968	3.516	32.898	100%	
432	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV AnumanchiPalle S	301331240102	11KV Balasupadu	Mixed	AMR	4.216	4.086	4.216	3.095	8.035	100%	
433	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV AnumanchiPalle S	301331240103	11KV Balusupadu Expres	Rural	AMR	2.951	2.802	2.951	5.032	13.315	100%	
434	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV AnumanchiPalle S	301331240104	11KV Arush Anumachipa	Rural	AMR	2.307	2.285	2.307	0.929	15.719	100%	
435	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV AnumanchiPalle S	301331240105	11KV BHAGAVATHI AER	INDL	AMR	0.835	0.812	0.835	2.692	6.173	100%	
436	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Chilakallu SubSta	301331240201	11KV Chillakallu Industri	Rural	AMR	3.862	3.618	3.862	6.313	6.749	100%	
437	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Chilakallu SubSta	301331240202	11KV Chillakallu Town	Rural	AMR	4.610	4.295	4.610	6.838	6.662	100%	
438	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Chilakallu SubSta	301331240203	11KV Bhimavaram	Mixed	AMR	2.652	2.563	2.652	3.354	3.354	100%	
439	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Chilakallu SubSta	301331240204	11KV DP Thanda	Mixed	AMR	2.059	1.962	2.059	4.731	25.372	100%	
440	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Chilakallu SubSta	301331240205	11KV Tirumalagiri	Mixed	AMR	0.585	0.545	0.585	6.893	49.303	100%	
441	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Chilakallu SubSta	301331240206	11KV SVS Temple	Rural	AMR	0.116	0.111	0.116	4.777	19.419	100%	
442	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Balusupadu SS	301331240301	11KV Ayyappanagar feed	Urban	AMR	4.263	4.005	4.263	6.040	9.229	100%	
443	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Balusupadu SS	301331240302	11KV Ramalayam feeder	Urban	AMR	7.064	6.658	7.064	5.742	6.528	100%	
444	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Balusupadu SS	301331240303	11KV Tripuravaram	Mixed	AMR	4.890	4.635	4.890	5.220	39.831	100%	
445	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV VEDADRI SS	301331240401	11KV VEDADRI FEEDER	Mixed	AMR	1.620	1.548	1.620	4.419	7.119	100%	
446	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV VEDADRI SS	301331240402	11KV RAVIRALA	Mixed	AMR	2.011	1.927	2.011	4.175	26.926	100%	
447	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV VEDADRI SS	301331240403	11KV POCHAMPALLI	Mixed	AMR	4.195	4.047	4.195	3.548	3.958	100%	
448	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV VEDADRI SS	301331240404	11KV SLNS TEMPLE FEEI	Rural	AMR	0.351	0.332	0.351	5.562	99.943	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
449	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV CHILAKALLU SS (A	301331240501	11KV Gandrai Industrial	Rural	AMR	0.633	0.600	0.633	5.151	5.173	100%	
450	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV CHILAKALLU SS (A	301331240502	11KV IDA	Rural	AMR	8.209	7.636	8.209	6.988	10.191	100%	
451	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV CHILAKALLU SS (A	301331240503	11KV AUTONAGAR	Rural	AMR	0.090	0.085	0.090	5.233	10.983	100%	
452	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV CHILAKALLU SS (A	301331240504	11KV SM PETA RURAL	Mixed	AMR	4.333	4.155	4.333	4.091	2.682	100%	
453	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Khambampadu Su	301331340101	11KV Kambampadu	Rural	AMR	1.628	1.534	1.628	5.795	13.399	100%	
454	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Khambampadu Su	301331340102	11KV Allurupadu	Mixed	AMR	1.593	1.485	1.593	6.808	6.808	100%	
455	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Khambampadu Su	301331340103	11KV Kakarvai	Mixed	AMR	1.986	1.861	1.986	6.289	4.672	100%	
456	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Mulapadul(Nawa	301331340201	11KV INDUSTRIAL FEEDE	Rural	AMR	3.326	3.238	3.326	2.641	3.377	100%	
457	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Mulapadul(Nawa	301331340202	11KV NAWABPETA RURA	Mixed	AMR	2.290	2.165	2.290	5.467	10.009	100%	
458	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Mulapadul(Nawa	301331340203	11KV KONAKANCHI FEEI	Mixed	AMR	1.552	1.463	1.552	5.706	4.123	100%	
459	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Mulapadul(Nawa	301331340204	11KV MULLAPADU FEED	Mixed	AMR	3.145	2.980	3.145	5.261	6.394	100%	
460	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Mulapadul(Nawa	301331340205	11KV SANAGAPADU LIFT	Rural	AMR	0.248	0.239	0.248	3.386	95.519	100%	
461	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Mulapadul(Nawa	301331340206	11KV NAWABPETA TOW	Rural	AMR	2.326	2.196	2.326	5.615	8.614	100%	
462	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV ANIGANDLAPADU	301331340301	11KV Anigandlapadu	Rural	AMR	2.635	2.454	2.635	6.844	10.233	100%	
463	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV ANIGANDLAPADU	301331340302	11KV siva puram	Mixed	AMR	1.838	1.708	1.838	7.073	34.281	100%	
464	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV ANIGANDLAPADU	301331340303	11KV Gummadiduru	Mixed	AMR	3.877	3.605	3.877	7.036	48.868	100%	
465	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Lingala SubStatio	301331440101	11KV Vatsavai	Rural	AMR	4.805	4.577	4.805	4.740	8.699	100%	
466	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Lingala SubStatio	301331440102	11KV Lingala	Rural	AMR	1.986	1.837	1.986	7.510	85.835	100%	
467	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Lingala SubStatio	301331440103	11KV Polampalli	Mixed	AMR	3.461	3.216	3.461	7.079	5.055	100%	
468	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Lingala SubStatio	301331440104	11KV MAKKAPETA-1	Mixed	AMR	1.283	1.186	1.283	7.595	3.849	100%	
469	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Lingala SubStatio	301331440105	11KV LI Scheme	Rural	AMR	1.167	1.104	1.167	5.385	98.911	100%	
470	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Lingala SubStatio	301331440106	11KV MAKKAPETA-2	Mixed	AMR	3.262	3.032	3.262	7.041	4.374	100%	
471	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Penuganchiprolu	301331440201	11KV PENUAGANCHIPRO	Rural	AMR	7.435	7.040	7.435	5.317	32.478	100%	
472	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Penuganchiprolu	301331440202	11KV PENUAGANCHIPRO	Mixed	AMR	3.480	3.269	3.480	6.043	15.513	100%	
473	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Penuganchiprolu	301331440203	11KV MUCHINTHALA FE	Mixed	AMR	1.329	1.262	1.329	5.051	24.722	100%	
474	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Penuganchiprolu	301331440204	11KV WATER WORKS FE	Rural	AMR	3.402	3.210	3.402	5.631	22.972	100%	
475	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Penuganchiprolu	301331440205	11KV Penuganchiprolu L	Rural	AMR	0.246	0.236	0.246	3.917	99.285	100%	
476	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Mangolu SS	301331440301	11KV MANGOLU FEEDEF	Rural	AMR	1.396	1.319	1.396	5.490	3.947	100%	
477	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Mangolu SS	301331440302	11KV DECHUPALEM FEE	Mixed	AMR	1.931	1.793	1.931	7.151	3.815	100%	
478	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Mangolu SS	301331440303	11KV INDUGUPALLI FEEI	Mixed	AMR	2.896	2.696	2.896	6.918	4.570	100%	
479	VIJAYAWADA	VIJAYAWADA RURAL	CHILLAKALLU	33/11KV Mangolu SS	301331440304	11KV GANDRAI FEEDER	Mixed	AMR	4.511	4.186	4.511	7.210	9.444	100%	
480	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Head water work	301411140101	11KV Punnami	Urban	AMR	0.527	0.517	0.527	1.968	43.879	100%	
481	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Head water work	301411140102	11KV Kummaripalem	Urban	AMR	3.332	3.216	3.332	3.506	2.963	100%	
482	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Head water work	301411140103	11KV H W Works	Urban	AMR	16.632	16.454	16.632	1.067	42.672	100%	
483	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Head water work	301411140104	11KV LOTUS	Urban	AMR	1.850	1.784	1.850	3.525	4.525	100%	
484	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Old power house	301411140201	11KV B R P feeder	Urban	AMR	4.049	4.005	4.049	1.096	3.305	100%	
485	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Old power house	301411140202	11KV Samarangam Chov	Urban	AMR	4.815	4.729	4.815	1.796	7.227	100%	
486	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Old power house	301411140204	11KV K C Canal	Urban	AMR	9.613	9.384	9.613	2.380	5.998	100%	
487	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Old power house	301411140205	11KV Nehru road	Urban	AMR	2.574	2.534	2.574	1.556	3.214	100%	
488	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Old power house	301411140206	11KV P Ghat-2	Urban	AMR	1.459	1.431	1.459	1.972	17.790	100%	
489	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV KG MARKET(G.M	301411140301	11KV CHITTURI COMPLE	Urban	AMR	1.477	1.445	1.477	2.151	3.256	100%	
490	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV KG MARKET(G.M	301411140302	11KV VMC FEEDER	Urban	AMR	0.062	0.061	0.062	0.473	53.240	100%	
491	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV KG MARKET(G.M	301411140303	11KV PARK ROAD FEEDE	Urban	AMR	2.837	2.814	2.837	0.827	2.417	100%	
492	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV KG MARKET(G.M	301411140305	11KV AMMA HOTEL FEE	Urban	AMR	7.691	7.569	7.691	1.577	2.067	100%	
493	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV KG MARKET(G.M	301411140307	11KV TARAPETA	Urban	AMR	0.685	0.682	0.685	0.525	5.439	100%	

SI No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
494	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Ghandi hills SubS	301411240101	11KV Mahantipuram	Urban	AMR	7.772	7.376	7.772	5.086	7.815	100%	
495	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Ghandi hills SubS	301411240102	11KV Panja Centre	Urban	AMR	6.554	6.348	6.554	3.132	5.601	100%	
496	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Ghandi hills SubS	301411240103	11KV Nyzam Gate	Urban	AMR	7.861	7.617	7.861	3.102	7.339	100%	
497	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Ghandi hills SubS	301411240104	11KV Tank Bund	Urban	AMR	2.725	2.635	2.725	3.284	4.613	100%	
498	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV FISH MARKET SEN	301411240201	11KV ANJANEYA TEMPLI	Urban	AMR	6.896	6.629	6.896	3.859	6.272	100%	
499	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV FISH MARKET SEN	301411240202	11KV KBN COLLEGE FEE	Urban	AMR	6.767	6.591	6.767	2.605	6.090	100%	
500	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV FISH MARKET SEN	301411240203	11KV BRAHMIN STREET	Urban	AMR	3.024	2.976	3.024	1.596	5.344	100%	
501	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV FISH MARKET SEN	301411240204	11KV FISH MARKET FEE	Urban	AMR	7.630	7.356	7.630	3.597	8.695	100%	
502	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV FISH MARKET SEN	301411240205	11KV HINDU HIGH SCHO	Urban	AMR	3.114	3.055	3.114	1.904	2.731	100%	
503	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Bhavanipuram Su	301411340101	11KV Bhavanipuram	Urban	AMR	7.192	6.936	7.192	3.562	5.217	100%	
504	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Bhavanipuram Su	301411340102	11KV High Way	Urban	AMR	5.905	5.716	5.905	3.196	4.670	100%	
505	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Bhavanipuram Su	301411340103	11KV Housing Board	Urban	AMR	4.647	4.490	4.647	3.383	9.393	100%	
506	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Bhavanipuram Su	301411340104	11KV Iron Yard	Urban	AMR	5.368	5.215	5.368	2.848	3.496	100%	
507	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Bhavanipuram Su	301411340105	11KV Teachers Colony	Urban	AMR	7.435	7.191	7.435	3.285	5.435	100%	
508	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Gollapudi SubStat	301411340201	11KV Surayapalem	Rural	AMR	5.664	5.396	5.664	4.743	25.324	100%	
509	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Gollapudi SubStat	301411340202	11KV Rayanapadu	Rural	AMR	5.798	5.499	5.798	5.149	11.768	100%	
510	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Gollapudi SubStat	301411340203	11KV Ayyappa temple	Rural	AMR	6.483	6.167	6.483	4.878	5.944	100%	
511	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Gollapudi SubStat	301411340204	11KV VASAVI PHARMA	Rural	AMR	5.709	5.434	5.709	4.814	6.148	100%	
512	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV PUNNAMI SS	301411340301	11KV GANDHIBOMMA	Urban	AMR	5.328	5.169	5.328	2.979	5.118	100%	
513	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV PUNNAMI SS	301411340302	11 KV MASZID	Urban	AMR	6.154	5.957	6.154	3.192	3.517	100%	
514	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV PUNNAMI SS	301411340303	11 KV BHAVANI ISLAND	Urban	AMR	0.567	0.551	0.567	2.817	26.315	100%	
515	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV PUNNAMI SS	301411340304	11 KV NETHAJI	Urban	AMR	3.264	3.145	3.264	3.663	4.596	100%	
516	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV PUNNAMI SS	301411340305	11 KV SANKARAMATAM	Urban	AMR	2.168	2.083	2.168	3.923	6.850	100%	
517	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV PUNNAMI SS	301411340306	11KV KANYAKA PARAME	Urban	AMR	1.781	1.712	1.781	3.869	5.894	100%	
518	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Kabela SubStatior	301411440101	11KV URMILA NAGAR	Urban	AMR	11.640	11.188	11.640	3.884	6.516	100%	
519	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Kabela SubStatior	301411440102	11KV LALITHA NAGAR	Urban	AMR	7.163	6.903	7.163	3.630	4.783	100%	
520	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Kabela SubStatior	301411440103	11KV Sitara Feeder	Urban	AMR	12.098	11.639	12.098	3.798	7.621	100%	
521	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Kabela SubStatior	301411440104	11KV Vidyadharapuram	Urban	AMR	6.450	6.205	6.450	3.799	4.862	100%	
522	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Kabela SubStatior	301411440105	11KV KK NAGAR	Urban	AMR	10.845	10.449	10.845	3.651	5.377	100%	
523	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Kabela SubStatior	301411440106	11KV INDUSTRIAL	Urban	AMR	10.179	9.825	10.179	3.482	4.005	100%	
524	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV milk project SubS	301411440201	11KV Chittinagar	Urban	AMR	3.405	3.265	3.405	4.112	9.168	100%	
525	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV milk project SubS	301411440202	11KV IMP	Urban	AMR	1.610	1.528	1.610	5.120	3.912	100%	
526	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV milk project SubS	301411440203	11KV KALARA HOSPITAL	Urban	AMR	9.052	8.829	9.052	2.456	5.574	100%	
527	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV milk project SubS	301411440204	11KV EIDGA MAHAL FEE	Urban	AMR	3.048	2.907	3.048	4.621	13.862	100%	
528	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV milk project SubS	301411440205	11KV RAJIV SARMA NAG	Urban	AMR	2.602	2.506	2.602	3.661	5.772	100%	
529	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV K.L.Rao Nagar	301411540101	11KV WAGON DEPO	Urban	AMR	0.739	0.710	0.739	3.926	3.926	100%	
530	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV K.L.Rao Nagar	301411540102	11KV OM SAKTHI	Urban	AMR	2.921	2.787	2.921	4.588	9.054	100%	
531	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV K.L.Rao Nagar	301411540103	11KV K A V TEMPLE	Urban	AMR	3.626	3.457	3.626	4.668	8.631	100%	
532	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV K.L.Rao Nagar	301411540104	11KV SYNDICATE BANK (	Urban	AMR	2.182	2.087	2.182	4.354	5.318	100%	
533	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV K.L.Rao Nagar	301411540105	11KV FOREMAN BUNGL	Urban	AMR	2.593	2.485	2.593	4.165	12.876	100%	
534	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV K.L.Rao Nagar	301411540106	11KV TAILOR PETA	Urban	AMR	3.912	3.752	3.912	4.093	11.013	100%	
535	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Moulanagar semi	301411640101	11KV 11KV NTR MARG F	Rural	AMR	4.567	4.379	4.567	4.113	46.883	100%	
536	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Moulanagar semi	301411640102	11KV SAIPURAM COLON	Rural	AMR	6.651	6.373	6.651	4.184	12.162	100%	
537	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Moulanagar semi	301411640103	11KV JAIN COLONY FEE	Rural	AMR	5.670	5.439	5.670	4.075	9.524	100%	
538	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Moulanagar semi	301411640104	11KV MOULANAGAR FE	Rural	AMR	10.482	10.039	10.482	4.227	7.798	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
539	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Moulanagar semi	301411640105	11KV PUSHKARGHAT FE	Rural	AMR	6.077	5.762	6.077	5.181	42.891	100%	
540	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Container semi In	301411640201	11KV ATKINSON SCHOO	Rural	AMR	0.153	0.143	0.153	6.915	7.617	100%	
541	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Container semi In	301411640202	11KV SAIPURAM COLON	Rural	AMR	0.185	0.175	0.185	5.514	6.103	100%	
542	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Container semi In	301411640203	11KV SRINIVAS NAGAR	Rural	AMR	0.147	0.138	0.147	5.853	6.320	100%	
543	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Container semi In	301411640205	11KV VENKAIAH SWAMY	Rural	AMR	0.199	0.190	0.199	4.264	4.863	100%	
544	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV CITY SubStation	301421140101	11KV NAKKAL ROAD FEE	Urban	AMR	5.598	5.478	5.598	2.151	2.882	100%	
545	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV CITY SubStation	301421140102	11KV A S ROAD FEEDER	Urban	AMR	3.965	3.900	3.965	1.615	1.621	100%	
546	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV CITY SubStation	301421140103	11KV V T ROAD FEEDER	Urban	AMR	4.064	4.005	4.064	1.468	2.171	100%	
547	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV CITY SubStation	301421140104	11KV K C ROAD FEEDER	Urban	AMR	1.169	1.151	1.169	1.523	2.243	100%	
548	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV CITY SubStation	301421140105	11KV GOVERNORPET FE	Urban	AMR	3.682	3.611	3.682	1.932	3.302	100%	
549	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV CITY SubStation	301421140106	11KV DURGA AGRAHARA	Urban	AMR	1.622	1.573	1.622	2.972	3.772	100%	
550	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV CITY SubStation	301421140107	11KV ARANDALPET FEED	Urban	AMR	3.883	3.808	3.883	1.933	2.618	100%	
551	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV MUSEUM ROAD I	301421140201	11KV AMERICAN HOSPIT	Urban	AMR	4.098	4.042	4.098	1.363	9.846	100%	
552	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV MUSEUM ROAD I	301421140202	11KV BANDAR ROAD FEE	Urban	AMR	4.261	4.190	4.261	1.658	7.035	100%	
553	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV MUSEUM ROAD I	301421140203	11KV BESANT ROAD FEE	Urban	AMR	5.810	5.659	5.810	2.585	1.525	100%	
554	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV MUSEUM ROAD I	301421140204	11KV CVR COMPLEX	Urban	AMR	6.874	6.800	6.874	1.081	9.181	100%	
555	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV MUSEUM ROAD I	301421140205	11KV CM CAMP OFFICE	Urban	AMR	0.467	0.463	0.467	0.923	14.965	100%	
556	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV MUSEUM ROAD I	301421140206	11KV MUSEUM ROAD FE	Urban	AMR	2.588	2.497	2.588	3.524	8.306	100%	
557	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV GandhiNagar Sub	301421240101	11KV HANUMANPET	Urban	AMR	4.291	4.195	4.291	2.225	17.168	100%	
558	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV GandhiNagar Sub	301421240102	11KV RAILWAYSTATION	Urban	AMR	9.638	9.454	9.638	1.911	5.545	100%	
559	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV GandhiNagar Sub	301421240103	11KV ELURUROAD	Urban	AMR	4.736	4.686	4.736	1.072	3.867	100%	
560	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV GandhiNagar Sub	301421240104	11KV ANNAPURNA	Urban	AMR	3.503	3.446	3.503	1.641	3.036	100%	
561	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV ALANKAR GAS IN	301421240201	11KV ALANKAR	Urban	AMR	7.465	7.359	7.465	1.411	4.186	100%	
562	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV ALANKAR GAS IN	301421240202	11KV GANDHINAGAR	Urban	AMR	6.390	6.072	6.390	4.974	5.177	100%	
563	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV ALANKAR GAS IN	301421240203	11KV ZINKANA GROUND	Urban	AMR	7.147	6.928	7.147	3.067	7.855	100%	
564	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV ALANKAR GAS IN	301421240204	11KV SATYANARAYANAS	Urban	AMR	5.246	5.119	5.246	2.428	3.133	100%	
565	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV ALANKAR GAS IN	301421240205	11KV APSARA	Urban	AMR	4.557	4.401	4.557	3.419	5.050	100%	
566	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV ALANKAR GAS IN	301421240206	11KV KOSALA	Urban	AMR	3.930	3.863	3.930	1.725	1.337	100%	
567	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Mutyalam padu S	301421340101	11KV G S Raju Road	Urban	AMR	5.222	5.028	5.222	3.714	7.255	100%	
568	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Mutyalam padu S	301421340102	11KV Kuddus Nagar	Urban	AMR	7.640	7.217	7.640	5.535	8.223	100%	
569	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Mutyalam padu S	301421340103	11KV MUTYALAMPADU	Urban	AMR	6.402	6.142	6.402	4.055	4.442	100%	
570	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Mutyalam padu S	301421340104	11KV Satyanarayanapura	Urban	AMR	6.752	6.505	6.752	3.652	5.864	100%	
571	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Mutyalam padu S	301421340105	11KV Nallagate	Urban	AMR	6.757	6.482	6.757	4.068	7.376	100%	
572	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Ayodhyanagar SS	301421340201	11KV KEDARESWARAPET	Urban	AMR	7.970	7.687	7.970	3.545	5.591	100%	
573	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Ayodhyanagar SS	301421340202	11KV AYODYANAGAR	Urban	AMR	7.406	7.118	7.406	3.887	6.174	100%	
574	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Ayodhyanagar SS	301421340203	11KV LOTUS	Urban	AMR	8.787	8.487	8.787	3.409	4.306	100%	
575	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Ayodhyanagar SS	301421340204	11KV Budameru Katta	Urban	AMR	4.409	4.275	4.409	3.038	5.462	100%	
576	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Srinagar colony S	301421340301	11KV Srinagar Colony	Urban	AMR	0.957	0.938	0.957	2.021	2.234	100%	
577	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Srinagar colony S	301421340302	11KV Railway Training C	Urban	AMR	0.597	0.579	0.597	2.940	6.554	100%	
578	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Srinagar colony S	301421340303	11KV Lakshminagar	Urban	AMR	0.485	0.472	0.485	2.584	2.259	100%	
579	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Srinagar colony S	301421340304	11KV Bagathsingh Road	Urban	AMR	1.001	0.977	1.001	2.416	1.005	100%	
580	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Srinagar colony S	301421340305	11KVAlluru Sitharamara	Urban	AMR	0.569	0.548	0.569	3.536	4.155	100%	
581	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Srinagar colony S	301421340306	11KVRamakrishnapuram	Urban	AMR	1.015	1.007	1.015	0.865	3.779	100%	
582	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV A.S.NAGAR SubSt	301421440101	11KV LUNA CENTER	Urban	AMR	5.487	5.303	5.487	3.361	5.140	100%	
583	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV A.S.NAGAR SubSt	301421440102	11KV INDIRANAYAK FEE	Urban	AMR	3.705	3.594	3.705	3.008	4.227	100%	

SI No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
584	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV A.S.NAGAR SubSt	301421440103	11KV TAMMINA DURGA	Urban	AMR	3.839	3.727	3.839	2.932	8.365	100%	
585	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV A.S.NAGAR SubSt	301421440104	11KV Y S R COLONY	Urban	AMR	5.773	5.606	5.773	2.895	8.594	100%	
586	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV A.S.NAGAR SubSt	301421440105	11KV KANAKA DURGA N	Urban	AMR	4.611	4.465	4.611	3.162	7.371	100%	
587	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV A.S.NAGAR SubSt	301421440106	11KV Pipula Road	Urban	AMR	6.136	5.940	6.136	3.188	4.177	100%	
588	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Vambay Colony S	301421440201	11KV VAMBAY COLONY	Urban	AMR	9.622	9.330	9.622	3.031	13.130	100%	
589	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Vambay Colony S	301421440202	11KV DISENY LAND	Urban	AMR	3.402	3.268	3.402	3.941	5.077	100%	
590	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Vambay Colony S	301421440203	11KV RYTHU BAZAR	Urban	AMR	5.639	5.480	5.639	2.824	22.207	100%	
591	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Vambay Colony S	301421440204	11KV JNNURM	Urban	AMR	2.536	2.434	2.536	4.005	16.059	100%	
592	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV NEW RAJARAJESV	301421440301	11KV RAIL WAY COLONY	Urban	AMR	3.696	3.569	3.696	3.456	9.207	100%	
593	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV NEW RAJARAJESV	301421440302	11KV KAMSALI PETA	Urban	AMR	5.903	5.655	5.903	4.189	5.855	100%	
594	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV NEW RAJARAJESV	301421440303	11KV NRR PETA FEEDER	Urban	AMR	7.047	6.837	7.047	2.984	8.327	100%	
595	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV NEW RAJARAJESV	301421440304	11KV BHARATHA MATHA	Urban	AMR	4.065	3.934	4.065	3.213	3.723	100%	
596	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV NEW RAJARAJESV	301421440305	11KV THOTAVARI STREE	Urban	AMR	5.903	5.733	5.903	2.872	3.720	100%	
597	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV NEW RAJARAJESV	301421440306	11KV JANA PRIYA FEEDE	Urban	AMR	4.001	3.896	4.001	2.630	4.386	100%	
598	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Payakapuram Sub	301421540101	11KV PAYAKAPURAM	Urban	AMR	10.940	10.451	10.940	4.473	6.360	100%	
599	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Payakapuram Sub	301421540102	11KV KANDRIGA	Urban	AMR	9.791	9.372	9.791	4.274	12.841	100%	
600	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Payakapuram Sub	301421540103	11KV RADHANAGAR	Urban	AMR	6.515	6.197	6.515	4.882	6.007	100%	
601	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Payakapuram Sub	301421540104	11KV UDA COLONY	Urban	AMR	9.931	9.390	9.931	5.451	8.849	100%	
602	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION IV	33/11KV Payakapuram Sub	301421540105	11KV Santhinagar	Urban	AMR	7.742	7.438	7.742	3.926	10.832	100%	
603	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Madhuranagar SS	301421640101	11KV PASUPUTHOTA	Urban	AMR	4.347	4.272	4.347	1.709	3.247	100%	
604	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Madhuranagar SS	301421640102	11KV DEVINAGAR	Urban	AMR	7.643	7.345	7.643	3.903	7.540	100%	
605	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Madhuranagar SS	301421640103	11KV PAPPULAMILL	Urban	AMR	6.150	5.951	6.150	3.221	8.553	100%	
606	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Madhuranagar SS	301421640104	11KV S V S Temple	Urban	AMR	6.853	6.618	6.853	3.432	19.624	100%	
607	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Madhuranagar SS	301421640105	11KV GVR NAGAR	Urban	AMR	7.033	6.927	7.033	1.494	2.968	100%	
608	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Madhuranagar SS	301421640106	11KV SAI BABA COLONY	Urban	AMR	4.706	4.538	4.706	3.560	6.197	100%	
609	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Durgapuram SS	301421640201	11KV INOX	Urban	AMR	6.446	6.135	6.446	4.828	5.349	100%	
610	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Durgapuram SS	301421640202	11KV MUSIC COLLEGE	Urban	AMR	6.210	6.067	6.210	2.307	2.934	100%	
611	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Durgapuram SS	301421640203	11KV DURGAPURAM	Urban	AMR	6.147	5.853	6.147	4.780	5.631	100%	
612	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Durgapuram SS	301421640204	11KV GULABITHOTHA	Urban	AMR	5.354	5.096	5.354	4.816	7.191	100%	
613	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV TREND SET MEAD	301421640301	11 KV PADMAVATHI	Urban	AMR	0.136	0.135	0.136	0.599	1.067	100%	
614	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV TREND SET MEAD	301421640302	11 KV MADYAKATTA	Urban	AMR	0.066	0.066	0.066	1.047	8.263	100%	
615	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV TREND SET MEAD	301421640304	11 KV TRENDSET PARK	Urban	AMR	0.022	0.022	0.022	2.044	1.951	100%	
616	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV TREND SET MEAD	301421640305	11 KV GVR NAGAR	Urban	AMR	0.150	0.149	0.150	0.665	1.945	100%	
617	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV TREND SET MEAD	301421640306	11 KV VINAYAK NAGAR	Urban	AMR	0.047	0.046	0.047	1.445	1.586	100%	
618	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV chuttagunta SubS	301422140101	11KV SRR FEEDER	Urban	AMR	3.984	3.927	3.984	1.422	9.733	100%	
619	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV chuttagunta SubS	301422140102	11KV VISALANDRA FEED	Urban	AMR	6.608	6.513	6.608	1.439	2.970	100%	
620	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV chuttagunta SubS	301422140103	11KV CHUTTUGUNTA FE	Urban	AMR	6.859	6.703	6.859	2.283	5.015	100%	
621	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV chuttagunta SubS	301422140104	11KV SITARAMPURAM F	Urban	AMR	7.037	6.907	7.037	1.842	2.582	100%	
622	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Machavaram (Gu	301422140201	11KV DASANJANEYA FEE	Urban	AMR	5.806	5.703	5.806	1.773	5.577	100%	
623	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Machavaram (Gu	301422140202	11KV MACHAVARAM FE	Urban	AMR	6.024	5.965	6.024	0.981	4.694	100%	
624	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Machavaram (Gu	301422140203	11KV MARYMATHA (GDL	Urban	AMR	7.227	7.112	7.227	1.583	6.130	100%	
625	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Machavaram (Gu	301422140204	11KV SIVALAYAM (GDL)	Urban	AMR	9.857	9.377	9.857	4.869	38.220	100%	
626	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Seetharamapurar	301422140301	11KV SURYARAOPETA FE	Urban	AMR	5.007	4.937	5.007	1.410	7.618	100%	
627	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Seetharamapurar	301422140302	11KV SATYA SAI FEEDER	Urban	AMR	2.890	2.847	2.890	1.477	3.861	100%	
628	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Seetharamapurar	301422140303	11KV MARUTHI NAGAR	Urban	AMR	6.018	5.921	6.018	1.611	2.363	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
629	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Seetharamapurar	301422140304	11KV GEETAMANDIRAM	Urban	AMR	4.854	4.783	4.854	1.462	2.681	100%	
630	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Indoor SubStatior	301422240101	11KV All India Radio	Urban	AMR	10.082	9.848	10.082	2.315	8.019	100%	
631	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Indoor SubStatior	301422240102	11KV CM CAMP OFFICE	Urban	AMR	0.208	0.203	0.208	2.639	79.692	100%	
632	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Indoor SubStatior	301422240103	11KV Doordarsan	Urban	AMR	1.683	1.640	1.683	2.554	14.538	100%	
633	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Indoor SubStatior	301422240104	11KV Dornakalroad	Urban	AMR	10.230	10.050	10.230	1.759	2.413	100%	
634	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Indoor SubStatior	301422240105	11KV Kasturibaipet	Urban	AMR	4.363	4.290	4.363	1.674	2.152	100%	
635	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Indoor SubStatior	301422240106	11KV Giripuram	Urban	AMR	6.985	6.790	6.985	2.786	4.286	100%	
636	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Brindavan Colony	301422240201	11KV Bandar Road I	Urban	AMR	9.162	8.980	9.162	1.982	1.836	100%	
637	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Brindavan Colony	301422240202	11KV Bandar Road II	Urban	AMR	9.909	9.621	9.909	2.915	3.338	100%	
638	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Brindavan Colony	301422240203	11KV Electricity Colony	Urban	AMR	4.131	3.999	4.131	3.198	3.560	100%	
639	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Brindavan Colony	301422240204	11KV Labbipet	Urban	AMR	8.189	7.922	8.189	3.267	9.143	100%	
640	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Brindavan Colony	301422240205	11KV Brundavan Colony	Urban	AMR	10.278	10.106	10.278	1.675	4.397	100%	
641	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Brindavan Colony	301422240206	11KV TICKKLE ROAD	Urban	AMR	6.884	6.684	6.884	2.905	4.738	100%	
642	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV MahatmaGhandi	301422240301	11KV JAMIICHETTU	Urban	AMR	6.899	6.688	6.899	3.055	3.055	100%	
643	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV MahatmaGhandi	301422240302	11KV PRAJASEKTHINAGA	Urban	AMR	5.078	4.944	5.078	2.635	0.772	100%	
644	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV MahatmaGhandi	301422240303	11KV SIVAGIRI	Urban	AMR	6.133	5.955	6.133	2.896	7.454	100%	
645	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV MahatmaGhandi	301422240304	11KV NIMMA THOTA	Urban	AMR	7.890	7.667	7.890	2.825	2.820	100%	
646	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV MahatmaGhandi	301422240305	11KV KALANIKETHAN	Urban	AMR	6.173	6.032	6.173	2.293	2.860	100%	
647	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV MahatmaGhandi	301422240306	11KV REVENUE COLONY	Urban	AMR	10.593	10.325	10.593	2.529	3.885	100%	
648	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV krishnalanka Sub	301422340101	11KV Ranigarithota	Urban	AMR	5.237	5.114	5.237	2.352	8.032	100%	
649	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV krishnalanka Sub	301422340102	11KV Krishnalanka	Urban	AMR	5.996	5.779	5.996	3.608	6.182	100%	
650	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV krishnalanka Sub	301422340103	11KV Balaji Nagar	Urban	AMR	4.588	4.371	4.588	4.735	6.904	100%	
651	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV krishnalanka Sub	301422340104	11KV GEETHA NAGAR	Urban	AMR	6.280	5.953	6.280	5.204	10.502	100%	
652	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV RTC Complex Sub	301422340201	11KV BRAMARAMBA PU	Urban	AMR	8.409	8.168	8.409	2.861	5.945	100%	
653	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV RTC Complex Sub	301422340202	11KV M G ROAD FEEDER	Urban	AMR	5.129	4.983	5.129	2.849	3.697	100%	
654	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV RTC Complex Sub	301422340203	11KV Pushkar Ghat -1	Urban	AMR	4.171	4.005	4.171	3.981	8.915	100%	
655	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV RTC Complex Sub	301422340204	11KV PN BUSSTAND	Urban	AMR	4.858	4.694	4.858	3.380	3.380	100%	
656	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Krishnalanka PSR	301422340301	11KV METLA BAZAR FEE	Urban	AMR	3.948	3.802	3.948	3.702	5.758	100%	
657	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Krishnalanka PSR	301422340302	11KV SUBBA RAYANAGA	Urban	AMR	5.641	5.454	5.641	3.316	13.289	100%	
658	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Krishnalanka PSR	301422340303	11KV INDIRA COLONY FE	Urban	AMR	5.841	5.635	5.841	3.527	10.115	100%	
659	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Krishnalanka PSR	301422340304	11KV HIGH SCHOOL ROA	Urban	AMR	4.322	4.166	4.322	3.607	3.836	100%	
660	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Krishnalanka PSR	301422340305	11KV TIRUMALARAO STI	Urban	AMR	2.373	2.297	2.373	3.202	13.690	100%	
661	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Skew Bridge SubS	301422440101	11KV POLICE COLONY	Urban	AMR	7.357	7.128	7.357	3.112	3.938	100%	
662	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Skew Bridge SubS	301422440102	11KV SVS	Urban	AMR	8.014	7.617	8.014	4.963	0.204	100%	
663	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Skew Bridge SubS	301422440103	11KV Telephone exchan	Urban	AMR	7.536	7.252	7.536	3.779	3.702	100%	
664	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Skew Bridge SubS	301422440104	11KV Patamata Lanka	Urban	AMR	4.462	4.270	4.462	4.289	6.120	100%	
665	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Skew Bridge SubS	301422440105	11KV 10 MGD Water Wo	Urban	AMR	4.553	4.375	4.553	3.915	3.873	100%	
666	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11 KV R.L.Nagar SS	301422440201	11KV RAMALAYAM	Urban	AMR	2.265	2.181	2.265	3.729	11.995	100%	
667	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11 KV R.L.Nagar SS	301422440202	11KV PUTTA ROAD	Urban	AMR	4.701	4.521	4.701	3.829	14.868	100%	
668	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11 KV R.L.Nagar SS	301422440203	11KV RAMALINGESWAR	Urban	AMR	5.432	5.196	5.432	4.338	6.590	100%	
669	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11 KV R.L.Nagar SS	301422440204	11KV SAI NAGAR	Urban	AMR	5.868	5.654	5.868	3.654	4.546	100%	
670	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11 KV R.L.Nagar SS	301422440205	11KV KALA NAGAR	Urban	AMR	3.621	3.476	3.621	4.021	22.759	100%	
671	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11 KV R.L.Nagar SS	301422440206	11KV GIRLS HIGH SCHOO	Urban	AMR	2.165	2.078	2.165	4.000	6.406	100%	
672	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV GANNAVARAM Su	301511140101	11KV Gannavaram Town	Rural	AMR	16.602	16.072	16.602	3.190	13.295	100%	
673	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV GANNAVARAM Su	301511140102	11KV ROY NAGAR	Rural	AMR	3.481	3.309	3.481	4.952	11.123	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
674	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV GANNAVARAM Su	301511140103	11KV R T C Bustand Roy	Rural	AMR	12.254	11.815	12.254	3.588	19.639	100%	
675	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV GANNAVARAM Su	301511140104	11KV Srinivasa Hatcherie	Rural	AMR	5.133	4.812	5.133	6.239	8.616	100%	
676	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV GANNAVARAM Su	301511140105	11KV Chinnaoutpally	Mixed	AMR	1.563	1.492	1.563	4.534	35.426	100%	
677	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Gudavalli Sub Sta	301511140201	11KV KKR	Rural	AMR	3.235	3.141	3.235	2.899	4.543	100%	
678	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Gudavalli Sub Sta	301511140202	11KV Gudavalli	Rural	AMR	1.818	1.757	1.818	3.369	9.533	100%	
679	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Gudavalli Sub Sta	301511140203	11KV Enadu	Rural	AMR	5.153	4.912	5.153	4.671	5.098	100%	
680	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Gudavalli Sub Sta	301511140204	11KV Zakkula Nekkalam	Mixed	AMR	0.645	0.620	0.645	3.982	29.322	100%	
681	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Veerapanenigude	301511140301	11KV TEMPALLI METLAP	Mixed	AMR	3.902	3.696	3.902	5.290	32.344	100%	
682	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Veerapanenigude	301511140302	11KV VEERAPANENI GUI	Rural	AMR	1.672	1.599	1.672	4.341	48.132	100%	
683	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Veerapanenigude	301511140303	11KV CHIKKAVARAM AG	Mixed	AMR	4.922	4.638	4.922	5.767	29.546	100%	
684	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Veerapanenigude	301511140304	11KV V P GUDEM INDUS	Rural	AMR	2.398	2.240	2.398	6.601	6.518	100%	
685	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Veerapanenigude	301511140305	11KV APIIC Indl feeder	Rural	AMR	0.958	0.912	0.958	4.830	3.469	100%	
686	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV KESARIPALLI SubS	301511140401	11KV KESARAPALLI TOW	Rural	AMR	8.972	8.744	8.972	2.543	12.588	100%	
687	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV KESARIPALLI SubS	301511140402	11KV AGL	Mixed	AMR	2.773	2.691	2.773	2.929	18.861	100%	
688	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV KESARIPALLI SubS	301511140403	11KV V N PURAM	Rural	AMR	1.998	1.855	1.998	7.182	10.810	100%	
689	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV KESARIPALLI SubS	301511140404	11KV SLV LAILA FEEDER	Rural	AMR	0.082	0.076	0.082	6.978	4.289	100%	
690	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Gunadala SubStat	301511240101	11KV Gunadala	Urban	AMR	3.350	3.236	3.350	3.404	6.482	100%	
691	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Gunadala SubStat	301511240102	11KV Donbosco	Urban	AMR	9.834	9.642	9.834	1.951	1.951	100%	
692	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Gunadala SubStat	301511240103	11kv store feeder	Urban	AMR	6.822	6.648	6.822	2.542	8.002	100%	
693	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Gunadala SubStat	301511240104	11KV E S I	Urban	AMR	5.895	5.792	5.895	1.743	5.553	100%	
694	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Gunadala SubStat	301511240105	11KV Currency Nagar	Urban	AMR	6.645	6.464	6.645	2.722	3.232	100%	
695	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Gunadala SubStat	301511240106	11KV Sri Ramachandra N	Urban	AMR	10.425	10.212	10.425	2.037	1.803	100%	
696	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Govt. Hospital SS	301511240201	11KV Medical College	Urban	AMR	5.419	5.267	5.419	2.793	13.886	100%	
697	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV Govt. Hospital SS	301511240202	11KV Vetarnary Coloy	Urban	AMR	6.636	6.479	6.636	2.368	6.304	100%	
698	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Govt. Hospital SS	301511240203	11KV Mahanadu Road fe	Urban	AMR	5.798	5.608	5.798	3.273	6.412	100%	
699	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Govt. Hospital SS	301511240204	11KV Srinagar Colony	Urban	AMR	0.574	0.546	0.574	4.711	6.047	100%	
700	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Govt. Hospital SS	301511240205	11KV ARUL NAGAR	Urban	AMR	6.123	5.923	6.123	3.274	4.941	100%	
701	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV KANAKADURGA N	301511240301	11KV KANAKA DURGA N	Urban	AMR	0.801	0.695	0.801	13.211	16.002	100%	
702	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV KANAKADURGA N	301511240302	11KV GANESH NAGAR	Urban	AMR	0.617	0.564	0.617	8.523	14.680	100%	
703	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV KANAKADURGA N	301511240303	11KV VINAYAKA TEMPLE	Urban	AMR	0.484	0.402	0.484	16.897	18.419	100%	
704	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Nunna SubStation	301511340101	11KV NUNNA	Rural	AMR	12.994	12.269	12.994	5.582	24.349	100%	
705	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Nunna SubStation	301511340102	11KV KT Palli	Mixed	AMR	7.440	6.838	7.440	8.085	11.693	100%	
706	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Nunna SubStation	301511340103	11KV Pathapadu	Rural	AMR	7.397	6.799	7.397	8.080	24.335	100%	
707	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Nunna SubStation	301511340104	11KV MANGO MARKET	Rural	AMR	9.275	8.605	9.275	7.229	10.614	100%	
708	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Surampalli SubSta	301511340201	11KV Mahila Estate	Rural	AMR	4.515	4.176	4.515	7.513	7.871	100%	
709	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Surampalli SubSta	301511340202	11KV R C Puram	Rural	AMR	8.016	7.425	8.016	7.372	13.893	100%	
710	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Surampalli SubSta	301511340203	11KV Kusalava Alcast	INDL	AMR	1.912	1.744	1.912	8.819	8.821	100%	
711	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Surampalli SubSta	301511340204	11KV Surampalli	Mixed	AMR	3.988	3.650	3.988	8.464	11.180	100%	
712	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Surampalli SubSta	301511340205	11KV Medharapalem	Mixed	AMR	0.656	0.597	0.656	8.998	30.522	100%	
713	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Surampalli SubSta	301511340206	11KV MahilaEstate2	Rural	AMR	7.819	7.253	7.819	7.241	12.852	100%	
714	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Mustabad SS	301511340301	11KV Mustabad	Mixed	AMR	4.786	4.400	4.786	8.062	10.341	100%	
715	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Mustabad SS	301511340302	11KV Sowjanyamitra	Rural	AMR	1.998	1.836	1.998	8.094	10.403	100%	
716	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Mustabad SS	301511340303	11KV	Mixed	AMR	4.036	3.898	4.036	3.416	23.972	100%	
717	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Jakkampudi SS	301511340401	11KV Jakkampudi Colony	Rural	AMR	13.056	12.190	13.056	6.637	3.675	100%	
718	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Jakkampudi SS	301511340402	11KV Jaganmatha Feede	Rural	AMR	4.525	4.150	4.525	8.280	10.453	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
719	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Enikepadu SubSta	301511440101	11KV Enikepadu	Rural	AMR	10.145	9.720	10.145	4.183	10.994	100%	
720	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Enikepadu SubSta	301511440102	11KV Pallavi	Rural	AMR	10.064	9.772	10.064	2.907	8.233	100%	
721	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Enikepadu SubSta	301511440103	11KV SER FEEDER	Rural	AMR	4.549	4.356	4.549	4.247	5.228	100%	
722	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Enikepadu SubSta	301511440104	11KV P S Padu	Rural	AMR	14.770	14.349	14.770	2.850	7.602	100%	
723	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Nidamanur SubSt	301511440201	11KV Incap	Rural	AMR	5.844	5.687	5.844	2.688	2.461	100%	
724	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Nidamanur SubSt	301511440202	11KV DONE ATUKUR FEE	Rural	AMR	1.510	1.462	1.510	3.186	21.454	100%	
725	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Nidamanur SubSt	301511440203	11KV CHASIS DONKA FEI	Agricultura	AMR	1.323	1.293	1.323	2.258	10.880	100%	
726	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Nidamanur SubSt	301511440204	11KV Nidamanuru	Rural	AMR	8.185	7.945	8.185	2.929	6.891	100%	
727	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Nidamanur SubSt	301511440205	11KV RAMA NAGAR FEE	Rural	AMR	5.967	5.781	5.967	3.113	8.212	100%	
728	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Prasadampadu se	301511440301	11KV SAI BABA TEMPLE	Rural	AMR	6.746	6.470	6.746	4.096	3.836	100%	
729	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Prasadampadu se	301511440302	11KV BALLEMVARI STRE	Rural	AMR	3.831	3.716	3.831	2.997	4.642	100%	
730	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Prasadampadu se	301511440303	11KV RAJULA BAZAR	Rural	AMR	8.363	8.078	8.363	3.408	5.082	100%	
731	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Prasadampadu se	301511440304	11KV Hanumana Nagar	Rural	AMR	7.855	7.643	7.855	2.693	4.938	100%	
732	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV Prasadampadu se	301511440305	11KV SYNDICATE BANK (	Rural	AMR	6.944	6.757	6.944	2.700	3.852	100%	
733	VIJAYAWADA	GUNADALA	KANURU	33/11KV Kanur SubStation	301521140101	11KV Nagarjuna Feeder	Urban	AMR	11.525	11.325	11.525	1.737	1.737	100%	
734	VIJAYAWADA	GUNADALA	KANURU	33/11KV Kanur SubStation	301521140102	11KV Bhagya Nagar	Urban	AMR	10.303	10.155	10.303	1.437	1.560	100%	
735	VIJAYAWADA	GUNADALA	KANURU	33/11KV Kanur SubStation	301521140103	11KV Jrd-1	Urban	AMR	7.084	6.886	7.084	2.784	4.138	100%	
736	VIJAYAWADA	GUNADALA	KANURU	33/11KV Kanur SubStation	301521140104	11KV Kanuru	Urban	AMR	8.756	8.630	8.756	1.431	2.631	100%	
737	VIJAYAWADA	GUNADALA	KANURU	33/11KV Kanur SubStation	301521140105	11KV Rama Tulasi Nagar	Urban	AMR	3.490	3.395	3.490	2.728	2.728	100%	
738	VIJAYAWADA	GUNADALA	KANURU	33/11KV Yanamalakuduru	301521140201	11KV CANAL BANK FEED	Urban	AMR	9.602	9.155	9.602	4.653	6.265	100%	
739	VIJAYAWADA	GUNADALA	KANURU	33/11KV Yanamalakuduru	301521140202	11KV DONKA ROAD FEE	Urban	AMR	8.235	7.763	8.235	5.740	7.645	100%	
740	VIJAYAWADA	GUNADALA	KANURU	33/11KV Yanamalakuduru	301521140203	11KV SIVA PARVATHI NA	Urban	AMR	2.613	2.471	2.613	5.419	5.419	100%	
741	VIJAYAWADA	GUNADALA	KANURU	33/11KV Yanamalakuduru	301521140204	11KV RAMALINGESWAR	Urban	AMR	12.286	11.729	12.286	4.535	12.180	100%	
742	VIJAYAWADA	GUNADALA	KANURU	33/11KV New Auto Nagar S	301521140501	11KV Indl Feeder	Urban	AMR	15.008	14.812	15.008	1.310	1.310	100%	
743	VIJAYAWADA	GUNADALA	KANURU	33/11KV New Auto Nagar S	301521140502	11KV Engg Feeder	Urban	AMR	12.147	11.855	12.147	2.402	2.356	100%	
744	VIJAYAWADA	GUNADALA	KANURU	33/11KV New Auto Nagar S	301521140503	11KV Agl Feeder	Agricultura	AMR	0.470	0.442	0.470	5.843	11.881	100%	
745	VIJAYAWADA	GUNADALA	KANURU	33/11KV New Auto Nagar S	301521140504	11KV Kamineni	Urban	AMR	2.703	2.697	2.703	0.230	0.499	100%	
746	VIJAYAWADA	GUNADALA	KANURU	33/11KV New Auto Nagar S	301521140505	11KV INDL C BLOCK	Urban	AMR	0.720	0.689	0.720	4.295	5.337	100%	
747	VIJAYAWADA	GUNADALA	KANURU	33/11KV Murali Nagar SS	301521140601	11KV Gowrsankarnagar	Urban	AMR	7.269	6.905	7.269	5.009	6.123	100%	
748	VIJAYAWADA	GUNADALA	KANURU	33/11KV Murali Nagar SS	301521140602	11KV Muralinagar Feede	Urban	AMR	3.396	3.305	3.396	2.683	3.162	100%	
749	VIJAYAWADA	GUNADALA	KANURU	33/11KV Murali Nagar SS	301521140603	11KV Vinayakanagar Fee	Urban	AMR	2.560	2.484	2.560	2.987	2.939	100%	
750	VIJAYAWADA	GUNADALA	KANURU	33/11KV Murali Nagar SS	301521140604	11KV JRD 2	Urban	AMR	6.529	6.224	6.529	4.672	6.085	100%	
751	VIJAYAWADA	GUNADALA	KANURU	33/11KV Mahadevapuram	301521140701	11KV Bundar Road Feed	Urban	AMR	9.104	8.984	9.104	1.318	4.834	100%	
752	VIJAYAWADA	GUNADALA	KANURU	33/11KV Mahadevapuram	301521140702	11KV Tulasi Nagar	Urban	AMR	6.216	6.001	6.216	3.459	4.213	100%	
753	VIJAYAWADA	GUNADALA	KANURU	33/11KV Mahadevapuram	301521140703	11KV Sanathnagar Feede	Urban	AMR	9.228	9.061	9.228	1.811	3.305	100%	
754	VIJAYAWADA	GUNADALA	KANURU	33/11KV Mahadevapuram	301521140704	11KV Teachers Colony Fe	Urban	AMR	6.671	6.501	6.671	2.557	2.448	100%	
755	VIJAYAWADA	GUNADALA	KANURU	33/11KV Sri Ram Nagar SS	301521140801	11KV SRIRAM NAGAR FE	Urban	AMR	1.111	1.094	1.111	1.559	2.495	100%	
756	VIJAYAWADA	GUNADALA	KANURU	33/11KV Gangur SubStatio	301521240101	11KV GOSALA FEEDER	Rural	AMR	8.122	7.826	8.122	3.647	16.780	100%	
757	VIJAYAWADA	GUNADALA	KANURU	33/11KV Gangur SubStatio	301521240103	11KV GANGURU FEEDER	Rural	AMR	5.610	5.397	5.610	3.793	5.838	100%	
758	VIJAYAWADA	GUNADALA	KANURU	33/11KV Gangur SubStatio	301521240104	11KV PENAMALURU FEE	Rural	AMR	10.651	10.373	10.651	2.605	9.583	100%	
759	VIJAYAWADA	GUNADALA	KANURU	33/11KV Gangur SubStatio	301521240105	11KV AP FOUNDRY FEED	Rural	AMR	1.802	1.713	1.802	4.977	23.969	100%	
760	VIJAYAWADA	GUNADALA	KANURU	33/11KV Gangur SubStatio	301521240106	11KV VANUKURU FEEDE	Mixed	AMR	2.151	1.974	2.151	8.221	25.389	100%	
761	VIJAYAWADA	GUNADALA	KANURU	33/11KV Gangur SubStatio	301521240107	11KV CHODAVARAM FEI	Mixed	AMR	1.004	0.915	1.004	8.783	40.039	100%	
762	VIJAYAWADA	GUNADALA	KANURU	33/11KV Gangur SubStatio	301521240108	11KV SRIHARI GARDEN F	Rural	AMR	4.877	4.715	4.877	3.324	12.555	100%	
763	VIJAYAWADA	GUNADALA	KANURU	33/11KV Poranki SubStatic	301521240201	11KV Poranki Feeder	Urban	AMR	12.190	11.889	12.190	2.467	2.467	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
764	VIJAYAWADA	GUNADALA	KANURU	33/11KV Poranki SubStatic	301521240202	11KV Siddhartha Feeder	Urban	AMR	15.255	14.656	15.255	3.922	4.559	100%	
765	VIJAYAWADA	GUNADALA	KANURU	33/11KV Poranki SubStatic	301521240203	11KV Poranki Agl Feeder	Agricultura	AMR	1.448	1.335	1.448	7.819	5.736	100%	
766	VIJAYAWADA	GUNADALA	KANURU	33/11KV Poranki SubStatic	301521240204	11KV Salipeta feeder	Urban	AMR	8.310	7.978	8.310	3.993	6.113	100%	
767	VIJAYAWADA	GUNADALA	KANURU	33/11KV Poranki SubStatic	301521240205	11KV Mahalaxmi feeder	Urban	AMR	12.452	12.028	12.452	3.408	4.048	100%	
768	VIJAYAWADA	GUNADALA	KANURU	33/11KV Kankipadu SubSta	301521340101	11KV Kankipadu town -I	Rural	AMR	5.245	4.917	5.245	6.255	9.114	100%	
769	VIJAYAWADA	GUNADALA	KANURU	33/11KV Kankipadu SubSta	301521340102	11KV Kankipadu Town -I	Rural	AMR	9.630	9.202	9.630	4.440	11.470	100%	
770	VIJAYAWADA	GUNADALA	KANURU	33/11KV Kankipadu SubSta	301521340103	11KV Gollagudem	Mixed	AMR	2.769	2.598	2.769	6.184	14.902	100%	
771	VIJAYAWADA	GUNADALA	KANURU	33/11KV Kankipadu SubSta	301521340104	11KV Kankipadu Rurals	Rural	AMR	1.444	1.352	1.444	6.358	9.158	100%	
772	VIJAYAWADA	GUNADALA	KANURU	33/11KV Madduru SubStat	301521340201	11KV Godavarru	Mixed	AMR	3.411	3.178	3.411	6.836	19.394	100%	
773	VIJAYAWADA	GUNADALA	KANURU	33/11KV Madduru SubStat	301521340202	11KV Madduru	Rural	AMR	2.145	2.015	2.145	6.066	24.480	100%	
774	VIJAYAWADA	GUNADALA	KANURU	33/11KV Madduru SubStat	301521340203	11KV K S N Palen	Mixed	AMR	1.591	1.479	1.591	7.072	6.885	100%	
775	VIJAYAWADA	GUNADALA	KANURU	33/11KV UPPALURU SubSt	301521340301	11KV Punadipadu,Velpu	Mixed	AMR	1.945	1.808	1.945	7.071	21.081	100%	
776	VIJAYAWADA	GUNADALA	KANURU	33/11KV UPPALURU SubSt	301521340302	11KV Uppuluru	Rural	AMR	4.741	4.476	4.741	5.599	14.604	100%	
777	VIJAYAWADA	GUNADALA	KANURU	33/11KV UPPALURU SubSt	301521340303	11KV Tenneru feeder	Mixed	AMR	3.262	3.042	3.262	6.754	15.452	100%	
778	VIJAYAWADA	GUNADALA	KANURU	33/11KV UPPALURU SubSt	301521340304	11KV Manthena feeder	Mixed	AMR	2.206	2.045	2.206	7.274	20.805	100%	
779	VIJAYAWADA	GUNADALA	KANURU	33/11KV EDUPUGALLU Sub	301521340401	11KV EDUPUGALLU TOW	Rural	AMR	3.040	2.869	3.040	5.613	13.814	100%	
780	VIJAYAWADA	GUNADALA	KANURU	33/11KV EDUPUGALLU Sub	301521340402	11KV EDUPUGALLU AGL	Mixed	AMR	1.952	1.825	1.952	6.524	20.635	100%	
781	VIJAYAWADA	GUNADALA	KANURU	33/11KV EDUPUGALLU Sub	301521340403	11KV TECHNO SCHOOL	Rural	AMR	6.013	5.704	6.013	5.132	4.172	100%	
782	VIJAYAWADA	GUNADALA	KANURU	33/11KV KOLAVENNU Sub	301521340501	11KV Bandar road	Agricultura	AMR	2.128	2.005	2.128	5.767	19.953	100%	
783	VIJAYAWADA	GUNADALA	KANURU	33/11KV KOLAVENNU Sub	301521340502	11KV Neppalli	Mixed	AMR	3.650	3.498	3.650	4.183	11.037	100%	
784	VIJAYAWADA	GUNADALA	KANURU	33/11KV KOLAVENNU Sub	301521340503	11KV K G Lock	Mixed	AMR	2.566	2.408	2.566	6.163	29.459	100%	
785	VIJAYAWADA	GUNADALA	KANURU	33/11KV KOLAVENNU Sub	301521340504	11KV Gudiwada	Rural	AMR	1.291	1.201	1.291	6.981	9.714	100%	
786	VIJAYAWADA	GUNADALA	KANURU	33/11KV PRODDUTURU SS	301521340601	11KV GAYATHRI VIHAR	Rural	AMR	4.230	3.977	4.230	5.988	9.678	100%	
787	VIJAYAWADA	GUNADALA	KANURU	33/11KV PRODDUTURU SS	301521340602	11KV PRODDUTURU	Mixed	AMR	2.025	1.927	2.025	4.824	16.581	100%	
788	VIJAYAWADA	GUNADALA	KANURU	33/11KV PRODDUTURU SS	301521340603	11KV CH V PALEM	Mixed	AMR	3.576	3.373	3.576	5.684	25.916	100%	
789	VIJAYAWADA	GUNADALA	KANURU	33/11KV PRODDUTURU SS	301521340604	11KV LOCK ROAD	Mixed	AMR	0.468	0.439	0.468	6.334	17.976	100%	
790	VIJAYAWADA	GUNADALA	KANURU	33/11KV Tadigadapa Sub S	301521440101	11KV TADIGADAPA	Urban	AMR	12.230	11.544	12.230	5.614	10.925	100%	
791	VIJAYAWADA	GUNADALA	KANURU	33/11KV Tadigadapa Sub S	301521440102	11KV QUALITY FEEDER	Urban	AMR	5.378	5.254	5.378	2.299	1.722	100%	
792	VIJAYAWADA	GUNADALA	KANURU	33/11KV Tadigadapa Sub S	301521440103	11KV PEDAPULIPAKA AG	Agricultura	AMR	2.408	2.257	2.408	6.281	14.241	100%	
793	VIJAYAWADA	GUNADALA	KANURU	33/11KV Tadigadapa Sub S	301521440104	11KV PADMAJA NAGAR	Urban	AMR	11.799	11.182	11.799	5.226	6.637	100%	
794	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV Auto nagar SubSt	301522140101	11KV APIIC	Urban	AMR	4.864	4.713	4.864	3.095	4.349	100%	
795	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV Auto nagar SubSt	301522140102	11KV Auto Nagar-II	Urban	AMR	8.204	7.957	8.204	3.019	12.697	100%	
796	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV Auto nagar SubSt	301522140103	11KV Auto Nagar-I	Urban	AMR	5.377	5.217	5.377	2.982	2.622	100%	
797	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV Auto nagar SubSt	301522140104	11KV100 feet road	Urban	AMR	1.482	1.434	1.482	3.276	3.209	100%	
798	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV Auto nagar SubSt	301522140105	11kv High School Road	Urban	AMR	3.984	3.854	3.984	3.276	5.909	100%	
799	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV Auto nagar SubSt	301522140106	11kv R R Gardens	Urban	AMR	8.651	8.413	8.651	2.744	7.063	100%	
800	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV Auto nagar SubSt	301522140107	11kv Ganapathi Ashrama	Urban	AMR	3.491	3.388	3.491	2.954	6.088	100%	
801	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV Auto nagar SubSt	301522140108	11kv Kakatiya Bazar	Urban	AMR	8.154	7.919	8.154	2.877	3.514	100%	
802	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV NewAutonagar In	301522140201	11KVIndl Estate	Urban	AMR	1.134	1.098	1.134	3.173	7.412	100%	
803	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV NewAutonagar In	301522140202	11KV IALA	Urban	AMR	0.888	0.863	0.888	2.798	3.908	100%	
804	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV NewAutonagar In	301522140203	11KVLiners India	Urban	AMR	0.178	0.172	0.178	3.683	77.605	100%	
805	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV NewAutonagar In	301522140204	11KV CPWD	Urban	AMR	5.393	5.246	5.393	2.724	3.633	100%	
806	VIJAYAWADA	GUNADALA	KANURU	33/11KV NewAutonagar In	301522140205	11KVAutonagar Bus star	Urban	AMR	6.249	6.122	6.249	2.027	2.484	100%	
807	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV NewAutonagar In	301522140206	11KVChowdary peta	Urban	AMR	6.454	6.230	6.454	3.472	3.369	100%	
808	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV polytechnic SubSt	301522240104	11KV BENZ CIRCLE	Urban	AMR	7.628	7.412	7.628	2.829	3.682	100%	

SI No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
809	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV polytechnic SubSt	301522240105	11KV ITI ROAD	Urban	AMR	1.794	1.774	1.794	1.108	1.108	100%	
810	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV polytechnic SubSt	301522240106	11KV CHRISTHURAJAPUI	Urban	AMR	5.036	4.919	5.036	2.336	10.099	100%	
811	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV polytechnic SubSt	301522240107	11KV JAYAPRAKASHNAG	Urban	AMR	9.884	9.690	9.884	1.961	4.671	100%	
812	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV polytechnic SubSt	301522240109	11KV LAYOLA GARDEN	Urban	AMR	7.755	7.536	7.755	2.828	3.202	100%	
813	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV polytechnic SubSt	301522240110	11KV STPI	Urban	AMR	3.078	3.015	3.078	2.047	2.308	100%	
814	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV polytechnic SubSt	301522240111	11KV SAINAGAR	Urban	AMR	1.408	1.368	1.408	2.843	5.529	100%	
815	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV polytechnic SubSt	301522240112	11KV RTC COLONY	Urban	AMR	8.965	8.620	8.965	3.851	6.873	100%	
816	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV BHARATHINAGAR	301522240201	11KV SUBBA RAO COLOI	Urban	AMR	9.886	9.779	9.886	1.079	2.802	100%	
817	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV BHARATHINAGAR	301522240202	11KV BHARATINAGAR M	Urban	AMR	8.417	8.212	8.417	2.427	2.881	100%	
818	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV BHARATHINAGAR	301522240203	11KV SNB COLONY WAT	Urban	AMR	9.367	9.217	9.367	1.602	3.546	100%	
819	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV BHARATHINAGAR	301522240204	11KV OMKAR KALYANAI	Urban	AMR	2.727	2.654	2.727	2.672	5.568	100%	
820	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV BHARATHINAGAR	301522240205	11KV Autonagar III	Urban	AMR	2.650	2.579	2.650	2.667	3.737	100%	
821	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV BHARATHINAGAR	301522240206	11kv Vijaya Lakshmi Fee	Urban	AMR	5.379	5.289	5.379	1.685	1.883	100%	
822	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV SIDDHARTHANAG	301522240301	11KV SIDDARHANAGAR	Urban	AMR	6.279	6.132	6.279	2.339	3.839	100%	
823	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV SIDDHARTHANAG	301522240302	11KV TICKLE ROAD FEED	Urban	AMR	8.986	8.785	8.986	2.233	2.904	100%	
824	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV SIDDHARTHANAG	301522240303	11KV 5TH ROUTE FEEDE	Urban	AMR	4.089	4.016	4.089	1.799	2.073	100%	
825	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV SIDDHARTHANAG	301522240304	11KV GEV PROJECTS FEE	Urban	AMR	2.579	2.533	2.579	1.784	1.509	100%	
826	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV SIDDHARTHANAG	301522240305	11KV KALANAGAR FEEDI	Urban	AMR	11.587	11.312	11.587	2.372	3.841	100%	
827	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV SIDDHARTHANAG	301522240306	11KV GAYATHRINAGAR I	Urban	AMR	3.620	3.543	3.620	2.109	2.031	100%	
828	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV Darsipeta SS	301522340101	11KV NSM	Urban	AMR	7.667	7.340	7.667	4.260	8.977	100%	
829	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV Darsipeta SS	301522340102	11KV Patamata	Urban	AMR	10.069	9.712	10.069	3.540	4.352	100%	
830	VIJAYAWADA	VIJAYAWADA TOWN	VIJAYAWADA C AND O D3	33/11KV Darsipeta SS	301522340103	11KV KRISHNAVENI ROA	Urban	AMR	1.804	1.733	1.804	3.902	5.079	100%	
831	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV Darsipeta SS	301522340104	11KV NTR Circle	Urban	AMR	4.819	4.630	4.819	3.926	5.285	100%	
832	VIJAYAWADA	GUNADALA	PATAMATA	33/11 KV ElecricityColony	301522340201	11KV treasury employee	Urban	AMR	5.005	4.815	5.005	3.795	4.599	100%	
833	VIJAYAWADA	GUNADALA	PATAMATA	33/11 KV ElecricityColony	301522340202	11KV AYYAPA NAGAR	Urban	AMR	4.587	4.398	4.587	4.117	4.917	100%	
834	VIJAYAWADA	GUNADALA	PATAMATA	33/11 KV ElecricityColony	301522340203	11KV JD NAGAR	Urban	AMR	6.786	6.485	6.786	4.432	7.935	100%	
835	VIJAYAWADA	GUNADALA	PATAMATA	33/11 KV ElecricityColony	301522340204	11KV NEW RTC COLONY	Urban	AMR	3.408	3.257	3.408	4.436	8.362	100%	
836	VIJAYAWADA	GUNADALA	PATAMATA	33/11 KV ElecricityColony	301522340205	11KV Mega Town ship	Urban	AMR	4.082	3.909	4.082	4.253	4.253	100%	
837	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Adavinekkalam Su	301611140101	11KV Kusalava	INDL	AMR	3.781	3.898	3.781	-3.100	4.502	100%	
838	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Adavinekkalam Su	301611140102	11KV Adavinekkalam	Mixed	AMR	1.777	1.654	1.777	6.920	43.813	100%	
839	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Adavinekkalam Su	301611140103	11KV Adavinekkalam To	Rural	AMR	5.071	4.575	5.071	9.786	24.588	100%	
840	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Adavinekkalam Su	301611140104	11KV Pothavarapadu	Mixed	AMR	5.808	5.256	5.808	9.504	31.778	100%	
841	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Agiripalli SubStati	301611140201	11KV Agiripalli Town-1	Rural	AMR	7.626	7.337	7.626	3.782	22.627	100%	
842	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Agiripalli SubStati	301611140202	11KV Thotapalli	Mixed	AMR	3.777	3.428	3.777	9.241	35.815	100%	
843	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Agiripalli SubStati	301611140203	11 KV Chopparametla	Mixed	AMR	3.481	3.080	3.481	11.520	46.143	100%	
844	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Agiripalli SubStati	301611140204	11KV vadlaman	Mixed	AMR	2.665	2.436	2.665	8.595	45.013	100%	
845	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Agiripalli SubStati	301611140205	11KV Agiripalli Town- 2	Rural	AMR	2.024	1.931	2.024	4.571	4.687	100%	
846	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Agiripalli SubStati	301611140206	11KV AMMAVARIGUDEI	Mixed	AMR	1.994	1.774	1.994	11.044	46.313	100%	
847	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Edulagudem SS	301611140301	11KV Edulagudem Town	Rural	AMR	1.677	1.604	1.677	4.349	56.385	100%	
848	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Edulagudem SS	301611140302	11KV Suravaram	Mixed	AMR	6.339	5.753	6.339	9.251	44.481	100%	
849	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Edulagudem SS	301611140303	11KV Edulagudem Rural	Mixed	AMR	1.450	1.323	1.450	8.715	18.457	100%	
850	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Chekkapalli SubSt	301611240101	11KV Chekkaplli Diwana	Mixed	AMR	4.633	3.982	4.633	14.062	74.254	100%	
851	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Chekkapalli SubSt	301611240102	11KV Chekkapalli Agl	Mixed	AMR	2.456	2.189	2.456	10.861	13.342	100%	
852	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Chekkapalli SubSt	301611240103	11KV Chekkapalli rural	Mixed	AMR	3.797	3.408	3.797	10.244	65.355	100%	
853	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Chekkapalli SubSt	301611240104	11KV Chekkapalli Town	Rural	AMR	1.439	1.301	1.439	9.611	16.377	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
854	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Gudipadu SubSta	301611240201	11KV Ellapuram feeder	Mixed	AMR	3.527	3.249	3.527	7.869	36.404	100%	
855	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Gudipadu SubSta	301611240202	11KV Gullapudi	Mixed	AMR	2.691	2.534	2.691	5.833	60.360	100%	
856	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Gudipadu SubSta	301611240203	11KV Gudipadu	Mixed	AMR	2.846	2.580	2.846	9.370	27.333	100%	
857	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Gudipadu SubSta	301611240204	11KV Gudipadu Agl	Agricultura	AMR	2.473	2.230	2.473	9.851	100.000	100%	
858	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Ramanakkapeta S	301611240301	11KV Ramanakkapet	Mixed	AMR	3.891	3.556	3.891	8.631	46.134	100%	
859	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Ramanakkapeta S	301611240302	11KV Ramanakkapeta Ag	Agricultura	AMR	2.055	1.858	2.055	9.623	61.786	100%	
860	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Ramanakkapeta S	301611240303	11KV HT feeder	INDL	AMR	0.612	0.551	0.612	9.989	10.142	100%	
861	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Ramanakkapeta S	301611240304	11KV Ramanakapet Agl-1	Agricultura	AMR	1.099	1.005	1.099	8.542	16.480	100%	
862	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Ramanakkapeta S	301611240305	11KV Surepalli	Mixed	AMR	2.709	2.478	2.709	8.524	44.846	100%	
863	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Ramanakkapeta S	301611240306	11KV A K Gudem	Mixed	AMR	4.628	4.120	4.628	10.972	26.234	100%	
864	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Basavarappadu S	301611240401	11KV Basavarapadu	Mixed	AMR	2.579	2.327	2.579	9.761	48.462	100%	
865	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Basavarappadu S	301611240402	11KV LOPUDI	Mixed	AMR	2.700	2.479	2.700	8.188	39.088	100%	
866	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Basavarappadu S	301611240403	11KV Surepalli Rural	Mixed	AMR	2.346	1.978	2.346	15.686	#N/A	100%	
867	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Edara SS	301611340101	11KV Edara Town	Rural	AMR	0.808	0.768	0.808	4.974	60.776	100%	
868	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Edara SS	301611340102	11KV Sobhana Puram	Mixed	AMR	3.986	3.751	3.986	5.907	35.987	100%	
869	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Edara SS	301611340103	11KV Edara Rural feeder	Mixed	AMR	3.615	3.203	3.615	11.393	39.927	100%	
870	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Edara SS	301611340104	11KV Kotha Edara Feede	Mixed	AMR	4.201	3.738	4.201	11.040	39.481	100%	
871	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Katrenipadu SubS	301611440101	11KV Katrenipadu AGL-I	Mixed	AMR	3.645	3.298	3.645	9.527	9.873	100%	
872	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Katrenipadu SubS	301611440102	11KV Katrenipadu Villag	Mixed	AMR	3.684	3.298	3.684	10.468	51.137	100%	
873	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Katrenipadu SubS	301611440103	11KV Katrenipadu RWS f	Rural	AMR	1.022	0.937	1.022	8.313	48.849	100%	
874	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Katrenipadu SubS	301611440104	11KV Katrenipadu AGL-I	Mixed	AMR	2.823	2.517	2.823	10.840	22.458	100%	
875	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Morsapudi SubSta	301611440201	11KV Gollapalli	Mixed	AMR	2.388	2.244	2.388	6.004	13.874	100%	
876	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Morsapudi SubSta	301611440202	11KV INDIRA	Rural	AMR	6.586	6.387	6.586	3.024	10.858	100%	
877	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Morsapudi SubSta	301611440203	11KV Devaragunta	Mixed	AMR	6.432	6.038	6.432	6.117	43.264	100%	
878	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Morsapudi SubSta	301611440204	11KV Morsapudi	Mixed	AMR	4.537	4.279	4.537	5.693	72.905	100%	
879	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Morsapudi SubSta	301611440205	11KV Raghunadha Swam	Mixed	AMR	5.261	4.864	5.261	7.540	17.663	100%	
880	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Musunuru SubSta	301611440301	11KV Musunuru AGL Fee	Mixed	AMR	2.321	2.016	2.321	13.143	28.370	100%	
881	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Musunuru SubSta	301611440302	11KV Gogulampadu-1 Fe	Mixed	AMR	1.571	1.543	1.571	1.765	23.056	100%	
882	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Musunuru SubSta	301611440303	11KV Chintalavalli AGL F	Mixed	AMR	3.244	3.015	3.244	7.071	18.176	100%	
883	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Musunuru SubSta	301611440304	11KV Korla Gunta	Mixed	AMR	4.319	4.060	4.319	5.984	50.974	100%	
884	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Musunuru SubSta	301611440305	11KV Musunuru 24hrs fe	INDL	AMR	0.298	0.272	0.298	8.552	6.607	100%	
885	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Musunuru SubSta	301611440306	11KV Simhadri Puram	Mixed	AMR	4.344	4.110	4.344	5.373	3.591	100%	
886	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Musunuru SubSta	301611440307	11KV Gogulampadu -2	Mixed	AMR	2.355	2.252	2.355	4.379	12.330	100%	
887	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Chillaboinapalli S	301611440401	11KV Chillaboinapalli Vil	Rural	AMR	3.315	2.978	3.315	10.168	23.757	100%	
888	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Chillaboinapalli S	301611440402	11KV Chillaboinapalli AG	Mixed	AMR	2.946	2.692	2.946	8.633	85.381	100%	
889	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Chillaboinapalli S	301611440403	11KV Chillaboinapalli 24	INDL	AMR	0.155	0.150	0.155	2.970	2.997	100%	
890	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Nuzivid SubStatio	301612140101	11KV Local/Nuzvid-3	Urban	AMR	4.012	3.722	4.012	7.222	6.839	100%	
891	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Nuzivid SubStatio	301612140102	11KV Local/Nuzvid-1	Urban	AMR	9.120	8.517	9.120	6.612	9.883	100%	
892	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Nuzivid SubStatio	301612140103	11KV AUTO NAGAR	Urban	AMR	0.920	0.840	0.920	8.755	14.614	100%	
893	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Nuzivid SubStatio	301612140105	11KV Tukkuluru	Mixed	AMR	3.494	3.273	3.494	6.319	45.508	100%	
894	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Nuzivid SubStatio	301612140106	11KV Jangamgudem	Mixed	AMR	5.050	4.618	5.050	8.560	30.307	100%	
895	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Nuzivid SubStatio	301612140108	11KV NUZVID-TOWN-II	Urban	AMR	4.326	4.097	4.326	5.302	6.690	100%	
896	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Nuzividu IIIT SS	301612140201	11KV Krishnawater Wor	Urban	AMR	8.292	7.797	8.292	5.966	5.966	100%	
897	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Nuzividu IIIT SS	301612140202	11KV Battulavarigudem	Mixed	AMR	6.497	6.155	6.497	5.261	25.073	100%	
898	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Nuzividu IIIT SS	301612140203	11KV Station Thota	Urban	AMR	2.383	2.180	2.383	8.527	12.713	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
899	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Nuzividu IIIT SS	301612140204	11KV Goduguvari Guden	Mixed	AMR	1.235	1.149	1.235	7.017	61.546	100%	
900	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV NUZIVID TOWN S	301612140301	11KV Krishnareddy Colo	Urban	AMR	0.601	0.547	0.601	9.072	30.287	100%	
901	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV NUZIVID TOWN S	301612140302	11KV Borvancha	Mixed	AMR	5.140	4.804	5.140	6.539	25.638	100%	
902	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV NUZIVID TOWN S	301612140303	11KV N T R Colony	Urban	AMR	2.067	1.931	2.067	6.559	16.576	100%	
903	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV NUZIVID TOWN S	301612140304	11KV R T C Bus stand	Urban	AMR	10.035	9.297	10.035	7.355	8.417	100%	
904	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV NUZIVID TOWN S	301612140305	11KV BAPUNAGAR	Mixed	AMR	1.530	1.468	1.530	4.044	5.641	100%	
905	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Annavaram SubSt	301612240101	11KV Nandini (HT)	Urban	AMR	3.655	3.647	3.655	0.206	7.426	100%	
906	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Annavaram SubSt	301612240102	11KV Annavaram Village	Rural	AMR	3.881	3.681	3.881	5.169	31.633	100%	
907	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Annavaram SubSt	301612240103	11KV Digavalli	Mixed	AMR	2.628	2.455	2.628	6.576	43.959	100%	
908	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Annavaram SubSt	301612240104	11KV Annavarm-Mukkol	Mixed	AMR	1.512	1.372	1.512	9.287	74.318	100%	
909	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Annavaram SubSt	301612240105	11KV Yanamadala	Mixed	AMR	0.674	0.628	0.674	6.835	69.897	100%	
910	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Annavaram SubSt	301612240106	11KV Venkatayapalem	Mixed	AMR	4.684	4.151	4.684	11.375	50.585	100%	
911	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Gopavaram SubSt	301612240201	11KV Gopavaram	Rural	AMR	1.991	1.944	1.991	2.340	34.507	100%	
912	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Gopavaram SubSt	301612240202	11KV Balaramgardens	Mixed	AMR	2.000	1.789	2.000	10.553	7.157	100%	
913	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Gopavaram SubSt	301612240203	11KV Gopavaram Agl1	Mixed	AMR	2.426	2.194	2.426	9.550	51.853	100%	
914	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Gopavaram SubSt	301612240204	11KV Gopavaram Agl 2	Mixed	AMR	3.389	3.110	3.389	8.240	22.278	100%	
915	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Vattigudipadu Su	301612240301	11KV A SAGARAM	Mixed	AMR	5.536	5.089	5.536	8.073	47.847	100%	
916	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Vattigudipadu Su	301612240302	11KV Water works	Rural	AMR	5.435	4.980	5.435	8.382	8.843	100%	
917	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Vattigudipadu Su	301612240303	11KV Polasanapalli	Mixed	AMR	3.577	3.375	3.577	5.647	26.443	100%	
918	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Vattigudipadu Su	301612240304	11KV VATTIGUDIPADU	Mixed	AMR	2.955	2.672	2.955	9.580	21.691	100%	
919	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Vattigudipadu Su	301612240305	11KV PRAKASH ARTS	Mixed	AMR	0.275	0.253	0.275	8.234	42.054	100%	
920	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Venkatapuram Su	301612240401	11KV Venkatapuram	Mixed	AMR	2.097	1.962	2.097	6.407	57.781	100%	
921	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Venkatapuram Su	301612240402	11KV Pedapativariguden	Mixed	AMR	2.765	2.456	2.765	11.167	65.544	100%	
922	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Venkatapuram Su	301612240403	11KV Velupucherla	Mixed	AMR	4.834	4.637	4.834	4.085	34.046	100%	
923	VIJAYAWADA	NUZVIDU	NUZVIDU RURAL	33/11KV Venkatapuram Su	301612240404	11KV Balive	Mixed	AMR	1.274	1.149	1.274	9.809	37.853	100%	
924	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Digavalli SS	301612240501	11KV Mittagudem	Mixed	AMR	2.622	2.307	2.622	12.016	43.042	100%	
925	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Digavalli SS	301612240502	11KV Leelanagar Village	Rural	AMR	1.379	1.252	1.379	9.189	20.679	100%	
926	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Digavalli SS	301612240503	11KV T Digavalli	Mixed	AMR	4.593	4.082	4.593	11.128	62.692	100%	
927	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Ravicherla SS	301612240601	11KV Ravicherla Village	Rural	AMR	1.042	0.943	1.042	9.496	9.896	100%	
928	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Ravicherla SS	301612240602	11KV China Ravicherla	Mixed	AMR	3.427	3.081	3.427	10.086	50.252	100%	
929	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Ravicherla SS	301612240603	11KV Peda Ravicherla	Mixed	AMR	2.879	2.573	2.879	10.636	41.309	100%	
930	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Pothireddipalli SS	301612240701	11KV Pothureddypalli Vi	Rural	AMR	1.564	1.407	1.564	10.092	39.210	100%	
931	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Pothireddipalli SS	301612240702	11KV Pothuredypalli-Mu	Mixed	AMR	1.346	1.186	1.346	11.870	1.212	100%	
932	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Pothireddipalli SS	301612240703	11KV Pothureddypalli Ru	Mixed	AMR	2.031	1.840	2.031	9.402	30.273	100%	
933	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Mukkoluppadu Su	301612240801	11KV Mukkollupadu Agl	Mixed	AMR	2.686	2.315	2.686	13.799	58.813	100%	
934	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Mukkoluppadu Su	301612240802	11KV Mukkollupadu Villa	Mixed	AMR	0.143	0.131	0.143	8.626	32.575	100%	
935	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Mukkoluppadu Su	301612240803	11KV Nehru Nagar	Mixed	AMR	1.647	1.489	1.647	9.584	32.773	100%	
936	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Mukkoluppadu Su	301612240804	11KV Reddy Gudem	Mixed	AMR	2.155	1.926	2.155	10.652	32.364	100%	
937	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Meerjapuram Sub	301612340201	11KV Kothapalli	Mixed	AMR	5.249	4.901	5.249	6.625	43.667	100%	
938	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Meerjapuram Sub	301612340202	11KV Meerjapuram	Mixed	AMR	3.404	3.223	3.404	5.314	16.133	100%	
939	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Meerjapuram Sub	301612340203	11KV Billanapalli	Mixed	AMR	2.100	1.918	2.100	8.639	53.168	100%	
940	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Meerjapuram Sub	301612340204	11KV M N S palem	Agricultura	AMR	2.723	2.553	2.723	6.229	52.108	100%	
941	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Meerjapuram Sub	301612340205	11KV Vempadu Agrahara	Rural	AMR	2.510	2.499	2.510	0.434	16.367	100%	
942	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Meerjapuram Sub	301612340206	11KV K Gollagudem	Mixed	AMR	2.980	2.775	2.980	6.879	8.389	100%	
943	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Pallerlamudi Sub	301612340301	11KV Madicharla	Mixed	AMR	5.656	5.323	5.656	5.878	78.697	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
944	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Pallerlamudi Sub	301612340302	11KV Pallerlamudi	Mixed	AMR	4.213	3.935	4.213	6.613	30.292	100%	
945	VIJAYAWADA	GUDIVADA	HANUMAN JUNCTION	33/11KV Pallerlamudi Sub	301612340303	11KV Koyyuru	Mixed	AMR	4.600	4.013	4.600	12.773	42.909	100%	
946	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Pallerlamudi Sub	301612340304	11KV Sobhanapuram	Rural	AMR	1.985	1.868	1.985	5.919	34.311	100%	
947	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Seetharampuram	301612340401	11KV Polavaram Canal	Rural	AMR	2.364	2.227	2.364	5.819	28.094	100%	
948	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Seetharampuram	301612340402	11KV Marribandam	Mixed	AMR	3.111	2.900	3.111	6.783	49.984	100%	
949	VIJAYAWADA	NUZVIDU	NUZVIDU TOWN	33/11KV Seetharampuram	301612340403	11KV Seetharampuram	Mixed	AMR	3.772	3.555	3.772	5.728	8.908	100%	
950	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Chimalapadu Sub	301621140101	11KV RC Puram	Mixed	AMR	2.830	2.651	2.830	6.310	15.158	100%	
951	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Chimalapadu Sub	301621140102	11KV Chimalapadu Tow	Rural	AMR	2.986	2.781	2.986	6.850	40.738	100%	
952	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Chimalapadu Sub	301621140103	11KV K R Palem	Mixed	AMR	3.061	2.860	3.061	6.545	54.855	100%	
953	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Chimalapadu Sub	301621140104	11KV Madhvaram	Mixed	AMR	4.616	4.201	4.616	8.982	34.974	100%	
954	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Kambhampadu Su	301621140201	11KV Khambhampadu	Mixed	AMR	3.989	3.753	3.989	5.913	3.555	100%	
955	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Kambhampadu Su	301621140202	11KV zellakuntla	Mixed	AMR	4.555	4.259	4.555	6.507	34.622	100%	
956	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Kambhampadu Su	301621140203	11KV Kambhmpadu-rura	Agricultura	AMR	1.087	1.005	1.087	7.511	23.409	100%	
957	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Kambhampadu Su	301621140204	11KV Gollamandala	Mixed	AMR	6.232	5.829	6.232	6.468	40.858	100%	
958	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV POLISELTIPADU S	301621140301	11KV Koduru Rural	Mixed	AMR	4.035	3.713	4.035	7.978	76.720	100%	
959	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV POLISELTIPADU S	301621140302	11KV Pollisettipadu	Mixed	AMR	4.148	3.853	4.148	7.117	30.386	100%	
960	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV POLISELTIPADU S	301621140303	11KV Koduru Town	Rural	AMR	1.045	0.981	1.045	6.145	12.231	100%	
961	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV A.Konduru SS	301621140401	11KV A Konduru Town	Rural	AMR	1.686	1.577	1.686	6.457	24.349	100%	
962	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV A.Konduru SS	301621140402	11KV A Konduru Rural	Mixed	AMR	2.226	2.063	2.226	7.320	38.814	100%	
963	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV A.Konduru SS	301621140403	11KV Atlapragada	Mixed	AMR	1.024	0.944	1.024	7.760	76.104	100%	
964	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV A.Konduru SS	301621140404	11KV Kummarikuntla	Mixed	AMR	3.491	3.215	3.491	7.911	49.882	100%	
965	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Tiruvuru(Lakshmi	301621240101	11KV KOKILAMPADU	Mixed	AMR	4.264	3.714	4.264	12.899	24.108	100%	
966	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Tiruvuru(Lakshmi	301621240102	11KV NSP COLONY	Urban	AMR	9.013	8.537	9.013	5.280	8.233	100%	
967	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Tiruvuru(Lakshmi	301621240103	11KV Laxmipuram	Mixed	AMR	4.206	3.736	4.206	11.162	36.485	100%	
968	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Tiruvuru(Lakshmi	301621240104	11KV MALLELA	Mixed	AMR	3.725	3.359	3.725	9.820	25.106	100%	
969	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Tiruvuru(Lakshmi	301621240105	11KV Industrial	INDL	AMR	1.227	1.187	1.227	3.296	4.046	100%	
970	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV TIRUVURU TOWN	301621240201	11KV Tiruvuru Town	Urban	AMR	7.301	7.012	7.301	3.954	8.047	100%	
971	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV TIRUVURU TOWN	301621240202	11KV Rajupeta	Urban	AMR	5.610	5.373	5.610	4.218	5.527	100%	
972	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV TIRUVURU TOWN	301621240203	11KV P T Kothuru	Urban	AMR	3.975	3.828	3.975	3.711	10.124	100%	
973	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV TIRUVURU TOWN	301621240204	11KV Tiruvuru Agl Feede	Agricultura	AMR	0.698	0.638	0.698	8.617	61.922	100%	
974	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Chintalapadu Sub	301621340101	11KV Rolupadi	Mixed	AMR	1.663	1.531	1.663	7.988	49.186	100%	
975	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Chintalapadu Sub	301621340102	11KV Komireddypalli	Mixed	AMR	3.501	3.178	3.501	9.219	46.376	100%	
976	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Chintalapadu Sub	301621340103	11KV Chintalapadu	Mixed	AMR	3.314	2.995	3.314	9.631	40.493	100%	
977	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Chintalapadu Sub	301621340104	11KV Mustikuntla	Mixed	AMR	1.319	1.201	1.319	8.981	35.240	100%	
978	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Munukollu SS	301621340201	11KV Akkapalem	Mixed	AMR	2.702	2.295	2.702	15.056	53.976	100%	
979	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Munukollu SS	301621340202	11KV Vamakuntla	Mixed	AMR	5.028	4.530	5.028	9.914	36.883	100%	
980	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Munukollu SS	301621340203	11KV Munukulla	Mixed	AMR	2.074	1.888	2.074	8.976	28.797	100%	
981	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Ganugapadu SS	301621340301	11KV Ganugapadu	Mixed	AMR	1.352	1.218	1.352	9.921	40.604	100%	
982	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Ganugapadu SS	301621340302	11KV Tekulapalli	Mixed	AMR	2.503	2.239	2.503	10.534	47.762	100%	
983	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Ganugapadu SS	301621340303	11KV Chowtapalli	Mixed	AMR	1.359	1.231	1.359	9.398	51.560	100%	
984	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Ganugapadu SS	301621340304	11KV Chikkullagudem	Mixed	AMR	3.247	2.927	3.247	9.850	40.849	100%	
985	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Gampalagudem S	301621440101	11KV Gosaveedu	Mixed	AMR	6.123	5.654	6.123	7.658	26.138	100%	
986	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Gampalagudem S	301621440102	11KV Gullapudi	Mixed	AMR	3.986	3.688	3.986	7.464	24.001	100%	
987	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Gampalagudem S	301621440103	11KV Gampalagudem(T)	Rural	AMR	6.307	5.815	6.307	7.814	23.534	100%	
988	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Gampalagudem S	301621440104	11KV Kanumuru lift	Rural	AMR	0.216	0.199	0.216	7.787	99.373	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
989	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Vootukuru SubSt	301621440201	11KV Vutukuru	Mixed	AMR	2.509	2.283	2.509	9.028	15.255	100%	
990	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Vootukuru SubSt	301621440202	11KV Chinthalanarva	Mixed	AMR	1.223	1.210	1.223	1.108	27.389	100%	
991	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Vootukuru SubSt	301621440203	11KV Nemali LI	Rural	AMR	0.259	0.254	0.259	1.882	67.268	100%	
992	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Vootukuru SubSt	301621440204	11KV KONIJERLA RURAL	Mixed	AMR	4.321	3.936	4.321	8.928	31.209	100%	
993	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV KANUMURU SS	301621440301	11KV Kanumuru Town	Rural	AMR	1.115	0.985	1.115	11.682	29.378	100%	
994	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV KANUMURU SS	301621440302	11KV Kanumuru Rural	Mixed	AMR	2.496	2.240	2.496	10.243	16.255	100%	
995	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV KANUMURU SS	301621440303	11KV Anumullanka	Mixed	AMR	4.681	4.287	4.681	8.420	27.924	100%	
996	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Penugolanu SS	301621440401	11KV Penugolanu	Rural	AMR	2.128	1.983	2.128	6.825	12.300	100%	
997	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Penugolanu SS	301621440402	11KV Tunikipadu	Mixed	AMR	4.401	4.024	4.401	8.579	27.230	100%	
998	VIJAYAWADA	NUZVIDU	TIRUVURU	33/11KV Penugolanu SS	301621440403	11KV Meduru	Mixed	AMR	4.812	4.542	4.812	5.595	34.913	100%	
999	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Korlamanda SubS	301631140101	11KV Korlamanda	Mixed	AMR	3.951	3.496	3.951	11.510	51.147	100%	
1000	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Korlamanda SubS	301631140102	11KV V R Palli	Mixed	AMR	4.086	3.830	4.086	6.265	49.530	100%	
1001	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Korlamanda SubS	301631140103	11KV Veeraraghavapura	Mixed	AMR	1.641	1.454	1.641	11.404	62.011	100%	
1002	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Narsapuram SubS	301631140201	11KV Marremanda	Mixed	AMR	1.496	1.448	1.496	3.206	62.516	100%	
1003	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Narsapuram SubS	301631140202	11KV Tsanubonda	Mixed	AMR	3.070	2.798	3.070	8.865	51.933	100%	
1004	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Narsapuram SubS	301631140203	11KV Narsapuram Town	Rural	AMR	1.511	1.385	1.511	8.332	22.934	100%	
1005	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Putrela SubStatio	301631140301	11KV Putrela Town	Rural	AMR	3.803	3.656	3.803	3.866	6.792	100%	
1006	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Putrela SubStatio	301631140302	11KV Putrela AGL	Mixed	AMR	1.587	1.438	1.587	9.408	41.836	100%	
1007	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Putrela SubStatio	301631140303	11KV Nuthipadu Lift	Rural	AMR	2.595	2.334	2.595	10.033	72.105	100%	
1008	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Putrela SubStatio	301631140304	11KV Janalagadda	Mixed	AMR	3.612	3.419	3.612	5.344	57.859	100%	
1009	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Vissannapeta Sub	301631140401	11KV Vissannapeta Tow	Rural	AMR	6.808	6.187	6.808	9.118	18.816	100%	
1010	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Vissannapeta Sub	301631140402	11KV Vissannapet Rural	Mixed	AMR	2.412	2.141	2.412	11.217	57.113	100%	
1011	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Vissannapeta Sub	301631140403	11KV Chandrupatla	Mixed	AMR	2.003	1.747	2.003	12.774	60.096	100%	
1012	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Vissannapeta Sub	301631140404	11KV Narasapuram	Mixed	AMR	0.271	0.246	0.271	8.996	47.997	100%	
1013	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Vissannapeta Sub	301631140405	11KV Vissannapeta Tow	Rural	AMR	6.848	6.591	6.848	3.746	12.251	100%	
1014	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV KONDAPARAVA S	301631140501	11KV Kondaparva Town	Rural	AMR	1.730	1.634	1.730	5.556	14.705	100%	
1015	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV KONDAPARAVA S	301631140502	11KV Kondaparva rural	Mixed	AMR	1.710	1.591	1.710	6.949	28.680	100%	
1016	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV KONDAPARAVA S	301631140503	11KV Chittapur AGL	Mixed	AMR	1.274	1.170	1.274	8.222	84.177	100%	
1017	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Ramachandrapur	301631140601	11KV Ramachandrapura	Rural	AMR	0.021	0.021	0.021	2.453	2.453	100%	
1018	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Ramachandrapur	301631140602	11KV Teladevarpalli	Mixed	AMR	3.187	2.844	3.187	10.743	48.012	100%	
1019	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Ramachandrapur	301631140603	11KV Kalagara	Mixed	AMR	5.430	4.813	5.430	11.363	48.730	100%	
1020	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Tatakuntala SS	301631140701	11KV Tatakuntla Town	Rural	AMR	1.223	1.084	1.223	11.336	31.976	100%	
1021	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Tatakuntala SS	301631140702	11KV Gowram Palem	Mixed	AMR	1.868	1.755	1.868	6.085	48.248	100%	
1022	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Tatakuntala SS	301631140703	11KV Mutharasi Palem	Mixed	AMR	0.828	0.742	0.828	10.368	100.000	100%	
1023	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Tatakuntala SS	301631140704	11KV Mitta Gudem	Mixed	AMR	0.964	0.865	0.964	10.223	21.450	100%	
1024	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Muchinapalli Sub	301631240101	11KV Maddulaparva	Mixed	AMR	4.689	4.259	4.689	9.169	39.761	100%	
1025	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Muchinapalli Sub	301631240102	11KV Kudapa	Mixed	AMR	4.235	3.892	4.235	8.106	34.614	100%	
1026	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Muchinapalli Sub	301631240103	11KV Madhavaram Lift	Rural	AMR	0.068	0.062	0.068	8.671	60.093	100%	
1027	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Muchinapalli Sub	301631240104	11KV Muchinapalli SS HO	Rural	AMR	1.617	1.507	1.617	6.809	22.434	100%	
1028	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Rangapuram Sub	301631240201	11KV Reddygudem Rura	Mixed	AMR	5.967	5.148	5.967	13.711	43.876	100%	
1029	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Rangapuram Sub	301631240202	11KV Naguluru	Mixed	AMR	2.354	2.301	2.354	2.271	31.610	100%	
1030	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Rangapuram Sub	301631240203	11KV Reddygudem Tow	Rural	AMR	2.589	2.315	2.589	10.596	41.605	100%	
1031	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Rangapuram Sub	301631240204	11KV Nuzvid Road	Mixed	AMR	4.942	4.330	4.942	12.382	36.247	100%	
1032	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Narukullapadu SS	301631240301	11KV RUDRAVARAM FEE	Mixed	AMR	3.735	3.330	3.735	10.837	36.379	100%	
1033	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Narukullapadu SS	301631240302	11KV NARUKULLAPADU	Mixed	AMR	3.334	2.813	3.334	15.607	52.999	100%	

SI No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1034	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Narukullapadu SS	301631240303	11KV NARUKULLAPADU	Rural	AMR	0.030	0.028	0.030	6.652	4.185	100%	
1035	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Naguluru SS	301631240402	11KV TADIGUDEM	Mixed	AMR	1.365	1.149	1.365	15.810	41.616	100%	
1036	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Naguluru SS	301631240403	11KV SAYANAPALEM	Mixed	AMR	2.205	1.887	2.205	14.448	38.934	100%	
1037	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Kotapadu SubSta	301631340101	11KV Kotapadu	Mixed	AMR	1.738	1.646	1.738	5.301	42.915	100%	
1038	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Kotapadu SubSta	301631340102	11KV Chinnampeta	Mixed	AMR	3.500	3.324	3.500	5.010	28.844	100%	
1039	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Kotapadu SubSta	301631340103	11KV Reliance	INDL	AMR	0.121	0.108	0.121	9.987	10.517	100%	
1040	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Kotapadu SubSta	301631340104	11KV Pothanapalli	Mixed	AMR	1.644	1.562	1.644	4.987	62.173	100%	
1041	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Tummugudem Su	301631340201	11KV Industrial	INDL	AMR	0.038	0.035	0.038	6.630	11.775	100%	
1042	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Tummugudem Su	301631340202	11KV Tummagudem	Mixed	AMR	2.931	2.768	2.931	5.554	38.211	100%	
1043	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Tummugudem Su	301631340203	11KV Gudipadu Rural	Mixed	AMR	2.295	2.139	2.295	6.800	42.684	100%	
1044	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Tummugudem Su	301631340204	11KV jayapuram	Mixed	AMR	2.509	2.333	2.509	7.013	64.170	100%	
1045	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Chatrai SubStatio	301631340301	11KV Chatrai Rural	Mixed	AMR	0.614	0.565	0.614	8.030	23.941	100%	
1046	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Chatrai SubStatio	301631340302	11KV Burugugudem	Mixed	AMR	3.191	2.904	3.191	8.998	39.528	100%	
1047	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Chatrai SubStatio	301631340303	11KV Chatrai Town	Rural	AMR	2.254	2.076	2.254	7.925	40.496	100%	
1048	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Chatrai SubStatio	301631340304	11KV GANDHI RURAL	Agricultura	AMR	1.001	0.913	1.001	8.714	72.479	100%	
1049	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Chatrai SubStatio	301631340305	11KV Brugugudem Rural	Mixed	AMR	0.020	0.018	0.020	9.610	9.610	100%	
1050	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Polavaram SubSta	301631340401	11KV MANKOLLU	Mixed	AMR	2.667	2.472	2.667	7.322	45.932	100%	
1051	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Polavaram SubSta	301631340402	11KV POLAVARAM RURA	Mixed	AMR	2.741	2.542	2.741	7.279	32.554	100%	
1052	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Polavaram SubSta	301631340403	11KV Polavaram Village	Rural	AMR	0.138	0.122	0.138	11.310	57.226	100%	
1053	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Janardhanavaram	301631340501	11KV Janaradanavaram I	Agricultura	AMR	2.831	2.517	2.831	11.094	67.994	100%	
1054	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Janardhanavaram	301631340502	11KV Janaradanavaram	Rural	AMR	1.296	1.198	1.296	7.606	49.990	100%	
1055	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Janardhanavaram	301631340503	11KV Arugolanupeta	Agricultura	AMR	3.127	2.892	3.127	7.511	37.497	100%	
1056	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Janardhanavaram	301631340504	11KV Chithapur Rural	Mixed	AMR	4.196	3.851	4.196	8.202	32.419	100%	
1057	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Somavaram SS	301631340601	11KV Kothagudem	Mixed	AMR	0.279	0.272	0.279	2.647	10.136	100%	
1058	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Somavaram SS	301631340602	11KV Marlapalem	Mixed	AMR	3.070	2.808	3.070	8.532	36.047	100%	
1059	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV Somavaram SS	301631340603	11KV Somavaram Rural	Mixed	AMR	3.543	3.242	3.543	8.479	49.683	100%	
1060	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV T.Saunabanda SS	301631340701	11KV Krishnaraopalem R	Mixed	AMR	2.174	2.004	2.174	7.817	44.053	100%	
1061	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV T.Saunabanda SS	301631340702	11KV Narsimharaopalem	Mixed	AMR	4.796	4.435	4.796	7.524	45.570	100%	
1062	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV T.Saunabanda SS	301631340703	11KV Tsanubanda Rural	Mixed	AMR	3.497	3.195	3.497	8.639	35.372	100%	
1063	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV CHEEPURUGUDEI	301631340801	11KV Cheepurugudem R	Mixed	AMR	1.956	1.774	1.956	9.303	59.415	100%	
1064	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV CHEEPURUGUDEI	301631340802	11KV Mangapeta	Mixed	AMR	1.843	1.664	1.843	9.749	31.611	100%	
1065	VIJAYAWADA	NUZVIDU	VISSANNAPET	33/11KV CHEEPURUGUDEI	301631340803	11KV Cheepurugudem V	Rural	AMR	0.381	0.350	0.381	8.051	6.209	100%	
1066	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Mopidevi SubStat	301711140101	11KV Mopidevi	Rural	AMR	4.308	4.134	4.308	4.030	12.342	100%	
1067	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Mopidevi SubStat	301711140102	11KV Bobbarlanka	Mixed	AMR	4.089	3.735	4.089	8.642	17.018	100%	
1068	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Mopidevi SubStat	301711140103	11KV Nagayathippa	Mixed	AMR	3.041	2.893	3.041	4.865	12.497	100%	
1069	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Pedakallepalli SS	301711140201	11KV Kummari palem	Mixed	AMR	0.748	0.686	0.748	8.278	14.066	100%	
1070	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Pedakallepalli SS	301711140202	11KV Venkatapuram Fee	Mixed	AMR	2.340	2.162	2.340	7.635	11.861	100%	
1071	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Pedakallepalli SS	301711140204	11KV Pedakallepalli	Rural	AMR	7.969	7.305	7.969	8.328	13.164	100%	
1072	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Ghantasala SubSt	301711240101	11KV Ghantasala (T)	Rural	AMR	4.560	4.394	4.560	3.634	14.725	100%	
1073	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Ghantasala SubSt	301711240102	11KV Kothapalli	Mixed	AMR	2.130	1.890	2.130	11.269	19.939	100%	
1074	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Ghantasala SubSt	301711240103	11KV Devarakota	Mixed	AMR	0.990	0.920	0.990	7.078	9.619	100%	
1075	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Kodali SS	301711240201	11KV Kodali	Rural	AMR	2.487	2.377	2.487	4.429	5.577	100%	
1076	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Kodali SS	301711240202	11KV Chitturpu	Mixed	AMR	1.834	1.669	1.834	8.993	14.402	100%	
1077	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Srikakulam SS	301711240301	11KV PAPAVINASANAM	Mixed	AMR	2.255	2.077	2.255	7.882	21.642	100%	
1078	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Srikakulam SS	301711240302	11KV Srikakulam	Mixed	AMR	2.487	2.277	2.487	8.443	16.328	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1079	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Srikakulam SS	301711240303	11KV BKMN Express Fee	INDL	AMR	0.238	0.238	0.238	0.159	0.159	100%	
1080	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Challapalli SubSta	301711340101	11KV Ramanagaram	Rural	AMR	0.385	0.355	0.385	7.671	3.209	100%	
1081	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Challapalli SubSta	301711340102	11KV Lakshmipuram	Rural	AMR	5.102	4.733	5.102	7.228	8.088	100%	
1082	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Challapalli SubSta	301711340103	11KV Putchagadda 11KV	Mixed	AMR	1.232	1.147	1.232	6.888	7.993	100%	
1083	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Challapalli SubSta	301711340104	11KV Mangalapuram	Mixed	AMR	1.249	1.157	1.249	7.370	10.679	100%	
1084	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Challapalli SubSta	301711340105	11KV Daliparru	Mixed	AMR	0.886	0.802	0.886	9.504	10.096	100%	
1085	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Puritigadda SubSt	301711340201	11KV Ramudupalem	Mixed	AMR	2.075	1.839	2.075	11.357	14.459	100%	
1086	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Puritigadda SubSt	301711340202	11KV Velivolu	Mixed	AMR	2.167	1.928	2.167	11.014	20.784	100%	
1087	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Puritigadda SubSt	301711340203	11KV Puritigadda	Mixed	AMR	1.453	1.373	1.453	5.489	6.593	100%	
1088	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Narayanarao Nag	301711340301	11KV Challapalli	Rural	AMR	8.109	7.724	8.109	4.751	5.694	100%	
1089	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Narayanarao Nag	301711340302	11KV Narayanarao naga	Rural	AMR	3.752	3.454	3.752	7.947	9.689	100%	
1090	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Narayanarao Nag	301711340303	11KV Vakkalagadda tow	Rural	AMR	3.284	3.140	3.284	4.369	9.787	100%	
1091	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Narayanarao Nag	301711340304	11KV RTC	Rural	AMR	4.156	3.984	4.156	4.144	4.266	100%	
1092	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Kotha Majeru Sub	301711340401	11KV MAJERU FEEDER	Rural	AMR	2.997	2.801	2.997	6.542	12.804	100%	
1093	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Kotha Majeru Sub	301711340402	11KV LANKAPALLI FEEDE	Mixed	AMR	1.389	1.320	1.389	4.944	8.683	100%	
1094	VIJAYAWADA	VUYYURU	CHALLAPALLI	33/11KV Kotha Majeru Sub	301711340404	11KV YENDAKUDURU	Mixed	AMR	0.158	0.142	0.158	9.711	18.261	100%	
1095	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Avanigadda SubS	301721140101	11KV Avanigadda Town-	Rural	AMR	6.600	6.341	6.600	3.932	8.595	100%	
1096	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Avanigadda SubS	301721140102	11KV Water Works	Rural	AMR	1.411	1.363	1.411	3.414	23.447	100%	
1097	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Avanigadda SubS	301721140103	11KV Southchiruvolu lan	Mixed	AMR	1.258	1.199	1.258	4.716	11.048	100%	
1098	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Avanigadda SubS	301721140104	11KV Puligadda	Mixed	AMR	2.117	2.039	2.117	3.689	11.593	100%	
1099	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Viswanathaplli Su	301721140201	11KV Viswanadha palli	Rural	AMR	2.568	2.433	2.568	5.272	7.504	100%	
1100	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Viswanathaplli Su	301721140202	11KV Pittalanka	Mixed	AMR	2.035	1.905	2.035	6.412	14.353	100%	
1101	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Viswanathaplli Su	301721140203	11KV V K Palem	Mixed	AMR	1.099	1.025	1.099	6.656	17.837	100%	
1102	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Viswanathaplli Su	301721140204	11KV Pittal lanka expres	Rural	AMR	11.417	10.604	11.417	7.121	7.837	100%	
1103	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Avanigadda New	301721140301	11KV AVANIGADDA III FI	Rural	AMR	4.142	3.973	4.142	4.085	8.431	100%	
1104	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Avanigadda New	301721140302	11KV AVANIGADDA IV FI	Rural	AMR	5.705	5.476	5.705	4.007	8.961	100%	
1105	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Avanigadda New	301721140303	11KV Tungalavari Palem	Mixed	AMR	2.017	1.899	2.017	5.836	26.697	100%	
1106	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV KODUR SubStatio	301721240101	11KV Koduru(Town)	Rural	AMR	7.828	7.600	7.828	2.909	5.317	100%	
1107	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV KODUR SubStatio	301721240102	11KV Ullipalem feeder	Mixed	AMR	1.020	0.929	1.020	8.935	6.213	100%	
1108	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV KODUR SubStatio	301721240103	11KV Koduru	Rural	AMR	11.746	10.790	11.746	8.143	9.909	100%	
1109	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV KODUR SubStatio	301721240104	11KV JAYAPURAM	Mixed	AMR	0.829	0.778	0.829	6.071	11.699	100%	
1110	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Mandapakala SS	301721240201	11KV Ootagundam feed	Rural	AMR	3.726	3.652	3.726	1.971	1.971	100%	
1111	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Mandapakala SS	301721240202	11KV MANDAPAKALA TC	Rural	AMR	1.305	1.204	1.305	7.751	5.031	100%	
1112	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Mandapakala SS	301721240204	11KV Potumeeda feeder	Mixed	AMR	1.675	1.471	1.675	12.169	17.333	100%	
1113	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Bhavadevrapalli S	301721340101	11KV Bhavadevarapalli C	Rural	AMR	11.989	11.217	11.989	6.433	6.806	100%	
1114	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Bhavadevrapalli S	301721340102	11KV Kammanamolu	Rural	AMR	4.880	4.283	4.880	12.225	17.070	100%	
1115	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Bhavadevrapalli S	301721340103	11KV Etimoga	Rural	AMR	0.454	0.404	0.454	10.978	11.963	100%	
1116	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Bhavadevrapalli S	301721340104	11KV Nagayalanka old	Rural	AMR	0.976	0.906	0.976	7.151	4.334	100%	
1117	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Etimoga SubStati	301721340201	11KV Edurumondi 7hou	Mixed	AMR	1.899	1.765	1.899	7.071	10.799	100%	
1118	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Etimoga SubStati	301721340202	11KV Parachivara	Mixed	AMR	0.928	0.857	0.928	7.627	10.397	100%	
1119	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Etimoga SubStati	301721340203	11KV Edurumondi CPWS	Rural	AMR	5.826	5.434	5.826	6.738	7.685	100%	
1120	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Etimoga SubStati	301721340204	11KV Etimoga	Rural	AMR	6.556	6.046	6.556	7.782	14.424	100%	
1121	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Nagayalanka Sub	301721340301	11KV Nagayalanka(town	Rural	AMR	8.353	7.740	8.353	7.341	11.717	100%	
1122	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Nagayalanka Sub	301721340302	11KV Nagayalanka(rural	Mixed	AMR	2.201	2.052	2.201	6.793	8.328	100%	
1123	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Nagayalanka Sub	301721340303	11KV T Kothapalem	Mixed	AMR	0.590	0.562	0.590	4.874	13.689	100%	

SI No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1124	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Ganapeswaram S	301721340401	11KV GANAPESWARAM	Rural	AMR	3.672	3.320	3.672	9.591	8.142	100%	
1125	VIJAYAWADA	VUYYURU	AVANIGADDA	33/11KV Ganapeswaram S	301721340402	11KV Sorlagondhi feede	Rural	AMR	2.373	2.184	2.373	7.952	13.073	100%	
1126	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Penamakuru Sub	301731140101	11KV Penamakuru SSHQ	Rural	AMR	1.247	1.231	1.247	1.235	18.240	100%	
1127	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Penamakuru Sub	301731140102	11KV Fathelanka feeder	Mixed	AMR	1.213	1.087	1.213	10.391	23.752	100%	
1128	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Penamakuru Sub	301731140103	11KV Chagantipadu	Mixed	AMR	2.385	2.286	2.385	4.146	25.697	100%	
1129	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Penamakuru Sub	301731140104	11KV Penamakuru Rural	Mixed	AMR	1.567	1.479	1.567	5.590	15.401	100%	
1130	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Thotlavallur SubS	301731140201	11KV Thotlavalluru	Rural	AMR	3.934	3.732	3.934	5.141	19.288	100%	
1131	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Thotlavallur SubS	301731140202	11KV Badrirajupalem	Mixed	AMR	2.362	2.113	2.362	10.549	23.960	100%	
1132	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Thotlavallur SubS	301731140203	11KV Thotlavalluru AGL	Agricultura	AMR	0.786	0.715	0.786	8.978	41.234	100%	
1133	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Pamula lanka SS	301731140301	11KV Pamulalanka	Rural	AMR	0.416	0.389	0.416	6.565	48.414	100%	
1134	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Pamula lanka SS	301731140302	11KV Pottidibba	Mixed	AMR	1.925	1.719	1.925	10.708	32.344	100%	
1135	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Pamula lanka SS	301731140303	11KV Marridibba	Mixed	AMR	2.006	1.807	2.006	9.926	40.815	100%	
1136	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Yakamuru SS	301731140401	11KV Yakamuru	Rural	AMR	2.128	2.070	2.128	2.759	4.973	100%	
1137	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Yakamuru SS	301731140402	11KV Kummamuru	Mixed	AMR	2.355	2.112	2.355	10.321	30.774	100%	
1138	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Yakamuru SS	301731140404	11KV Yakamuru Rural	Agricultura	AMR	0.328	0.295	0.328	10.055	35.592	100%	
1139	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Devarapally SS	301731140501	11KV Devarapalli Rural	Mixed	AMR	1.095	1.064	1.095	2.887	11.724	100%	
1140	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Devarapally SS	301731140502	11KV Iluru feeder	Mixed	AMR	2.257	2.037	2.257	9.749	35.478	100%	
1141	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Devarapally SS	301731140504	11KV Devarapalli Town	Rural	AMR	0.681	0.625	0.681	8.213	18.302	100%	
1142	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Katuru SubStation	301731240101	11KV Katuru	Rural	AMR	3.040	2.824	3.040	7.117	17.307	100%	
1143	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Katuru SubStation	301731240102	11KV Kalavapamula	Mixed	AMR	3.154	2.925	3.154	7.287	47.651	100%	
1144	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Katuru SubStation	301731240103	11KV Kadavakollu	Mixed	AMR	3.669	3.312	3.669	9.725	32.980	100%	
1145	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Katuru SubStation	301731240104	11KV Kalavapamula-Tow	Rural	AMR	0.566	0.377	0.566	33.352	45.672	100%	
1146	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Vuyyur SubStatio	301731240201	11KV Vuyyuru Town - 1	Urban	AMR	14.109	14.055	14.109	0.385	0.306	100%	
1147	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Vuyyur SubStatio	301731240202	11KV Vuyyuru Town - II	Urban	AMR	6.697	6.525	6.697	2.571	1.888	100%	
1148	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Vuyyur SubStatio	301731240203	11KV Vuyyuru Town - III	Urban	AMR	10.670	10.401	10.670	2.522	3.252	100%	
1149	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Vuyyur SubStatio	301731240204	11KV Pedavogirala	Agricultura	AMR	0.575	0.518	0.575	9.818	20.901	100%	
1150	VIJAYAWADA	MACHILIPATNAM	PAMARRU	33/11KV Vuyyur SubStatio	301731240205	11KV Mantada	Mixed	AMR	5.120	4.917	5.120	3.955	17.913	100%	
1151	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Gandigunta Sub S	301731240301	11KV Gandigunta	Rural	AMR	2.968	2.858	2.968	3.723	15.266	100%	
1152	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Gandigunta Sub S	301731240302	11KV Viswasanthi	Rural	AMR	3.785	3.607	3.785	4.697	9.010	100%	
1153	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Gandigunta Sub S	301731240303	11KV Eginipadu	Mixed	AMR	1.112	0.996	1.112	10.394	11.099	100%	
1154	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Mudunur SubStat	301731340101	11KV Mudunuru	Rural	AMR	1.733	1.641	1.733	5.274	18.382	100%	
1155	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Mudunur SubStat	301731340102	11KV BOLLAPADU	Mixed	AMR	1.196	1.069	1.196	10.598	29.957	100%	
1156	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Mudunur SubStat	301731340104	11KV Saipuram	Mixed	AMR	1.768	1.599	1.768	9.599	44.503	100%	
1157	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Pedaogirala SubS	301731340201	11KV Pedaogirala Town	Rural	AMR	1.526	1.398	1.526	8.346	21.235	100%	
1158	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Pedaogirala SubS	301731340202	11KV Akunuru	Mixed	AMR	2.293	2.119	2.293	7.593	18.458	100%	
1159	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Pedaogirala SubS	301731340203	11KV Pedaogirala Rural	Mixed	AMR	1.607	1.449	1.607	9.854	14.559	100%	
1160	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Pedaogirala SubS	301731340204	11KV Chinaogirala	Mixed	AMR	2.703	2.452	2.703	9.287	21.288	100%	
1161	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Valluripalem Sub	301731340301	11KV Vallurupalem	Rural	AMR	1.543	1.497	1.543	2.978	19.504	100%	
1162	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Valluripalem Sub	301731340302	11KV Boddapadu	Mixed	AMR	2.452	2.236	2.452	8.833	30.870	100%	
1163	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Valluripalem Sub	301731340303	11KV T V Lanka	Mixed	AMR	2.425	2.203	2.425	9.155	19.532	100%	
1164	VIJAYAWADA	VUYYURU	VUYYURU	33/11KV Valluripalem Sub	301731340304	11KV Royyuru Feeder	Mixed	AMR	1.604	1.431	1.604	10.765	34.671	100%	
1165	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Kothapeta Sub-St	302111140101	11KV Kothapet	Urban	AMR	11.848	11.754	11.848	0.798	1.862	100%	
1166	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Kothapeta Sub-St	302111140102	11KV Lalapet1	Urban	AMR	6.385	5.988	6.385	6.215	6.360	100%	
1167	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Kothapeta Sub-St	302111140103	11KV Naaz Lalapet2	Urban	AMR	7.330	7.069	7.330	3.568	3.568	100%	
1168	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Ramireddy Thota	302111140201	11KV Gunturivarithota	Urban	AMR	11.718	11.593	11.718	1.061	0.891	100%	

SI No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1169	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Ramireddy Thota	302111140202	11KV Nehru Nagar Wate	Urban	AMR	3.067	3.003	3.067	2.062	2.291	100%	
1170	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Ramireddy Thota	302111140203	11KV Railpet	Urban	AMR	5.391	5.254	5.391	2.543	3.105	100%	
1171	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Ramireddy Thota	302111140204	11KV Tolly Wood	Urban	AMR	3.542	3.461	3.542	2.283	3.612	100%	
1172	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV GGH SS	302111140301	11KV AC College Road	Urban	AMR	2.189	2.097	2.189	4.181	4.572	100%	
1173	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV GGH SS	302111140302	11KV GGH Feeder	Urban	AMR	6.348	6.223	6.348	1.959	39.480	100%	
1174	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV GGH SS	302111140303	11KV Railway Station Ro	Urban	AMR	5.932	5.629	5.932	5.105	7.114	100%	
1175	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Brodipet Sub-Stat	302111240101	11KV Guntur 18th	Urban	AMR	8.734	8.409	8.734	3.725	2.462	100%	
1176	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Brodipet Sub-Stat	302111240102	11KV Guntur 19th	Urban	AMR	10.054	9.882	10.054	1.710	0.256	100%	
1177	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Brodipet Sub-Stat	302111240103	11KV Guntur 20th	Urban	AMR	4.158	3.914	4.158	5.871	5.662	100%	
1178	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Brodipet Sub-Stat	302111240104	11KV Guntur 21st	Urban	AMR	3.184	3.062	3.184	3.812	3.954	100%	
1179	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV PICHIKALAGUNT/	302111240201	11KV Kalanikethan Feed	Urban	AMR	3.115	3.000	3.115	3.695	3.851	100%	
1180	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV PICHIKALAGUNT/	302111240202	11KV Arundalpeta Park (	Urban	AMR	5.595	5.477	5.595	2.110	4.840	100%	
1181	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV PICHIKALAGUNT/	302111240203	11KV Joy Alukas (Local 2	Urban	AMR	5.576	5.473	5.576	1.840	1.846	100%	
1182	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV Koretipadu Park	302111240301	11KV Vinayaka Nagar	Urban	AMR	4.459	4.237	4.459	4.976	5.813	100%	
1183	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV Koretipadu Park	302111240302	11KV Santhi Nagar	Urban	AMR	3.003	2.911	3.003	3.056	3.233	100%	
1184	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV Koretipadu Park	302111240303	11KV Ramannapet	Urban	AMR	2.622	2.515	2.622	4.064	3.892	100%	
1185	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV Koretipadu Park	302111240304	11KV Naidupet	Urban	AMR	6.103	6.051	6.103	0.858	2.182	100%	
1186	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV Koretipadu Park	302111240305	11KV Redlabazar	Urban	AMR	5.398	5.180	5.398	4.044	4.788	100%	
1187	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV Koretipadu Park	302111240306	11KV Main Road	Urban	AMR	0.896	0.839	0.896	6.337	7.036	100%	
1188	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Sangadigunta Sub	302111340101	11KV Budampadu	Urban	AMR	7.536	7.490	7.536	0.612	3.656	100%	
1189	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Sangadigunta Sub	302111340102	11KV Guntur 1st	Urban	AMR	0.064	0.061	0.064	4.383	70.070	100%	
1190	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Sangadigunta Sub	302111340103	11kv Guntur-2	Urban	AMR	0.165	0.155	0.165	6.133	52.734	100%	
1191	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Sangadigunta Sub	302111340104	11KV Industrial	Urban	AMR	3.606	3.488	3.606	3.289	2.448	100%	
1192	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Sangadigunta Sub	302111340105	11KV Vidyut Bhavan	Urban	AMR	0.023	0.023	0.023	1.740	2.353	100%	
1193	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Sangadigunta Sub	302111340106	11kv Guntur-4	Urban	AMR	10.250	10.077	10.250	1.685	2.391	100%	
1194	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV VIDYUT BHAVAN	302111340201	11KV 1ST FEEDER	Urban	AMR	9.912	9.697	9.912	2.171	2.292	100%	
1195	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV VIDYUT BHAVAN	302111340202	11KV 2nd Feeder	Urban	AMR	8.186	7.893	8.186	3.580	4.001	100%	
1196	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV VIDYUT BHAVAN	302111340203	11KV ANANDAPET FEED	Urban	AMR	8.700	8.455	8.700	2.818	1.506	100%	
1197	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV VIDYUT BHAVAN	302111340204	11KV LANCHESTER ROAI	Urban	AMR	4.813	4.534	4.813	5.780	6.268	100%	
1198	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV VIDYUT BHAVAN	302111340205	11KV SPDCL Feeder	Urban	AMR	0.092	0.087	0.092	5.484	99.537	100%	
1199	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV VIDYUT BHAVAN	302111340206	11KV Panchavati Feeder	Urban	AMR	0.418	0.383	0.418	8.192	8.298	100%	
1200	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV Vishnupriya Com	302111340301	11KV VISHNU PRIYA FEE	Urban	AMR	0.032	0.031	0.032	4.439	5.768	100%	
1201	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV Vishnupriya Com	302111340302	11KV HINDUSTAN FEEDE	Urban	AMR	1.824	1.744	1.824	4.402	5.780	100%	
1202	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV Vishnupriya Com	302111340303	11KV SATYA SAI TRUST F	Urban	AMR	0.428	0.396	0.428	7.514	8.220	100%	
1203	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV Vishnupriya Com	302111340304	11KV TSR FEEDER	INDL	AMR	0.794	0.754	0.794	5.073	6.964	100%	
1204	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11 KV Vishnupriya Com	302111340305	11KV R K POLYMER	INDL	AMR	0.018	0.017	0.018	4.733	6.721	100%	
1205	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Etukuru Road SS S	302112140101	11KV BY PASS ROAD	Urban	AMR	3.267	3.183	3.267	2.563	5.224	100%	
1206	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Etukuru Road SS S	302112140102	11KV BJT Ground	Urban	AMR	2.300	2.251	2.300	2.146	3.069	100%	
1207	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Etukuru Road SS S	302112140103	11KV SIMHAPURI	Urban	AMR	3.139	3.061	3.139	2.488	3.654	100%	
1208	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Nallacheruvu Sub	302112140201	11KV 'R' AGRAHARAM	Urban	AMR	10.982	10.884	10.982	0.888	1.563	100%	
1209	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Nallacheruvu Sub	302112140202	11KV Etukuru Road	Urban	AMR	12.370	12.219	12.370	1.226	1.937	100%	
1210	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Nallacheruvu Sub	302112140203	11KV Market	Urban	AMR	5.997	5.897	5.997	1.656	1.656	100%	
1211	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Nallacheruvu Sub	302112140204	11KV SAMPATH NAGAR	Urban	AMR	10.690	10.518	10.690	1.610	2.386	100%	
1212	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Nallacheruvu Sub	302112140205	11KV Ramesh Hospital	Urban	AMR	2.945	2.872	2.945	2.468	1.205	100%	
1213	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11 KV Y Junction SS	302112140401	11KV Ananthavarapadu	Urban	AMR	3.725	3.651	3.725	1.971	7.571	100%	

SI No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1214	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11 KV Y Junction SS	302112140402	11KV Etukuru Village Fe	Urban	AMR	4.784	4.675	4.784	2.285	3.213	100%	
1215	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11 KV Y Junction SS	302112140403	11KV NH - 5 Feeder	Urban	AMR	3.144	3.104	3.144	1.268	3.985	100%	
1216	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Lalpuram Sub-Sta	302112240101	11KV Guntur 12th	Urban	AMR	8.935	8.788	8.935	1.647	1.647	100%	
1217	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Lalpuram Sub-Sta	302112240102	11KV Guntur 13th	Urban	AMR	8.043	7.931	8.043	1.389	2.114	100%	
1218	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Lalpuram Sub-Sta	302112240103	11KV AnkiReddy Palem	Urban	AMR	4.254	4.140	4.254	2.689	2.073	100%	
1219	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Lalpuram Sub-Sta	302112240104	11KV R R Nagar Feeder	Urban	AMR	9.180	8.939	9.180	2.628	9.700	100%	
1220	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Lalpuram Sub-Sta	302112240105	11KV KVP Colony	Urban	AMR	6.815	6.674	6.815	2.059	7.184	100%	
1221	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Superbazar Sub-S	302112240201	11KV Guntur 15th	Urban	AMR	0.867	0.822	0.867	5.180	42.435	100%	
1222	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Superbazar Sub-S	302112240202	11KV Guntur 16th	Urban	AMR	3.639	3.508	3.639	3.581	3.581	100%	
1223	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Superbazar Sub-S	302112240203	11KV Guntur 17th	Urban	AMR	4.358	4.187	4.358	3.934	1.772	100%	
1224	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Superbazar Sub-S	302112240204	11KV U G cable	Urban	AMR	2.634	2.525	2.634	4.132	5.771	100%	
1225	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Superbazar Sub-S	302112240205	11KV Kankargunta Feed	Urban	AMR	7.397	6.999	7.397	5.379	9.599	100%	
1226	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV A.T. Agraharam S	302112340101	11KV Adarsh Nagar	Urban	AMR	13.012	12.779	13.012	1.787	7.868	100%	
1227	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV A.T. Agraharam S	302112340102	11KV APHB Colony	Urban	AMR	9.031	8.685	9.031	3.826	3.732	100%	
1228	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV A.T. Agraharam S	302112340103	11KV A T Agraharam	Urban	AMR	9.317	9.037	9.317	2.998	3.030	100%	
1229	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV A.T. Agraharam S	302112340104	11KV Y Junction	Urban	AMR	2.089	2.011	2.089	3.742	7.530	100%	
1230	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Dasaripalem Sub-	302112340201	11KV Srinivasa Delanters	Urban	AMR	1.727	1.702	1.727	1.414	9.368	100%	
1231	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Dasaripalem Sub-	302112340202	11KV CHOWDAVARAM	Urban	AMR	2.934	2.892	2.934	1.433	3.684	100%	
1232	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Dasaripalem Sub-	302112340203	11KV BOMMIDALA	Urban	AMR	3.500	3.212	3.500	8.242	2.928	100%	
1233	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Dasaripalem Sub-	302112340204	11KV APHC-I	Urban	AMR	2.680	2.573	2.680	3.988	5.221	100%	
1234	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Nallapadu Sub-St	302112340301	11KV MBTS	Urban	AMR	3.351	3.261	3.351	2.687	5.368	100%	
1235	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Nallapadu Sub-St	302112340302	11KV EENADU	Urban	AMR	5.633	5.515	5.633	2.109	8.997	100%	
1236	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Nallapadu Sub-St	302112340303	11KV PVR CMI	Urban	AMR	1.022	0.991	1.022	3.075	2.223	100%	
1237	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Nallapadu Sub-St	302112340304	11KV Nallapadu	Urban	AMR	7.858	7.736	7.858	1.550	1.455	100%	
1238	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Pothuru Sub-Stat	302112340401	11KV Alliance One	Urban	AMR	3.784	3.692	3.784	2.422	1.532	100%	
1239	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Pothuru Sub-Stat	302112340402	11KV Naidupet	Urban	AMR	4.554	4.309	4.554	5.386	8.672	100%	
1240	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Pothuru Sub-Stat	302112340403	11KV Pothuru	Urban	AMR	2.565	2.369	2.565	7.631	8.839	100%	
1241	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Pothuru Sub-Stat	302112340404	11KV Vartha	Urban	AMR	6.853	6.281	6.853	8.339	10.372	100%	
1242	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11 KV SWARNA BHARA	302112340501	11KV SWARNA BHARATH	Urban	AMR	6.013	5.717	6.013	4.918	8.054	100%	
1243	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11 KV SWARNA BHARA	302112340502	11KV JAYANTHI NAGAR	Urban	AMR	5.209	5.037	5.209	3.305	3.305	100%	
1244	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11 KV SWARNA BHARA	302112340503	11KV APHC-II	Urban	AMR	1.173	1.121	1.173	4.387	4.387	100%	
1245	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11 KV SS KVP Colony	302112340601	11KV Reliance	Urban	AMR	8.849	8.101	8.849	8.458	10.308	100%	
1246	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11 KV SS KVP Colony	302112340602	11KV Srinivasa Rao thota	Urban	AMR	4.673	4.210	4.673	9.908	10.943	100%	
1247	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11 KV SS KVP Colony	302112340603	11KV Yethi Rajula Colon	Urban	AMR	8.737	8.358	8.737	4.330	4.305	100%	
1248	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11 KV SS KVP Colony	302112340604	11KV 60 FEET ROAD FEE	Urban	AMR	6.242	5.731	6.242	8.200	7.718	100%	
1249	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV PEDAPALAKALUR	302112340701	11KV JanmaBhumi Naga	Urban	AMR	1.697	1.620	1.697	4.534	3.523	100%	
1250	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV PEDAPALAKALUR	302112340702	11KV Thurakapalem Fee	Urban	AMR	1.531	1.462	1.531	4.473	11.521	100%	
1251	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV PEDAPALAKALUR	302112340703	11KV Pedapalakaluru Fe	Urban	AMR	5.419	5.232	5.419	3.464	3.853	100%	
1252	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV PEDAPALAKALUR	302112340704	11KV Mallavaram Feede	Rural	AMR	3.457	3.338	3.457	3.445	6.780	100%	
1253	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11 KV Indoor Adavi Tak	302112340805	11KV SUMMER PETA	Urban	AMR	0.452	0.415	0.452	8.172	10.564	100%	
1254	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Lalpuram Village	302112440101	11KV Janachaitanya Fee	Urban	AMR	8.437	8.323	8.437	1.354	4.849	100%	
1255	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Lalpuram Village	302112440102	11KV Highway	Urban	AMR	12.492	12.090	12.492	3.216	3.257	100%	
1256	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Lalpuram Village	302112440103	11KV Lalpuram Village F	Urban	AMR	3.088	2.950	3.088	4.484	3.454	100%	
1257	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Lalpuram Village	302112440104	11KV Vijayanthi	Urban	AMR	6.075	5.876	6.075	3.263	5.365	100%	
1258	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Gujjanagundla Su	302121240101	11KV 10TH FEEDER	Urban	AMR	4.373	4.298	4.373	1.727	1.796	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1259	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Gujjanagundla Su	302121240102	11KV Guntur 5th	Urban	AMR	2.439	2.364	2.439	3.105	3.364	100%	
1260	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Gujjanagundla Su	302121240103	11KV Guntur 6th	Urban	AMR	6.072	5.944	6.072	2.106	1.841	100%	
1261	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Gujjanagundla Su	302121240104	11KV Guntur 7th	Urban	AMR	1.654	1.587	1.654	4.020	4.625	100%	
1262	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Gujjanagundla Su	302121240105	11KV Guntur 8th	Urban	AMR	8.107	7.915	8.107	2.370	2.687	100%	
1263	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Gujjanagundla Su	302121240106	11KV Ring Road	Urban	AMR	5.511	5.428	5.511	1.516	5.331	100%	
1264	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV Gujjanagundla Su	302121240107	11KV Rural(Palakaluru)	Urban	AMR	1.430	1.368	1.430	4.337	4.521	100%	
1265	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Syamala Nagar Su	302121240201	11KV Ravindra Nagar	Urban	AMR	2.826	2.748	2.826	2.759	2.630	100%	
1266	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Syamala Nagar Su	302121240202	11KV Stambalagaruvu	Urban	AMR	3.474	3.386	3.474	2.523	2.548	100%	
1267	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Syamala Nagar Su	302121240203	11KV Syamala Nagar	Urban	AMR	3.524	3.454	3.524	1.974	1.425	100%	
1268	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Vikas Nagar Sub-S	302121240301	11KV Navabharath naga	Urban	AMR	4.821	4.608	4.821	4.410	5.354	100%	
1269	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Vikas Nagar Sub-S	302121240302	11KV DWARAKANAGAR	Urban	AMR	4.923	4.813	4.923	2.235	2.337	100%	
1270	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Vikas Nagar Sub-S	302121240303	11KV SADASIVANAGAR	Urban	AMR	3.760	3.680	3.760	2.129	3.164	100%	
1271	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Women s Polytec	302121240402	11KV JKC Road Feeder	Urban	AMR	3.421	3.369	3.421	1.509	0.686	100%	
1272	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Women s Polytec	302121240403	11KV Rajendra Nagar Fe	Urban	AMR	5.839	5.696	5.839	2.448	2.323	100%	
1273	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Women s Polytec	302121240404	11KV Brundavan Garden	Urban	AMR	1.961	1.914	1.961	2.350	2.874	100%	
1274	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV RavindraNagar Se	302121240501	11KV BALAKUTEER FEED	Urban	AMR	4.042	3.971	4.042	1.778	0.299	100%	
1275	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV RavindraNagar Se	302121240502	11KV N C C FEEDER	Urban	AMR	3.172	3.094	3.172	2.463	2.617	100%	
1276	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV RavindraNagar Se	302121240503	11KV RAVINDRA NAGAR	Urban	AMR	2.715	2.643	2.715	2.646	3.417	100%	
1277	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV RavindraNagar Se	302121240504	11KV ANNAMAIAH PARK	Urban	AMR	7.761	7.679	7.761	1.047	1.284	100%	
1278	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV RavindraNagar Se	302121240505	11KV MEE SEVA FEEDER	Urban	AMR	4.511	4.374	4.511	3.034	2.889	100%	
1279	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN3	33/11KV RavindraNagar Se	302121240506	11KV Mallareddy Nagar	Urban	AMR	5.674	5.478	5.674	3.443	4.488	100%	
1280	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Maruthi Nagar Su	302121240601	11KV MARUTHI NAGAR	Urban	AMR	1.822	1.751	1.822	3.883	4.535	100%	
1281	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Maruthi Nagar Su	302121240602	11KV CHEBROLU HANUM	Urban	AMR	0.123	0.122	0.123	1.175	3.027	100%	
1282	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Maruthi Nagar Su	302121240603	11KV Mahaprastanam rd	Urban	AMR	0.517	0.515	0.517	0.427	2.043	100%	
1283	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Dwaraka Nagar SS	302121340101	11KV Gorantla	Urban	AMR	12.588	12.482	12.588	0.837	1.793	100%	
1284	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Dwaraka Nagar SS	302121340102	11KV Lam Jonnalagadda	Urban	AMR	6.264	5.989	6.264	4.402	5.045	100%	
1285	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Dwaraka Nagar SS	302121340103	11KV HOSANNA MANDIL	Urban	AMR	0.000	0.000	0.000	8.205	8.205	100%	
1286	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Gorantla Sub-Stat	302121340201	11KV Guntur 11th	Urban	AMR	2.219	2.104	2.219	5.182	3.345	100%	
1287	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Gorantla Sub-Stat	302121340202	11KV Dwaraka Nagar	Urban	AMR	9.672	9.473	9.672	2.050	5.725	100%	
1288	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Gorantla Sub-Stat	302121340203	11KV Industrial Estate	Urban	AMR	5.281	5.005	5.281	5.226	2.398	100%	
1289	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Gorantla Sub-Stat	302121340204	11KV Temple	Urban	AMR	6.933	6.740	6.933	2.785	2.398	100%	
1290	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Koritepadu Sub-S	302121340301	11KV Amaravathi Road	Urban	AMR	5.788	5.614	5.788	2.998	2.790	100%	
1291	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Koritepadu Sub-S	302121340302	11KV Chaitanyapuri	Urban	AMR	5.571	5.483	5.571	1.583	2.035	100%	
1292	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Koritepadu Sub-S	302121340303	11KV Hanumaiah Nagar	Urban	AMR	3.240	3.084	3.240	4.812	4.807	100%	
1293	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Koritepadu Sub-S	302121340304	11KV Koritepadu	Urban	AMR	5.865	5.657	5.865	3.538	3.078	100%	
1294	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Reddypalem Sub-	302121340401	11KV Reddypalem	Urban	AMR	9.418	9.319	9.418	1.059	0.425	100%	
1295	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Reddypalem Sub-	302121340402	11KV Inner Ring Road	Urban	AMR	9.089	9.004	9.089	0.928	3.815	100%	
1296	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Reddypalem Sub-	302121340403	11KV Sarada Colony	Urban	AMR	8.150	8.051	8.150	1.210	0.682	100%	
1297	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Reddypalem Sub-	302121340404	11KV Bhashyam	Urban	AMR	2.379	2.245	2.379	5.622	4.035	100%	
1298	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11 KV ID Hospital SS	302121340501	11KV Balaji Nagar	Urban	AMR	4.007	3.964	4.007	1.061	2.067	100%	
1299	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11 KV ID Hospital SS	302121340502	11KV ID Hospital	Urban	AMR	0.383	0.367	0.383	4.170	32.503	100%	
1300	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11 KV ID Hospital SS	302121340503	11KV Panduranga Nagar	Urban	AMR	13.562	13.251	13.562	2.296	2.345	100%	
1301	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Pattabhipuram Su	302121440101	11KV Brodipet	Urban	AMR	6.160	6.026	6.160	2.179	2.466	100%	
1302	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Pattabhipuram Su	302121440102	11KV Cobaltpet	Urban	AMR	4.095	3.975	4.095	2.930	2.469	100%	
1303	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Pattabhipuram Su	302121440103	11KV Fhathimapuram Fe	Urban	AMR	2.469	2.402	2.469	2.730	2.916	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1304	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Pattabhipuram Su	302121440104	11KV K K Towers	Urban	AMR	5.251	5.148	5.251	1.968	1.849	100%	
1305	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Pattabhipuram Su	302121440105	11KV Georgepeta Feede	Urban	AMR	2.564	2.493	2.564	2.780	2.519	100%	
1306	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Krishna nagar Sub	302121440201	11KV Chandra Mouli Nag	Urban	AMR	3.451	3.379	3.451	2.078	2.331	100%	
1307	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Krishna nagar Sub	302121440202	11KV Asok Nagar	Urban	AMR	3.938	3.855	3.938	2.127	2.067	100%	
1308	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Krishna nagar Sub	302121440203	11KV Lakshmipuram	Urban	AMR	5.369	5.208	5.369	3.006	2.159	100%	
1309	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Krishna nagar Sub	302121440204	11KV Devapuram Feede	Urban	AMR	3.690	3.592	3.690	2.662	2.197	100%	
1310	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Lakshmipuram Se	302121440301	11KV 14th Cross Road	Urban	AMR	5.687	5.559	5.687	2.258	2.164	100%	
1311	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Lakshmipuram Se	302121440302	11KV Pandaripuram	Urban	AMR	7.329	7.206	7.329	1.679	2.180	100%	
1312	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Lakshmipuram Se	302121440303	11KV Harihara Mahal	Urban	AMR	5.593	5.500	5.593	1.668	2.094	100%	
1313	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Lakshmipuram Se	302121440304	11KV Water Works	Urban	AMR	3.629	3.544	3.629	2.339	2.339	100%	
1314	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV Lakshmipuram Se	302121440305	11KV LEM School	Urban	AMR	2.031	1.899	2.031	6.485	5.960	100%	
1315	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Lakshmipuram Se	302121440306	11KV Sweet Magic Feed	Urban	AMR	5.626	5.534	5.626	1.635	0.674	100%	
1316	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11 KV EPF Office New S	302121440401	11KV EPF OFFICE FEEDE	Urban	AMR	1.641	1.579	1.641	3.796	5.181	100%	
1317	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11 KV EPF Office New S	302121440402	11KV BRUNDAVAN GARI	Urban	AMR	1.878	1.813	1.878	3.439	3.173	100%	
1318	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11 KV EPF Office New S	302121440403	11KV OXFORD SCHOOL F	Urban	AMR	2.249	2.173	2.249	3.377	3.116	100%	
1319	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11 KV EPF Office New S	302121440404	11KV RING ROAD FEEDE	Urban	AMR	3.137	3.053	3.137	2.675	3.188	100%	
1320	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11 KV EPF Office New S	302121440405	11KV PATTABHIPURAM	Urban	AMR	1.175	1.140	1.175	2.983	2.466	100%	
1321	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11 KV EPF Office New S	302121440406	11KV KUNDULA ROAD FI	Urban	AMR	1.272	1.216	1.272	4.411	3.853	100%	
1322	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV VIDYANAGAR IND	302121540101	11KV Vijayapuri Feeder	Urban	AMR	6.133	5.969	6.133	2.683	2.360	100%	
1323	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV VIDYANAGAR IND	302121540102	11KV Siddardha Nagar	Urban	AMR	5.714	5.605	5.714	1.912	0.848	100%	
1324	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV VIDYANAGAR IND	302121540103	11KV Vikas Nagar feeder	Urban	AMR	3.593	3.400	3.593	5.375	5.397	100%	
1325	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV VIDYANAGAR IND	302121540104	11KV Little Flower Schoo	Urban	AMR	6.975	6.652	6.975	4.629	3.742	100%	
1326	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV VIDYANAGAR IND	302121540105	11KV Saibaba Road feed	Urban	AMR	4.631	4.376	4.631	5.492	4.727	100%	
1327	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV VIDYANAGAR IND	302121540106	11KV WELCOME HOTEL	Urban	AMR	2.331	2.314	2.331	0.752	0.082	100%	
1328	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Maanasa sarovar	302131140101	11KV Guntur 3rd	Urban	AMR	8.048	7.940	8.048	1.346	1.346	100%	
1329	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Maanasa sarovar	302131140102	11KV Sibar Industrial	Urban	AMR	1.352	1.339	1.352	0.960	0.967	100%	
1330	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Maanasa sarovar	302131140103	11KV Guntur 9th	Urban	AMR	8.559	8.468	8.559	1.059	1.333	100%	
1331	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Maanasa sarovar	302131140104	11KV Takkellapdu	Urban	AMR	9.614	9.513	9.614	1.052	5.325	100%	
1332	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Maanasa sarovar	302131140105	11KV Water Works	Urban	AMR	0.187	0.177	0.187	5.033	5.033	100%	
1333	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Maanasa sarovar	302131140106	11KV Filter water work	Rural	AMR	5.369	5.303	5.369	1.223	1.223	100%	
1334	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Maanasa sarovar	302131140107	11KV VYSHNAVI FEEDER	Urban	AMR	1.354	1.296	1.354	4.281	3.339	100%	
1335	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV R.T.C., Guntur Sul	302131140201	11KV RTC Feeder	Urban	AMR	1.089	1.079	1.089	0.915	0.965	100%	
1336	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN1	33/11KV R.T.C., Guntur Sul	302131140202	11KV Local 14th	Urban	AMR	7.464	7.107	7.464	4.782	4.051	100%	
1337	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV R.T.C., Guntur Sul	302131140204	11KV Vinobha Nagar	Urban	AMR	5.174	4.792	5.174	7.381	9.520	100%	
1338	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV R.T.C., Guntur Sul	302131140205	11KV Maruthi Nagar	Urban	AMR	6.641	6.322	6.641	4.799	4.101	100%	
1339	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV R.T.C., Guntur Sul	302131140206	11KV B R Stadium	Urban	AMR	5.161	4.804	5.161	6.923	8.600	100%	
1340	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV R.T.C., Guntur Sul	302131140207	11KV Sivalayam	Urban	AMR	2.918	2.734	2.918	6.308	6.375	100%	
1341	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11 KV Suddapallidonka	302131140301	11 KV BALAJI NAGAR	Urban	AMR	11.720	11.253	11.720	3.985	4.186	100%	
1342	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11 KV Suddapallidonka	302131140302	11 KV PRAGATHI NAGAR	Urban	AMR	1.774	1.643	1.774	7.419	6.571	100%	
1343	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11 KV Suddapallidonka	302131140303	11 KV PRIYANKA GARDE	Urban	AMR	7.060	6.746	7.060	4.444	5.007	100%	
1344	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11 KV Suddapallidonka	302131140304	11 KV Yadav Bazar Feede	Urban	AMR	7.947	7.493	7.947	5.708	5.582	100%	
1345	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV V A.S.KRISHNA SE	302131140401	11KV Omega Hospital	Urban	AMR	2.476	2.329	2.476	5.942	5.302	100%	
1346	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV V A.S.KRISHNA SE	302131140402	11KV Seetharam Nagar	Urban	AMR	7.753	7.662	7.753	1.174	1.373	100%	
1347	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV V A.S.KRISHNA SE	302131140403	11KV Best Price	Urban	AMR	7.579	7.407	7.579	2.277	2.091	100%	
1348	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV V A.S.KRISHNA SE	302131140404	11KV Mangaldas Nagar	Urban	AMR	5.652	5.524	5.652	2.268	2.576	100%	

SI No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1349	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV V A.S.KRISHNA SE	302131140405	11KV Vasavi Nagar	Urban	AMR	6.933	6.673	6.933	3.752	4.993	100%	
1350	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Autonagar Sub-St	302131240101	11KV Auto Nagar 1 2	Urban	AMR	3.932	3.887	3.932	1.131	0.186	100%	
1351	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Autonagar Sub-St	302131240102	11KV Auto Nagar 3 4	Urban	AMR	7.049	6.969	7.049	1.136	3.253	100%	
1352	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Autonagar Sub-St	302131240103	11KV Nexa Show Room	Urban	AMR	0.330	0.315	0.330	4.678	4.936	100%	
1353	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Autonagar Sub-St	302131240104	11KV Manasasarovaram	Urban	AMR	9.141	9.065	9.141	0.834	0.927	100%	
1354	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Autonagar Sub-St	302131240105	11KV Gaddipadu	Urban	AMR	1.738	1.689	1.738	2.836	2.759	100%	
1355	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Autonagar Sub-St	302131240106	11KV SitaramNagar	Urban	AMR	1.135	1.108	1.135	2.450	2.450	100%	
1356	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Kakumanu varith	302131240201	11KV Bongaralabeedu	Urban	AMR	5.844	5.773	5.844	1.219	4.010	100%	
1357	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Kakumanu varith	302131240202	11KV Donkaroad	Urban	AMR	9.902	9.795	9.902	1.073	1.934	100%	
1358	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN2	33/11KV Kakumanu varith	302131240203	11KV Srinagar	Urban	AMR	6.997	6.883	6.997	1.638	1.656	100%	
1359	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Kakumanu varith	302131240204	11KV Vasantharayapura	Urban	AMR	8.730	8.639	8.730	1.035	1.035	100%	
1360	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11 KV Indoor Nehru Na	302131240301	11KV MOTHILAL NAGAR	Urban	AMR	0.348	0.336	0.348	3.453	3.714	100%	
1361	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11 KV Indoor Nehru Na	302131240302	11KV VENKATADRI PETA	Urban	AMR	1.544	1.529	1.544	0.985	0.985	100%	
1362	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11 KV Indoor Nehru Na	302131240303	11KV NEHRU NAGAR	Urban	AMR	1.070	1.040	1.070	2.847	3.455	100%	
1363	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11 KV Indoor Nehru Na	302131240304	11KV WATER WORKS	Urban	AMR	2.160	2.127	2.160	1.509	1.509	100%	
1364	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11 KV Indoor Nehru Na	302131240305	11KV RAILWAY QUARTE	Urban	AMR	0.454	0.426	0.454	6.273	8.641	100%	
1365	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11 KV Indoor Nehru Na	302131240306	11KV BUTCHAIAH THOT	Urban	AMR	1.564	1.549	1.564	0.919	1.130	100%	
1366	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Pedakakani Sub-S	302131340101	11KV Pedakakani I	Rural	AMR	5.800	5.638	5.800	2.804	4.270	100%	
1367	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Pedakakani Sub-S	302131340102	11KV Pedakakani II	Rural	AMR	5.260	5.035	5.260	4.287	5.581	100%	
1368	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Pedakakani Sub-S	302131340103	11KV DECCAN TOBACCO	Urban	AMR	4.682	4.606	4.682	1.615	0.769	100%	
1369	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Pedakakani Sub-S	302131340104	11KV Venigandla	Urban	AMR	6.809	6.693	6.809	1.707	8.335	100%	
1370	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Pedakakani Sub-S	302131340105	11KV Pedakakani Indust	INDL	AMR	5.263	5.260	5.263	0.056	17.061	100%	
1371	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Namburu Sub-Sta	302131340201	11KV KAZA INDL	Urban	AMR	2.085	2.026	2.085	2.825	1.352	100%	
1372	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Namburu Sub-Sta	302131340202	11KV A N U	Rural	AMR	1.459	1.448	1.459	0.765	0.765	100%	
1373	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Namburu Sub-Sta	302131340203	11KV Namburu	Urban	AMR	8.765	8.650	8.765	1.306	2.357	100%	
1374	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Namburu Sub-Sta	302131340204	11 KV KAZA Lift Irrigatio	Rural	AMR	0.316	0.306	0.316	3.383	59.676	100%	
1375	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV Namburu Sub-Sta	302131340205	11KV Namburu Industria	Urban	AMR	6.607	6.455	6.607	2.293	6.000	100%	
1376	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV IJM (Rain Tree Pa	302131340301	11KV VILLAS	Rural	AMR	0.725	0.694	0.725	4.238	6.450	100%	
1377	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV IJM (Rain Tree Pa	302131340302	11KV MAPLE BLOCK	Rural	AMR	1.156	1.133	1.156	1.994	2.513	100%	
1378	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV IJM (Rain Tree Pa	302131340303	11KV PTW BLOCKS	Rural	AMR	1.650	1.512	1.650	8.389	9.289	100%	
1379	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV IJM (Rain Tree Pa	302131340304	11KV WTP	Rural	AMR	0.354	0.348	0.354	1.609	6.118	100%	
1380	GUNTUR	GUNTUR-TOWN1	GUNTUR-TOWN4(AUTO N	33/11KV IJM (Rain Tree Pa	302131340305	11KV WILLOWS-I	Rural	AMR	0.597	0.593	0.597	0.685	7.146	100%	
1381	GUNTUR	MACHERLA	MACHERLA	33/11KV Macherla Sub-Sta	302211140101	11KV Ring Road	Urban	AMR	10.428	10.306	10.428	1.169	10.993	100%	
1382	GUNTUR	MACHERLA	MACHERLA	33/11KV Macherla Sub-Sta	302211140102	11KV AIR	Urban	AMR	1.843	1.776	1.843	3.642	13.000	100%	
1383	GUNTUR	MACHERLA	MACHERLA	33/11KV Macherla Sub-Sta	302211140103	11KV Sagar Road	Urban	AMR	2.282	2.233	2.282	2.159	6.694	100%	
1384	GUNTUR	MACHERLA	MACHERLA	33/11KV Macherla Sub-Sta	302211140104	11KV Municipal water w	Urban	AMR	0.463	0.448	0.463	3.190	3.190	100%	
1385	GUNTUR	MACHERLA	MACHERLA	33/11KV Macherla Sub-Sta	302211140105	11KV A J Madaka	Mixed	AMR	0.853	0.817	0.853	4.207	64.757	100%	
1386	GUNTUR	MACHERLA	MACHERLA	33/11KV Macherla Sub-Sta	302211140106	11KV Kothapalli	Mixed	AMR	1.859	1.812	1.859	2.538	45.727	100%	
1387	GUNTUR	MACHERLA	MACHERLA	33/11KV Suddaguntla Sub-	302211140201	11KV Town 1	Urban	AMR	8.245	7.991	8.245	3.082	5.831	100%	
1388	GUNTUR	MACHERLA	MACHERLA	33/11KV Suddaguntla Sub-	302211140202	11KV Town 2	Urban	AMR	6.446	6.274	6.446	2.665	5.717	100%	
1389	GUNTUR	MACHERLA	MACHERLA	33/11KV Suddaguntla Sub-	302211140203	11KV Suddagunta	Urban	AMR	3.377	3.241	3.377	4.025	67.403	100%	
1390	GUNTUR	MACHERLA	MACHERLA	33/11KV Suddaguntla Sub-	302211140204	11KV INDUSTRIAL	Urban	AMR	0.013	0.012	0.013	5.981	91.955	100%	
1391	GUNTUR	MACHERLA	MACHERLA	33/11KV Macherla New SS	302211140301	11KV Balaji Nagar	Urban	AMR	1.195	1.155	1.195	3.410	50.261	100%	
1392	GUNTUR	MACHERLA	MACHERLA	33/11KV Macherla New SS	302211140302	11KV chennakesava swa	Urban	AMR	3.942	3.886	3.942	1.430	5.591	100%	
1393	GUNTUR	MACHERLA	MACHERLA	33/11KV Macherla New SS	302211140303	11KV macherla agl	Mixed	AMR	1.888	1.701	1.888	9.939	18.697	100%	

SI No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1394	GUNTUR	MACHERLA	MACHERLA	33/11KV Koppunuru Sub-S	302211240101	11KV Koppunuru	Mixed	AMR	3.722	3.620	3.722	2.743	45.458	100%	
1395	GUNTUR	MACHERLA	MACHERLA	33/11KV Koppunuru Sub-S	302211240102	11KV Chinthalathanda	Mixed	AMR	3.737	3.569	3.737	4.491	48.962	100%	
1396	GUNTUR	MACHERLA	MACHERLA	33/11KV Koppunuru Sub-S	302211240103	11KV B K V Palem	Mixed	AMR	2.678	2.499	2.678	6.686	63.541	100%	
1397	GUNTUR	MACHERLA	MACHERLA	33/11KV Koppunuru Sub-S	302211240104	11KV RELIANCE	Rural	AMR	0.275	0.253	0.275	7.976	5.518	100%	
1398	GUNTUR	MACHERLA	MACHERLA	33/11KV Koppunuru Sub-S	302211240105	11KV SUBBAREDDYPALE	Mixed	AMR	3.807	3.564	3.807	6.379	77.989	100%	
1399	GUNTUR	MACHERLA	MACHERLA	33/11KV N S Dam Sub-Stat	302211240201	11KV Tallapalli	Mixed	AMR	1.061	0.946	1.061	10.854	75.297	100%	
1400	GUNTUR	MACHERLA	MACHERLA	33/11KV N S Dam Sub-Stat	302211240202	11KV N Konda	Rural	AMR	1.424	1.313	1.424	7.753	15.107	100%	
1401	GUNTUR	MACHERLA	MACHERLA	33/11KV N S Dam Sub-Stat	302211240203	11KV RB	Rural	AMR	4.413	4.294	4.413	2.702	2.702	100%	
1402	GUNTUR	MACHERLA	MACHERLA	33/11KV Rayavaram Sub-S	302211240301	11KV Rayavaram Village	Mixed	AMR	2.814	2.679	2.814	4.819	41.380	100%	
1403	GUNTUR	MACHERLA	MACHERLA	33/11KV Rayavaram Sub-S	302211240302	11KV Macherla Rural	Agricultura	AMR	1.874	1.684	1.874	10.101	79.157	100%	
1404	GUNTUR	MACHERLA	MACHERLA	33/11KV Rayavaram Sub-S	302211240303	11KV Kambhampadu	Mixed	AMR	3.976	3.846	3.976	3.292	29.843	100%	
1405	GUNTUR	MACHERLA	MACHERLA	33/11KV Rayavaram Sub-S	302211240304	11KV Polepalli	Mixed	AMR	1.627	1.490	1.627	8.365	76.311	100%	
1406	GUNTUR	MACHERLA	MACHERLA	33/11KV Rayavaram Sub-S	302211240305	11KVINDUSTRIAL	Rural	AMR	4.778	4.620	4.778	3.307	4.564	100%	
1407	GUNTUR	MACHERLA	MACHERLA	33/11KV Tallapalli Sub-Stat	302211240401	11KV Tallapall	Mixed	AMR	1.228	1.168	1.228	4.856	42.136	100%	
1408	GUNTUR	MACHERLA	MACHERLA	33/11KV Tallapalli Sub-Stat	302211240402	11KV Bairavunipadu	Mixed	AMR	0.735	0.697	0.735	5.149	46.097	100%	
1409	GUNTUR	MACHERLA	MACHERLA	33/11KV Tallapalli Sub-Stat	302211240403	11KV Power grid	Rural	AMR	0.144	0.130	0.144	9.544	7.682	100%	
1410	GUNTUR	MACHERLA	MACHERLA	33/11KV Tallapalli Sub-Stat	302211240404	11KV KOTHURU-PASIVEI	Mixed	AMR	1.460	1.379	1.460	5.594	36.491	100%	
1411	GUNTUR	MACHERLA	MACHERLA	33/11 KV Dwarakapuri SS	302211240501	11KV Dwarakapuri	Mixed	AMR	1.071	0.968	1.071	9.601	54.149	100%	
1412	GUNTUR	MACHERLA	MACHERLA	33/11 KV Dwarakapuri SS	302211240502	11KV Kothapalli	Mixed	AMR	1.761	1.678	1.761	4.725	20.157	100%	
1413	GUNTUR	MACHERLA	MACHERLA	33/11 KV Dwarakapuri SS	302211240504	11KV REGULAVARAM TH	Mixed	AMR	2.160	2.096	2.160	2.962	79.799	100%	
1414	GUNTUR	MACHERLA	MACHERLA	33/11KV A.J.Madaka SS	302211240601	11KV GANNAVARAM	Mixed	AMR	2.097	1.943	2.097	7.333	56.180	100%	
1415	GUNTUR	MACHERLA	MACHERLA	33/11KV A.J.Madaka SS	302211240602	11KV ETTIPOTHALA	Agricultura	AMR	0.192	0.177	0.192	7.487	76.938	100%	
1416	GUNTUR	MACHERLA	MACHERLA	33/11KV A.J.Madaka SS	302211240603	11KV A J MADAKA	Mixed	AMR	1.463	1.396	1.463	4.572	27.894	100%	
1417	GUNTUR	MACHERLA	MACHERLA	33/11KV SS Atchammakun	302211240701	11KV ATCHAMMAKUNT,	Mixed	AMR	0.063	0.059	0.063	6.373	100.000	100%	
1418	GUNTUR	MACHERLA	MACHERLA	33/11KV SS Atchammakun	302211240702	11KV ATCHAMMAKUNT,	Agricultura	AMR	1.412	1.280	1.412	9.337	62.843	100%	
1419	GUNTUR	MACHERLA	MACHERLA	33/11KV SS Atchammakun	302211240703	11KV LATCHAM BAI	Mixed	AMR	1.912	1.790	1.912	6.360	87.960	100%	
1420	GUNTUR	MACHERLA	MACHERLA	33/11KV Bodilaveedu Sub-	302211340101	11KV Bodilaveedu	Mixed	AMR	1.593	1.543	1.593	3.151	59.018	100%	
1421	GUNTUR	MACHERLA	MACHERLA	33/11KV Bodilaveedu Sub-	302211340102	11KV Ratchamallapadu	Mixed	AMR	1.016	0.978	1.016	3.732	60.102	100%	
1422	GUNTUR	MACHERLA	MACHERLA	33/11KV Bodilaveedu Sub-	302211340103	11KV S R P Thanda	Mixed	AMR	2.579	2.361	2.579	8.471	86.347	100%	
1423	GUNTUR	MACHERLA	MACHERLA	33/11KV Kandlakunta Sub-	302211340201	11KV K P Gudem	Agricultura	AMR	3.307	2.980	3.307	9.894	93.114	100%	
1424	GUNTUR	MACHERLA	MACHERLA	33/11KV Kandlakunta Sub-	302211340202	11KV Kandlakunta	Mixed	AMR	0.369	0.351	0.369	4.918	77.267	100%	
1425	GUNTUR	MACHERLA	MACHERLA	33/11KV Kandlakunta Sub-	302211340203	11KV Kandlakunta Rural	Agricultura	AMR	1.025	0.921	1.025	10.138	25.776	100%	
1426	GUNTUR	MACHERLA	MACHERLA	33/11KV Kandlakunta Sub-	302211340204	11KV Water works	Rural	AMR	1.021	0.941	1.021	7.856	87.864	100%	
1427	GUNTUR	MACHERLA	MACHERLA	33/11KV Mandadi Sub-Stat	302211340301	11KV Mandadi Town	Rural	AMR	3.438	3.250	3.438	5.487	33.193	100%	
1428	GUNTUR	MACHERLA	MACHERLA	33/11KV Mandadi Sub-Stat	302211340302	11KV Mandadi Rural	Mixed	AMR	3.565	3.231	3.565	9.365	43.501	100%	
1429	GUNTUR	MACHERLA	MACHERLA	33/11KV Mandadi Sub-Stat	302211340303	11KV Terala	Mixed	AMR	0.180	0.164	0.180	8.479	44.497	100%	
1430	GUNTUR	MACHERLA	MACHERLA	33/11KV Sirigiripadu Sub-S	302211340401	11KV Sirigiripadu	Mixed	AMR	2.975	2.700	2.975	9.228	33.041	100%	
1431	GUNTUR	MACHERLA	MACHERLA	33/11KV Sirigiripadu Sub-S	302211340402	11KV Loyapalli	Mixed	AMR	0.652	0.581	0.652	10.784	76.655	100%	
1432	GUNTUR	MACHERLA	MACHERLA	33/11KV Sirigiripadu Sub-S	302211340403	11KV All Thandas	Mixed	AMR	1.820	1.664	1.820	8.577	96.934	100%	
1433	GUNTUR	MACHERLA	MACHERLA	33/11KV Sirigiripadu Sub-S	302211340404	11KV DAVUPALLI	Mixed	AMR	1.576	1.378	1.576	12.582	78.366	100%	
1434	GUNTUR	MACHERLA	MACHERLA	33/11KV Veldurthy Sub-Sta	302211340501	11KV Gundlapadu	Agricultura	AMR	0.252	0.222	0.252	11.716	95.795	100%	
1435	GUNTUR	MACHERLA	MACHERLA	33/11KV Veldurthy Sub-Sta	302211340502	11KV Gangireddypalli	Mixed	AMR	4.071	3.686	4.071	9.471	88.400	100%	
1436	GUNTUR	MACHERLA	MACHERLA	33/11KV Veldurthy Sub-Sta	302211340503	11KV UPPALAPADU	Agricultura	AMR	2.018	1.851	2.018	8.277	83.238	100%	
1437	GUNTUR	MACHERLA	MACHERLA	33/11KV Veldurthy Sub-Sta	302211340504	11KV VELDURTHY RURA	Agricultura	AMR	1.062	0.926	1.062	12.764	96.913	100%	
1438	GUNTUR	MACHERLA	MACHERLA	33/11KV Veldurthy Sub-Sta	302211340505	11KV VELDURTHY MHQ	Rural	AMR	1.130	1.097	1.130	2.911	42.072	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1439	GUNTUR	MACHERLA	MACHERLA	33/11KV Veldurthy Sub-Sta	302211340506	11KV Ch P thanda	Mixed	AMR	1.207	1.063	1.207	11.965	100.000	100%	
1440	GUNTUR	MACHERLA	MACHERLA	33/11KV GANGALKUNTA S	302211340601	11KV Gangalakunta	Mixed	AMR	4.283	3.915	4.283	8.584	44.836	100%	
1441	GUNTUR	MACHERLA	MACHERLA	33/11KV GANGALKUNTA S	302211340602	11KV Gottipalla	Mixed	AMR	0.665	0.621	0.665	6.592	57.138	100%	
1442	GUNTUR	MACHERLA	MACHERLA	33/11KV GANGALKUNTA S	302211340603	11KV Hanumapuram Tar	Mixed	AMR	2.360	2.170	2.360	8.052	97.905	100%	
1443	GUNTUR	MACHERLA	MACHERLA	33/11 KV Uppalapadu SS	302211340701	11KV Uppalapadu	Mixed	AMR	2.384	2.161	2.384	9.378	38.662	100%	
1444	GUNTUR	MACHERLA	MACHERLA	33/11 KV Uppalapadu SS	302211340702	11KV Ch P Thanda	Mixed	AMR	1.131	0.983	1.131	13.074	78.774	100%	
1445	GUNTUR	MACHERLA	MACHERLA	33/11 KV Uppalapadu SS	302211340703	11KV Yerrabalem	Mixed	AMR	1.842	1.665	1.842	9.602	91.099	100%	
1446	GUNTUR	MACHERLA	MACHERLA	33/11 KV Gundlapadu SS	302211340801	11KV Gundlapadu	Mixed	AMR	1.423	1.318	1.423	7.390	67.621	100%	
1447	GUNTUR	MACHERLA	MACHERLA	33/11 KV Gundlapadu SS	302211340802	11KV Gottipalla	Mixed	AMR	0.002	0.002	0.002	6.245	90.314	100%	
1448	GUNTUR	MACHERLA	MACHERLA	33/11 KV Gundlapadu SS	302211340803	11KV Lakshmaiah kunta	Agricultura	AMR	0.974	0.883	0.974	9.264	86.266	100%	
1449	GUNTUR	MACHERLA	MACHERLA	33/11KV K.P.GUDEM SS	302211340901	11KV KPGUDEM TOWN	Rural	AMR	0.403	0.375	0.403	6.852	90.930	100%	
1450	GUNTUR	MACHERLA	MACHERLA	33/11KV K.P.GUDEM SS	302211340902	11KV PAKIRISALA	Agricultura	AMR	2.518	2.316	2.518	8.045	100.000	100%	
1451	GUNTUR	MACHERLA	MACHERLA	33/11KV K.P.GUDEM SS	302211340903	11KV VENKAIAH KUNTA	Agricultura	AMR	4.392	4.020	4.392	8.458	100.000	100%	
1452	GUNTUR	MACHERLA	MACHERLA	33/11 KV GOTTIPALLA SS	302211341001	11KV GOTTIPALLA	Mixed	AMR	0.040	0.037	0.040	8.199	89.883	100%	
1453	GUNTUR	MACHERLA	MACHERLA	33/11 KV GOTTIPALLA SS	302211341002	11KV JERRIVAGU FEEDEI	Mixed	AMR	0.051	0.046	0.051	9.190	#N/A	100%	
1454	GUNTUR	MACHERLA	MACHERLA	33/11 KV GOTTIPALLA SS	302211341003	11KV MORSAPENTA FEE	Mixed	AMR	0.164	0.149	0.164	9.226	100.000	100%	
1455	GUNTUR	MACHERLA	MACHERLA	33/11KV Durgi Sub-Station	302211440101	11KV O B PALLI	Mixed	AMR	3.795	3.861	3.795	-1.743	62.353	100%	
1456	GUNTUR	MACHERLA	MACHERLA	33/11KV Durgi Sub-Station	302211440102	11KV J M PADU	Mixed	AMR	2.827	2.767	2.827	2.123	27.657	100%	
1457	GUNTUR	MACHERLA	MACHERLA	33/11KV Durgi Sub-Station	302211440103	11KV VANAM FEEDER	Mixed	AMR	1.869	2.329	1.869	-24.650	10.594	100%	
1458	GUNTUR	MACHERLA	MACHERLA	33/11KV Durgi Sub-Station	302211440104	11KV POLEPALLY AGL	Mixed	AMR	2.688	2.597	2.688	3.408	63.078	100%	
1459	GUNTUR	MACHERLA	MACHERLA	33/11KV Durgi Sub-Station	302211440105	11KV DURGI TOWN	Rural	AMR	8.032	7.965	8.032	0.834	36.729	100%	
1460	GUNTUR	MACHERLA	MACHERLA	33/11KV Durgi Sub-Station	302211440106	11KV INDUSTRIAL FEEDE	INDL	AMR	5.508	5.692	5.508	-3.350	-2.971	100%	
1461	GUNTUR	MACHERLA	MACHERLA	33/11KV Mutukuru Sub-Sta	302211440201	11KV Mutukuru Town I	Mixed	AMR	1.753	1.664	1.753	5.065	38.451	100%	
1462	GUNTUR	MACHERLA	MACHERLA	33/11KV Mutukuru Sub-Sta	302211440202	11KV Kancharagunta	Mixed	AMR	3.047	2.840	3.047	6.792	80.565	100%	
1463	GUNTUR	MACHERLA	MACHERLA	33/11KV Mutukuru Sub-Sta	302211440203	11KV Patlaveedu	Mixed	AMR	0.481	0.451	0.481	6.198	50.138	100%	
1464	GUNTUR	MACHERLA	MACHERLA	33/11KV Mutukuru Sub-Sta	302211440204	11KV NN THANDA	Mixed	AMR	2.129	1.969	2.129	7.520	97.687	100%	
1465	GUNTUR	MACHERLA	MACHERLA	33/11KV Mutukuru Sub-Sta	302211440205	11KV Mutukuru Town II	Mixed	AMR	0.799	0.750	0.799	6.201	43.244	100%	
1466	GUNTUR	MACHERLA	MACHERLA	33/11 KV POLEPALLI SS	302211440301	11KV Polepalli (T)	Mixed	AMR	3.217	3.077	3.217	4.366	38.865	100%	
1467	GUNTUR	MACHERLA	MACHERLA	33/11 KV POLEPALLI SS	302211440302	11KV Atmakuru	Mixed	AMR	3.153	2.997	3.153	4.949	33.951	100%	
1468	GUNTUR	MACHERLA	MACHERLA	33/11 KV POLEPALLI SS	302211440303	11KV Terala	Mixed	AMR	0.028	0.026	0.028	8.365	62.699	100%	
1469	GUNTUR	MACHERLA	MACHERLA	33/11 KV Nehru Nagar Tha	302211440401	11KV N N Thanda	Mixed	AMR	2.351	2.162	2.351	8.066	98.521	100%	
1470	GUNTUR	MACHERLA	MACHERLA	33/11 KV Nehru Nagar Tha	302211440402	11KV Kondavagu	Mixed	AMR	2.490	2.303	2.490	7.533	99.537	100%	
1471	GUNTUR	MACHERLA	MACHERLA	33/11 KV Nehru Nagar Tha	302211440403	11KV MANGAPURAM TH	Mixed	AMR	0.366	0.348	0.366	4.820	99.680	100%	
1472	GUNTUR	MACHERLA	MACHERLA	33/11 KV Adigoppala SS	302211440501	11KV Adigoppala	Mixed	AMR	2.527	2.372	2.527	6.112	43.458	100%	
1473	GUNTUR	MACHERLA	MACHERLA	33/11 KV Adigoppala SS	302211440502	11KV Nidanampadu	Mixed	AMR	3.119	2.972	3.119	4.719	34.459	100%	
1474	GUNTUR	MACHERLA	MACHERLA	33/11 KV Adigoppala SS	302211440503	11KV Industrial	Rural	AMR	0.291	0.274	0.291	5.762	5.074	100%	
1475	GUNTUR	MACHERLA	MACHERLA	33/11 KV Kolagutla SS	302211440601	11KVKAKIRALA	Mixed	AMR	3.672	3.536	3.672	3.714	60.547	100%	
1476	GUNTUR	MACHERLA	MACHERLA	33/11 KV Kolagutla SS	302211440602	11KV LAKSHMI PURAM T	Mixed	AMR	0.027	0.025	0.027	5.768	97.770	100%	
1477	GUNTUR	MACHERLA	MACHERLA	33/11 KV Kolagutla SS	302211440603	11KV KANCHRAGUNTA	Mixed	AMR	4.213	3.974	4.213	5.666	64.064	100%	
1478	GUNTUR	MACHERLA	MACHERLA	33/11KV Dharamavaram S	302211440701	11KV DHARMAVARAM	Mixed	AMR	3.169	2.962	3.169	6.529	46.653	100%	
1479	GUNTUR	MACHERLA	MACHERLA	33/11KV Dharamavaram S	302211440702	11KV SYAMARAJAPURAI	Mixed	AMR	2.810	2.727	2.810	2.949	56.973	100%	
1480	GUNTUR	MACHERLA	MACHERLA	33/11KV Dharamavaram S	302211440703	11KV RWS	Rural	AMR	0.248	0.225	0.248	9.201	35.634	100%	
1481	GUNTUR	MACHERLA	GURAZALA	33/11KV Gurazala Sub-Stat	302221140101	11KV Gurajala	Rural	AMR	14.779	14.373	14.779	2.749	3.711	100%	
1482	GUNTUR	MACHERLA	GURAZALA	33/11KV Gurazala Sub-Stat	302221140102	11KV Pallegunta	Mixed	AMR	2.082	1.984	2.082	4.704	35.210	100%	
1483	GUNTUR	MACHERLA	GURAZALA	33/11KV Gurazala Sub-Stat	302221140103	11 KV TOWN 2 GZL	Rural	AMR	9.220	8.875	9.220	3.746	3.170	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1484	GUNTUR	MACHERLA	GURAZALA	33/11KV Gurazala Sub-Stat	302221140104	11KV Anjanapuram	Mixed	AMR	0.723	0.671	0.723	7.230	42.231	100%	
1485	GUNTUR	MACHERLA	GURAZALA	33/11KV Charlagudipadu S	302221140201	11KV Cherlagudipadu	Rural	AMR	5.610	5.607	5.610	0.052	41.485	100%	
1486	GUNTUR	MACHERLA	GURAZALA	33/11KV Charlagudipadu S	302221140202	11KV J M Puram	Mixed	AMR	0.760	0.726	0.760	4.470	20.327	100%	
1487	GUNTUR	MACHERLA	GURAZALA	33/11KV Charlagudipadu S	302221140203	11KV Lakshmipuram	Mixed	AMR	0.643	0.622	0.643	3.155	25.074	100%	
1488	GUNTUR	MACHERLA	GURAZALA	33/11KV Charlagudipadu S	302221140204	11KV RWS	Rural	AMR	0.691	0.659	0.691	4.671	5.920	100%	
1489	GUNTUR	MACHERLA	GURAZALA	33/11KV Pulipadu SS	302221140301	11KV Pulipadu	Mixed	AMR	2.582	2.403	2.582	6.935	22.748	100%	
1490	GUNTUR	MACHERLA	GURAZALA	33/11KV Pulipadu SS	302221140302	11KV Daida	Mixed	AMR	0.411	0.389	0.411	5.486	13.064	100%	
1491	GUNTUR	MACHERLA	GURAZALA	33/11KV Pulipadu SS	302221140303	11KV SRINIVASAPURAM	Agricultura	AMR	0.700	0.669	0.700	4.389	63.090	100%	
1492	GUNTUR	MACHERLA	GURAZALA	33/11KV Daida SS	302221140401	11KV Gottimukkala	Mixed	AMR	1.455	1.419	1.455	2.469	36.416	100%	
1493	GUNTUR	MACHERLA	GURAZALA	33/11KV Daida SS	302221140402	11KV Telukutla	Mixed	AMR	2.367	2.337	2.367	1.284	30.445	100%	
1494	GUNTUR	MACHERLA	GURAZALA	33/11KV Daida SS	302221140403	11KV daida (temple)	Rural	AMR	0.015	0.015	0.015	0.949	100.000	100%	
1495	GUNTUR	MACHERLA	GURAZALA	33/11KV JANGAMAHESWA	302221140501	11KV JMPURAM	Mixed	AMR	2.104	1.984	2.104	5.716	5.097	100%	
1496	GUNTUR	MACHERLA	GURAZALA	33/11KV JANGAMAHESWA	302221140502	11KV Anjanapuram AGL	Agricultura	AMR	0.026	0.024	0.026	6.475	#N/A	100%	
1497	GUNTUR	MACHERLA	GURAZALA	33/11KV JANGAMAHESWA	302221140503	11KV GURAZALA TOWN	Rural	AMR	0.042	0.040	0.042	4.392	4.624	100%	
1498	GUNTUR	MACHERLA	GURAZALA	33/11KV MADUGULA SS	302221140601	11KV MADUGULA TOWN	Rural	AMR	0.039	0.038	0.039	2.104	6.669	100%	
1499	GUNTUR	MACHERLA	GURAZALA	33/11KV MADUGULA SS	302221140602	11KV BUGGAVAGU DAM	Rural	AMR	0.220	0.213	0.220	3.416	4.048	100%	
1500	GUNTUR	MACHERLA	GURAZALA	33/11KV MADUGULA SS	302221140603	11KV MADUGULA AGL	Mixed	AMR	0.074	0.069	0.074	5.572	67.078	100%	
1501	GUNTUR	MACHERLA	GURAZALA	33/11KV MADUGULA SS	302221140604	11KV RENTAL DONKA	Mixed	AMR	1.477	1.447	1.477	2.038	48.954	100%	
1502	GUNTUR	MACHERLA	GURAZALA	33/11KV Rentachintala Sub	302221240101	11KV Rentachintala	Rural	AMR	5.728	5.585	5.728	2.500	24.118	100%	
1503	GUNTUR	MACHERLA	GURAZALA	33/11KV Rentachintala Sub	302221240102	11KV Mittagudipadu	Mixed	AMR	0.820	0.792	0.820	3.453	43.558	100%	
1504	GUNTUR	MACHERLA	GURAZALA	33/11KV Rentachintala Sub	302221240103	11KV Rentala	Mixed	AMR	2.337	2.255	2.337	3.507	38.174	100%	
1505	GUNTUR	MACHERLA	GURAZALA	33/11KV Rentachintala Sub	302221240104	11KV Pasarlapadu	Mixed	AMR	3.571	3.548	3.571	0.626	34.145	100%	
1506	GUNTUR	MACHERLA	GURAZALA	33/11KV Rentachintala Sub	302221240105	11KV N S Tail Pond	Rural	AMR	0.525	0.506	0.525	3.779	11.237	100%	
1507	GUNTUR	MACHERLA	GURAZALA	33/11KV Paluvai Gate Sub-	302221240201	11KV Paluvaigate	Mixed	AMR	1.830	1.755	1.830	4.079	16.432	100%	
1508	GUNTUR	MACHERLA	GURAZALA	33/11KV Paluvai Gate Sub-	302221240202	11KV Palavai	Mixed	AMR	0.942	0.912	0.942	3.233	19.590	100%	
1509	GUNTUR	MACHERLA	GURAZALA	33/11KV Paluvai Gate Sub-	302221240203	11KV Tumrukota	Mixed	AMR	1.174	1.152	1.174	1.940	13.622	100%	
1510	GUNTUR	MACHERLA	GURAZALA	33/11 KV Manchikallu SS	302221240301	11KV MANCHIKALLU SS	Rural	AMR	2.222	2.162	2.222	2.706	19.154	100%	
1511	GUNTUR	MACHERLA	GURAZALA	33/11 KV Manchikallu SS	302221240302	11KV VISRANTHI PURAM	Mixed	AMR	1.445	1.407	1.445	2.655	51.116	100%	
1512	GUNTUR	MACHERLA	GURAZALA	33/11KV Karampudi Sub-S	302221340101	11KV Karampudi	Rural	AMR	11.184	10.985	11.184	1.782	24.263	100%	
1513	GUNTUR	MACHERLA	GURAZALA	33/11KV Karampudi Sub-S	302221340102	11KV Oppicherla	Mixed	AMR	3.284	3.173	3.284	3.363	12.196	100%	
1514	GUNTUR	MACHERLA	GURAZALA	33/11KV Karampudi Sub-S	302221340103	11KV Mellavagu	Mixed	AMR	2.447	2.350	2.447	3.961	28.809	100%	
1515	GUNTUR	MACHERLA	GURAZALA	33/11KV Karampudi Sub-S	302221340104	11KV Vepakampalli	Mixed	AMR	2.524	2.424	2.524	3.979	33.998	100%	
1516	GUNTUR	MACHERLA	GURAZALA	33/11KV Karampudi Sub-S	302221340105	11 kv oppicherla Agl	Mixed	AMR	2.359	2.232	2.359	5.382	48.775	100%	
1517	GUNTUR	MACHERLA	GURAZALA	33/11KV Karampudi Sub-S	302221340106	11KV LIFT FEEDER	Mixed	AMR	2.649	2.534	2.649	4.330	8.880	100%	
1518	GUNTUR	MACHERLA	GURAZALA	33/11KV Gadevaripalli Sub	302221340201	11KV P K Gundla	Mixed	AMR	2.037	1.979	2.037	2.891	23.293	100%	
1519	GUNTUR	MACHERLA	GURAZALA	33/11KV Gadevaripalli Sub	302221340202	11KV Gadevaripalli	Mixed	AMR	0.086	0.083	0.086	3.999	14.876	100%	
1520	GUNTUR	MACHERLA	GURAZALA	33/11KV Gadevaripalli Sub	302221340203	11KV Kachavaram	Mixed	AMR	2.581	2.506	2.581	2.884	31.891	100%	
1521	GUNTUR	MACHERLA	GURAZALA	33/11KV Gadevaripalli Sub	302221340204	11KV China Garlapadu	Mixed	AMR	1.836	1.716	1.836	6.530	26.889	100%	
1522	GUNTUR	MACHERLA	GURAZALA	33/11KV Naramalapadu Su	302221340301	11KV Miriyala	Mixed	AMR	1.699	1.592	1.699	6.294	38.862	100%	
1523	GUNTUR	MACHERLA	GURAZALA	33/11KV Naramalapadu Su	302221340302	11KV Naramalapadu	Mixed	AMR	1.145	1.052	1.145	8.158	37.928	100%	
1524	GUNTUR	MACHERLA	GURAZALA	33/11KV Naramalapadu Su	302221340303	11KV Vykuntapuram	Mixed	AMR	1.797	1.688	1.797	6.057	42.310	100%	
1525	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PidugurallaSub-St	302231140101	11KV PDRL - 1	Urban	AMR	2.859	2.765	2.859	3.293	4.565	100%	
1526	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PidugurallaSub-St	302231140102	11KV PDRL - 2	Urban	AMR	5.699	5.625	5.699	1.302	7.275	100%	
1527	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PidugurallaSub-St	302231140103	11KV PDRL - 3	Urban	AMR	4.069	3.962	4.069	2.621	10.016	100%	
1528	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PidugurallaSub-St	302231140104	11KV R R	Urban	AMR	13.780	13.562	13.780	1.588	4.561	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1529	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PidugurallaSub-St	302231140105	11KV Nekarikallu	Mixed	AMR	1.144	1.072	1.144	6.358	5.962	100%	
1530	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PidugurallaSub-St	302231140106	11KV S R Nagar	Urban	AMR	8.785	8.577	8.785	2.366	5.420	100%	
1531	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PidugurallaSub-St	302231140108	11KVK NPURI	Mixed	AMR	3.167	2.968	3.167	6.274	15.673	100%	
1532	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PidugurallaSub-St	302231140109	11KV DEVARAMPADU	Mixed	AMR	2.691	2.319	2.691	13.831	37.333	100%	
1533	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Janapadu Sub-Sta	302231140201	11KV Janapdu Industrial	Urban	AMR	4.452	4.112	4.452	7.645	4.671	100%	
1534	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Janapadu Sub-Sta	302231140202	11KV Janapdu Rural	Mixed	AMR	3.568	3.459	3.568	3.052	6.104	100%	
1535	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Janapadu Sub-Sta	302231140203	11 KV Janapadu Industri	Urban	AMR	4.639	4.395	4.639	5.240	8.232	100%	
1536	GUNTUR	MACHERLA	PIDUGURALLA	33/11 KV MAHAVEER NAG	302231140401	11KV Sivalayam	Urban	AMR	7.422	7.190	7.422	3.124	3.124	100%	
1537	GUNTUR	MACHERLA	PIDUGURALLA	33/11 KV MAHAVEER NAG	302231140402	11KV Indiramma Colony	Urban	AMR	0.423	0.402	0.423	4.781	7.021	100%	
1538	GUNTUR	MACHERLA	PIDUGURALLA	33/11 KV MAHAVEER NAG	302231140403	11KV Industrial	Urban	AMR	3.906	3.736	3.906	4.352	13.867	100%	
1539	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PGRL New SS(Yer	302231140501	11KV bypass feeder	Urban	AMR	0.014	0.013	0.014	6.395	6.395	100%	
1540	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PGRL New SS(Yer	302231140502	11KV cheruvukunta	Urban	AMR	3.256	3.090	3.256	5.109	13.289	100%	
1541	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PGRL New SS(Yer	302231140503	11KV kallam town ship	Urban	AMR	0.922	0.842	0.922	8.602	8.703	100%	
1542	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PGRL New SS(Yer	302231140504	11KV RTC	Urban	AMR	5.448	5.132	5.448	5.789	9.008	100%	
1543	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Brahamanapalli S	302231240101	11KV Brahmanapalli	Mixed	AMR	3.410	3.106	3.410	8.910	10.438	100%	
1544	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Brahamanapalli S	302231240102	11KV Anjanipuram	Mixed	AMR	1.854	1.718	1.854	7.355	15.563	100%	
1545	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Brahamanapalli S	302231240103	11KV Tummalacheruvu	Mixed	AMR	6.659	6.224	6.659	6.537	26.741	100%	
1546	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Brahamanapalli S	302231240104	11KV BHPALLI INDL	INDL	AMR	2.201	1.985	2.201	9.788	14.128	100%	
1547	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV P.G. Padu Sub-Sta	302231240201	11KV Industrial	INDL	AMR	2.456	2.396	2.456	2.447	2.055	100%	
1548	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV P.G. Padu Sub-Sta	302231240203	11KV P G Padu	Mixed	AMR	0.946	0.911	0.946	3.691	14.950	100%	
1549	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV P.G. Padu Sub-Sta	302231240204	11KV K G Padu	Mixed	AMR	3.417	3.262	3.417	4.528	13.058	100%	
1550	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV P.G. Padu Sub-Sta	302231240205	11KV Konanki L I Scheme	Rural	AMR	0.337	0.328	0.337	2.495	99.294	100%	
1551	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV P.G. Padu Sub-Sta	302231240206	11KV SPTHANDA	Mixed	AMR	2.438	2.265	2.438	7.096	72.474	100%	
1552	GUNTUR	MACHERLA	PIDUGURALLA	33/11 KV Julakallu SS	302231240301	11KVzoolakallu	Mixed	AMR	4.173	3.918	4.173	6.111	19.471	100%	
1553	GUNTUR	MACHERLA	PIDUGURALLA	33/11 KV Julakallu SS	302231240302	11KV Guttikonda	Mixed	AMR	5.248	4.830	5.248	7.967	18.266	100%	
1554	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV KONANKI SS	302231240501	11 KV KONANKI TOWN	Rural	AMR	0.732	0.679	0.732	7.243	33.245	100%	
1555	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV KONANKI SS	302231240502	11KV DANDAKATLA	Mixed	AMR	0.911	0.815	0.911	10.509	10.509	100%	
1556	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV KONANKI SS	302231240503	11KV REGADA FEEDER	Mixed	AMR	1.798	1.647	1.798	8.361	63.805	100%	
1557	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV KONANKI SS	302231240504	11KV Papayapalem Feed	Rural	AMR	0.097	0.092	0.097	4.932	7.111	100%	
1558	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Rajupalem Sub-St	302231340101	11KV Rajupalem	Rural	AMR	4.831	4.476	4.831	7.340	8.457	100%	
1559	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Rajupalem Sub-St	302231340102	11KV Ganapavaram	Mixed	AMR	1.744	1.634	1.744	6.288	7.657	100%	
1560	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Rajupalem Sub-St	302231340103	11KV Anupalem	Mixed	AMR	0.936	0.925	0.936	1.151	0.841	100%	
1561	GUNTUR	MACHERLA	PIDUGURALLA	33/11 KV Ganapavaram SS	302231340201	11KV Ganapavaram	Mixed	AMR	4.401	4.153	4.401	5.628	9.830	100%	
1562	GUNTUR	MACHERLA	PIDUGURALLA	33/11 KV Ganapavaram SS	302231340202	11KV Uppalapadu	Mixed	AMR	1.372	1.261	1.372	8.105	57.145	100%	
1563	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PEDANEMALAPU	302231340301	11KV PN PURI TOWN	Rural	AMR	1.145	1.076	1.145	6.042	11.325	100%	
1564	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PEDANEMALAPU	302231340302	11KV RAILWAY FEEDER	INDL	AMR	0.022	0.022	0.022	3.278	12.944	100%	
1565	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PEDANEMALAPU	302231340303	11KV GANGAMMA GUD	Mixed	AMR	1.049	0.981	1.049	6.484	52.952	100%	
1566	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PEDANEMALAPU	302231340304	11KV SRINIVASA NAGAR	Mixed	AMR	2.210	2.045	2.210	7.470	15.654	100%	
1567	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV PEDANEMALAPU	302231340305	11KV P N PURI AGL	Mixed	AMR	1.401	1.277	1.401	8.842	91.335	100%	
1568	GUNTUR	MACHERLA	PIDUGURALLA	33/11 KV Anupalem	302231340401	11KV ANUPALEM	Mixed	AMR	2.419	2.218	2.419	8.327	18.607	100%	
1569	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Bellamkonda Sub	302231440101	11KV Machayapalem Fe	Mixed	AMR	6.050	5.401	6.050	10.725	31.035	100%	
1570	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Bellamkonda Sub	302231440102	11KV Mokkapadu Feede	Mixed	AMR	2.570	2.148	2.570	16.423	18.094	100%	
1571	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Bellamkonda Sub	302231440103	11KV Bellamkonda Towr	Rural	AMR	2.544	2.276	2.544	10.531	10.531	100%	
1572	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Bellamkonda Sub	302231440104	11 KV Nandirajupalem fe	Mixed	AMR	0.735	0.697	0.735	5.099	49.052	100%	
1573	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Papaipalem Sub-S	302231440201	11KV M S Palem Feeder	Mixed	AMR	2.536	2.213	2.536	12.724	34.905	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1574	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Papaipalem Sub-S	302231440202	11KV Venkatayapalem F	Mixed	AMR	2.464	2.171	2.464	11.885	24.314	100%	
1575	GUNTUR	MACHERLA	PIDUGURALLA	33/11KV Papaipalem Sub-S	302231440203	11KV Papayapalem SS H	Mixed	AMR	2.246	1.816	2.246	19.155	63.792	100%	
1576	GUNTUR	MACHERLA	DACHEPALLI	33/11KV MADINAPADU SU	302241140101	11KV S Agraharam	Mixed	AMR	2.647	2.347	2.647	11.335	53.235	100%	
1577	GUNTUR	MACHERLA	DACHEPALLI	33/11KV MADINAPADU SU	302241140102	11KV Mutyalampadu	Mixed	AMR	4.219	3.836	4.219	9.086	19.357	100%	
1578	GUNTUR	MACHERLA	DACHEPALLI	33/11KV MADINAPADU SU	302241140103	11KV Madinapadu	Mixed	AMR	0.891	0.850	0.891	4.568	26.261	100%	
1579	GUNTUR	MACHERLA	DACHEPALLI	33/11KV MADINAPADU SU	302241140104	11KV BHATRUPALEM	Mixed	AMR	1.432	1.252	1.432	12.566	45.079	100%	
1580	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Pedagarlapadu SS	302241140301	11KV Takkelapadu	Mixed	AMR	2.954	2.676	2.954	9.407	9.706	100%	
1581	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Pedagarlapadu SS	302241140302	11KV Pedagarlapadu	Mixed	AMR	1.932	1.755	1.932	9.170	38.779	100%	
1582	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Pedagarlapadu SS	302241140303	11KV INDL EXPRESS	Rural	AMR	0.664	0.657	0.664	1.004	1.004	100%	
1583	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Machavaram Sub	302241240101	11KV Machavaram	Rural	AMR	3.984	3.761	3.984	5.585	10.101	100%	
1584	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Machavaram Sub	302241240102	11KV Morjampadu	Mixed	AMR	1.630	1.512	1.630	7.221	3.070	100%	
1585	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Machavaram Sub	302241240103	11KV Pinnelli	Mixed	AMR	2.356	2.096	2.356	11.067	21.542	100%	
1586	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Machavaram Sub	302241240104	11KV VEMAVARAM	Mixed	AMR	3.363	3.198	3.363	4.903	27.938	100%	
1587	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Machavaram Sub	302241240105	11KV Chennayapalem fe	Mixed	AMR	2.055	1.877	2.055	8.669	28.323	100%	
1588	GUNTUR	MACHERLA	DACHEPALLI	33/11 KV Morjampadu SS	302241240201	11KV GOVINDAPURAM	Mixed	AMR	1.660	1.563	1.660	5.844	39.507	100%	
1589	GUNTUR	MACHERLA	DACHEPALLI	33/11 KV Morjampadu SS	302241240203	11KV RWS	Rural	AMR	1.266	1.153	1.266	8.923	31.422	100%	
1590	GUNTUR	MACHERLA	DACHEPALLI	33/11 KV Morjampadu SS	302241240204	11KV MORJAMPADU	Mixed	AMR	1.869	1.757	1.869	5.961	10.071	100%	
1591	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Pinnelli SubStatio	302241240301	11KV Pinnelli	Mixed	AMR	2.115	1.993	2.115	5.769	41.198	100%	
1592	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Pinnelli SubStatio	302241240302	11KV Ramchandrapuram	Mixed	AMR	0.547	0.508	0.547	7.129	31.073	100%	
1593	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Pinnelli SubStatio	302241240303	11KV Pinnelli Agl	Mixed	AMR	0.857	0.787	0.857	8.204	15.756	100%	
1594	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Nadikudi Sub-Stat	302241340101	11KV Dachepalli Town I	Rural	AMR	8.644	8.558	8.644	0.998	0.245	100%	
1595	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Nadikudi Sub-Stat	302241340102	11KV Dachepalli Town 2	Rural	AMR	11.431	11.325	11.431	0.934	9.741	100%	
1596	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Nadikudi Sub-Stat	302241340103	11KV Kesanupalli	Mixed	AMR	0.327	0.313	0.327	4.337	24.916	100%	
1597	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Nadikudi Sub-Stat	302241340104	11KV Madinapadu	Mixed	AMR	0.022	0.021	0.022	6.215	80.323	100%	
1598	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Nadikudi Sub-Stat	302241340105	11KV Express	INDL	AMR	1.595	1.552	1.595	2.722	1.941	100%	
1599	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Nadikudi Sub-Stat	302241340107	11KV PHASE I INDUSTRIA	INDL	AMR	9.534	9.528	9.534	0.061	0.061	100%	
1600	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Srinagar Sub-Stat	302241340201	11KV Srinagar (RWS)	Rural	AMR	1.896	1.867	1.896	1.544	55.666	100%	
1601	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Srinagar Sub-Stat	302241340202	11KV Ramapuram	Mixed	AMR	1.551	1.507	1.551	2.827	2.827	100%	
1602	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Srinagar Sub-Stat	302241340203	11KV DANDIVAGU LI SCH	Rural	AMR	0.733	0.711	0.733	2.904	94.712	100%	
1603	GUNTUR	MACHERLA	DACHEPALLI	33/11KV Srinagar Sub-Stat	302241340204	11KV Gamalapadu	Mixed	AMR	3.243	3.150	3.243	2.854	22.284	100%	
1604	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV SS-I Narasaraopet	302311140101	11KV town A	Urban	AMR	3.879	3.784	3.879	2.455	2.856	100%	
1605	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV SS-I Narasaraopet	302311140102	11 KV Town B	Urban	AMR	7.155	6.926	7.155	3.202	4.307	100%	
1606	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV SS-I Narasaraopet	302311140103	11 KV Town C	Urban	AMR	3.320	3.217	3.320	3.107	1.930	100%	
1607	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV SS-I Narasaraopet	302311140104	11 KV Jonnalagadda	Rural	AMR	4.316	3.995	4.316	7.438	5.172	100%	
1608	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV SS-I Narasaraopet	302311140105	11kv Kesanupalli	Mixed	AMR	3.017	2.816	3.017	6.646	7.703	100%	
1609	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV SS-I Narasaraopet	302311140106	11KV Mulakaluru	Mixed	AMR	2.880	2.658	2.880	7.697	10.433	100%	
1610	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV Barampet(NRPT S	302311140201	11KV Pathuru	Urban	AMR	4.029	3.870	4.029	3.937	4.799	100%	
1611	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV Barampet(NRPT S	302311140202	11KV Sivastatue Centre	Urban	AMR	5.663	5.564	5.663	1.742	2.153	100%	
1612	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV Barampet(NRPT S	302311140203	11KV Burampet	Urban	AMR	4.023	3.882	4.023	3.504	3.915	100%	
1613	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV Barampet(NRPT S	302311140204	11KV Sisumandir	Urban	AMR	2.302	2.261	2.302	1.765	2.952	100%	
1614	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV SS-III Narasaraope	302311140301	11KV Ramireddypet	Urban	AMR	4.605	4.196	4.605	8.881	9.591	100%	
1615	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV SS-III Narasaraope	302311140302	11KV Station Road	Urban	AMR	2.142	2.003	2.142	6.514	8.931	100%	
1616	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV SS-III Narasaraope	302311140303	11KV Ravipadu	Rural	AMR	7.231	6.634	7.231	8.250	7.969	100%	
1617	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV SS-III Narasaraope	302311140304	11KV Allurivaripalem+RV	Rural	AMR	6.491	5.987	6.491	7.763	9.049	100%	
1618	GUNTUR	NARASARAOPET	NARASARAOPET	33/11 KV Narasaraopet-5(I	302311140401	11KV Palanadu	Urban	AMR	5.107	4.874	5.107	4.563	5.094	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1619	GUNTUR	NARASARAOPET	NARASARAOPET	33/11 KV Narasaraopet-5(I	302311140402	11KV Govt Hospital	Urban	AMR	4.299	4.097	4.299	4.691	10.498	100%	
1620	GUNTUR	NARASARAOPET	NARASARAOPET	33/11 KV Narasaraopet-5(I	302311140403	11KV SS N College	Urban	AMR	5.510	5.277	5.510	4.221	4.934	100%	
1621	GUNTUR	NARASARAOPET	NARASARAOPET	33/11 KV Narasaraopet-5(I	302311140404	11KV Estate	Urban	AMR	5.610	5.412	5.610	3.521	4.401	100%	
1622	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV NarasaraopetSS -	302311140501	11KV CBN TOWN FEEDE	Urban	AMR	2.725	2.665	2.725	2.214	1.788	100%	
1623	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV NarasaraopetSS -	302311140502	11KV SAKIRALAMITTA T	Urban	AMR	4.261	4.060	4.261	4.723	2.675	100%	
1624	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV NarasaraopetSS -	302311140503	11KV HOSANNAMANDIF	Urban	AMR	7.405	7.159	7.405	3.323	3.865	100%	
1625	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV NarasaraopetSS -	302311140504	11KV VISAPALEM RURAL	Rural	AMR	4.156	3.793	4.156	8.724	8.997	100%	
1626	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV SS-II Narasaraope	302311240101	11KV Prakash Nagar	Urban	AMR	1.344	1.281	1.344	4.643	7.209	100%	
1627	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV SS-II Narasaraope	302311240102	11KV RTC	Urban	AMR	5.251	4.808	5.251	8.434	8.939	100%	
1628	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV SS-II Narasaraope	302311240103	11KV Islampet	Urban	AMR	14.952	14.205	14.952	4.999	2.330	100%	
1629	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV SS-II Narasaraope	302311240104	11KV yellamanda	Rural	AMR	4.483	4.199	4.483	6.347	5.820	100%	
1630	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV SS-II Narasaraope	302311240105	11KV RWS	Rural	AMR	1.396	1.292	1.396	7.405	12.377	100%	
1631	GUNTUR	NARASARAOPET	NARASARAOPET	33/11 KV Narasaraopet SS-	302311240201	11KV Bank Colony	Urban	AMR	6.873	6.538	6.873	4.878	8.459	100%	
1632	GUNTUR	NARASARAOPET	NARASARAOPET	33/11 KV Narasaraopet SS-	302311240202	11KV ShalemNagar	Urban	AMR	4.003	3.703	4.003	7.496	3.770	100%	
1633	GUNTUR	NARASARAOPET	NARASARAOPET	33/11 KV Narasaraopet SS-	302311240203	11KV ST Anns	Urban	AMR	5.398	4.926	5.398	8.740	8.104	100%	
1634	GUNTUR	NARASARAOPET	NARASARAOPET	33/11 KV Narasaraopet SS-	302311240204	11KV Town Hall	Urban	AMR	4.658	4.478	4.658	3.861	6.889	100%	
1635	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV Narasaraopet Ser	302311240301	11KV SRIRAMPURAM FE	Urban	AMR	3.237	2.943	3.237	9.098	8.795	100%	
1636	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV Narasaraopet Ser	302311240302	11KV HEAD POST OFFICE	Urban	AMR	3.704	3.488	3.704	5.829	8.290	100%	
1637	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV Narasaraopet Ser	302311240303	11KV AREA HOSPITAL	Urban	AMR	0.620	0.543	0.620	12.385	12.841	100%	
1638	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV Narasaraopet Ser	302311240304	11KV ARUNDAL PET	Urban	AMR	5.899	5.468	5.899	7.300	7.979	100%	
1639	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV Narasaraopet Ser	302311240305	11KV OLD CHECK POST	Urban	AMR	1.157	1.069	1.157	7.540	7.540	100%	
1640	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV Uppalapadu Sub-	302311340101	11KV GONEPUDI FEEDEF	Mixed	AMR	0.129	0.118	0.129	8.154	17.803	100%	
1641	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV Uppalapadu Sub-	302311340102	11KV KAKAI FEEDER	Mixed	AMR	3.783	3.518	3.783	7.009	6.840	100%	
1642	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV Uppalapadu Sub-	302311340103	11KV UPPALAPADU FEE	Rural	AMR	2.994	2.830	2.994	5.488	14.337	100%	
1643	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV Uppalapadu Sub-	302311340104	11KV LI SCHEME	Rural	AMR	0.012	0.012	0.012	1.851	97.917	100%	
1644	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Chejarla Sub-Stat	302311340201	11KV Chezerla	Rural	AMR	4.555	3.895	4.555	14.489	29.465	100%	
1645	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Chejarla Sub-Stat	302311340202	11KV Zillapet Thanda	Mixed	AMR	1.409	1.187	1.409	15.737	76.847	100%	
1646	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Chejarla Sub-Stat	302311340203	11KV Kunkalagunta	Mixed	AMR	4.812	4.070	4.812	15.428	24.080	100%	
1647	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV KOTAPPAKONDA	302311340301	11KV GONEPUDI FEEDEF	Mixed	AMR	1.647	1.535	1.647	6.824	16.537	100%	
1648	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV KOTAPPAKONDA	302311340302	11KV GURAVAIPALEM FI	INDL	AMR	2.937	2.765	2.937	5.869	9.243	100%	
1649	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV KOTAPPAKONDA	302311340303	11KV KOTAPPAKONDA F	Rural	AMR	12.730	11.619	12.730	8.729	6.492	100%	
1650	GUNTUR	NARASARAOPET	NARASARAOPET	33/11KV KOTAPPAKONDA	302311340304	11KV PAMIDIMARRU FE	Mixed	AMR	1.484	1.392	1.484	6.253	12.860	100%	
1651	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Rompicharla Sub-	302312340101	11KV Vadlamudivaripale	Mixed	AMR	0.725	0.645	0.725	11.025	5.859	100%	
1652	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Rompicharla Sub-	302312340102	11KV Annavaram	Mixed	AMR	2.006	1.761	2.006	12.193	8.568	100%	
1653	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Rompicharla Sub-	302312340103	11KV Ramireddypalem	Mixed	AMR	0.505	0.442	0.505	12.426	17.674	100%	
1654	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Rompicharla Sub-	302312340104	11KV Rompicherla	Rural	AMR	2.262	2.104	2.262	6.959	11.003	100%	
1655	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Rompicharla Sub-	302312340105	11KV Power Grid Feeder	INDL	AMR	0.025	0.023	0.025	8.603	8.603	100%	
1656	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Vipparlareddypal	302312340201	11KV machavaram	Mixed	AMR	2.141	1.858	2.141	13.225	10.500	100%	
1657	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Vipparlareddypal	302312340202	11KV Mukunda Dairy	INDL	AMR	1.202	1.066	1.202	11.315	12.336	100%	
1658	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Vipparlareddypal	302312340203	11KV Santhagudipadu lif	Mixed	AMR	2.630	2.327	2.630	11.541	25.889	100%	
1659	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Vipparlareddypal	302312340204	11KV Vipparlareddypale	Mixed	AMR	4.599	4.010	4.599	12.815	17.036	100%	
1660	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11 KV Subbaiahpalem S	302312340301	11KV Atchaihpalem	Mixed	AMR	0.874	0.783	0.874	10.474	26.257	100%	
1661	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11 KV Subbaiahpalem S	302312340302	11KV Subbaihapalem	Mixed	AMR	0.645	0.587	0.645	8.950	5.187	100%	
1662	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV SS Buchibapanap	302312340402	11KV BUCHIPAPANAPAL	Rural	AMR	0.991	0.899	0.991	9.292	13.510	100%	
1663	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV SS Buchibapanap	302312340403	11KV GOGULAPADU FEE	Mixed	AMR	1.490	1.299	1.490	12.772	12.844	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1664	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV SS Buchibapanapa	302312340404	11KV AREPALLI AGL FEE	Mixed	AMR	0.547	0.484	0.547	11.496	7.404	100%	
1665	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Nekarikallu Sub-S	302312440101	11KV Challagundla	Mixed	AMR	1.781	1.557	1.781	12.550	17.288	100%	
1666	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Nekarikallu Sub-S	302312440102	11KV Nakarikallu	Rural	AMR	5.830	5.091	5.830	12.665	5.201	100%	
1667	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Nekarikallu Sub-S	302312440103	11KV Narsingapadu	Mixed	AMR	5.394	4.680	5.394	13.234	18.619	100%	
1668	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Nekarikallu Sub-S	302312440105	11KV Sivapuram Thanda	Mixed	AMR	3.440	3.014	3.440	12.373	68.375	100%	
1669	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Kandlakunta Sub-	302312440201	11KV Chagallu	Mixed	AMR	3.909	3.334	3.909	14.717	20.059	100%	
1670	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Kandlakunta Sub-	302312440202	11KV Dechavaram	Mixed	AMR	3.075	2.628	3.075	14.542	18.260	100%	
1671	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Kandlakunta Sub-	302312440203	11KV Pamidipadu	Mixed	AMR	2.579	2.201	2.579	14.667	12.440	100%	
1672	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Gundlapalli Sub S	302312440301	11KV Gundlapalli Agl Fe	Mixed	AMR	1.494	1.352	1.494	9.552	93.933	100%	
1673	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Gundlapalli Sub S	302312440302	11KV GUNDLAPALLI SS H	Rural	AMR	3.575	2.965	3.575	17.076	26.503	100%	
1674	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Gundlapalli Sub S	302312440303	11KV BALAJI NAGAR THA	Agricultura	AMR	1.281	1.079	1.281	15.748	32.241	100%	
1675	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Challagundla SS	302312440401	11KV Adda road agl fder	Mixed	AMR	0.798	0.683	0.798	14.410	14.410	100%	
1676	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Challagundla SS	302312440402	11KV RWS feeder	Rural	AMR	1.731	1.484	1.731	14.300	18.566	100%	
1677	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Challagundla SS	302312440403	11KV Challa Gundla SS H	Rural	AMR	0.001	0.001	0.001	4.851	100.000	100%	
1678	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Challagundla SS	302312440404	11KV Nakerikallu AGL fe	Mixed	AMR	0.003	0.002	0.003	29.358	87.426	100%	
1679	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Sattenapalli - SS1	302321140101	11KV Indl	Urban	AMR	2.048	1.946	2.048	5.002	6.392	100%	
1680	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Sattenapalli - SS1	302321140102	11KV Town A	Urban	AMR	3.251	3.123	3.251	3.930	4.831	100%	
1681	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Sattenapalli - SS1	302321140103	11KV Town B	Urban	AMR	5.520	5.210	5.520	5.615	6.731	100%	
1682	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Sattenapalli - SS1	302321140104	11KV Town C	Urban	AMR	5.257	5.085	5.257	3.258	3.200	100%	
1683	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Sattenapalli - SS1	302321140105	11 KV Water works	Urban	AMR	1.094	1.040	1.094	4.945	14.627	100%	
1684	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KVSattenapalli SS-III(	302321140201	11KV FEIROJU MANDIRA	Urban	AMR	3.341	3.171	3.341	5.080	6.141	100%	
1685	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KVSattenapalli SS-III(	302321140202	11 KV NAGARJUNA NAG	Urban	AMR	3.227	3.073	3.227	4.771	7.112	100%	
1686	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KVSattenapalli SS-III(	302321140203	11KV MADDURU BAVI	Urban	AMR	4.701	4.495	4.701	4.380	4.691	100%	
1687	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KVSattenapalli SS-III(	302321140204	11KV BSNL	Urban	AMR	0.669	0.624	0.669	6.715	10.841	100%	
1688	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV STPL Semi Indoo	302321140301	11KV E-SEVA FEEDER	Urban	AMR	2.117	2.011	2.117	4.977	7.691	100%	
1689	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV STPL Semi Indoo	302321140302	11KV RANGA COLONY	Urban	AMR	4.417	4.270	4.417	3.317	4.018	100%	
1690	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV STPL Semi Indoo	302321140303	11KV SAI KRISHNA FEED	Urban	AMR	3.496	3.286	3.496	6.007	5.112	100%	
1691	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Muppaalla Sub-St	302321240101	11KV Dammalapadu	Mixed	AMR	4.336	3.725	4.336	14.074	17.830	100%	
1692	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Muppaalla Sub-St	302321240102	11KV Gollapadu	Mixed	AMR	2.625	2.300	2.625	12.367	16.986	100%	
1693	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Muppaalla Sub-St	302321240103	11KV Madala	Rural	AMR	4.794	4.132	4.794	13.797	13.378	100%	
1694	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Muppaalla Sub-St	302321240104	11KV Muppalla	Rural	AMR	3.129	2.870	3.129	8.291	8.291	100%	
1695	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Sattenapalli -SS2(	302321340101	11KV Town D	Urban	AMR	6.408	6.108	6.408	4.687	6.349	100%	
1696	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Sattenapalli -SS2(	302321340103	11KV VENNADEVI	Rural	AMR	0.817	0.737	0.817	9.847	5.747	100%	
1697	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Dhulipalla Sub-St	302321340201	11KV Brugubanda	Mixed	AMR	3.524	3.203	3.524	9.097	10.693	100%	
1698	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Dhulipalla Sub-St	302321340202	11KV DHULIPALLA	Rural	AMR	2.319	2.161	2.319	6.788	9.114	100%	
1699	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Dhulipalla Sub-St	302321340203	11KV Indl	Urban	AMR	0.961	0.897	0.961	6.671	7.406	100%	
1700	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV NANDIGAMA(Ch	302321340301	11KV Indl Nandigama (B	Rural	AMR	4.722	4.365	4.722	7.550	12.633	100%	
1701	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV NANDIGAMA(Ch	302321340302	11KV Gudipudii Feeder	Mixed	AMR	3.508	3.315	3.508	5.493	9.410	100%	
1702	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV NANDIGAMA(Ch	302321340305	11KV Komerapui Feeder	Mixed	AMR	3.490	3.279	3.490	6.062	13.564	100%	
1703	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV Abburu SS	302321340401	11KV ABBURU FEEDER	Rural	AMR	3.297	3.050	3.297	7.501	11.944	100%	
1704	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV Abburu SS	302321340402	11KV RENTAPLLA	Mixed	AMR	3.706	3.418	3.706	7.765	8.627	100%	
1705	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV Abburu SS	302321340403	11KV PHANIDAM FEEDE	Mixed	AMR	3.580	3.447	3.580	3.723	14.015	100%	
1706	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV ACTHAMPETA Su	302321440101	11KV Atchempet	Rural	AMR	5.587	5.024	5.587	10.070	22.195	100%	
1707	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV ACTHAMPETA Su	302321440102	11KV Chintapalli	Mixed	AMR	3.374	2.844	3.374	15.708	30.968	100%	
1708	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV ACTHAMPETA Su	302321440103	11KV Kastala	Rural	AMR	1.949	1.475	1.949	24.344	96.626	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1709	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV ACTHAMPETA Su	302321440104	11KV Putlagudem	Rural	AMR	1.291	0.344	1.291	73.317	92.151	100%	
1710	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV ACTHAMPETA Su	302321440105	11KV Velpuru	Mixed	AMR	3.608	3.262	3.608	9.582	26.150	100%	
1711	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Challagariga Sub-	302321440301	11KV Challagariga	Rural	AMR	0.550	0.487	0.550	11.420	30.196	100%	
1712	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Challagariga Sub-	302321440302	11KV GINJUPALLI	Mixed	AMR	0.881	0.758	0.881	13.959	43.032	100%	
1713	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Challagariga Sub-	302321440303	11KV Putlagudem	Mixed	AMR	1.832	1.592	1.832	13.095	48.467	100%	
1714	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Tallacheruvu SS S	302321440401	11KV Neeleswara palem	Mixed	AMR	2.186	1.913	2.186	12.507	48.492	100%	
1715	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Tallacheruvu SS S	302321440402	11KV Thallacheruvu	Rural	AMR	1.873	1.562	1.873	16.622	30.293	100%	
1716	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Tallacheruvu SS S	302321440403	11KV Thallacheruvu AGL	Agricultura	AMR	1.155	0.988	1.155	14.513	23.858	100%	
1717	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV Madipadu SS	302321440601	11KV J P THANDA FEEDE	Mixed	AMR	1.540	1.339	1.540	13.101	81.872	100%	
1718	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV Madipadu SS	302321440602	11KV PULICHINTA PROJE	INDL	AMR	0.271	0.257	0.271	5.476	99.188	100%	
1719	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV Madipadu SS	302321440603	11KV MADIPADU	Mixed	AMR	0.746	0.648	0.746	13.131	57.247	100%	
1720	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV KROSUR Sub-Stat	302321540101	11KV 88 Talluru	Mixed	AMR	3.279	3.028	3.279	7.654	17.515	100%	
1721	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV KROSUR Sub-Stat	302321540102	11KV Dodleru	Mixed	AMR	1.055	0.940	1.055	10.917	23.691	100%	
1722	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV KROSUR Sub-Stat	302321540103	11KV Grandhasiri	Mixed	AMR	3.402	3.099	3.402	8.907	17.980	100%	
1723	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV KROSUR Sub-Stat	302321540104	11KV Krosuru	Rural	AMR	6.269	5.662	6.269	9.674	10.559	100%	
1724	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV KROSUR Sub-Stat	302321540105	11KV RWS Gorantla	Rural	AMR	0.721	0.681	0.721	5.509	61.593	100%	
1725	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Peesapadu SS Sub	302321540201	11KV Gudipadu	Mixed	AMR	3.289	3.035	3.289	7.729	14.645	100%	
1726	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Peesapadu SS Sub	302321540202	11KV Peesapadu	Rural	AMR	2.023	1.806	2.023	10.707	13.795	100%	
1727	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Peesapadu SS Sub	302321540203	11KV Kattamuru	Mixed	AMR	0.235	0.214	0.235	8.958	40.187	100%	
1728	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11KV Peesapadu SS Sub	302321540204	11KV Rentapalla	Mixed	AMR	0.077	0.071	0.077	8.251	10.921	100%	
1729	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV SS Utukuru	302321540401	11KV Bayyavaram	Mixed	AMR	2.335	2.065	2.335	11.550	15.311	100%	
1730	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV SS Utukuru	302321540402	11KV Kastala	Mixed	AMR	3.005	2.705	3.005	9.975	21.387	100%	
1731	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV SS Utukuru	302321540403	11KV Utukuru	Rural	AMR	1.861	1.689	1.861	9.237	16.081	100%	
1732	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV Dodleru SS	302321540501	11KV DODELRU FEEDR	Mixed	AMR	2.927	2.591	2.927	11.467	11.686	100%	
1733	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV Dodleru SS	302321540502	11KV HASANABAD FEED	Mixed	AMR	4.473	3.923	4.473	12.309	17.673	100%	
1734	GUNTUR	NARASARAOPET	SATTENAPALLI	33/11 KV Dodleru SS	302321540504	11KV NINDUJERLA FEED	Mixed	AMR	2.986	2.567	2.986	14.042	29.336	100%	
1735	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Epuru Sub-Station	302332140101	11KV RWS Udizerla	Rural	AMR	0.524	0.486	0.524	7.196	82.347	100%	
1736	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Epuru Sub-Station	302332140102	11KV Boggaram	Mixed	AMR	4.146	4.008	4.146	3.334	1.705	100%	
1737	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Epuru Sub-Station	302332140103	11KV Badrupalem	Agricultura	AMR	4.416	3.966	4.416	10.199	18.819	100%	
1738	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Epuru Sub-Station	302332140104	11KV Epuru	Agricultura	AMR	2.576	2.396	2.576	7.002	2.730	100%	
1739	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Epuru Sub-Station	302332140106	11KV UDUCHERLA	Mixed	AMR	1.171	1.093	1.171	6.631	31.052	100%	
1740	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11 KV A.MUPPALLA SS	302332140201	11KV Chittapuram	Mixed	AMR	1.794	1.629	1.794	9.230	9.394	100%	
1741	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11 KV A.MUPPALLA SS	302332140202	11KV Inumella	Mixed	AMR	3.948	3.641	3.948	7.781	14.197	100%	
1742	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11 KV A.MUPPALLA SS	302332140203	11KV Muppalla	Rural	AMR	2.596	2.455	2.596	5.428	17.688	100%	
1743	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11 KV Kocherla SS	302332140301	11KV KONDRAMUTLA FE	Mixed	AMR	3.105	2.826	3.105	8.981	12.862	100%	
1744	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11 KV Kocherla SS	302332140302	11KV AGNIGUNDALA FE	Mixed	AMR	2.774	2.521	2.774	9.099	21.137	100%	
1745	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11 KV Kocherla SS	302332140303	11KV SRINAGAR	Mixed	AMR	1.747	1.585	1.747	9.274	54.616	100%	
1746	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11 KV Kocherla SS	302332140304	11KV KOTCHERLA 24HRS	Rural	AMR	1.069	1.003	1.069	6.182	10.706	100%	
1747	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Udicharla	302332140401	11KV GANDLABAI THAN	Mixed	AMR	1.425	1.309	1.425	8.113	8.113	100%	
1748	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Udicharla	302332140402	11KV UDICHERLA FEEDE	Rural	AMR	0.074	0.068	0.074	8.678	15.454	100%	
1749	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Udicharla	302332140403	11KV YARRAKUNTA THA	Mixed	AMR	1.889	1.657	1.889	12.252	67.754	100%	
1750	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Savalyapuram Sul	302332240101	11KV Lift (Savalyapuram	Rural	AMR	0.701	0.668	0.701	4.725	95.211	100%	
1751	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Savalyapuram Sul	302332240102	11KV Mathukumalli	Rural	AMR	3.027	3.335	3.027	-10.186	-7.102	100%	
1752	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Savalyapuram Sul	302332240103	11KV Savalyuapuram	Rural	AMR	2.681	2.553	2.681	4.771	0.005	100%	
1753	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11KV Savalyapuram Sul	302332240104	11KV Kanamarlapudi	Mixed	AMR	4.351	4.156	4.351	4.489	6.321	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1754	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11 KV Mathukumalli (K	302332240201	11KV Chinakancherla	Mixed	AMR	1.953	1.858	1.953	4.887	12.756	100%	
1755	GUNTUR	NARASARAOPET	NARASARAOPET-RURAL	33/11 KV Mathukumalli (K	302332240202	11KV Karumanchi	Mixed	AMR	2.395	2.282	2.395	4.717	2.888	100%	
1756	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Nuzendla Sub-Sta	302332340101	11KV Nuzendla	Rural	AMR	1.444	1.398	1.444	3.175	8.204	100%	
1757	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Nuzendla Sub-Sta	302332340102	11KV Ravvaram	Mixed	AMR	1.842	1.732	1.842	5.959	5.084	100%	
1758	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Nuzendla Sub-Sta	302332340103	11KV RWS	Rural	AMR	1.521	1.426	1.521	6.259	5.056	100%	
1759	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Nuzendla Sub-Sta	302332340104	11KV Talarlapalli	Mixed	AMR	2.523	2.333	2.523	7.538	15.197	100%	
1760	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Mulakaluru SS	302332340201	11KV Lift	Rural	AMR	0.068	0.062	0.068	8.909	99.680	100%	
1761	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Mulakaluru SS	302332340202	11KV Puvvada	Mixed	AMR	1.507	1.351	1.507	10.353	15.431	100%	
1762	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Mulakaluru SS	302332340203	11KV Mulakaluru	Mixed	AMR	0.805	0.722	0.805	10.319	49.397	100%	
1763	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Mulakaluru SS	302332340204	11KV RWS	Rural	AMR	0.511	0.459	0.511	10.135	6.157	100%	
1764	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Chinthala Cheruv	302332340301	11KV CHINTALA CHERUV	Rural	AMR	1.222	1.103	1.222	9.791	6.117	100%	
1765	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Chinthala Cheruv	302332340302	11KV MUKKELAPADU	Mixed	AMR	1.370	1.231	1.370	10.158	10.158	100%	
1766	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Chinthala Cheruv	302332340303	11KV CHERUKUPALEM	Mixed	AMR	1.739	1.582	1.739	9.009	14.574	100%	
1767	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Gandiganumala S	302332440101	11KV GANDIGANUMALA	Mixed	AMR	2.730	2.540	2.730	6.939	41.531	100%	
1768	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Gandiganumala S	302332440102	11KV Showlayapalem	Mixed	AMR	1.515	1.422	1.515	6.148	28.063	100%	
1769	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Gandiganumala S	302332440104	11KV KOTHA THANDA	Mixed	AMR	1.389	1.289	1.389	7.148	30.390	100%	
1770	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Bandlamottu Sub	302332440201	11KV Bollapalli MHQ	Rural	AMR	5.453	5.199	5.453	4.656	32.048	100%	
1771	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Bandlamottu Sub	302332440202	11 KV Malapadu and Bar	Mixed	AMR	0.773	0.756	0.773	2.219	32.511	100%	
1772	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Bandlamottu Sub	302332440205	11KV MC Palem and Lax	Mixed	AMR	0.028	0.026	0.028	9.542	76.797	100%	
1773	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Pamidipadu Sub-S	302332440301	11KV Mellavagu	Mixed	AMR	0.906	0.860	0.906	5.124	19.919	100%	
1774	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Pamidipadu Sub-S	302332440302	11KV Chakrayapalem	Mixed	AMR	0.309	0.270	0.309	12.637	37.514	100%	
1775	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Pamidipadu Sub-S	302332440303	11KV Garikapadu	Mixed	AMR	1.157	1.113	1.157	3.786	3.786	100%	
1776	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Pamidipadu Sub-S	302332440304	11KV Pamidiapdu	Mixed	AMR	1.755	1.601	1.755	8.732	1.611	100%	
1777	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Remidicherla Sub	302332440401	11KV Ayyannapalem Rav	Mixed	AMR	2.151	2.036	2.151	5.330	73.944	100%	
1778	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Remidicherla Sub	302332440402	11KV Remidicherla	Rural	AMR	1.107	0.973	1.107	12.149	20.847	100%	
1779	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Remidicherla Sub	302332440403	11KV Gummanampadu	Mixed	AMR	0.645	0.579	0.645	10.196	18.748	100%	
1780	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Remidicherla Sub	302332440404	11KV Remidicherla Agl	Agricultura	AMR	1.541	1.465	1.541	4.924	71.530	100%	
1781	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Vellaturu Sub-Sta	302332440501	11KV Kanumalacheruvu	Mixed	AMR	1.363	1.230	1.363	9.727	35.958	100%	
1782	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Vellaturu Sub-Sta	302332440502	11KV Perurapadu	Mixed	AMR	2.531	2.282	2.531	9.838	16.285	100%	
1783	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Vellaturu Sub-Sta	302332440503	11KV VELLATURU	Mixed	AMR	2.226	1.992	2.226	10.536	12.822	100%	
1784	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Vellaturu Sub-Sta	302332440504	11KV Vaddemgunta	Mixed	AMR	1.471	1.434	1.471	2.456	9.035	100%	
1785	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV RAVULAPURAM S	302332440601	11KV BODIPALEM THAN	Mixed	AMR	3.551	3.426	3.551	3.539	96.307	100%	
1786	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV RAVULAPURAM S	302332440602	11KV MANNEPALLI THAI	Mixed	AMR	2.559	2.425	2.559	5.263	73.939	100%	
1787	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV RAVULAPURAM S	302332440603	11KV Ravulapuram	Rural	AMR	1.133	1.099	1.133	3.077	11.955	100%	
1788	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Gutlapalli SS	302332440701	11KV Gutlapalli AGL	Agricultura	AMR	1.205	1.029	1.205	14.595	54.154	100%	
1789	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Gutlapalli SS	302332440702	11KV Kandrika	Mixed	AMR	2.501	2.283	2.501	8.699	57.316	100%	
1790	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Gutlapalli SS	302332440703	11KV Gutlapalli Town	Rural	AMR	0.214	0.202	0.214	5.624	31.222	100%	
1791	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Gutlapalli SS	302332440704	11KV Palukuru	Mixed	AMR	3.037	2.674	3.037	11.974	24.973	100%	
1792	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV MUGACHINTHAP	302332440801	11KV MC PALEM SS HQ	Rural	AMR	0.121	0.112	0.121	7.742	29.317	100%	
1793	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV MUGACHINTHAP	302332440802	11KV MC PALEM AGL	Agricultura	AMR	0.056	0.052	0.056	6.400	#N/A	100%	
1794	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV MUGACHINTHAP	302332440803	11KV GANGUPALEM	Mixed	AMR	0.142	0.131	0.142	7.504	13.269	100%	
1795	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV MUGACHINTHAP	302332440804	11KV VADDEMGUNTA A	Agricultura	AMR	0.147	0.133	0.147	9.717	34.680	100%	
1796	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Cheekateegapale	302332540101	11KV Inavolu feeder	Mixed	AMR	0.162	0.154	0.162	4.988	38.003	100%	
1797	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Cheekateegapale	302332540102	11KV Lift (CT Palem)	Rural	AMR	1.325	1.191	1.325	10.102	7.410	100%	
1798	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Cheekateegapale	302332540103	11KV Nuzendla	Mixed	AMR	3.851	3.444	3.851	10.563	13.160	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1799	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Cheekateegapale	302332540104	11KV Sivapuram	Mixed	AMR	2.706	2.413	2.706	10.818	17.056	100%	
1800	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Enugupalem Sub-	302332540201	11KV Lift	Rural	AMR	1.633	1.497	1.633	8.346	99.533	100%	
1801	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Enugupalem Sub-	302332540202	11KV Mulakaluru	Mixed	AMR	0.131	0.119	0.131	9.105	22.657	100%	
1802	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Enugupalem Sub-	302332540203	11KV Pedakancherla	Mixed	AMR	2.711	2.395	2.711	11.646	10.627	100%	
1803	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Enugupalem Sub-	302332540204	11KV Pittambanda	Mixed	AMR	3.382	2.895	3.382	14.408	24.699	100%	
1804	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Enugupalem Sub-	302332540205	11KV RWS	Rural	AMR	0.797	0.715	0.797	10.336	15.003	100%	
1805	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV NEELI GANGA VA	302332540301	11KV A Kothapalem	Mixed	AMR	1.827	1.620	1.827	11.296	40.726	100%	
1806	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV NEELI GANGA VA	302332540302	11KV Koppukonda	Mixed	AMR	2.518	2.224	2.518	11.680	23.164	100%	
1807	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV NEELI GANGA VA	302332540303	11KV Neeligangavaram A	Mixed	AMR	3.427	3.064	3.427	10.611	8.953	100%	
1808	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV NEELI GANGA VA	302332540304	11KV Industrial Feeder	Rural	AMR	1.998	1.811	1.998	9.342	0.912	100%	
1809	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Vinukonda Sub-St	302332640101	11KV Vinukonda 1	Urban	AMR	6.847	6.414	6.847	6.327	6.543	100%	
1810	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Vinukonda Sub-St	302332640102	11KV Vinukonda 2	Urban	AMR	4.100	3.746	4.100	8.654	9.625	100%	
1811	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Vinukonda Sub-St	302332640103	11KV Vinukonda 3	Urban	AMR	11.949	11.191	11.949	6.346	5.628	100%	
1812	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Vinukonda Sub-St	302332640104	11KV Exchange	Urban	AMR	2.241	2.079	2.241	7.220	9.689	100%	
1813	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Vinukonda Sub-St	302332640105	11KV Karampudi Road	Urban	AMR	2.457	2.278	2.457	7.286	17.817	100%	
1814	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Vinukonda Sub-St	302332640106	11KV NRT-Kotcherla	Rural	AMR	0.156	0.106	0.156	31.541	35.555	100%	
1815	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV SS II Vinukonda(M	302332640301	11KV Vinukonda 5	Urban	AMR	7.117	6.872	7.117	3.440	3.730	100%	
1816	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV SS II Vinukonda(M	302332640302	11KV Vinukonda 6	Urban	AMR	1.901	1.842	1.901	3.134	3.134	100%	
1817	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV SS II Vinukonda(M	302332640303	11KV Vinukonda 7	Urban	AMR	4.945	4.710	4.945	4.762	6.408	100%	
1818	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV SS II Vinukonda(M	302332640304	11KV Thimmayapalem	Mixed	AMR	3.698	3.458	3.698	6.485	2.203	100%	
1819	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Vinukonda-III SS	302332640401	11KV Vinukonda 8	Urban	AMR	9.934	9.297	9.934	6.409	17.266	100%	
1820	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Vinukonda-III SS	302332640402	11KV Indl	INDL	AMR	3.237	2.961	3.237	8.531	5.509	100%	
1821	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Vinukonda-III SS	302332640403	11KV Vittamrajupalli	Rural	AMR	3.936	3.663	3.936	6.949	7.967	100%	
1822	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Vinukonda-III SS	302332640404	11KV Brahmanapalli	Mixed	AMR	1.933	1.748	1.933	9.575	13.141	100%	
1823	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Ayyannapalem S	302332740101	11KV Marripalem	Mixed	AMR	2.182	2.017	2.182	7.582	43.391	100%	
1824	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Ayyannapalem S	302332740102	11KV Mekaladinne	Mixed	AMR	1.434	1.280	1.434	10.737	49.818	100%	
1825	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Ayyannapalem S	302332740103	11KV AYYANNAPALEM F	Mixed	AMR	1.639	1.520	1.639	7.258	70.386	100%	
1826	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Chakrayapalem S	302332740201	11KV Chakrayapalem Ag	Mixed	AMR	2.506	2.307	2.506	7.953	37.007	100%	
1827	GUNTUR	NARASARAOPET	VINUKONDA	33/11 KV Chakrayapalem S	302332740202	11KV Lalipuram Agl	Mixed	AMR	1.709	1.551	1.709	9.265	76.601	100%	
1828	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Gummanampadu	302332740301	11KV GUMMANAMPADI	Rural	AMR	0.154	0.137	0.154	11.009	4.242	100%	
1829	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Gummanampadu	302332740302	11KV NSK THANDA	Mixed	AMR	0.010	0.005	0.010	53.209	99.404	100%	
1830	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Gummanampadu	302332740303	11KV KOMITIKUNTA FEE	Agricultura	AMR	0.052	0.050	0.052	5.015	89.569	100%	
1831	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Gummanampadu	302332740304	11KV LINGAMGUNTA TH	Agricultura	AMR	0.042	0.036	0.042	12.866	88.943	100%	
1832	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Mellavagu SS	302332740401	11KV MELLAVAGU SS HO	Rural	AMR	0.087	0.066	0.087	23.848	46.143	100%	
1833	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Mellavagu SS	302332740402	11KV MELLAVAGU AGL F	Agricultura	AMR	1.154	1.039	1.154	9.901	49.100	100%	
1834	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Mellavagu SS	302332740403	11KV REDDY PALEM FEE	Mixed	AMR	0.283	0.248	0.283	12.464	32.095	100%	
1835	GUNTUR	NARASARAOPET	VINUKONDA	33/11KV Mellavagu SS	302332740404	11KV JAYANTHARAMA P	Mixed	AMR	1.495	1.339	1.495	10.417	11.077	100%	
1836	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Duggirala Sub-Sta	302411140101	11KV DUGGIRALA MHQ-	Rural	AMR	1.558	1.489	1.558	4.428	3.216	100%	
1837	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Duggirala Sub-Sta	302411140102	11KV Duggirala Rural fee	Rural	AMR	0.217	0.205	0.217	5.581	41.070	100%	
1838	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Duggirala Sub-Sta	302411140103	11 KV PENUMULI FEEDE	Mixed	AMR	3.476	3.270	3.476	5.924	9.251	100%	
1839	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Duggirala Sub-Sta	302411140104	11KV MORAMPUDI (DG	Rural	AMR	7.920	7.447	7.920	5.966	8.731	100%	
1840	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Pedapalem Sub-S	302411140201	11KV Pedapalem	Mixed	AMR	1.036	0.957	1.036	7.608	11.000	100%	
1841	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Pedapalem Sub-S	302411140202	11KV Perakalapudi	Mixed	AMR	3.201	2.906	3.201	9.231	13.935	100%	
1842	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Pedapalem Sub-S	302411140203	11KV Revendrapadu	Mixed	AMR	3.363	3.020	3.363	10.190	12.439	100%	
1843	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Pedapalem Sub-S	302411140204	11KV Godavarru	Mixed	AMR	3.721	3.304	3.721	11.199	14.867	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1844	GUNTUR	TENALI	TENALI-RURAL1	33/11 KV Chiluvuru	302411140301	11KV Manchikalapudi	Mixed	AMR	1.523	1.385	1.523	9.023	15.211	100%	
1845	GUNTUR	TENALI	TENALI-RURAL1	33/11 KV Chiluvuru	302411140302	11KV Chiluvulru AGL	Agricultura	AMR	0.478	0.428	0.478	10.545	37.233	100%	
1846	GUNTUR	TENALI	TENALI-RURAL1	33/11 KV Chiluvuru	302411140303	11KV Chiluvulru	Rural	AMR	3.307	3.097	3.307	6.341	7.909	100%	
1847	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Kollipara Sub-Stat	302411240101	11KV Kollipara	Rural	AMR	6.692	6.160	6.692	7.943	11.297	100%	
1848	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Kollipara Sub-Stat	302411240102	11KV Athota	Mixed	AMR	3.810	3.465	3.810	9.054	15.454	100%	
1849	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Kollipara Sub-Stat	302411240103	11KV Annavaram	Mixed	AMR	4.763	4.342	4.763	8.827	8.869	100%	
1850	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Kollipara Sub-Stat	302411240104	11KV Davuluru	Mixed	AMR	1.353	1.188	1.353	12.165	21.560	100%	
1851	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Munnangi Sub-St	302411240201	11KV Munnangi	Rural	AMR	2.778	2.560	2.778	7.838	9.046	100%	
1852	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Munnangi Sub-St	302411240202	11KV Pidapartipalem	Mixed	AMR	2.195	2.038	2.195	7.156	22.551	100%	
1853	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Munnangi Sub-St	302411240203	11KV Vallabhapuram	Mixed	AMR	3.232	2.971	3.232	8.057	8.151	100%	
1854	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Munnangi Sub-St	302411240204	11KV Emani	Mixed	AMR	3.540	3.190	3.540	9.891	12.851	100%	
1855	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Munnangi Sub-St	302411240205	11KV Vallabhapuram Wa	Rural	AMR	0.159	0.149	0.159	6.250	27.607	100%	
1856	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Munnangi Sub-St	302411240206	11KV Emani Town	Rural	AMR	0.353	0.270	0.353	23.481	28.018	100%	
1857	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Vemuru Sub-Stati	302411340101	11KV Vemuru	Rural	AMR	4.231	4.112	4.231	2.796	8.478	100%	
1858	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Vemuru Sub-Stati	302411340102	11KV Zampany	Mixed	AMR	4.302	3.977	4.302	7.572	11.109	100%	
1859	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Vemuru Sub-Stati	302411340103	11KV Chavali	Mixed	AMR	4.484	4.398	4.484	1.908	13.712	100%	
1860	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Vemuru Sub-Stati	302411340104	11KV Kodiparru	Mixed	AMR	2.416	2.181	2.416	9.729	21.070	100%	
1861	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Kolluru Sub-Statio	302411440101	11KV Kolluru	Rural	AMR	8.311	7.773	8.311	6.473	10.060	100%	
1862	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Kolluru Sub-Statio	302411440102	11KV Gajullanka	Mixed	AMR	2.314	2.178	2.314	5.859	11.494	100%	
1863	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Kolluru Sub-Statio	302411440103	11KV Donepudi	Mixed	AMR	3.205	2.901	3.205	9.485	18.175	100%	
1864	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Kolluru Sub-Statio	302411440104	11KV Ravikampadu	Mixed	AMR	3.845	3.438	3.845	10.585	19.724	100%	
1865	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Kolluru Sub-Statio	302411440105	11KV Potharlanka Lift Irr	Rural	AMR	0.413	0.399	0.413	3.425	99.484	100%	
1866	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Chilumuru Sub-St	302411440201	11KV Kolluru AGL	Mixed	AMR	0.508	0.454	0.508	10.529	16.973	100%	
1867	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Chilumuru Sub-St	302411440202	11KV Chintallanka	Mixed	AMR	1.747	1.589	1.747	9.022	12.918	100%	
1868	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Chilumuru Sub-St	302411440203	11KV Epuru	Mixed	AMR	0.228	0.203	0.228	11.114	33.870	100%	
1869	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Chilumuru Sub-St	302411440204	11KV Chilumuru	Rural	AMR	1.910	1.846	1.910	3.339	7.719	100%	
1870	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Juvvalapalem Sub	302411440301	11KV Juvvalapalem	Mixed	AMR	1.283	1.190	1.283	7.233	26.502	100%	
1871	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Juvvalapalem Sub	302411440302	11KV Tippalakatta	Mixed	AMR	2.451	2.160	2.451	11.871	27.051	100%	
1872	GUNTUR	TENALI	TENALI-RURAL1	33/11KV Juvvalapalem Sub	302411440303	11KV Kishkindapalem	Mixed	AMR	1.593	1.413	1.593	11.298	28.987	100%	
1873	GUNTUR	TENALI	TENALI-RURAL1	33/11 KV EPURULANKA SS	302411440401	11KV Epurulanka	Mixed	AMR	1.695	1.495	1.695	11.811	18.997	100%	
1874	GUNTUR	TENALI	TENALI-RURAL1	33/11 KV EPURULANKA SS	302411440402	11KV Suggunalanka	Mixed	AMR	2.185	1.921	2.185	12.076	21.773	100%	
1875	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Amarthaluru Sub-	302412140101	11KV Amarthaluru	Rural	AMR	2.840	2.679	2.840	5.660	18.580	100%	
1876	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Amarthaluru Sub-	302412140102	11KV Govada	Rural	AMR	2.183	1.990	2.183	8.850	40.619	100%	
1877	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Amarthaluru Sub-	302412140103	11KV Inturu	Rural	AMR	5.020	4.699	5.020	6.395	30.068	100%	
1878	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Amarthaluru Sub-	302412140104	11KV Pedapudi	Mixed	AMR	1.714	1.632	1.714	4.763	26.288	100%	
1879	GUNTUR	TENALI	TENALI-RURAL2	33/11 KV Mulpuru SS	302412140201	11 KV Mulpuru SS HQ	Rural	AMR	1.686	1.536	1.686	8.895	14.959	100%	
1880	GUNTUR	TENALI	TENALI-RURAL2	33/11 KV Mulpuru SS	302412140202	11KV Kuchipudi	Mixed	AMR	2.734	2.589	2.734	5.314	9.155	100%	
1881	GUNTUR	TENALI	TENALI-RURAL2	33/11 KV Mulpuru SS	302412140203	11KV Mulpuru AGL	Agricultura	AMR	0.367	0.333	0.367	9.219	46.696	100%	
1882	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Chebrolu Sub-Sta	302412240101	11KV CHEBROLU	Rural	AMR	6.930	6.822	6.930	1.549	11.583	100%	
1883	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Chebrolu Sub-Sta	302412240102	11KV Manchala	Mixed	AMR	1.170	1.098	1.170	6.149	17.193	100%	
1884	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Chebrolu Sub-Sta	302412240103	11KV Chebrolu Industria	Rural	AMR	1.222	1.209	1.222	1.081	0.426	100%	
1885	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Chebrolu Sub-Sta	302412240104	11KV Narakoduru	Rural	AMR	8.928	8.736	8.928	2.149	8.970	100%	
1886	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Chebrolu Sub-Sta	302412240105	11KV Kothareddypalem	Rural	AMR	3.956	3.828	3.956	3.247	24.465	100%	
1887	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Vadlamudi Sub-St	302412240201	11KV Sekuru	Mixed	AMR	4.574	4.386	4.574	4.106	28.350	100%	
1888	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Vadlamudi Sub-St	302412240202	11KV VIGNAN FEEDER	Rural	AMR	0.360	0.346	0.360	3.808	4.716	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1889	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Vadlamudi Sub-St	302412240203	11KV VADLAMUDI FEED	Rural	AMR	9.336	9.166	9.336	1.820	4.961	100%	
1890	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Vadlamudi Sub-St	302412240204	11KV Vejendla	Rural	AMR	8.858	8.444	8.858	4.664	11.410	100%	
1891	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Vadlamudi Sub-St	302412240205	11KV Sekuru LI Scheme	Rural	AMR	0.777	0.765	0.777	1.615	5.078	100%	
1892	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Tsunduru Sub-Sta	302412340101	11KV TSUNDURU	Rural	AMR	3.361	3.226	3.361	4.006	23.889	100%	
1893	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Tsunduru Sub-Sta	302412340102	11KV MODUKURU	Mixed	AMR	3.310	2.939	3.310	11.195	15.850	100%	
1894	GUNTUR	TENALI	TENALI-RURAL2	33/11KV Tsunduru Sub-Sta	302412340103	11KV Vetapalem	Mixed	AMR	2.297	2.138	2.297	6.934	14.975	100%	
1895	GUNTUR	TENALI	TENALI-RURAL2	33/11KV EDLAPALLI SS	302412340201	11KV Edlapalli	Rural	AMR	2.708	2.588	2.708	4.427	4.522	100%	
1896	GUNTUR	TENALI	TENALI-RURAL2	33/11KV EDLAPALLI SS	302412340202	11KV Valiveru	Rural	AMR	2.084	1.904	2.084	8.629	17.466	100%	
1897	GUNTUR	TENALI	TENALI-RURAL2	33/11KV EDLAPALLI SS	302412340203	11KV Dundipalem	Mixed	AMR	1.683	1.501	1.683	10.827	12.956	100%	
1898	GUNTUR	TENALI	TENALI-RURAL2	33/11KV EDLAPALLI SS	302412340204	11KV Penugudurpadu	Mixed	AMR	1.533	1.382	1.533	9.849	19.709	100%	
1899	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS II Sub-St	302413140101	11KV Tenali Local X	Urban	AMR	6.094	5.907	6.094	3.066	4.244	100%	
1900	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS II Sub-St	302413140102	11KV Tenali Local III	Urban	AMR	7.014	6.688	7.014	4.648	6.884	100%	
1901	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS II Sub-St	302413140103	11KV Tenali Local IV	Urban	AMR	7.782	7.521	7.782	3.349	5.612	100%	
1902	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS II Sub-St	302413140104	11KV CERP (Chadalawad	Rural	AMR	3.505	3.369	3.505	3.870	6.982	100%	
1903	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS II Sub-St	302413140105	11KV Ananthavaram	Mixed	AMR	1.746	1.649	1.746	5.505	5.795	100%	
1904	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS4 Sub-St	302413140201	11KV Tenali Local VIII	Urban	AMR	0.241	0.232	0.241	3.944	3.944	100%	
1905	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS4 Sub-St	302413140202	11KV Tenali Local IX	Urban	AMR	4.306	4.098	4.306	4.829	8.465	100%	
1906	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS4 Sub-St	302413140203	11KV PEDDA RAAVURU	Rural	AMR	7.466	7.107	7.466	4.810	6.816	100%	
1907	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS4 Sub-St	302413140204	11KV APTIDCO	Urban	AMR	0.000	0.000	0.000	1.323	53.112	100%	
1908	GUNTUR	TENALI	TENALI-TOWN	33/11 KV Chinaravuru park	302413140301	11KV Express	Urban	AMR	2.957	2.844	2.957	3.817	8.928	100%	
1909	GUNTUR	TENALI	TENALI-TOWN	33/11 KV Chinaravuru park	302413140302	11KV Chinaravuru	Urban	AMR	7.607	7.256	7.607	4.611	8.010	100%	
1910	GUNTUR	TENALI	TENALI-TOWN	33/11 KV Chinaravuru park	302413140303	11KV Nazerpet	Urban	AMR	4.808	4.561	4.808	5.122	6.120	100%	
1911	GUNTUR	TENALI	TENALI-TOWN	33/11 KV Chinaravuru park	302413140304	11KV M S Palem	Urban	AMR	7.203	6.934	7.203	3.735	4.993	100%	
1912	GUNTUR	TENALI	TENALI-TOWN	33/11 KV Chinaravuru park	302413140305	11KV Gandhichowk	Urban	AMR	6.252	6.038	6.252	3.410	4.906	100%	
1913	GUNTUR	TENALI	TENALI-TOWN	33/11 KV Chinaravuru park	302413140306	11KV Kothapet	Urban	AMR	1.891	1.820	1.891	3.771	6.547	100%	
1914	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS1 Sub-St	302413240101	11KV Tenali Local I	Urban	AMR	6.796	6.496	6.796	4.419	6.529	100%	
1915	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS1 Sub-St	302413240102	11KV Tenali Governmen	Urban	AMR	0.522	0.507	0.522	2.871	99.735	100%	
1916	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS1 Sub-St	302413240103	11KV Tenali UDA	Urban	AMR	11.370	11.030	11.370	2.991	4.446	100%	
1917	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS1 Sub-St	302413240104	11KV Tenali Industrial Es	Urban	AMR	3.663	3.474	3.663	5.168	3.581	100%	
1918	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS1 Sub-St	302413240105	11KV Pinapadu	Urban	AMR	4.162	3.926	4.162	5.672	10.126	100%	
1919	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS1 Sub-St	302413240106	11KV Sulthanabad	Urban	AMR	5.674	5.455	5.674	3.860	5.623	100%	
1920	GUNTUR	TENALI	TENALI-TOWN	33/11 KV Tenali SS -V (WA	302413240201	11KV Balajiraopet	Urban	AMR	7.081	6.704	7.081	5.320	6.813	100%	
1921	GUNTUR	TENALI	TENALI-TOWN	33/11 KV Tenali SS -V (WA	302413240202	11KV Tenali Railway Stat	Urban	AMR	5.676	5.451	5.676	3.961	5.825	100%	
1922	GUNTUR	TENALI	TENALI-TOWN	33/11 KV Tenali SS -V (WA	302413240203	11KV Ganganammapet	Urban	AMR	7.568	7.361	7.568	2.734	4.348	100%	
1923	GUNTUR	TENALI	TENALI-TOWN	33/11 KV Tenali SS -V (WA	302413240204	11KV Wahab Chowk	Urban	AMR	7.917	7.575	7.917	4.314	6.152	100%	
1924	GUNTUR	TENALI	TENALI-TOWN	33/11 KV R.R.Nagar SS(TEN	302413240301	11KV Tenali R R Nagar	Urban	AMR	3.437	3.193	3.437	7.099	9.143	100%	
1925	GUNTUR	TENALI	TENALI-TOWN	33/11 KV R.R.Nagar SS(TEN	302413240302	11KV CN Colony	Urban	AMR	2.848	2.678	2.848	5.988	12.406	100%	
1926	GUNTUR	TENALI	TENALI-TOWN	33/11 KV R.R.Nagar SS(TEN	302413240303	11KV Morrispet	Urban	AMR	4.909	4.630	4.909	5.682	6.592	100%	
1927	GUNTUR	TENALI	TENALI-TOWN	33/11 KV R.R.Nagar SS(TEN	302413240304	11KV CHINAPARIMI	Rural	AMR	0.014	0.013	0.014	7.237	7.855	100%	
1928	GUNTUR	TENALI	TENALI-TOWN	33/11KV JAGGADIGUNTAP	302413240401	11KV TIDCO	Rural	AMR	0.003	0.002	0.003	4.287	12.637	100%	
1929	GUNTUR	TENALI	TENALI-TOWN	33/11KV JAGGADIGUNTAP	302413240402	11KV CHINAPARIMI	Mixed	AMR	4.645	3.894	4.645	16.174	21.015	100%	
1930	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS3 Sub-St	302413340101	11KV Tenali Local XI	Urban	AMR	1.922	1.847	1.922	3.865	3.323	100%	
1931	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS3 Sub-St	302413340102	11KV Tenali Local V	Urban	AMR	12.368	12.007	12.368	2.918	4.655	100%	
1932	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS3 Sub-St	302413340103	11KV Tenali Local VI	Urban	AMR	9.378	8.899	9.378	5.107	6.217	100%	
1933	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS3 Sub-St	302413340105	11KV Tenali Water Work	Urban	AMR	1.509	1.478	1.509	2.073	2.073	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1934	GUNTUR	TENALI	TENALI-TOWN	33/11KV Tenali SS3 Sub-St	302413340106	11KV Tenali S S Palem	Urban	AMR	5.809	5.612	5.809	3.393	6.825	100%	
1935	GUNTUR	TENALI	TENALI-TOWN	33/11KV AUTONAGAR-TEN	302413340201	11KV Tenali Auto Nagar	Urban	AMR	5.241	4.985	5.241	4.892	4.663	100%	
1936	GUNTUR	TENALI	TENALI-TOWN	33/11KV AUTONAGAR-TEN	302413340202	11KV Tenali Rural Expres	INDL	AMR	1.850	1.734	1.850	6.248	9.067	100%	
1937	GUNTUR	TENALI	TENALI-TOWN	33/11KV AUTONAGAR-TEN	302413340203	11KV Katevaram	Mixed	AMR	5.806	5.559	5.806	4.240	4.736	100%	
1938	GUNTUR	TENALI	TENALI-TOWN	33/11KV AUTONAGAR-TEN	302413340204	11KV Nandivelugu	Mixed	AMR	5.196	4.977	5.196	4.206	3.152	100%	
1939	GUNTUR	TENALI	TENALI-TOWN	33/11KV Angalakuduru Sul	302413440101	11KV ANGALAKUDRU IN	Rural	AMR	3.343	3.266	3.343	2.274	4.745	100%	
1940	GUNTUR	TENALI	TENALI-TOWN	33/11KV Angalakuduru Sul	302413440102	11KV Angalakuduru Rura	Mixed	AMR	1.064	1.005	1.064	5.550	8.973	100%	
1941	GUNTUR	TENALI	TENALI-TOWN	33/11KV Angalakuduru Sul	302413440103	11KV Gudiwada	Mixed	AMR	2.629	2.478	2.629	5.751	9.742	100%	
1942	GUNTUR	TENALI	TENALI-TOWN	33/11KV Angalakuduru Sul	302413440104	11KV ANGALAKUDRU IN	Rural	AMR	3.293	3.190	3.293	3.117	2.481	100%	
1943	GUNTUR	TENALI	TENALI-TOWN	33/11KV Angalakuduru Sul	302413440105	11KV Sankara Sai	INDL	AMR	0.818	0.784	0.818	4.133	3.397	100%	
1944	GUNTUR	TENALI	TENALI-TOWN	33/11KV Kolakaluru Sub-St	302413440201	11KV Kolakaluru	Rural	AMR	7.738	7.587	7.738	1.941	17.399	100%	
1945	GUNTUR	TENALI	TENALI-TOWN	33/11KV Kolakaluru Sub-St	302413440202	11KV Halfpet	Mixed	AMR	0.905	0.864	0.905	4.601	31.079	100%	
1946	GUNTUR	TENALI	TENALI-TOWN	33/11KV Kolakaluru Sub-St	302413440203	11KV Kolakaluru AGL	Mixed	AMR	3.930	3.761	3.930	4.297	19.273	100%	
1947	GUNTUR	TENALI	TENALI-TOWN	33/11 KV Sangamjagarlam	302413440301	11KV S J Mudi SS HQ Fee	Rural	AMR	3.535	3.334	3.535	5.689	7.652	100%	
1948	GUNTUR	TENALI	TENALI-TOWN	33/11 KV Sangamjagarlam	302413440302	11KV GMC Water Works	Rural	AMR	2.923	2.802	2.923	4.141	6.054	100%	
1949	GUNTUR	TENALI	REPALLE	33/11KV Repalle SS1 Sub-S	302421140101	11KV Repalle Local I	Urban	AMR	8.123	7.962	8.123	1.975	1.975	100%	
1950	GUNTUR	TENALI	REPALLE	33/11KV Repalle SS1 Sub-S	302421140102	11KV Repalle Local II	Urban	AMR	5.431	5.169	5.431	4.827	6.911	100%	
1951	GUNTUR	TENALI	REPALLE	33/11KV Repalle SS1 Sub-S	302421140103	11KV Repalle Rural	Mixed	AMR	1.000	0.929	1.000	7.088	13.053	100%	
1952	GUNTUR	TENALI	REPALLE	33/11KV Repalle SS2 Sub-S	302421140201	11KV Repalle Local III	Urban	AMR	3.844	3.625	3.844	5.692	8.212	100%	
1953	GUNTUR	TENALI	REPALLE	33/11KV Repalle SS2 Sub-S	302421140202	11KV Repalle Local IV	Urban	AMR	8.413	8.072	8.413	4.055	4.721	100%	
1954	GUNTUR	TENALI	REPALLE	33/11KV Repalle SS2 Sub-S	302421140203	11KV Nalluru	Mixed	AMR	2.381	2.309	2.381	3.017	17.868	100%	
1955	GUNTUR	TENALI	REPALLE	33/11KV Repalle SS2 Sub-S	302421140204	11KV Nallurupalem	Mixed	AMR	1.691	1.643	1.691	2.886	17.252	100%	
1956	GUNTUR	TENALI	REPALLE	33/11KV Potumeraka Sub-	302421240101	11KV Pothumeraka SHQ	Rural	AMR	0.639	0.615	0.639	3.790	5.074	100%	
1957	GUNTUR	TENALI	REPALLE	33/11KV Potumeraka Sub-	302421240102	11KV Bobbarlanka	Mixed	AMR	1.887	1.832	1.887	2.927	9.972	100%	
1958	GUNTUR	TENALI	REPALLE	33/11KV Potumeraka Sub-	302421240103	11KV Nirmalanagar	Mixed	AMR	0.692	0.647	0.692	6.611	16.709	100%	
1959	GUNTUR	TENALI	REPALLE	33/11KV Potumeraka Sub-	302421240104	11KV Palakurthy	Rural	AMR	4.138	4.223	4.138	-2.049	1.397	100%	
1960	GUNTUR	TENALI	REPALLE	33/11KV Gangadipalem Su	302421240201	11KV Gangadipalem	Mixed	AMR	1.112	1.013	1.112	8.859	9.292	100%	
1961	GUNTUR	TENALI	REPALLE	33/11KV Gangadipalem Su	302421240202	11KV Rajukalva	Rural	AMR	3.326	3.219	3.326	3.221	0.955	100%	
1962	GUNTUR	TENALI	REPALLE	33/11KV Gangadipalem Su	302421240203	11KV Kothapalem	Mixed	AMR	1.673	1.552	1.673	7.253	10.824	100%	
1963	GUNTUR	TENALI	REPALLE	33/11KV Gangadipalem Su	302421240204	11KV G G Palem LI Scher	Rural	AMR	4.595	4.568	4.595	0.595	99.887	100%	
1964	GUNTUR	TENALI	REPALLE	33/11KV Gangadipalem Su	302421240205	11KV Rajukalava Express	Rural	AMR	5.386	5.051	5.386	6.231	6.231	100%	
1965	GUNTUR	TENALI	REPALLE	33/11 KV Repalle SS -III (Pe	302421240301	11KV Peteru	Rural	AMR	6.577	6.303	6.577	4.155	8.730	100%	
1966	GUNTUR	TENALI	REPALLE	33/11 KV Repalle SS -III (Pe	302421240302	11KV Karumuru	Mixed	AMR	1.477	1.395	1.477	5.512	15.233	100%	
1967	GUNTUR	TENALI	REPALLE	33/11 KV Repalle SS -III (Pe	302421240303	11KV Repalle Town V	Urban	AMR	7.972	7.630	7.972	4.299	7.006	100%	
1968	GUNTUR	TENALI	REPALLE	33/11 KV Repalle SS -III (Pe	302421240304	11KV PENUMUDI	Rural	AMR	2.008	1.899	2.008	5.437	10.199	100%	
1969	GUNTUR	TENALI	REPALLE	33/11KV RUDRAVARAM(M	302421240401	11KV Moorthota	Mixed	AMR	0.334	0.293	0.334	12.141	43.312	100%	
1970	GUNTUR	TENALI	REPALLE	33/11KV RUDRAVARAM(M	302421240402	11KV Chatragadda	Mixed	AMR	0.968	0.882	0.968	8.954	15.747	100%	
1971	GUNTUR	TENALI	REPALLE	33/11KV RUDRAVARAM(M	302421240403	11KV Aqua	Rural	AMR	3.121	3.084	3.121	1.192	6.147	100%	
1972	GUNTUR	TENALI	REPALLE	33/11KV LANKEVANI DIBB/	302421240501	11KV Lankevanidibba Ac	Rural	AMR	5.082	5.066	5.082	0.319	0.319	100%	
1973	GUNTUR	TENALI	REPALLE	33/11KV LANKEVANI DIBB/	302421240502	11KV Rajulacheruvu Aqu	Rural	AMR	3.562	3.476	3.562	2.414	3.638	100%	
1974	GUNTUR	TENALI	REPALLE	33/11KV LANKEVANI DIBB/	302421240503	11KV Lakshmipuram	Rural	AMR	2.662	2.659	2.662	0.124	4.856	100%	
1975	GUNTUR	TENALI	REPALLE	33/11KV LANKEVANI DIBB/	302421240504	11KV Elechetladibba LI S	Rural	AMR	0.103	0.099	0.103	3.913	99.824	100%	
1976	GUNTUR	TENALI	REPALLE	33/11KV Bhattiprolu Sub-S	302421340101	11KV Bhattiprolu	Rural	AMR	7.193	6.945	7.193	3.448	6.131	100%	
1977	GUNTUR	TENALI	REPALLE	33/11KV Bhattiprolu Sub-S	302421340102	11KV Pallekona	Mixed	AMR	3.370	3.242	3.370	3.800	20.571	100%	
1978	GUNTUR	TENALI	REPALLE	33/11KV Bhattiprolu Sub-S	302421340103	11KV Vellaturu	Mixed	AMR	2.285	2.266	2.285	0.855	2.441	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
1979	GUNTUR	TENALI	REPALLE	33/11KV Bhattiprolu Sub-S	302421340104	11KV Ilavaram	Rural	AMR	1.597	1.518	1.597	4.949	10.921	100%	
1980	GUNTUR	TENALI	REPALLE	33/11KV Pedapulivarru Sul	302421340201	11KV Pedapulivarru	Mixed	AMR	3.571	3.382	3.571	5.300	18.618	100%	
1981	GUNTUR	TENALI	REPALLE	33/11KV Pedapulivarru Sul	302421340202	11KV Pesarlanka	Mixed	AMR	2.241	2.093	2.241	6.583	22.102	100%	
1982	GUNTUR	TENALI	REPALLE	33/11KV Pedapulivarru Sul	302421340203	11KV Chintamotu	Mixed	AMR	0.821	0.781	0.821	4.821	14.276	100%	
1983	GUNTUR	TENALI	REPALLE	33/11KV Pedapulivarru Sul	302421340204	11KV Pedapulivarru SSH	Rural	AMR	1.098	1.047	1.098	4.642	10.167	100%	
1984	GUNTUR	BAPATLA	BAPATLA	33/11KV Bapatla-1 SS(Sect	302711140101	11KV Bapatla industrial	Urban	AMR	4.888	4.780	4.888	2.206	1.933	100%	
1985	GUNTUR	BAPATLA	BAPATLA	33/11KV Bapatla-1 SS(Sect	302711140102	11KV PATEL NAGAR	Urban	AMR	8.767	8.500	8.767	3.044	2.187	100%	
1986	GUNTUR	BAPATLA	BAPATLA	33/11KV Bapatla-1 SS(Sect	302711140103	11KV Vijaya lakshmipura	Urban	AMR	7.441	7.292	7.441	2.001	4.879	100%	
1987	GUNTUR	BAPATLA	BAPATLA	33/11KV Bapatla-1 SS(Sect	302711140104	11KV HYDERPET	Mixed	AMR	3.657	3.503	3.657	4.192	7.112	100%	
1988	GUNTUR	BAPATLA	BAPATLA	33/11KV Nandirajuthota Su	302711140201	11KV Arts College	Urban	AMR	4.693	4.602	4.693	1.932	2.204	100%	
1989	GUNTUR	BAPATLA	BAPATLA	33/11KV Nandirajuthota Su	302711140202	11KV Railpet	Urban	AMR	0.459	0.442	0.459	3.711	5.163	100%	
1990	GUNTUR	BAPATLA	BAPATLA	33/11KV Nandirajuthota Su	302711140203	11KV Agraharam	Urban	AMR	5.553	5.385	5.553	3.026	5.495	100%	
1991	GUNTUR	BAPATLA	BAPATLA	33/11KV Nandirajuthota Su	302711140204	11KV Water Works	Urban	AMR	1.752	1.708	1.752	2.479	5.089	100%	
1992	GUNTUR	BAPATLA	BAPATLA	33/11KV Kankatapalem Su	302711140301	11KV Bethapudi	Rural	AMR	6.332	6.036	6.332	4.682	7.421	100%	
1993	GUNTUR	BAPATLA	BAPATLA	33/11KV Kankatapalem Su	302711140302	11KV Narasaypalem	Rural	AMR	6.831	6.472	6.831	5.267	12.797	100%	
1994	GUNTUR	BAPATLA	BAPATLA	33/11KV Kankatapalem Su	302711140303	11KV RWS	Rural	AMR	1.466	1.441	1.466	1.710	22.470	100%	
1995	GUNTUR	BAPATLA	BAPATLA	33/11 KV Bapatla SS -2(Div	302711140501	11KV D K Palem	Urban	AMR	1.737	1.653	1.737	4.798	1.691	100%	
1996	GUNTUR	BAPATLA	BAPATLA	33/11 KV Bapatla SS -2(Div	302711140502	11KV Islampet	Urban	AMR	4.417	4.259	4.417	3.560	3.557	100%	
1997	GUNTUR	BAPATLA	BAPATLA	33/11 KV Bapatla SS -2(Div	302711140503	11KV Market	Urban	AMR	4.352	4.243	4.352	2.506	4.872	100%	
1998	GUNTUR	BAPATLA	BAPATLA	33/11 KV Bapatla SS -2(Div	302711140504	11KV Radham Bazar	Urban	AMR	4.516	4.402	4.516	2.534	2.910	100%	
1999	GUNTUR	BAPATLA	BAPATLA	33/11 KV R.K.PURAM(BAP/	302711140601	11KV Ramakrishna Pura	Urban	AMR	2.286	2.223	2.286	2.747	3.217	100%	
2000	GUNTUR	BAPATLA	BAPATLA	33/11 KV R.K.PURAM(BAP/	302711140602	11KV Brindavanam	Urban	AMR	2.702	2.608	2.702	3.466	3.494	100%	
2001	GUNTUR	BAPATLA	BAPATLA	33/11 KV R.K.PURAM(BAP/	302711140603	11KV Shanti Nagar	Urban	AMR	3.869	3.774	3.869	2.449	3.867	100%	
2002	GUNTUR	BAPATLA	BAPATLA	33/11KV Adavi Sub-Station	302711240101	11KV Adavi Feeder	Rural	AMR	6.095	5.828	6.095	4.379	4.475	100%	
2003	GUNTUR	BAPATLA	BAPATLA	33/11KV Adavi Sub-Station	302711240102	11KV Air Force	INDL	AMR	1.469	1.423	1.469	3.122	2.418	100%	
2004	GUNTUR	BAPATLA	BAPATLA	33/11KV Adavi Sub-Station	302711240103	11KV Pandurangapuram	Rural	AMR	10.369	9.996	10.369	3.599	46.752	100%	
2005	GUNTUR	BAPATLA	BAPATLA	33/11KV Adavi Sub-Station	302711240104	11KV LIFT IRRIGATION	Rural	AMR	0.604	0.563	0.604	6.808	96.339	100%	
2006	GUNTUR	BAPATLA	BAPATLA	33/11 KV Appikatla SS	302711240201	11KV Poondla	Mixed	AMR	2.193	2.056	2.193	6.230	21.251	100%	
2007	GUNTUR	BAPATLA	BAPATLA	33/11 KV Appikatla SS	302711240202	11KV Appikatla	Rural	AMR	1.399	1.333	1.399	4.761	26.901	100%	
2008	GUNTUR	BAPATLA	BAPATLA	33/11 KV Appikatla SS	302711240203	11KV BHARTHIPUDI	Mixed	AMR	1.078	1.003	1.078	6.918	23.747	100%	
2009	GUNTUR	BAPATLA	BAPATLA	33/11KV BAPATLA BEACH S	302711240301	11KV LAILA FEEDER	Rural	AMR	0.075	0.068	0.075	9.683	10.179	100%	
2010	GUNTUR	BAPATLA	BAPATLA	33/11KV BAPATLA BEACH S	302711240302	11KV VASANTHI FEEDER	Rural	AMR	2.705	2.555	2.705	5.556	5.592	100%	
2011	GUNTUR	BAPATLA	BAPATLA	33/11KV BAPATLA BEACH S	302711240303	11KV PANDURANGAPUR	Rural	AMR	0.477	0.450	0.477	5.634	5.634	100%	
2012	GUNTUR	BAPATLA	BAPATLA	33/11KV BAPATLA BEACH S	302711240304	11KV ADAVIPALLIPALEM	Rural	AMR	0.088	0.082	0.088	6.613	3.032	100%	
2013	GUNTUR	BAPATLA	BAPATLA	33/11KV BAPATLA BEACH S	302711240305	11KV GAAYATHRI FEEDE	INDL	AMR	2.425	2.334	2.425	3.780	3.780	100%	
2014	GUNTUR	BAPATLA	BAPATLA	33/11KV Karlapalem Sub-S	302711340101	11KV Karlapalem feeder	Rural	AMR	10.979	10.447	10.979	4.844	7.413	100%	
2015	GUNTUR	BAPATLA	BAPATLA	33/11KV Karlapalem Sub-S	302711340102	11KV LI Scheme feeder	Rural	AMR	0.112	0.105	0.112	5.863	97.833	100%	
2016	GUNTUR	BAPATLA	BAPATLA	33/11KV Karlapalem Sub-S	302711340103	11KV N M V PALEM	Mixed	AMR	2.728	2.565	2.728	5.958	13.543	100%	
2017	GUNTUR	BAPATLA	BAPATLA	33/11KV Karlapalem Sub-S	302711340104	11KV Buddam	Rural	AMR	10.131	9.636	10.131	4.890	5.958	100%	
2018	GUNTUR	BAPATLA	BAPATLA	33/11KV Karlapalem Sub-S	302711340105	11KV Yazali	Mixed	AMR	3.461	3.295	3.461	4.815	14.846	100%	
2019	GUNTUR	BAPATLA	BAPATLA	33/11 KV SS Ganapavaram	302711340201	11KV Ganapavarm	Rural	AMR	9.205	8.596	9.205	6.616	10.980	100%	
2020	GUNTUR	BAPATLA	BAPATLA	33/11 KV SS Ganapavaram	302711340202	11KV Aqua	Rural	AMR	6.869	6.460	6.869	5.949	11.068	100%	
2021	GUNTUR	BAPATLA	BAPATLA	33/11 KV SS Ganapavaram	302711340203	11 KV PERALI	Rural	AMR	3.598	3.331	3.598	7.423	29.234	100%	
2022	GUNTUR	BAPATLA	PONNUR	33/11KV Nidubrolu SS Sub	302721140101	11KV Nidubrolu-I	Urban	AMR	2.490	2.414	2.490	3.038	5.142	100%	
2023	GUNTUR	BAPATLA	PONNUR	33/11KV Nidubrolu SS Sub	302721140102	11KV Nidubrolu-II	Urban	AMR	3.665	3.547	3.665	3.218	6.053	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2024	GUNTUR	BAPATLA	PONNUR	33/11KV Nidubrolu SS Sub	302721140103	11KV Vaddimukkala	Mixed	AMR	0.646	0.614	0.646	4.952	39.192	100%	
2025	GUNTUR	BAPATLA	PONNUR	33/11KV Ponnuru SS1 Sub-	302721140201	11KV Ponnuru Town - I	Urban	AMR	4.325	4.182	4.325	3.308	5.054	100%	
2026	GUNTUR	BAPATLA	PONNUR	33/11KV Ponnuru SS1 Sub-	302721140202	11KV Ponnuru Town - II	Urban	AMR	4.662	4.537	4.662	2.671	4.040	100%	
2027	GUNTUR	BAPATLA	PONNUR	33/11KV Ponnuru SS1 Sub-	302721140203	11KV Ponnuru Town-III	Urban	AMR	5.691	5.590	5.691	1.780	3.562	100%	
2028	GUNTUR	BAPATLA	PONNUR	33/11KV Ponnuru SS1 Sub-	302721140204	11KV Jupudi	Mixed	AMR	5.258	4.970	5.258	5.475	12.895	100%	
2029	GUNTUR	BAPATLA	PONNUR	33/11KV Ponnuru SS1 Sub-	302721140205	11KV Rural Express	INDL	AMR	2.014	1.912	2.014	5.088	5.057	100%	
2030	GUNTUR	BAPATLA	PONNUR	33/11KV Ponnuru SS1 Sub-	302721140206	11KV BRAMHANA KODU	Mixed	AMR	4.311	4.036	4.311	6.373	12.354	100%	
2031	GUNTUR	BAPATLA	PONNUR	33/11KV Mamillapalli Sub-	302721140301	11KV Mamillapalli Vellal	Mixed	AMR	1.895	1.777	1.895	6.246	1.490	100%	
2032	GUNTUR	BAPATLA	PONNUR	33/11KV Mamillapalli Sub-	302721140302	11KV Dandamudi	Mixed	AMR	2.106	1.989	2.106	5.559	9.037	100%	
2033	GUNTUR	BAPATLA	PONNUR	33/11KV Mamillapalli Sub-	302721140304	11KV VELLALURU	Mixed	AMR	1.037	0.984	1.037	5.192	18.520	100%	
2034	GUNTUR	BAPATLA	PONNUR	33/11KV Ponnur SS-2, OLD	302721140401	11KV ABDUL KALAM	Urban	AMR	5.420	5.258	5.420	3.000	3.920	100%	
2035	GUNTUR	BAPATLA	PONNUR	33/11KV Ponnur SS-2, OLD	302721140402	11KV AMBEDKAR COLON	Urban	AMR	5.971	5.795	5.971	2.950	4.655	100%	
2036	GUNTUR	BAPATLA	PONNUR	33/11KV Ponnur SS-2, OLD	302721140403	11KV KASKURU	Mixed	AMR	2.732	2.585	2.732	5.387	9.243	100%	
2037	GUNTUR	BAPATLA	PONNUR	33/11KV Ponnur SS-2, OLD	302721140404	11KV INDUSTRIAL	INDL	AMR	0.707	0.660	0.707	6.702	5.699	100%	
2038	GUNTUR	BAPATLA	PONNUR	33/11KV Nidubrolu Tidco S	302721140501	11KV CABIN PETA	Urban	AMR	2.211	2.106	2.211	4.788	15.992	100%	
2039	GUNTUR	BAPATLA	PONNUR	33/11KV Nidubrolu Tidco S	302721140502	11KV TIDCO-1	Urban	AMR	0.002	0.002	0.002	3.433	6.267	100%	
2040	GUNTUR	BAPATLA	PONNUR	33/11KV Nidubrolu Tidco S	302721140504	11KV TIDCO-3	Urban	AMR	0.001	0.000	0.001	77.531	#DIV/0!	100%	
2041	GUNTUR	BAPATLA	PONNUR	33/11KV Mulukuduru Sub-	302721240101	11kv Nanduru	Mixed	AMR	2.075	1.972	2.075	4.957	19.042	100%	
2042	GUNTUR	BAPATLA	PONNUR	33/11KV Mulukuduru Sub-	302721240102	11KV LIFT	Rural	AMR	0.124	0.116	0.124	6.017	99.410	100%	
2043	GUNTUR	BAPATLA	PONNUR	33/11KV Mulukuduru Sub-	302721240103	11KV Machavaram	Mixed	AMR	3.342	3.176	3.342	4.952	6.942	100%	
2044	GUNTUR	BAPATLA	PONNUR	33/11 KV Chintalapudi SS	302721240201	11KV Ponnur Express -I	Urban	AMR	4.871	4.755	4.871	2.394	3.454	100%	
2045	GUNTUR	BAPATLA	PONNUR	33/11 KV Chintalapudi SS	302721240202	11KV CHINTALAPUDI	Mixed	AMR	2.504	2.371	2.504	5.311	7.107	100%	
2046	GUNTUR	BAPATLA	PONNUR	33/11 KV Chintalapudi SS	302721240203	11KV Chintalapudu 2	Mixed	AMR	0.975	0.919	0.975	5.806	20.447	100%	
2047	GUNTUR	BAPATLA	PONNUR	33/11KV Pedanandipadu S	302721340101	11KV Pedanandipadu	Rural	AMR	5.673	5.519	5.673	2.710	11.097	100%	
2048	GUNTUR	BAPATLA	PONNUR	33/11KV Pedanandipadu S	302721340102	11KV LIFT IRRIGATION	Rural	AMR	1.585	1.551	1.585	2.105	99.621	100%	
2049	GUNTUR	BAPATLA	PONNUR	33/11KV Pedanandipadu S	302721340103	11KV Pedanandipadu Ru	Rural	AMR	8.994	8.676	8.994	3.540	14.175	100%	
2050	GUNTUR	BAPATLA	PONNUR	33/11KV Pedanandipadu S	302721340104	11KV Industrial	Rural	AMR	1.215	1.179	1.215	3.001	14.530	100%	
2051	GUNTUR	BAPATLA	PONNUR	33/11KV Kakumanu Sub-St	302721440101	11KV RETURU	Rural	AMR	3.358	3.202	3.358	4.638	6.705	100%	
2052	GUNTUR	BAPATLA	PONNUR	33/11KV Kakumanu Sub-St	302721440102	11KV VALLURU Feeder	Rural	AMR	4.256	4.077	4.256	4.209	22.087	100%	
2053	GUNTUR	BAPATLA	PONNUR	33/11KV Kakumanu Sub-St	302721440103	11KV Kakumanu	Rural	AMR	3.572	3.433	3.572	3.870	19.060	100%	
2054	GUNTUR	BAPATLA	PONNUR	33/11KV Kakumanu Sub-St	302721440104	11KV APPAPURAM RWS	Rural	AMR	0.043	0.041	0.043	3.748	3.748	100%	
2055	GUNTUR	BAPATLA	PONNUR	33/11KV Chinalingayapalei	302721440201	11KV CHINNA LINGAYA I	Rural	AMR	1.524	1.454	1.524	4.583	23.421	100%	
2056	GUNTUR	BAPATLA	PONNUR	33/11KV Chinalingayapalei	302721440202	11KV VALLURU-1	Rural	AMR	1.366	1.289	1.366	5.610	13.386	100%	
2057	GUNTUR	BAPATLA	PONNUR	33/11KV Chinalingayapalei	302721440203	11KV PANDRAPADU	Rural	AMR	3.904	3.718	3.904	4.767	19.626	100%	
2058	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Nagaram Sub-Sta	302731140101	11KV Nagaram	Rural	AMR	2.991	2.822	2.991	5.644	12.103	100%	
2059	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Nagaram Sub-Sta	302731140102	11KV Edupalli	Mixed	AMR	2.950	2.765	2.950	6.247	12.262	100%	
2060	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Nagaram Sub-Sta	302731140103	11KV ALLAPARRU WATE	Rural	AMR	0.332	0.310	0.332	6.794	89.436	100%	
2061	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Vullipalem Sub-St	302731140201	11KV MANTRIPALEM	Rural	AMR	4.057	3.847	4.057	5.175	9.446	100%	
2062	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Vullipalem Sub-St	302731140202	11KV SAJJAVARI PALEM	Rural	AMR	1.868	1.753	1.868	6.178	13.662	100%	
2063	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Vullipalem Sub-St	302731140203	11KV DHULIPUDI	Rural	AMR	3.703	3.416	3.703	7.759	20.451	100%	
2064	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Vullipalem Sub-St	302731140204	11KV BUDDAM LANKA	Rural	AMR	0.292	0.267	0.292	8.436	8.436	100%	
2065	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Cherukupalli Sub-	302731240101	11KV Cherukupalli	Rural	AMR	8.698	8.292	8.698	4.671	7.992	100%	
2066	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Cherukupalli Sub-	302731240102	11KV Rambotlavari Palei	Mixed	AMR	5.362	5.064	5.362	5.558	5.246	100%	
2067	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Cherukupalli Sub-	302731240103	11KV Nadimpalli	Mixed	AMR	4.262	4.059	4.262	4.750	11.428	100%	
2068	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Gudavalli Sub-Sta	302731240201	11KV Gudavalli	Rural	AMR	7.713	7.349	7.713	4.714	6.563	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2069	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Gudavalli Sub-Sta	302731240202	11KV Peddavaram	Mixed	AMR	4.358	4.147	4.358	4.823	12.537	100%	
2070	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Kuchinapudi Sub-	302731340101	11KV KUCHINPUDI	Rural	AMR	3.700	3.529	3.700	4.614	29.707	100%	
2071	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Kuchinapudi Sub-	302731340102	11KV PRAGNAM	Mixed	AMR	2.482	2.367	2.482	4.614	18.002	100%	
2072	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Kuchinapudi Sub-	302731340103	11KV Pallapatla	Mixed	AMR	1.350	1.279	1.350	5.248	10.737	100%	
2073	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Kuchinapudi Sub-	302731340104	11KV Adavuladeevi	Mixed	AMR	0.589	0.558	0.589	5.324	10.823	100%	
2074	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Nizampatrnam Su	302731340201	11KV NIZAMPATNAM TC	Rural	AMR	6.052	5.881	6.052	2.826	2.826	100%	
2075	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Nizampatrnam Su	302731340202	11KV NIZAMPATNAM RU	Rural	AMR	7.426	7.292	7.426	1.800	3.631	100%	
2076	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Nizampatrnam Su	302731340203	11KV PWS Amudalapalli	Mixed	AMR	0.579	0.561	0.579	3.100	44.927	100%	
2077	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Nizampatrnam Su	302731340204	11KV MATLAPUDI	Mixed	AMR	2.955	2.817	2.955	4.690	14.336	100%	
2078	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Nizampatrnam Su	302731340205	11KV NIZAMPATNAM IN	Rural	AMR	6.843	6.629	6.843	3.122	3.191	100%	
2079	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Nizampatnam II S	302731340301	11KV NIZAMPATNAM M	Rural	AMR	5.590	5.466	5.590	2.214	4.102	100%	
2080	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Nizampatnam II S	302731340302	11KV Meedulaparru	Rural	AMR	5.567	5.368	5.567	3.575	3.575	100%	
2081	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Adavula Divi SS	302731340401	11KV ADAVULADEEVI	Rural	AMR	0.130	0.128	0.130	1.577	5.297	100%	
2082	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Adavula Divi SS	302731340402	11KV CHANDRAMOULI N	Rural	AMR	0.217	0.206	0.217	5.021	22.289	100%	
2083	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Adavula Divi SS	302731340403	11KV MUKTESWARA PU	Rural	AMR	7.577	7.348	7.577	3.021	1.285	100%	
2084	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Adavula Divi SS	302731340404	11KV ADAVULADEEVI Ag	Mixed	AMR	2.412	2.322	2.412	3.729	30.020	100%	
2085	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Khazipalem Sub-S	302731440101	11KV KHAJIPALEM TOW	Rural	AMR	9.408	9.155	9.408	2.693	5.668	100%	
2086	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Khazipalem Sub-S	302731440102	11KV KHAJIPALEM RURA	Mixed	AMR	5.760	5.586	5.760	3.022	9.394	100%	
2087	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Khazipalem Sub-S	302731440103	11KV Yazali Lift	Rural	AMR	0.142	0.136	0.142	4.140	99.782	100%	
2088	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Khazipalem Sub-S	302731440104	11KV RAM NAGAR	Mixed	AMR	5.810	5.656	5.810	2.658	1.423	100%	
2089	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV Khazipalem Sub-S	302731440105	11KV Chandolu	Mixed	AMR	11.413	11.098	11.413	2.761	7.166	100%	
2090	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV P.V.Palem Sub-St	302731440201	11KV P V Palem	Rural	AMR	3.802	3.724	3.802	2.054	5.595	100%	
2091	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV P.V.Palem Sub-St	302731440202	11KV ALLURU	Rural	AMR	12.015	12.377	12.015	-3.012	-3.012	100%	
2092	GUNTUR	BAPATLA	CHERUKUPALLI	33/11KV P.V.Palem Sub-St	302731440203	11KV KOTHAPALEM	Rural	AMR	0.025	0.025	0.025	0.060	0.104	100%	
2093	ONGOLE	DARSI	PODILI	33/11 KV Podili Sub Statior	303111140101	11KV Kambalapadu	Agricultura	AMR	0.536	0.674	0.536	-25.749	-4.271	100%	
2094	ONGOLE	DARSI	PODILI	33/11 KV Podili Sub Statior	303111140102	11KV Kunchapalli	Agricultura	AMR	0.309	0.295	0.309	4.619	50.413	100%	
2095	ONGOLE	DARSI	PODILI	33/11 KV Podili Sub Statior	303111140103	11KV PODILITOWN1(KO	Urban	AMR	9.287	9.074	9.287	2.287	3.142	100%	
2096	ONGOLE	DARSI	PODILI	33/11 KV Podili Sub Statior	303111140104	11KV PODILITOWN2(PA	Urban	AMR	5.515	5.338	5.515	3.221	29.728	100%	
2097	ONGOLE	DARSI	PODILI	33/11 KV Podili Sub Statior	303111140105	11KV RAJUPALEM	Mixed	AMR	3.055	2.735	3.055	10.462	17.217	100%	
2098	ONGOLE	DARSI	PODILI	33/11 KV Mallavaram Sub	303111140201	11KV KUNCHEPALLI	Mixed	AMR	3.760	3.012	3.760	19.874	20.470	100%	
2099	ONGOLE	DARSI	PODILI	33/11 KV Mallavaram Sub	303111140202	11KV ANNAVARAM	Mixed	AMR	2.429	2.209	2.429	9.028	28.530	100%	
2100	ONGOLE	DARSI	PODILI	33/11 KV Mallavaram Sub	303111140203	11KV MALLAVARAM	Rural	AMR	0.912	0.770	0.912	15.576	30.289	100%	
2101	ONGOLE	DARSI	PODILI	33/11 KV Mallavaram Sub	303111140204	11KV SUDANAGUNTA	Mixed	AMR	2.935	2.428	2.935	17.289	25.920	100%	
2102	ONGOLE	DARSI	PODILI	33/11 KV Uppalapadu Sub	303111140301	11KV UPPALAPADU TOV	Rural	AMR	0.742	0.621	0.742	16.320	14.533	100%	
2103	ONGOLE	DARSI	PODILI	33/11 KV Uppalapadu Sub	303111140302	11KV INDUSTRIAL	INDL	AMR	24.795	20.779	24.795	16.197	19.461	100%	
2104	ONGOLE	DARSI	PODILI	33/11 KV Uppalapadu Sub	303111140303	11KV GOGINENIVARIPAL	Mixed	AMR	0.813	0.581	0.813	28.555	76.640	100%	
2105	ONGOLE	DARSI	PODILI	33/11 KV Uppalapadu Sub	303111140304	11KV ELURU	Mixed	AMR	1.954	1.710	1.954	12.450	16.164	100%	
2106	ONGOLE	DARSI	PODILI	33/11 KV Kambalapadu Su	303111140401	11KV KONDAYAPALEM	Mixed	AMR	1.518	1.421	1.518	6.397	8.904	100%	
2107	ONGOLE	DARSI	PODILI	33/11 KV Kambalapadu Su	303111140402	11KV KAMBALAPADU TC	Rural	AMR	0.944	1.005	0.944	-6.460	5.913	100%	
2108	ONGOLE	DARSI	PODILI	33/11 KV Kambalapadu Su	303111140403	11KV KAMBALAPADU AC	Mixed	AMR	0.519	0.442	0.519	14.754	29.244	100%	
2109	ONGOLE	DARSI	PODILI	33/11 KV KATURIVARIPALE	303111140501	11KV KATURIVARIPALEN	Rural	AMR	6.513	6.218	6.513	4.525	4.525	100%	
2110	ONGOLE	DARSI	PODILI	33/11 KV KATURIVARIPALE	303111140502	11KV KATURIVARIPALEN	Mixed	AMR	2.353	2.581	2.353	-9.689	-7.017	100%	
2111	ONGOLE	DARSI	PODILI	33/11 KV KATURIVARIPALE	303111140503	11KV AGRAHARAM	Mixed	AMR	2.746	2.615	2.746	4.748	18.815	100%	
2112	ONGOLE	DARSI	PODILI	33/11 KV Marripudi Sub St	303111240101	11KV ANKEPALLI	Mixed	AMR	2.809	2.519	2.809	10.318	19.249	100%	
2113	ONGOLE	DARSI	PODILI	33/11 KV Marripudi Sub St	303111240102	11KV GARLAPETA	Mixed	AMR	2.408	1.853	2.408	23.068	30.650	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2114	ONGOLE	DARSI	PODILI	33/11 KV Marripudi Sub St	303111240103	11KV MARRIPUDIAGL	Mixed	AMR	1.319	1.234	1.319	6.507	29.101	100%	
2115	ONGOLE	DARSI	PODILI	33/11 KV Marripudi Sub St	303111240104	11KV DUGGIREDDYPALE	Mixed	AMR	1.429	1.100	1.429	23.027	47.685	100%	
2116	ONGOLE	DARSI	PODILI	33/11 KV Marripudi Sub St	303111240105	11KV MARRIPUDITOWN	Rural	AMR	0.887	0.842	0.887	5.147	12.339	100%	
2117	ONGOLE	DARSI	PODILI	33/11 KV Marripudi Sub St	303111240106	11KV MARRIPUDI NAP	Rural	AMR	0.664	0.654	0.664	1.500	100.000	100%	
2118	ONGOLE	DARSI	PODILI	33/11KV Kakarla Sub Stati	303111240201	11KV Kakarla	Mixed	AMR	0.970	0.770	0.970	20.604	28.525	100%	
2119	ONGOLE	DARSI	PODILI	33/11KV Kakarla Sub Stati	303111240202	11KV Chilamkuru	Mixed	AMR	1.420	1.198	1.420	15.650	23.024	100%	
2120	ONGOLE	DARSI	PODILI	33/11KV Kakarla Sub Stati	303111240203	11KV Chimata	Mixed	AMR	1.472	1.175	1.472	20.175	25.149	100%	
2121	ONGOLE	DARSI	PODILI	33/11 KV Juvvigunta SS	303111240301	11KV Juvvigunta	Mixed	AMR	1.240	1.072	1.240	13.540	21.627	100%	
2122	ONGOLE	DARSI	PODILI	33/11 KV Juvvigunta SS	303111240302	11KV Tangella	Mixed	AMR	2.122	1.702	2.122	19.812	32.513	100%	
2123	ONGOLE	DARSI	PODILI	33/11 KV Juvvigunta SS	303111240303	11KV Darmavaram	Mixed	AMR	1.344	1.089	1.344	18.993	29.322	100%	
2124	ONGOLE	DARSI	PODILI	33/11 KV Konakanamitta S	303111340101	11KV CHINTAGUNTA	Mixed	AMR	0.991	0.905	0.991	8.738	20.121	100%	
2125	ONGOLE	DARSI	PODILI	33/11 KV Konakanamitta S	303111340102	11KV Konakanamitla Tov	Rural	AMR	0.964	0.921	0.964	4.508	15.781	100%	
2126	ONGOLE	DARSI	PODILI	33/11 KV Konakanamitta S	303111340103	11KV NAGIREDDYPALLI	Mixed	AMR	1.051	0.968	1.051	7.901	16.489	100%	
2127	ONGOLE	DARSI	PODILI	33/11 KV Konakanamitta S	303111340104	11kV MUNAGAPADU	Mixed	AMR	2.659	2.375	2.659	10.669	20.797	100%	
2128	ONGOLE	DARSI	PODILI	33/11 KV Gorlagattu Sub S	303111340201	11KV KATRAGUNTA	Mixed	AMR	1.753	1.560	1.753	10.978	18.738	100%	
2129	ONGOLE	DARSI	PODILI	33/11 KV Gorlagattu Sub S	303111340202	11KV GOTLAGATTU TOV	Rural	AMR	0.794	0.766	0.794	3.594	4.492	100%	
2130	ONGOLE	DARSI	PODILI	33/11 KV Gorlagattu Sub S	303111340203	11kV VINJAVARTHI PADU	Mixed	AMR	1.587	1.341	1.587	15.506	27.288	100%	
2131	ONGOLE	DARSI	PODILI	33/11 KV Chinarikatla Sub	303111340301	11KV BATCHALAKURAPA	Mixed	AMR	0.532	0.539	0.532	-1.279	40.531	100%	
2132	ONGOLE	DARSI	PODILI	33/11 KV Chinarikatla Sub	303111340302	11KV SIDDAVARAM	Mixed	AMR	1.598	1.376	1.598	13.854	28.449	100%	
2133	ONGOLE	DARSI	PODILI	33/11 KV Chinarikatla Sub	303111340303	11KV CHINARIKATLA TO	Rural	AMR	0.421	0.354	0.421	15.832	46.621	100%	
2134	ONGOLE	DARSI	PODILI	33/11 KV Chinarikatla Sub	303111340304	11KV CHINARIKATLA RU	Agricultura	AMR	0.456	0.430	0.456	5.699	26.536	100%	
2135	ONGOLE	DARSI	PODILI	33/11 KV Peddarikatla Sub	303111340401	11KV Pedarikatla	Rural	AMR	0.098	0.096	0.098	1.807	12.787	100%	
2136	ONGOLE	DARSI	PODILI	33/11 KV Peddarikatla Sub	303111340402	11KV Guntuvanipalli	Mixed	AMR	0.478	0.433	0.478	9.482	33.358	100%	
2137	ONGOLE	DARSI	PODILI	33/11 KV Peddarikatla Sub	303111340403	11KV Bapatipalli	Mixed	AMR	1.534	1.193	1.534	22.252	29.326	100%	
2138	ONGOLE	DARSI	PODILI	33/11KV CHOWTAPALLI SS	303111340501	11KV Chowtapalli	Mixed	AMR	2.083	1.755	2.083	15.774	27.421	100%	
2139	ONGOLE	DARSI	PODILI	33/11KV CHOWTAPALLI SS	303111340502	11KV Vagemadugu	Mixed	AMR	1.760	1.533	1.760	12.887	19.055	100%	
2140	ONGOLE	DARSI	PODILI	33/11KV CHOWTAPALLI SS	303111340503	11KV Marripalem	Mixed	AMR	0.051	0.061	0.051	-19.421	70.916	100%	
2141	ONGOLE	DARSI	PODILI	33/11 KV Donakonda Sub S	303111440101	11KV Polepalli	Mixed	AMR	2.237	2.030	2.237	9.267	24.039	100%	
2142	ONGOLE	DARSI	PODILI	33/11 KV Donakonda Sub S	303111440102	11KV DONAKONDATOW	Rural	AMR	3.155	2.979	3.155	5.589	7.913	100%	
2143	ONGOLE	DARSI	PODILI	33/11 KV Donakonda Sub S	303111440104	11KV Indlachervu	Mixed	AMR	3.028	2.369	3.028	21.753	28.679	100%	
2144	ONGOLE	DARSI	PODILI	33/11 KV Donakonda Sub S	303111440105	11KV RAGHAMAKKAPAL	Mixed	AMR	0.373	0.347	0.373	7.087	44.060	100%	
2145	ONGOLE	DARSI	PODILI	33/11 KV Rudrasamudram	303111440201	11KV Rudrasamudram T	Mixed	AMR	0.739	0.673	0.739	9.005	22.202	100%	
2146	ONGOLE	DARSI	PODILI	33/11 KV Rudrasamudram	303111440202	11KV Bhumanapalli	Mixed	AMR	0.410	0.382	0.410	6.729	44.987	100%	
2147	ONGOLE	DARSI	PODILI	33/11 KV Rudrasamudram	303111440203	11KV MALLAMPET	Mixed	AMR	2.319	2.021	2.319	12.846	24.671	100%	
2148	ONGOLE	DARSI	PODILI	33/11 KV Rudrasamudram	303111440204	11KV LAKSHMIPURAM	Agricultura	AMR	0.129	0.118	0.129	8.535	17.555	100%	
2149	ONGOLE	DARSI	PODILI	33/11 KV Rudrasamudram	303111440205	11KV Rudrasamudram A	Agricultura	AMR	0.434	0.427	0.434	1.740	37.606	100%	
2150	ONGOLE	DARSI	PODILI	33/11 KV CHANDAVARAM	303111440301	11KV CHANDAVARAM W	Rural	AMR	2.909	2.608	2.909	10.353	99.290	100%	
2151	ONGOLE	DARSI	PODILI	33/11 KV CHANDAVARAM	303111440302	11KV Chandavaram Agl	Mixed	AMR	3.741	3.440	3.741	8.062	23.894	100%	
2152	ONGOLE	DARSI	PODILI	33/11 KV CHANDAVARAM	303111440303	11KV Laxmipuram Agl	Mixed	AMR	2.811	2.405	2.811	14.445	31.222	100%	
2153	ONGOLE	DARSI	PODILI	33/11 KV Kotcherlakota Su	303111440401	11KV Kotcherlakota	Rural	AMR	0.991	1.064	0.991	-7.345	8.660	100%	
2154	ONGOLE	DARSI	PODILI	33/11 KV Kotcherlakota Su	303111440402	11KV Basireddypalli	Mixed	AMR	2.082	1.833	2.082	11.975	18.563	100%	
2155	ONGOLE	DARSI	PODILI	33/11 KV Kotcherlakota Su	303111440403	11KV Narapureddypalli	Mixed	AMR	0.973	0.844	0.973	13.329	32.600	100%	
2156	ONGOLE	DARSI	PODILI	33/11KV MANGINPUDI SS	303111440501	11KV Chilakalapalli	Mixed	AMR	0.145	0.170	0.145	-17.081	30.002	100%	
2157	ONGOLE	DARSI	PODILI	33/11KV MANGINPUDI SS	303111440502	11KV Manginapudi	Mixed	AMR	1.227	1.096	1.227	10.623	52.915	100%	
2158	ONGOLE	DARSI	PODILI	33/11KV MANGINPUDI SS	303111440503	11KV Ananthavaram	Mixed	AMR	0.537	0.478	0.537	11.041	31.952	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2159	ONGOLE	DARSI	PODILI	33/11KV P.VENKATA PURA	303111440601	11KV P Venkatapuram	Mixed	AMR	0.115	0.111	0.115	3.830	20.143	100%	
2160	ONGOLE	DARSI	PODILI	33/11KV P.VENKATA PURA	303111440602	11KV Sangapuram	Mixed	AMR	0.574	0.323	0.574	43.772	87.493	100%	
2161	ONGOLE	DARSI	PODILI	33/11KV P.VENKATA PURA	303111440603	11KV Arrivellipadu	Mixed	AMR	1.029	0.592	1.029	42.473	47.383	100%	
2162	ONGOLE	DARSI	PODILI	33/11KV P.VENKATA PURA	303111440604	11KV Vaddipadu	Mixed	AMR	0.103	0.149	0.103	-43.735	-40.227	100%	
2163	ONGOLE	DARSI	DARSI	33/11 KV Darsi Sub Station	303121140101	11KV DARSITOWN I	Urban	AMR	10.675	10.397	10.675	2.604	31.189	100%	
2164	ONGOLE	DARSI	DARSI	33/11 KV Darsi Sub Station	303121140102	11KV DARSITOWN II	Urban	AMR	5.695	5.445	5.695	4.383	5.059	100%	
2165	ONGOLE	DARSI	DARSI	33/11 KV Darsi Sub Station	303121140103	11KV POTHAKAMURU	Mixed	AMR	4.114	3.461	4.114	15.868	21.800	100%	
2166	ONGOLE	DARSI	DARSI	33/11 KV Darsi Sub Station	303121140104	11KV RAJAMPALLI	Mixed	AMR	1.198	1.283	1.198	-7.112	-1.163	100%	
2167	ONGOLE	DARSI	DARSI	33/11 KV Ragampalli Sub S	303121140201	11KV KOTHAPALLI	Mixed	AMR	0.807	0.793	0.807	1.821	16.062	100%	
2168	ONGOLE	DARSI	DARSI	33/11 KV Ragampalli Sub S	303121140202	11KV GANESWARAPURA	Mixed	AMR	3.931	3.160	3.931	19.617	62.719	100%	
2169	ONGOLE	DARSI	DARSI	33/11 KV Ragampalli Sub S	303121140203	11KV R C PURAM	Mixed	AMR	1.037	1.136	1.037	-9.562	11.210	100%	
2170	ONGOLE	DARSI	DARSI	33/11 KV Ragampalli Sub S	303121140204	11KV RAJAMPALLITOWN	Rural	AMR	1.890	2.006	1.890	-6.155	-2.887	100%	
2171	ONGOLE	DARSI	DARSI	33/11 KV Botlapalem Sub S	303121140301	11KV BOTLAPALEMTOW	Mixed	AMR	0.913	0.896	0.913	1.846	15.917	100%	
2172	ONGOLE	DARSI	DARSI	33/11 KV Botlapalem Sub S	303121140302	11KV BOTLAPALEMAGL	Agricultura	AMR	1.468	1.348	1.468	8.155	40.146	100%	
2173	ONGOLE	DARSI	DARSI	33/11 KV Botlapalem Sub S	303121140303	11KV PAPIREDDYPALEM	Mixed	AMR	1.443	1.385	1.443	4.024	11.980	100%	
2174	ONGOLE	DARSI	DARSI	33/11 KV Botlapalem Sub S	303121140304	11KV CH K PALEM	Mixed	AMR	2.167	1.985	2.167	8.409	25.920	100%	
2175	ONGOLE	DARSI	DARSI	33/11KV SS NSP Colony	303121140501	11KV PUCHELAMITTA	Rural	AMR	3.966	3.988	3.966	-0.565	-0.565	100%	
2176	ONGOLE	DARSI	DARSI	33/11KV SS NSP Colony	303121140502	11KV AUTO NAGAR	Rural	AMR	3.529	3.809	3.529	-7.939	-7.939	100%	
2177	ONGOLE	DARSI	DARSI	33/11KV SS NSP Colony	303121140503	11KV PULUPADU	Mixed	AMR	3.216	2.696	3.216	16.156	22.998	100%	
2178	ONGOLE	DARSI	DARSI	33/11 KV Tallur Sub Station	303121240101	11KV Rajanagaram	Mixed	AMR	1.320	1.090	1.320	17.426	23.454	100%	
2179	ONGOLE	DARSI	DARSI	33/11 KV Tallur Sub Station	303121240102	11KV Talluru North	Mixed	AMR	1.787	1.839	1.787	-2.921	3.700	100%	
2180	ONGOLE	DARSI	DARSI	33/11 KV Tallur Sub Station	303121240103	11KV TALLUR TOWN	Rural	AMR	1.741	1.564	1.741	10.163	28.130	100%	
2181	ONGOLE	DARSI	DARSI	33/11 KV Tallur Sub Station	303121240104	11KV Talluru South	Mixed	AMR	0.759	0.652	0.759	14.093	29.451	100%	
2182	ONGOLE	DARSI	DARSI	33/11 KV Tallur Sub Station	303121240105	11KV Gangavaram	Mixed	AMR	2.729	2.363	2.729	13.402	32.671	100%	
2183	ONGOLE	DARSI	DARSI	33/11 KV Tallur Sub Station	303121240106	11KV Mundlamuru	Mixed	AMR	3.624	2.759	3.624	23.860	13.090	100%	
2184	ONGOLE	DARSI	DARSI	33/11 KV East Gangavaram	303121240202	11KV R B Puram	Mixed	AMR	2.324	2.155	2.324	7.286	32.636	100%	
2185	ONGOLE	DARSI	DARSI	33/11 KV East Gangavaram	303121240203	11KV Turakapalem	Mixed	AMR	2.075	1.616	2.075	22.110	28.631	100%	
2186	ONGOLE	DARSI	DARSI	33/11 KV East Gangavaram	303121240205	11kv Gangavaram	Rural	AMR	5.004	4.364	5.004	12.787	15.594	100%	
2187	ONGOLE	DARSI	DARSI	33/11 KV Dosakayalapadu	303121240301	11KV T V Palem	Mixed	AMR	0.833	0.634	0.833	23.882	13.639	100%	
2188	ONGOLE	DARSI	DARSI	33/11 KV Dosakayalapadu	303121240302	11KV D K Padu D V Paler	Rural	AMR	0.179	0.240	0.179	-34.233	16.130	100%	
2189	ONGOLE	DARSI	DARSI	33/11 KV Dosakayalapadu	303121240303	11KV Papireddypalli	Mixed	AMR	1.299	1.025	1.299	21.130	36.865	100%	
2190	ONGOLE	DARSI	DARSI	33/11 KV Dosakayalapadu	303121240304	11KV D K PADU AGL	Mixed	AMR	2.405	1.590	2.405	33.888	52.104	100%	
2191	ONGOLE	DARSI	DARSI	33/11 KV Dosakayalapadu	303121240305	11KV SINGANNA PALEM	Mixed	AMR	1.560	1.293	1.560	17.149	26.164	100%	
2192	ONGOLE	DARSI	DARSI	33/11 KV Nagambotlapalei	303121240401	11KV N B Palem	Rural	AMR	1.080	1.312	1.080	-21.529	-16.639	100%	
2193	ONGOLE	DARSI	DARSI	33/11 KV Nagambotlapalei	303121240402	11KV N B Palem RURAL	Mixed	AMR	0.993	1.086	0.993	-9.341	21.958	100%	
2194	ONGOLE	DARSI	DARSI	33/11 KV Nagambotlapalei	303121240403	11KV Lakkavaram	Agricultura	AMR	1.205	1.084	1.205	10.082	47.019	100%	
2195	ONGOLE	DARSI	DARSI	33/11 KV Nagambotlapalei	303121240404	11KV B K Padu	Mixed	AMR	1.387	1.159	1.387	16.434	16.434	100%	
2196	ONGOLE	DARSI	DARSI	33/11 KV Daravaripalem Su	303121240501	11KV Daramvaripalem T	Rural	AMR	0.683	0.447	0.683	34.557	58.822	100%	
2197	ONGOLE	DARSI	DARSI	33/11 KV Daravaripalem Su	303121240502	11KV T V PALEM Agl	Agricultura	AMR	2.232	1.997	2.232	10.517	31.650	100%	
2198	ONGOLE	DARSI	DARSI	33/11 KV Daravaripalem Su	303121240503	11KV Daramvaripalem R	Agricultura	AMR	1.076	0.962	1.076	10.519	29.397	100%	
2199	ONGOLE	DARSI	DARSI	33/11 KV SIVARAMPURAM	303121240601	11KV Sivarampuram Son	Mixed	AMR	3.305	2.706	3.305	18.123	23.292	100%	
2200	ONGOLE	DARSI	DARSI	33/11 KV SIVARAMPURAM	303121240602	11KV Korrapativari paler	Mixed	AMR	1.447	1.168	1.447	19.268	36.049	100%	
2201	ONGOLE	DARSI	DARSI	33/11 KV SIVARAMPURAM	303121240603	11KV Sivaramapuram AC	Mixed	AMR	1.464	1.303	1.464	11.014	9.177	100%	
2202	ONGOLE	DARSI	DARSI	33/11 KV Turakapalem Sub	303121240701	11KV Turakapalem	Mixed	AMR	2.624	1.859	2.624	29.175	27.078	100%	
2203	ONGOLE	DARSI	DARSI	33/11 KV Turakapalem Sub	303121240702	11KV Kothuru	Mixed	AMR	1.911	1.718	1.911	10.111	18.260	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2204	ONGOLE	DARSI	DARSI	33/11 KV Turakapalem Sub	303121240703	11KV SANGAM	Agricultura	AMR	0.380	0.355	0.380	6.585	8.410	100%	
2205	ONGOLE	DARSI	DARSI	33/11 KV Madhavaram SS	303121241001	11KV kothapalem	Mixed	AMR	1.616	1.267	1.616	21.564	24.185	100%	
2206	ONGOLE	DARSI	DARSI	33/11 KV Madhavaram SS	303121241002	11KV Madhavaram	Rural	AMR	1.900	1.672	1.900	12.010	26.479	100%	
2207	ONGOLE	DARSI	DARSI	33/11 KV Madhavaram SS	303121241003	11KV Madhavaram AGL	Mixed	AMR	1.410	1.236	1.410	12.360	76.543	100%	
2208	ONGOLE	DARSI	DARSI	33/11 KV Boddukurapadu	303121241101	11KV b k padu	Rural	AMR	1.369	1.269	1.369	7.286	4.782	100%	
2209	ONGOLE	DARSI	DARSI	33/11 KV Boddukurapadu	303121241102	11KV veluguvaripalem	Mixed	AMR	2.478	1.817	2.478	26.661	26.317	100%	
2210	ONGOLE	DARSI	DARSI	33/11 KV Boddukurapadu	303121241103	11KV Chintalapalem	Mixed	AMR	0.943	0.788	0.943	16.427	28.557	100%	
2211	ONGOLE	DARSI	DARSI	33/11KV Lakkavaram SS	303121241201	11KV Lakkavaram AGL	Agricultura	AMR	1.788	1.565	1.788	12.508	44.578	100%	
2212	ONGOLE	DARSI	DARSI	33/11KV Lakkavaram SS	303121241202	11KV Lakkavaram	Rural	AMR	0.949	0.184	0.949	80.578	82.362	100%	
2213	ONGOLE	DARSI	DARSI	33/11KV Lakkavaram SS	303121241203	11KV Bellamkondavaripa	Mixed	AMR	3.160	2.690	3.160	14.892	35.655	100%	
2214	ONGOLE	DARSI	DARSI	33/11 KV Mundlamur Sub	303121340101	11KV AGRAHARAM	Mixed	AMR	1.212	1.296	1.212	-6.931	0.373	100%	
2215	ONGOLE	DARSI	DARSI	33/11 KV Mundlamur Sub	303121340103	11KV MUNDLAMURUAG	Mixed	AMR	1.017	0.703	1.017	30.877	34.722	100%	
2216	ONGOLE	DARSI	DARSI	33/11 KV Mundlamur Sub	303121340104	11KV MUNDLAMURU	Rural	AMR	2.341	2.289	2.341	2.245	11.287	100%	
2217	ONGOLE	DARSI	DARSI	33/11 KV Mundlamur Sub	303121340105	11KV Pasupugallu Polava	Rural	AMR	3.674	4.809	3.674	-30.914	39.944	100%	
2218	ONGOLE	DARSI	DARSI	33/11 KV Mundlamur Sub	303121340106	11KV Sankarapuram	Mixed	AMR	1.173	1.066	1.173	9.124	15.895	100%	
2219	ONGOLE	DARSI	DARSI	33/11 KV Marella Sub Stati	303121340201	11KV MARELL T+MAREL	Rural	AMR	1.850	1.815	1.850	1.929	42.399	100%	
2220	ONGOLE	DARSI	DARSI	33/11 KV Marella Sub Stati	303121340202	11 KV Purimetla	Mixed	AMR	1.335	1.155	1.335	13.506	25.844	100%	
2221	ONGOLE	DARSI	DARSI	33/11 KV Marella Sub Stati	303121340203	11KV VEMPADU	Mixed	AMR	2.330	2.037	2.330	12.581	15.749	100%	
2222	ONGOLE	DARSI	DARSI	33/11 KV Marella Sub Stati	303121340208	11KV MARELL AGL+GP L	Mixed	AMR	1.534	1.564	1.534	-1.923	99.023	100%	
2223	ONGOLE	DARSI	DARSI	33/11 KV Umamaheswara	303121340401	11KV NAIDUPALEM	Mixed	AMR	0.606	0.659	0.606	-8.700	-4.697	100%	
2224	ONGOLE	DARSI	DARSI	33/11 KV Umamaheswara	303121340402	11KV UMAMAHESWARA	Mixed	AMR	0.939	0.904	0.939	3.689	11.968	100%	
2225	ONGOLE	DARSI	DARSI	33/11 KV Umamaheswara	303121340403	11KV VEMULA	Mixed	AMR	0.490	0.625	0.490	-27.385	-19.694	100%	
2226	ONGOLE	DARSI	DARSI	33/11 KV Edara SS	303121340501	11KV Ayodhyanagar	Mixed	AMR	2.629	2.088	2.629	20.587	34.708	100%	
2227	ONGOLE	DARSI	DARSI	33/11 KV Edara SS	303121340502	11KV Bheemavaram	Mixed	AMR	2.914	2.589	2.914	11.164	13.622	100%	
2228	ONGOLE	DARSI	DARSI	33/11 KV Edara SS	303121340503	11KV EDARA	Rural	AMR	1.779	1.274	1.779	28.412	27.551	100%	
2229	ONGOLE	DARSI	DARSI	33/11 KV Sankarapuram SS	303121340601	11KV Polavaram	Mixed	AMR	2.273	2.058	2.273	9.461	25.194	100%	
2230	ONGOLE	DARSI	DARSI	33/11 KV Sankarapuram SS	303121340602	11KV Sankarapuram	Rural	AMR	1.102	1.087	1.102	1.308	3.432	100%	
2231	ONGOLE	DARSI	DARSI	33/11 KV Sankarapuram SS	303121340603	11KV Nuzillapalli	Mixed	AMR	3.200	3.115	3.200	2.639	12.835	100%	
2232	ONGOLE	DARSI	DARSI	33/11 KV Kurichedu Sub St	303121440101	11KV 11KV KATAMVARI	Mixed	AMR	2.322	2.298	2.322	1.040	6.334	100%	
2233	ONGOLE	DARSI	DARSI	33/11 KV Kurichedu Sub St	303121440102	11KV KURICHEDU TOWN	Rural	AMR	3.198	3.108	3.198	2.810	7.096	100%	
2234	ONGOLE	DARSI	DARSI	33/11 KV Kurichedu Sub St	303121440103	11KV PERAMBOTLAPALE	Rural	AMR	0.278	0.280	0.278	-0.695	99.830	100%	
2235	ONGOLE	DARSI	DARSI	33/11 KV Kurichedu Sub St	303121440104	11KV BODANAMPADU	Mixed	AMR	4.050	3.623	4.050	10.528	23.476	100%	
2236	ONGOLE	DARSI	DARSI	33/11 KV Kurichedu Sub St	303121440106	11KV NAMASIVAYAPURA	Mixed	AMR	3.492	3.141	3.492	10.051	11.673	100%	
2237	ONGOLE	DARSI	DARSI	33/11 KV AVULAMANDA S	303121440201	11KV AVULAMANDA M (	Mixed	AMR	3.043	2.762	3.043	9.249	9.249	100%	
2238	ONGOLE	DARSI	DARSI	33/11 KV AVULAMANDA S	303121440202	11KV kasipuram	Mixed	AMR	3.909	3.461	3.909	11.458	58.036	100%	
2239	ONGOLE	DARSI	DARSI	33/11 KV CHANDALURU SS	303121540101	11KV CHANDALUR	Mixed	AMR	2.532	2.403	2.532	5.119	17.430	100%	
2240	ONGOLE	DARSI	DARSI	33/11 KV CHANDALURU SS	303121540102	11KV POTHAVARAM	Mixed	AMR	6.115	4.923	6.115	19.501	30.334	100%	
2241	ONGOLE	DARSI	DARSI	33/11 KV CHANDALURU SS	303121540103	11KV VENKATACHALAM	Mixed	AMR	0.713	0.914	0.713	-28.094	-10.730	100%	
2242	ONGOLE	DARSI	DARSI	33/11 KV Kothapalli Sub St	303121540201	11KV Kothapalli Town	Rural	AMR	0.786	0.699	0.786	11.070	14.151	100%	
2243	ONGOLE	DARSI	DARSI	33/11 KV Kothapalli Sub St	303121540202	11kv Korlamadugu	Mixed	AMR	0.230	0.356	0.230	-54.763	-6.447	100%	
2244	ONGOLE	DARSI	DARSI	33/11 KV Kothapalli Sub St	303121540203	11kv Tripurasundaripura	Mixed	AMR	2.480	1.823	2.480	26.503	31.422	100%	
2245	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Kanigiri Sub Stati	303131140101	11KV ALAVALAPADU	Mixed	AMR	2.659	2.190	2.659	17.628	25.402	100%	
2246	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Kanigiri Sub Stati	303131140102	11KV KANIGIRITOWN1	Urban	AMR	11.418	10.696	11.418	6.324	6.432	100%	
2247	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Kanigiri Sub Stati	303131140103	11KV KANIGIRITOWN2	Urban	AMR	8.615	7.947	8.615	7.754	11.067	100%	
2248	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Kanigiri Sub Stati	303131140104	11KV KANIGIRITOWN3	Urban	AMR	10.420	9.713	10.420	6.787	11.232	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2249	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Kanigiri Sub Stati	303131140105	11KV PUNUGODU	Mixed	AMR	1.801	1.420	1.801	21.148	24.599	100%	
2250	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Kanigiri Sub Stati	303131140106	11KV WATERWORKS	Rural	AMR	0.558	0.432	0.558	22.686	99.799	100%	
2251	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Kotturu Sub Stati	303131140201	11KV challagirigalla	Mixed	AMR	3.077	2.678	3.077	12.988	18.972	100%	
2252	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Kotturu Sub Stati	303131140202	11KV LINGAREDDYPALLI	Mixed	AMR	1.292	1.064	1.292	17.627	25.930	100%	
2253	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Kotturu Sub Stati	303131140203	11KV MACHAVARAM	Mixed	AMR	2.684	2.104	2.684	21.624	40.308	100%	
2254	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Kotturu Sub Stati	303131140204	11KV WATAR WORKS	Rural	AMR	0.508	0.473	0.508	6.810	86.646	100%	
2255	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV PC Palli Sub Stati	303131240101	11KV marella	Mixed	AMR	1.426	1.326	1.426	7.009	36.433	100%	
2256	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV PC Palli Sub Stati	303131240102	11KV Marrikunta Palli	Mixed	AMR	1.522	1.326	1.522	12.890	36.997	100%	
2257	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV PC Palli Sub Stati	303131240103	11kv p c palli	Rural	AMR	0.949	0.895	0.949	5.687	26.075	100%	
2258	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV PC Palli Sub Stati	303131240105	11KV Varimadugu	Mixed	AMR	2.413	2.189	2.413	9.297	20.598	100%	
2259	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV P Irlapadu Sub St	303131240201	11KV Peda Irlapadu	Mixed	AMR	2.084	2.057	2.084	1.291	10.564	100%	
2260	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV P Irlapadu Sub St	303131240202	11kv adavilopalli	Mixed	AMR	2.317	2.052	2.317	11.438	29.782	100%	
2261	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV P Irlapadu Sub St	303131240204	11KV vengalayapalli	Mixed	AMR	0.623	0.618	0.623	0.908	23.586	100%	
2262	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV P Alavalapadu Su	303131240301	11 KV Potavaram industr	INDL	AMR	0.066	0.072	0.066	-8.804	-3.614	100%	
2263	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV P Alavalapadu Su	303131240302	11KV Vengalapuram	Mixed	AMR	0.451	0.396	0.451	12.038	22.200	100%	
2264	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV P Alavalapadu Su	303131240303	11KV PEDAALAVALAPAD	Mixed	AMR	0.818	0.854	0.818	-4.464	15.951	100%	
2265	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV P Alavalapadu Su	303131240305	11KV Neredupalli	Mixed	AMR	0.517	0.525	0.517	-1.458	9.666	100%	
2266	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Guntupalli Sub St	303131240401	11KV Guntupalli	Mixed	AMR	1.438	1.465	1.438	-1.884	8.961	100%	
2267	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Guntupalli Sub St	303131240402	11KV MULEVARIPALLI	Mixed	AMR	0.578	0.571	0.578	1.276	21.788	100%	
2268	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Guntupalli Sub St	303131240404	11KV Desireddypalli	Mixed	AMR	0.348	0.347	0.348	0.285	19.573	100%	
2269	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV TR Palli Sub Stati	303131340101	11KV MORAVARIPALLI	Mixed	AMR	1.811	1.609	1.811	11.127	28.438	100%	
2270	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV TR Palli Sub Stati	303131340102	11KV Vemulapadu TR Pa	Mixed	AMR	1.890	1.793	1.890	5.145	16.762	100%	
2271	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV TR Palli Sub Stati	303131340103	11KV HMPADUTOWN	Rural	AMR	0.372	0.347	0.372	6.779	22.847	100%	
2272	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV TR Palli Sub Stati	303131340104	11KV Ummanapalli	Mixed	AMR	0.954	0.830	0.954	12.988	36.501	100%	
2273	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Seetharamapura	303131340201	11KV S R Puram Local Ha	Mixed	AMR	5.626	4.565	5.626	18.849	30.186	100%	
2274	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Seetharamapura	303131340202	11KV Kutagundla	Mixed	AMR	0.852	0.819	0.852	3.930	31.234	100%	
2275	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Seetharamapura	303131340205	11KV Muppalapadu	Mixed	AMR	2.077	1.781	2.077	14.232	35.391	100%	
2276	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV NANDANAVANAI	303131340401	11KV Nandanavanam To	Mixed	AMR	1.172	1.155	1.172	1.411	26.239	100%	
2277	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV NANDANAVANAI	303131340402	11KV Rangampeta	Mixed	AMR	0.792	0.728	0.792	8.003	22.898	100%	
2278	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Nandanamarella	303131440101	11KV Baduguleru	Mixed	AMR	1.143	0.936	1.143	18.169	30.587	100%	
2279	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Nandanamarella	303131440102	11KV GADDAMEEDA PAI	Mixed	AMR	1.189	0.962	1.189	19.142	35.877	100%	
2280	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Nandanamarella	303131440103	11KV NANDANAMARELL	Rural	AMR	0.492	0.457	0.492	7.176	1.444	100%	
2281	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Nandanamarella	303131440105	11KV Yadavalli	Mixed	AMR	1.393	1.120	1.393	19.645	32.728	100%	
2282	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV BP Adda Road Su	303131440201	11KV BALLIPALLI	Mixed	AMR	1.405	1.255	1.405	10.709	21.424	100%	
2283	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV BP Adda Road Su	303131440202	11KV NALLAREDDYPALLI	Mixed	AMR	1.585	1.431	1.585	9.715	13.158	100%	
2284	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV BP Adda Road Su	303131440203	11KVBallipalli Town Taki	Mixed	AMR	1.144	1.037	1.144	9.399	12.314	100%	
2285	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV BP Adda Road Su	303131440204	11KV TALAKONDAPADU	Mixed	AMR	1.559	1.480	1.559	5.072	15.432	100%	
2286	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Guravajipeta Sub	303131440301	11KV G PETARURAL	Mixed	AMR	0.244	0.227	0.244	7.103	36.857	100%	
2287	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Guravajipeta Sub	303131440302	11KV VANGAPADU	Mixed	AMR	1.507	1.366	1.507	9.337	22.907	100%	
2288	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Guravajipeta Sub	303131440303	11KV PATHAPADU	Mixed	AMR	0.969	0.890	0.969	8.202	33.462	100%	
2289	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV Guravajipeta Sub	303131440304	11KV Guravajipeta Towr	Rural	AMR	0.324	0.299	0.324	7.572	21.154	100%	
2290	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV TALLURU SS, kng	303131440401	11kv Venkateswarapura	Mixed	AMR	0.861	0.707	0.861	17.794	28.819	100%	
2291	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV TALLURU SS, kng	303131440402	11KV BOMMI REDDY PA	Mixed	AMR	1.411	1.225	1.411	13.209	19.622	100%	
2292	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV TALLURU SS, kng	303131440405	11KV Tallur	Mixed	AMR	0.502	0.375	0.502	25.243	28.392	100%	
2293	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV GUDIPADU SS	303131440601	11KV Gudipadu Town B	Mixed	AMR	0.444	0.490	0.444	-10.403	5.588	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2294	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV GUDIPADU SS	303131440602	11KV Gudipadu Rural	Mixed	AMR	0.385	0.348	0.385	9.587	24.485	100%	
2295	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV AJEESPURAM SS	303131440701	11KV Yeruvaripalli	Mixed	AMR	0.460	0.405	0.460	11.918	40.470	100%	
2296	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV AJEESPURAM SS	303131440702	11KV Battupalli	Mixed	AMR	1.127	0.986	1.127	12.513	42.188	100%	
2297	ONGOLE	KANIGIRI	KANIGIRI	33/11 KV AJEESPURAM SS	303131440704	11KV Azeespuram	Mixed	AMR	0.446	0.398	0.446	10.768	10.768	100%	
2298	ONGOLE	KANIGIRI	KANIGIRI	33/11KV Punugodu SS	303131440801	11KV Industrial	INDL	AMR	4.618	4.148	4.618	10.170	0.772	100%	
2299	ONGOLE	KANIGIRI	KANIGIRI	33/11KV Punugodu SS	303131440802	11KV Punugodu	Mixed	AMR	1.216	1.063	1.216	12.603	18.129	100%	
2300	ONGOLE	KANIGIRI	KANIGIRI	33/11KV Punugodu SS	303131440803	11KV Siddareddypalli	Mixed	AMR	1.737	1.510	1.737	13.111	24.645	100%	
2301	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV CS Puram Sub Sta	303132140101	11KV ARIVEMULA	Mixed	AMR	0.662	0.701	0.662	-5.967	11.907	100%	
2302	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV CS Puram Sub Sta	303132140102	11KV C S PURAMTOWN	Rural	AMR	2.271	2.235	2.271	1.604	4.317	100%	
2303	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV CS Puram Sub Sta	303132140103	11KV KAMBAMPADU	Rural	AMR	0.019	0.023	0.019	-24.493	18.639	100%	
2304	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV CS Puram Sub Sta	303132140104	11KV NALLAMADUGULA	Mixed	AMR	0.626	0.633	0.626	-1.153	11.946	100%	
2305	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV DG Peta Sub Stat	303132140201	11KV AMBAVARAM	Mixed	AMR	2.430	2.312	2.430	4.838	32.260	100%	
2306	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV DG Peta Sub Stat	303132140202	11KV GUNTHACHENNAM	Mixed	AMR	0.744	0.880	0.744	-18.309	-10.442	100%	
2307	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV DG Peta Sub Stat	303132140204	11KV DGPeta	Rural	AMR	0.549	0.508	0.549	7.502	16.855	100%	
2308	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV P. Gogulapalli Su	303132140301	11KV AGRAHARAM	Mixed	AMR	1.430	1.378	1.430	3.600	1.019	100%	
2309	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV P. Gogulapalli Su	303132140302	11KV KOTTALAPALLI	Mixed	AMR	0.946	0.929	0.946	1.818	37.468	100%	
2310	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV P. Gogulapalli Su	303132140303	11KV VENGANAGUNTA	Mixed	AMR	0.907	0.924	0.907	-1.848	29.830	100%	
2311	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV P. Gogulapalli Su	303132140304	11KV Gogulapalli	Rural	AMR	0.338	0.368	0.338	-9.065	-1.388	100%	
2312	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV KOYALAMPADU S	303132140401	11KV KOVILAMPADU	Rural	AMR	2.220	2.409	2.220	-8.517	-8.517	100%	
2313	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV KOYALAMPADU S	303132140402	11KV ANIKALAPALLI	Mixed	AMR	0.490	0.473	0.490	3.649	6.269	100%	
2314	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV KOYALAMPADU S	303132140403	11KV KOMATIGUNTA P I	Mixed	AMR	1.609	1.492	1.609	7.238	19.763	100%	
2315	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Pamur Sub Static	303132240101	11KV BUKKAPURAM	Mixed	AMR	1.250	1.769	1.250	-41.487	-28.425	100%	
2316	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Pamur Sub Static	303132240102	11KV MOTRAVULAPADU	Mixed	AMR	0.930	0.992	0.930	-6.672	-6.265	100%	
2317	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Pamur Sub Static	303132240103	11KV NUTCHUPADU	Mixed	AMR	1.991	2.030	1.991	-1.939	14.428	100%	
2318	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Pamur Sub Static	303132240104	11KV PAMURUTOWN	Rural	AMR	11.531	11.443	11.531	0.768	6.825	100%	
2319	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV B Gudur Sub Stat	303132240201	11KV Botlagudur AGL	Mixed	AMR	2.957	2.624	2.957	11.256	35.344	100%	
2320	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV B Gudur Sub Stat	303132240202	11KV Kambaladinne	Mixed	AMR	2.812	2.610	2.812	7.180	20.453	100%	
2321	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV B Gudur Sub Stat	303132240203	11KV GUNTUPALLI	Mixed	AMR	0.993	0.934	0.993	5.975	29.356	100%	
2322	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV B Gudur Sub Stat	303132240204	11KV THIRAGALADINNE	Mixed	AMR	2.279	2.218	2.279	2.655	20.084	100%	
2323	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV B Gudur Sub Stat	303132240206	11KV Botlagudur Town	Rural	AMR	0.723	0.734	0.723	-1.444	10.836	100%	
2324	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Voggampalli Sub	303132240301	11KV Chilamkur	Mixed	AMR	1.864	1.733	1.864	7.062	21.989	100%	
2325	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Voggampalli Sub	303132240302	11KV raviguntapalli	Mixed	AMR	2.120	1.894	2.120	10.662	21.001	100%	
2326	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Voggampalli Sub	303132240303	11KV KONDAREDDYPALL	Mixed	AMR	1.692	1.581	1.692	6.511	21.683	100%	
2327	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Voggampalli Sub	303132240305	11KV Vaggampalli	Rural	AMR	0.765	0.800	0.765	-4.608	12.128	100%	
2328	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Veligandla Sub St	303132340101	11KV K P AGRAHARAM	Mixed	AMR	1.525	1.508	1.525	1.114	9.232	100%	
2329	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Veligandla Sub St	303132340102	11KV MARAPAGUNTLA	Mixed	AMR	1.175	1.047	1.175	10.892	35.168	100%	
2330	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Veligandla Sub St	303132340103	11KV R G Puram	Mixed	AMR	1.263	1.142	1.263	9.578	17.773	100%	
2331	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Veligandla Sub St	303132340105	11KV Veligandla Town	Rural	AMR	0.993	0.928	0.993	6.539	14.439	100%	
2332	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Rallapalli Sub Sta	303132340201	11KV vedullacheru	Mixed	AMR	0.513	0.475	0.513	7.305	20.419	100%	
2333	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Rallapalli Sub Sta	303132340202	11KV Rallapalli Town	Rural	AMR	0.385	0.224	0.385	41.736	47.356	100%	
2334	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Rallapalli Sub Sta	303132340206	11KV IMMADICHERUVU	Mixed	AMR	0.699	0.617	0.699	11.712	29.966	100%	
2335	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Rallapalli Sub Sta	303132340207	11KV gudipatipalli	Mixed	AMR	1.581	1.522	1.581	3.788	14.316	100%	
2336	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Mogullur Sub Sta	303132340301	11KV MOGALLURUAGL	Mixed	AMR	1.030	1.148	1.030	-11.416	-11.416	100%	
2337	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Mogullur Sub Sta	303132340302	11KV NARSAMAMBAPU	Mixed	AMR	0.267	0.241	0.267	9.646	17.105	100%	
2338	ONGOLE	KANIGIRI	KANIGIRI RURALS	33/11 KV Mogullur Sub Sta	303132340303	11KV PADMAPURAMAG	Mixed	AMR	0.924	0.852	0.924	7.815	13.073	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2339	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Ravipadu Sub Sta	303211140101	11KV SALAKALAVEEDU	Mixed	AMR	1.936	1.932	1.936	0.206	24.032	100%	
2340	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Ravipadu Sub Sta	303211140102	11KV RAVIPADU RURALS	Mixed	AMR	0.775	0.716	0.775	7.562	44.802	100%	
2341	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Ravipadu Sub Sta	303211140103	11KV RAVIPADU TOWN	Rural	AMR	1.116	1.009	1.116	9.634	38.874	100%	
2342	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Errabalem Sub St	303211140201	11KV TURIMELLA	Mixed	AMR	2.686	2.402	2.686	10.571	26.118	100%	
2343	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Errabalem Sub St	303211140202	11KV YERRABALEM RUR	Mixed	AMR	0.611	0.588	0.611	3.700	48.349	100%	
2344	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Errabalem Sub St	303211140203	11KV PEDANALLAKALUV	Mixed	AMR	1.894	1.683	1.894	11.158	38.835	100%	
2345	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Kandulapuram Su	303211140301	11KV CHINNA CUMBUM	Mixed	AMR	0.578	0.488	0.578	15.572	30.998	100%	
2346	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Kandulapuram Su	303211140302	11KV ZANGAMGUNTLA	Mixed	AMR	1.235	1.131	1.235	8.400	34.315	100%	
2347	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Kandulapuram Su	303211140303	11KV TOWN 1	Rural	AMR	9.282	9.274	9.282	0.086	15.922	100%	
2348	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Kandulapuram Su	303211140304	11KV TOWN 2	Rural	AMR	6.372	5.970	6.372	6.305	31.041	100%	
2349	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Kandulapuram Su	303211140305	11KV KANDULAPURAM T	Rural	AMR	1.229	0.948	1.229	22.837	55.140	100%	
2350	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV PEDDOBINENIPA	303211140401	11KV P O PALLI + 11 KV (	Mixed	AMR	0.890	0.861	0.890	3.360	50.954	100%	
2351	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV PEDDOBINENIPA	303211140402	11KV RETLAPALLI FEEDE	Mixed	AMR	0.983	0.858	0.983	12.733	71.915	100%	
2352	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV L.Kota SubStation	303211140501	11KV SUREPALLI	Mixed	AMR	0.972	0.841	0.972	13.441	46.114	100%	
2353	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV L.Kota SubStation	303211140502	11KV LINZOJIPALLI	Mixed	AMR	0.581	0.493	0.581	15.148	38.328	100%	
2354	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV L.Kota SubStation	303211140503	11KV THALADINNE	Mixed	AMR	0.680	0.601	0.680	11.586	37.288	100%	
2355	ONGOLE	MARKAPURAM	CUMBUM	33/11KV CHINA CUMBUM	303211140601	11KV CHINNA CUMBUM	Mixed	AMR	0.488	0.517	0.488	-5.890	15.677	100%	
2356	ONGOLE	MARKAPURAM	CUMBUM	33/11KV CHINA CUMBUM	303211140602	11KV CUMBUM GATCHU	Rural	AMR	2.523	1.980	2.523	21.502	35.652	100%	
2357	ONGOLE	MARKAPURAM	CUMBUM	33/11KV CHINA CUMBUM	303211140603	11KV KRISTAPURAM FEE	Mixed	AMR	0.655	0.677	0.655	-3.298	31.954	100%	
2358	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Ardhaveedu Sub	303211240101	11KV ARDHAVEEDU TOV	Rural	AMR	1.979	1.817	1.979	8.169	33.773	100%	
2359	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Ardhaveedu Sub	303211240102	11KV NARAYANAPALLI	Mixed	AMR	1.134	1.062	1.134	6.323	40.897	100%	
2360	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Ardhaveedu Sub	303211240103	11KV ATCHAMPETA	Mixed	AMR	0.145	0.132	0.145	8.642	70.418	100%	
2361	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Ardhaveedu Sub	303211240104	11KV ANKABHUPALEM	Mixed	AMR	0.378	0.360	0.378	4.717	11.159	100%	
2362	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Mohiddinpuram	303211240201	11KV MOHIDDINPURAM	Rural	AMR	0.607	0.572	0.607	5.892	38.780	100%	
2363	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Mohiddinpuram	303211240202	11KV MOHIDDINPURAM	Mixed	AMR	1.804	1.738	1.804	3.670	40.354	100%	
2364	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Mohiddinpuram	303211240203	11kv Donakonda	Mixed	AMR	1.842	1.761	1.842	4.427	41.963	100%	
2365	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Mohiddinpuram	303211240204	11KV PEDAKANDUKURU	Mixed	AMR	3.837	3.665	3.837	4.479	44.068	100%	
2366	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Yachavaram Sub	303211240301	11KV Pothurajuturu	Mixed	AMR	0.071	0.069	0.071	1.713	41.097	100%	
2367	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Yachavaram Sub	303211240302	11kV Rangapuram Yacha	Mixed	AMR	1.180	1.137	1.180	3.653	39.351	100%	
2368	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Yachavaram Sub	303211240305	11KV Yachavaram Rural	Mixed	AMR	0.884	0.825	0.884	6.667	27.065	100%	
2369	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Nagulavaram Sul	303211240401	11KV NAGULAVARAM	Mixed	AMR	1.053	1.024	1.053	2.791	28.274	100%	
2370	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Nagulavaram Sul	303211240402	11KV Kakarla	Mixed	AMR	1.892	1.841	1.892	2.686	21.059	100%	
2371	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV MAGUTURU SS	303211240501	11KV Magutur	Mixed	AMR	1.696	1.669	1.696	1.607	51.954	100%	
2372	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV MAGUTURU SS	303211240502	11KV Basireddy	Mixed	AMR	0.407	0.394	0.407	3.318	37.716	100%	
2373	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV MAGUTURU SS	303211240503	11KV MS THANDA	Mixed	AMR	0.891	0.872	0.891	2.061	62.355	100%	
2374	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Papinenipalli SS	303211240601	11KV YERRABATTELU	Mixed	AMR	1.920	1.795	1.920	6.504	42.938	100%	
2375	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Papinenipalli SS	303211240602	11KV BOLLUPALLI	Mixed	AMR	2.044	1.916	2.044	6.251	24.694	100%	
2376	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Papinenipalli SS	303211240603	11KV PAPINENIPALLI	Rural	AMR	0.785	0.672	0.785	14.425	32.348	100%	
2377	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV velagalapaya SS	303211240701	11KV VELAGALAPAYA	Mixed	AMR	0.825	0.787	0.825	4.621	66.675	100%	
2378	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV velagalapaya SS	303211240702	11KV BOMMILINGAM	Mixed	AMR	0.245	0.240	0.245	2.119	74.494	100%	
2379	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV velagalapaya SS	303211240703	11KV GANNEPALLI	Mixed	AMR	1.018	0.982	1.018	3.611	33.934	100%	
2380	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Akkapalli Sub Sta	303211340101	11KV BASINEPALLI	Mixed	AMR	1.858	1.734	1.858	6.668	45.892	100%	
2381	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Akkapalli Sub Sta	303211340102	11KV Konapalli 11KV Akl	Mixed	AMR	0.410	0.481	0.410	-17.377	49.052	100%	
2382	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Akkapalli Sub Sta	303211340103	11KV KHAJIPURAM AKK/	Mixed	AMR	2.159	2.368	2.159	-9.726	18.883	100%	
2383	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Mokshagundam	303211340201	11KV PUSALAPADU	Mixed	AMR	1.269	1.253	1.269	1.222	26.532	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2384	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV Mokshagundam	303211340202	11KV Penchikalapadu M	Mixed	AMR	1.209	1.264	1.209	-4.563	28.947	100%	
2385	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV BV Peta Sub Stati	303211340301	11KV BESTHAVARIPETA	Rural	AMR	7.484	7.264	7.484	2.940	6.998	100%	
2386	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV BV Peta Sub Stati	303211340302	11KV KALAGATLA	Mixed	AMR	0.926	1.056	0.926	-14.010	26.481	100%	
2387	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV BV Peta Sub Stati	303211340303	11KV NEKUNAMBAD	Mixed	AMR	1.138	1.136	1.138	0.229	18.265	100%	
2388	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV BV Peta Sub Stati	303211340304	11KV VONDUTLA	Mixed	AMR	1.216	1.319	1.216	-8.426	57.880	100%	
2389	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV PITTIKAYAGULLA	303211340401	11KV P T Gulla Rural P T	Mixed	AMR	1.522	1.455	1.522	4.447	40.076	100%	
2390	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV PITTIKAYAGULLA	303211340402	11KV J C Agraharam	Mixed	AMR	1.275	1.131	1.275	11.254	45.230	100%	
2391	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV SINGARAPALLI SS	303211340701	11KV Singaripalli	Mixed	AMR	2.153	1.871	2.153	13.108	40.301	100%	
2392	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV SINGARAPALLI SS	303211340702	11KV Barlakunta	Rural	AMR	0.007	0.007	0.007	0.105	0.105	100%	
2393	ONGOLE	MARKAPURAM	CUMBUM	33/11 KV SINGARAPALLI SS	303211340703	11KV Konapalli	Mixed	AMR	0.293	0.301	0.293	-2.513	40.197	100%	
2394	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Markapur Sub St	303221140101	11KV TOWN1	Urban	AMR	2.817	2.706	2.817	3.960	12.090	100%	
2395	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Markapur Sub St	303221140102	11KV TOWN II	Urban	AMR	11.826	11.362	11.826	3.925	6.443	100%	
2396	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Markapur Sub St	303221140103	11KV TOWN III	Urban	AMR	7.152	6.839	7.152	4.373	12.944	100%	
2397	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Markapur Sub St	303221140104	11KV TOWN IV	Urban	AMR	2.203	2.104	2.203	4.493	46.119	100%	
2398	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Markapur Sub St	303221140105	11KV AIR	Urban	AMR	1.770	1.700	1.770	3.962	16.977	100%	
2399	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Market yard Sub	303221140201	11KV RTC	Urban	AMR	7.778	7.481	7.778	3.811	7.254	100%	
2400	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Market yard Sub	303221140202	11KV JAGADESWARI	Urban	AMR	5.936	5.668	5.936	4.508	6.645	100%	
2401	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Market yard Sub	303221140203	11KV DARIMADUGU	Mixed	AMR	1.534	1.415	1.534	7.755	51.090	100%	
2402	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Market yard Sub	303221140204	11KV COLLEGE	Rural	AMR	2.304	2.237	2.304	2.915	16.623	100%	
2403	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tarlupadu Road S	303221140301	11KV KONDEPALLI	Mixed	AMR	2.955	2.538	2.955	14.111	39.214	100%	
2404	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tarlupadu Road S	303221140302	11KV KAMALA COLLEGE	Rural	AMR	0.462	0.367	0.462	20.594	39.477	100%	
2405	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tarlupadu Road S	303221140303	11KV INDIRAMMA FEED	Mixed	AMR	0.012	0.011	0.012	5.112	37.902	100%	
2406	ONGOLE	MARKAPURAM	MARKAPUR	33/11KV MARKAPUR INDO	303221140401	11KV DATTA SAI FEEDER	Urban	AMR	2.609	2.515	2.609	3.620	9.461	100%	
2407	ONGOLE	MARKAPURAM	MARKAPUR	33/11KV MARKAPUR INDO	303221140402	11KV MUNCIPALITY FEE	Urban	AMR	2.864	2.690	2.864	6.081	10.460	100%	
2408	ONGOLE	MARKAPURAM	MARKAPUR	33/11KV MARKAPUR INDO	303221140403	11KV N S NAGAR FEEDEF	Urban	AMR	0.452	0.424	0.452	6.101	15.402	100%	
2409	ONGOLE	MARKAPURAM	MARKAPUR	33/11KV MARKAPUR INDO	303221140404	11KV THULASI KOTA FEE	Urban	AMR	3.985	3.846	3.985	3.510	7.622	100%	
2410	ONGOLE	MARKAPURAM	MARKAPUR	33/11KV MARKAPUR INDO	303221140405	11KV READING ROOM FI	Urban	AMR	3.543	3.385	3.543	4.454	8.486	100%	
2411	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV P Araveedu Sub S	303221240101	11KV GOBBURU FEEDER	Mixed	AMR	1.602	1.456	1.602	9.157	42.391	100%	
2412	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV P Araveedu Sub S	303221240102	11KV P ARAVEEDU RURA	Mixed	AMR	1.172	1.001	1.172	14.559	60.508	100%	
2413	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV P Araveedu Sub S	303221240103	11KV SIVAPURAM FEEDE	Mixed	AMR	1.525	1.363	1.525	10.573	27.612	100%	
2414	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV P Araveedu Sub S	303221240104	11KV P ARAVEEDUN TOV	Rural	AMR	1.197	1.118	1.197	6.621	50.554	100%	
2415	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV B Cherlopalli Sub	303221240201	11KV B CHERLOPALLI TO	Rural	AMR	0.781	0.751	0.781	3.778	42.520	100%	
2416	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV B Cherlopalli Sub	303221240202	11KV POTHAMPALLI	Mixed	AMR	0.262	0.239	0.262	8.681	58.522	100%	
2417	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV B Cherlopalli Sub	303221240203	11KV R C KOTA	Mixed	AMR	0.607	0.559	0.607	7.950	72.668	100%	
2418	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV B Cherlopalli Sub	303221240204	11KV B CHERLO PALLI RU	Mixed	AMR	1.415	1.393	1.415	1.586	31.624	100%	
2419	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Puchakayalapalli	303221240301	11KV KALANUTHALA FEE	Mixed	AMR	1.893	1.815	1.893	4.124	35.820	100%	
2420	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Puchakayalapalli	303221240302	11KV GUNDAMCHERLA I	Mixed	AMR	0.740	0.709	0.740	4.186	49.322	100%	
2421	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Puchakayalapalli	303221240303	11KV SUNKESULA FEEDE	Mixed	AMR	2.504	2.304	2.504	8.009	62.643	100%	
2422	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Puchakayalapalli	303221240304	11KV JAMMANA PALLI F	Rural	AMR	0.726	0.720	0.726	0.928	0.928	100%	
2423	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Sanikavaram Sub	303221240401	11KV THAMMADA PALLI	Mixed	AMR	2.116	2.005	2.116	5.271	44.922	100%	
2424	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Sanikavaram Sub	303221240402	11KV SANIKAVARAM RU	Mixed	AMR	1.258	1.142	1.258	9.200	50.964	100%	
2425	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Sanikavaram Sub	303221240404	11KV SANIKAVARAM TO	Rural	AMR	0.439	0.462	0.439	-5.275	22.384	100%	
2426	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Chetlamitta Sub S	303221240501	11KV Y D PADU FEEDER	Mixed	AMR	1.088	1.048	1.088	3.685	22.669	100%	
2427	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Chetlamitta Sub S	303221240502	11KV POTHAM PALLI FEI	Mixed	AMR	1.437	1.326	1.437	7.711	43.386	100%	
2428	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Chetlamitta Sub S	303221240503	11KV CHATLAMITTA TOV	Rural	AMR	0.246	0.245	0.246	0.134	25.127	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2429	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Chetlamitta Sub	303221240504	11KV RAJAMPALLI FEED	Mixed	AMR	0.582	0.581	0.582	0.190	9.869	100%	
2430	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tokapalli Sub sta	303221240601	11KV THOKAPALLI FEED	Mixed	AMR	1.531	1.426	1.531	6.815	24.762	100%	
2431	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tokapalli Sub sta	303221240602	11KV KAMABUMPADU F	Mixed	AMR	2.719	2.498	2.719	8.121	64.897	100%	
2432	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tokapalli Sub sta	303221240603	11KV THANGIRALA PALL	Mixed	AMR	1.866	1.713	1.866	8.210	41.956	100%	
2433	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tokapalli Sub sta	303221240604	11KV OBULAKKAPALLI FI	Mixed	AMR	1.922	1.718	1.922	10.615	16.170	100%	
2434	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Maddalakatla SS	303221240701	11KV MADDALAKATTA T	Mixed	AMR	0.001	0.001	0.001	27.042	27.042	100%	
2435	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Maddalakatla SS	303221240702	11KV MADDALAKATTA R	Mixed	AMR	0.540	0.517	0.540	4.387	41.843	100%	
2436	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Maddalakatla SS	303221240703	11KV CH AGRAHARAM F	Mixed	AMR	0.682	0.656	0.682	3.824	62.254	100%	
2437	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Maddalakatla SS	303221240704	11KV REGUMANUPALLI	Mixed	AMR	1.307	1.177	1.307	9.905	53.520	100%	
2438	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Komatikunta Sub	303221340101	11KV CHINTAKUNTA	Mixed	AMR	1.663	1.399	1.663	15.850	39.670	100%	
2439	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Komatikunta Sub	303221340102	11KV GOTTIPADIYA	Mixed	AMR	1.126	0.812	1.126	27.914	55.871	100%	
2440	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Komatikunta Sub	303221340103	11KV P Nagulavaram	Mixed	AMR	2.153	1.562	2.153	27.422	33.052	100%	
2441	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Komatikunta Sub	303221340104	11KV LBS Nagar	Mixed	AMR	1.164	0.850	1.164	26.949	45.869	100%	
2442	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Komatikunta Sub	303221340105	11KV INDUSTRIAL	Rural	AMR	0.120	0.074	0.120	38.458	74.748	100%	
2443	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Rayavaram Sub S	303221340201	11KV INDUSTRAILESTAT	Urban	AMR	2.400	2.265	2.400	5.646	12.415	100%	
2444	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Rayavaram Sub S	303221340202	11KV RAYAVARAM TOW	Rural	AMR	3.759	3.330	3.759	11.417	28.509	100%	
2445	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Rayavaram Sub S	303221340203	11KV Naidupalli + P Yach	Mixed	AMR	1.809	1.663	1.809	8.111	34.418	100%	
2446	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Rayavaram Sub S	303221340204	11KV GOGULADINNE	Mixed	AMR	2.486	1.788	2.486	28.065	68.648	100%	
2447	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Gajjalakonda Sub	303221340301	11KV GAJJALAKONDA RU	Mixed	AMR	0.896	0.679	0.896	24.148	63.130	100%	
2448	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Gajjalakonda Sub	303221340302	11KV KANDHALAPALLI	Mixed	AMR	0.733	0.565	0.733	22.902	33.572	100%	
2449	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Gajjalakonda Sub	303221340303	11KV POTHALAPADU	Mixed	AMR	0.886	0.831	0.886	6.131	14.982	100%	
2450	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Gajjalakonda Sub	303221340304	11KV GAJJALAKONDA TO	Rural	AMR	1.165	0.838	1.165	28.080	33.327	100%	
2451	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tippayapalem Su	303221340401	11KV THIPPAYA PALEM T	Rural	AMR	0.551	0.511	0.551	7.248	42.327	100%	
2452	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tippayapalem Su	303221340402	11KV M V PADU	Mixed	AMR	1.304	1.181	1.304	9.401	29.989	100%	
2453	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tippayapalem Su	303221340403	11KV MITTAMEDIPALLI	Mixed	AMR	0.677	0.889	0.677	-31.402	-18.458	100%	
2454	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tippayapalem Su	303221340404	11KV B NARVA FEEDER	Mixed	AMR	2.576	2.173	2.576	15.649	48.322	100%	
2455	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV BODICHERLA (BH	303221340501	11KV BONDALAPADU	Mixed	AMR	1.317	1.141	1.317	13.324	62.884	100%	
2456	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV BODICHERLA (BH	303221340502	11KV BHUPATIPALLI	Mixed	AMR	1.104	1.351	1.104	-22.432	22.238	100%	
2457	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tarlupadu Sub St	303221440101	11KV CHENNAREDDYPAI	Mixed	AMR	0.151	0.096	0.151	35.953	56.985	100%	
2458	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tarlupadu Sub St	303221440102	11KV MEERJAPET	Mixed	AMR	0.771	0.669	0.771	13.186	42.351	100%	
2459	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tarlupadu Sub St	303221440103	11KV SEETHANAGULAVA	Mixed	AMR	0.489	0.595	0.489	-21.717	-5.525	100%	
2460	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tarlupadu Sub St	303221440104	11KV TARLUPADU RURA	Mixed	AMR	0.225	0.143	0.225	36.491	63.040	100%	
2461	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Tarlupadu Sub St	303221440105	11KV TOWN	Rural	AMR	2.060	2.007	2.060	2.530	32.643	100%	
2462	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Ummareddypalli	303221440201	11KV TADIVARI PALLI FE	Mixed	AMR	1.134	1.027	1.134	9.397	44.423	100%	
2463	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Ummareddypalli	303221440203	11KV CHENNA REDDY PA	Mixed	AMR	1.463	1.308	1.463	10.597	28.044	100%	
2464	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Ummareddypalli	303221440204	11KV GOLLA PALLI FEED	Mixed	AMR	1.277	1.157	1.277	9.403	21.446	100%	
2465	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Mekalavaripalli S	303221440301	11KV WATER WORKS FE	Rural	AMR	0.795	0.711	0.795	10.639	75.697	100%	
2466	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Mekalavaripalli S	303221440302	11KV THUMMALA CHER	Mixed	AMR	1.102	0.942	1.102	14.559	47.637	100%	
2467	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Mekalavaripalli S	303221440303	11KV KALUJUVUALAPAD	Mixed	AMR	1.934	1.707	1.934	11.751	28.592	100%	
2468	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Mekalavaripalli S	303221440304	11KV POTHALA PADU FE	Mixed	AMR	0.783	0.633	0.783	19.196	39.213	100%	
2469	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV TUMMALACHERU	303221440401	11KV THUMMALA CHER	Mixed	AMR	1.148	1.005	1.148	12.417	33.141	100%	
2470	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV TUMMALACHERU	303221440402	11KV BUDDA PALLI FEED	Mixed	AMR	1.171	1.004	1.171	14.301	52.188	100%	
2471	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV TUMMALACHERU	303221440403	11KV OBAYA PALLI FEED	Mixed	AMR	1.483	1.327	1.483	10.493	33.096	100%	
2472	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV TUMMALACHERU	303221440404	11KV MANGALA KUNTA	Mixed	AMR	0.555	0.463	0.555	16.583	62.393	100%	
2473	ONGOLE	MARKAPURAM	MARKAPUR	33/11KV GANUGAPENTA S	303221440501	11KV POTHALAPADU	Mixed	AMR	0.830	0.905	0.830	-8.952	44.327	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2474	ONGOLE	MARKAPURAM	MARKAPUR	33/11KV GANUGAPENTA S	303221440502	11KV KANDALAPALLI	Mixed	AMR	1.247	0.986	1.247	20.985	60.895	100%	
2475	ONGOLE	MARKAPURAM	MARKAPUR	33/11KV GANUGAPENTA S	303221440503	11KV GANUGAPENTA	Mixed	AMR	1.487	1.234	1.487	17.027	25.491	100%	
2476	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV P Dornala Sub St	303221540101	11KV BOMMALAPURAM	Mixed	AMR	1.136	1.167	1.136	-2.727	35.756	100%	
2477	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV P Dornala Sub St	303221540102	11KV CHINNADORNALA	Mixed	AMR	0.609	0.556	0.609	8.630	9.688	100%	
2478	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV P Dornala Sub St	303221540103	11KV DORNALA TOWN	Rural	AMR	6.925	6.537	6.925	5.595	29.542	100%	
2479	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV P Dornala Sub St	303221540104	11KV KOTHURU	Mixed	AMR	1.735	1.696	1.735	2.273	36.263	100%	
2480	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV P Dornala Sub St	303221540105	11KV TIMMAPURAM	Mixed	AMR	1.228	1.109	1.228	9.681	67.977	100%	
2481	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Y Cherlopalli Sub	303221540201	11KV CHILAKACHERLA	Mixed	AMR	1.364	1.254	1.364	8.082	70.000	100%	
2482	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Y Cherlopalli Sub	303221540202	11KV NALAGUNTLA	Mixed	AMR	0.776	0.789	0.776	-1.684	59.156	100%	
2483	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Y Cherlopalli Sub	303221540203	11KV Y CHERLOPALLI	Mixed	AMR	0.427	0.398	0.427	6.788	24.751	100%	
2484	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Y Cherlopalli Sub	303221540204	11KV KOTHURU	Mixed	AMR	2.718	2.550	2.718	6.188	20.498	100%	
2485	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Bommalapuram	303221540301	11KV CHINTALA	Mixed	AMR	1.949	1.779	1.949	8.737	79.332	100%	
2486	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Bommalapuram	303221540302	11KV BOMMALAPURAM	Mixed	AMR	2.131	2.030	2.131	4.772	47.464	100%	
2487	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV Bommalapuram	303221540303	11KV CHINNA GUDIPAD	Mixed	AMR	1.301	1.145	1.301	12.040	87.912	100%	
2488	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV R.c.kota Sub stat	303221540401	11KV R C KOTA FEEDER	Mixed	AMR	1.988	1.993	1.988	-0.246	30.869	100%	
2489	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV R.c.kota Sub stat	303221540402	11KV CHINTHALA AGRA	Mixed	AMR	3.087	2.904	3.087	5.911	38.703	100%	
2490	ONGOLE	MARKAPURAM	MARKAPUR	33/11 KV R.c.kota Sub stat	303221540403	11KV CHINNA DORNALA	Mixed	AMR	1.438	1.421	1.438	1.191	27.834	100%	
2491	ONGOLE	MARKAPURAM	MARKAPUR	33/11KV Sattuthanda SubS	303221540501	11KV CHITALA FEEDER	Mixed	AMR	0.305	0.262	0.305	14.221	96.362	100%	
2492	ONGOLE	MARKAPURAM	MARKAPUR	33/11KV Sattuthanda SubS	303221540502	11KV BODE NAIK THAND	Mixed	AMR	1.520	1.422	1.520	6.465	35.420	100%	
2493	ONGOLE	MARKAPURAM	MARKAPUR	33/11KV Korraprolu SubSt	303221540601	11KV PEDDAMANTHANA	Mixed	AMR	0.121	0.109	0.121	9.568	#N/A	100%	
2494	ONGOLE	MARKAPURAM	MARKAPUR	33/11KV Korraprolu SubSt	303221540602	11KV NALLAGUNTLA	Mixed	AMR	0.238	0.218	0.238	8.650	9.903	100%	
2495	ONGOLE	MARKAPURAM	MARKAPUR	33/11KV Korraprolu SubSt	303221540603	11KV CHENCHUKUNTA	Mixed	AMR	0.011	0.009	0.011	19.415	#N/A	100%	
2496	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV P Cheruvu Sub St	303231140101	11KV KAVALAKUNTLA +	Mixed	AMR	2.781	2.493	2.781	10.374	34.163	100%	
2497	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV P Cheruvu Sub St	303231140102	11KV SATHAKODU	Mixed	AMR	0.342	0.238	0.342	30.593	90.000	100%	
2498	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV P Cheruvu Sub St	303231140103	11KV RACHAKONDA+UM	Mixed	AMR	0.599	0.599	0.599	0.070	36.046	100%	
2499	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV P Cheruvu Sub St	303231140104	11KV PULLALACHERUVU	Rural	AMR	1.998	1.934	1.998	3.186	9.157	100%	
2500	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Chapalamadugu	303231140201	11KV PIDIKITIVANIPALLI	Mixed	AMR	2.486	2.084	2.486	16.183	35.706	100%	
2501	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Chapalamadugu	303231140202	11KV KOTHAPALLI+CHA	Mixed	AMR	2.459	1.999	2.459	18.696	32.048	100%	
2502	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Mutukula Sub St	303231140301	11KV MARRIVEMULA +	Mixed	AMR	16.098	12.821	16.098	20.358	68.540	100%	
2503	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Mutukula Sub St	303231140302	11KV MUTUKULA + SETH	Mixed	AMR	0.965	0.876	0.965	9.275	55.849	100%	
2504	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Endrapalli Sub St	303231140401	11KV KOMAROLE	Mixed	AMR	1.943	1.647	1.943	15.273	45.947	100%	
2505	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Endrapalli Sub St	303231140402	11KV MALLAPALEM	Mixed	AMR	3.064	2.502	3.064	18.348	59.433	100%	
2506	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Endrapalli Sub St	303231140403	11KV PRCTHANDA	Mixed	AMR	0.949	0.886	0.949	6.577	52.223	100%	
2507	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV R Ummadivaram	303231140501	11KV R UMMADIVARAM	Mixed	AMR	1.341	0.958	1.341	28.580	38.568	100%	
2508	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV R Ummadivaram	303231140502	11KV R UMMADIVARAM	Mixed	AMR	4.228	3.737	4.228	11.600	44.860	100%	
2509	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Kavalakuntla Sub	303231140601	11KV NAIDUPALEM	Mixed	AMR	1.190	0.993	1.190	16.533	41.674	100%	
2510	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Kavalakuntla Sub	303231140602	11KV TOWN+RURAL	Mixed	AMR	1.814	1.479	1.814	18.471	30.260	100%	
2511	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Marrivemula Sub	303231140701	11KV MARRIVEMULA	Mixed	AMR	2.094	1.607	2.094	23.254	43.505	100%	
2512	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Marrivemula Sub	303231140702	11KV AKKAPALEM + GAJ	Mixed	AMR	3.395	2.781	3.395	18.101	63.723	100%	
2513	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Siddanapalli Sub	303231140801	11KV AYYAGARIPALLI	Mixed	AMR	2.360	1.733	2.360	26.566	74.322	100%	
2514	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Siddanapalli Sub	303231140802	11KV I T VARAM	Mixed	AMR	2.659	2.185	2.659	17.841	51.436	100%	
2515	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Siddanapalli Sub	303231140803	11KV MANEPALLI	Mixed	AMR	1.007	0.890	1.007	11.635	19.198	100%	
2516	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Tripuranthakam	303231240101	11KV KANKANALAPALLI	Mixed	AMR	5.904	5.037	5.904	14.679	29.785	100%	
2517	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Tripuranthakam	303231240102	11KV T CHERLOPALLI	Mixed	AMR	2.093	1.816	2.093	13.221	47.785	100%	
2518	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Tripuranthakam	303231240103	11KV MITTAPALEM	Mixed	AMR	3.267	2.632	3.267	19.449	33.974	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2519	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Tripuranthakam	303231240104	11KV TRIPURANTHAKAN	Rural	AMR	5.847	5.495	5.847	6.025	16.104	100%	
2520	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Kesinenipalli Sub	303231240201	11KV KESINENIPALLI	Mixed	AMR	0.816	0.843	0.816	-3.300	22.114	100%	
2521	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Kesinenipalli Sub	303231240203	11KV RWS	Rural	AMR	0.697	0.979	0.697	-40.509	-40.509	100%	
2522	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Kesinenipalli Sub	303231240204	11KV NADIGADDA	Agricultura	AMR	2.268	3.314	2.268	-46.131	88.007	100%	
2523	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Kesinenipalli Sub	303231240205	11KV TANGIRALAPALLI +	Mixed	AMR	1.150	0.733	1.150	36.284	61.873	100%	
2524	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Dupadu Sub Stat	303231240301	11KV DUPADU TOWN +	Mixed	AMR	3.672	2.877	3.672	21.642	40.741	100%	
2525	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Dupadu Sub Stat	303231240302	11KV HASANAPURAM	Mixed	AMR	0.265	0.308	0.265	-15.993	30.911	100%	
2526	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Dupadu Sub Stat	303231240303	11KV VELLAMPALLI	Mixed	AMR	1.042	0.878	1.042	15.770	32.303	100%	
2527	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Gamapavaram Su	303231240401	11KV GANAPAVARAM +	Mixed	AMR	4.214	3.623	4.214	14.017	20.250	100%	
2528	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Gamapavaram Su	303231240402	11KV ENDURIVARIPALEN	Mixed	AMR	2.666	2.311	2.666	13.302	22.487	100%	
2529	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Medapi Sub Stati	303231240501	11KV MEDAPI TOWN + A	Mixed	AMR	5.084	4.514	5.084	11.225	18.267	100%	
2530	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Medapi Sub Stati	303231240502	11KV G UMMADIVARAM	Mixed	AMR	2.243	1.888	2.243	15.812	37.084	100%	
2531	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Medapi Sub Stati	303231240503	11KV VENGAYAPALEM	Mixed	AMR	2.762	2.324	2.762	15.876	52.688	100%	
2532	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Lellapalli Sub sta	303231240701	11KV LELLAPALLI + VISW	Mixed	AMR	4.068	3.637	4.068	10.608	36.136	100%	
2533	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Lellapalli Sub sta	303231240702	11KV DUVVALI	Mixed	AMR	0.217	0.210	0.217	2.947	29.752	100%	
2534	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV SOMEPALLI SS	303231240801	11KV SOMEPALLI	Mixed	AMR	3.169	2.631	3.169	16.965	32.046	100%	
2535	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV SOMEPALLI SS	303231240802	11KV GANDHI NAGAR	Mixed	AMR	3.193	2.772	3.193	13.172	28.562	100%	
2536	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV NADIGADDA SS	303231240901	11KV NADIGADDA RURA	Mixed	AMR	1.717	1.525	1.717	11.165	18.742	100%	
2537	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV NADIGADDA SS	303231240902	11KV DUVVALERU	Mixed	AMR	2.029	1.799	2.029	11.339	71.636	100%	
2538	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV NADIGADDA SS	303231240903	11KV RWS	Rural	AMR	0.574	0.663	0.574	-15.546	99.917	100%	
2539	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Viswnadhapuram	303231241002	11KV VELLAMPALLI	Mixed	AMR	2.618	2.057	2.618	21.419	31.155	100%	
2540	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Viswnadhapuram	303231241003	11KV VISWANADHAPUR	Mixed	AMR	0.360	0.333	0.360	7.476	66.642	100%	
2541	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Y Palem Sub Stat	303231340101	11KV BOYALAPALLI	Mixed	AMR	2.319	2.231	2.319	3.809	23.731	100%	
2542	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Y Palem Sub Stat	303231340102	11KV KOMAROLU + CHA	Mixed	AMR	0.576	0.533	0.576	7.484	72.090	100%	
2543	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Y Palem Sub Stat	303231340103	11KV PANDIVANIPALLI	Mixed	AMR	1.548	1.452	1.548	6.198	48.343	100%	
2544	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Y Palem Sub Stat	303231340104	11KV Y PALEM TOWN	Rural	AMR	6.750	6.606	6.750	2.135	31.430	100%	
2545	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Ayyambotlapalli	303231340401	11KV AYYAMBOTLAPALL	Mixed	AMR	3.110	2.960	3.110	4.836	14.420	100%	
2546	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Ayyambotlapalli	303231340402	11KV AYYAMBOTLAPALL	Mixed	AMR	1.222	1.232	1.222	-0.828	14.411	100%	
2547	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Kolukula Sub Sta	303231340501	11KV P KOLUKULA	Mixed	AMR	0.011	0.006	0.011	43.670	59.100	100%	
2548	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Kolukula Sub Sta	303231340502	11KV SAIBABANAGAR + (	Mixed	AMR	2.091	1.878	2.091	10.180	53.976	100%	
2549	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Kolukula Sub Sta	303231340503	11KV CH KOLUKULA	Mixed	AMR	4.188	3.644	4.188	12.998	34.572	100%	
2550	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV AG Padu Sub Stat	303231340601	11KV GANGABODU	Agricultura	AMR	1.926	2.117	1.926	-9.880	25.625	100%	
2551	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV AG Padu Sub Stat	303231340603	11KV VADDULAVAGU+G	Agricultura	AMR	1.505	1.653	1.505	-9.851	9.863	100%	
2552	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV AG Padu Sub Stat	303231340604	11KV GANGUPALLI	Mixed	AMR	0.728	0.693	0.728	4.798	32.462	100%	
2553	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Boyalapalli Sub S	303231340701	11KV BOYALAPALLI RUR	Mixed	AMR	3.046	2.902	3.046	4.724	13.100	100%	
2554	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Boyalapalli Sub S	303231340702	11KV BOYALAPALLI + SA	Mixed	AMR	1.124	1.069	1.124	4.955	37.999	100%	
2555	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Veerabadhrapura	303231340801	11KV VEERABADRAPURA	Mixed	AMR	0.679	0.332	0.679	51.087	70.923	100%	
2556	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Veerabadhrapura	303231340802	11KV VEERABADRAPURA	Mixed	AMR	1.671	1.486	1.671	11.057	41.118	100%	
2557	ONGOLE	MARKAPURAM	Y.PALEM	33/11KV Venkatadri palem	303231340901	11KV ANKAMMAGUDEN	Mixed	AMR	0.342	0.289	0.342	15.383	73.536	100%	
2558	ONGOLE	MARKAPURAM	Y.PALEM	33/11KV Venkatadri palem	303231340902	11KV V T PALEM	Rural	AMR	0.344	0.288	0.344	16.299	42.618	100%	
2559	ONGOLE	MARKAPURAM	Y.PALEM	33/11KV Venkatadri palem	303231340903	11KV SANGAM THANDA	Mixed	AMR	1.373	1.134	1.373	17.437	85.185	100%	
2560	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Ganjivaripalli SS	303231341001	11KV CHENNUPALLI	Mixed	AMR	1.135	1.032	1.135	9.096	56.019	100%	
2561	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Ganjivaripalli SS	303231341002	11KV GANJIVARIPALLI R	Mixed	AMR	0.555	0.533	0.555	3.844	78.636	100%	
2562	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Ganjivaripalli SS	303231341003	11KV GANJIVARIPALLI-T	Rural	AMR	0.174	0.096	0.174	44.657	62.847	100%	
2563	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Millampalli Sub S	303231341101	11KV Y PALEM TOWN 2	Rural	AMR	4.674	4.530	4.674	3.093	13.067	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2564	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Millampalli Sub S	303231341102	11KV PANDIVANIPALLI R	Mixed	AMR	0.978	0.903	0.978	7.592	98.926	100%	
2565	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Millampalli Sub S	303231341103	11KV MURARIPALLI	Mixed	AMR	1.510	1.377	1.510	8.819	9.026	100%	
2566	ONGOLE	MARKAPURAM	Y.PALEM	33/11 KV Millampalli Sub S	303231341104	11KV METTABODU THAI	Mixed	AMR	0.780	0.703	0.780	9.892	76.312	100%	
2567	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Giddalur Sub Sta	303241140103	11KV TOWN 1	Urban	AMR	4.704	4.569	4.704	2.881	10.213	100%	
2568	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Giddalur Sub Sta	303241140105	11KV TOWN 3	Urban	AMR	7.017	6.826	7.017	2.719	7.487	100%	
2569	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Giddalur Sub Sta	303241140106	11KV TOWN 4	Urban	AMR	1.306	1.264	1.306	3.186	6.120	100%	
2570	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV P.R.COLONY SS	303241140201	11KV URBAN COLONY	Urban	AMR	4.065	3.944	4.065	2.988	11.025	100%	
2571	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV P.R.COLONY SS	303241140202	11KV PR COLONY	Urban	AMR	0.584	0.540	0.584	7.487	24.268	100%	
2572	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV P.R.COLONY SS	303241140203	11KV MODAM PALLI K B	Mixed	AMR	3.112	2.524	3.112	18.896	48.402	100%	
2573	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV AMBAVARAM SS	303241140301	11KV AMBAVARAM TOV	Rural	AMR	1.144	0.876	1.144	23.375	44.156	100%	
2574	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV AMBAVARAM SS	303241140302	11KV AMBAVARAM RUR	Mixed	AMR	2.241	1.997	2.241	10.898	51.593	100%	
2575	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV AMBAVARAM SS	303241140303	11KV V R PALLI	Mixed	AMR	4.027	3.471	4.027	13.807	46.746	100%	
2576	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV Podalakuntapalli	303241140401	11KV PODALAKUNTA PA	Mixed	AMR	2.805	2.022	2.805	27.916	46.030	100%	
2577	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV Podalakuntapalli	303241140402	11KV THAMBALLAPALLI	Mixed	AMR	0.601	0.410	0.601	31.702	71.426	100%	
2578	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV Podalakuntapalli	303241140403	11KV TRIPURAPURAM F	Mixed	AMR	1.814	1.432	1.814	21.084	57.020	100%	
2579	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV Kothapalli (MARK	303241140501	11KV KOTHAPALLI	Rural	AMR	0.666	0.552	0.666	17.022	37.107	100%	
2580	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV Kothapalli (MARK	303241140502	11KV LIC OFFICE FEEDER	Urban	AMR	3.776	3.660	3.776	3.073	4.288	100%	
2581	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV Kothapalli (MARK	303241140503	11KV NALLABANDA BAZ	Urban	AMR	3.921	3.727	3.921	4.943	16.031	100%	
2582	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV Kothapalli (MARK	303241140504	11KV TIMMAPURAM RU	Mixed	AMR	0.949	0.850	0.949	10.460	31.178	100%	
2583	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Komarolu Sub Sta	303241240101	11KV CHINTALAPALLI	Mixed	AMR	2.122	1.859	2.122	12.425	28.063	100%	
2584	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Komarolu Sub Sta	303241240102	11KV KOMAROLE TOWN	Rural	AMR	4.809	4.516	4.809	6.093	21.680	100%	
2585	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Komarolu Sub Sta	303241240103	11KV SURAVARIPALLI KC	Mixed	AMR	2.172	2.007	2.172	7.574	52.213	100%	
2586	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Taticherla Motu	303241240201	11KV NALLAGATLA	Mixed	AMR	1.007	0.916	1.007	8.957	36.814	100%	
2587	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Taticherla Motu	303241240202	11KV THATICHERLA RUR	Mixed	AMR	0.575	0.533	0.575	7.287	62.813	100%	
2588	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Taticherla Motu	303241240203	11KV thaticherla town	Rural	AMR	0.599	0.577	0.599	3.744	49.269	100%	
2589	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Taticherla Motu	303241240204	11KV NAGIREDDYPALLI	Mixed	AMR	1.566	1.361	1.566	13.105	44.958	100%	
2590	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Reddycherla Sub	303241240301	11KV REDDYCHERLA TOV	Rural	AMR	0.580	0.266	0.580	54.154	60.751	100%	
2591	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Reddycherla Sub	303241240302	11KV MALLAREDDYPALL	Mixed	AMR	1.309	1.115	1.309	14.793	64.074	100%	
2592	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Reddycherla Sub	303241240303	11KV MULAPALLI	Mixed	AMR	0.530	0.493	0.530	7.117	24.468	100%	
2593	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Reddycherla Sub	303241240304	11KV Allinagaram	Mixed	AMR	1.231	1.179	1.231	4.190	84.512	100%	
2594	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KVRajupalem Sub St	303241240401	11KV DWARAKACHERLA	Mixed	AMR	0.664	0.543	0.664	18.187	30.931	100%	
2595	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KVRajupalem Sub St	303241240402	11KV MUKTAPURAM RA	Mixed	AMR	2.004	1.892	2.004	5.567	39.589	100%	
2596	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV ALLI NAGAR SS	303241240501	11KV ALLINAGARAM FEE	Mixed	AMR	1.352	1.197	1.352	11.407	44.557	100%	
2597	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV ALLI NAGAR SS	303241240502	11KV VOTTIVEPAMANIP	Mixed	AMR	0.413	0.366	0.413	11.281	73.789	100%	
2598	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV ALLI NAGAR SS	303241240503	11KV YERRAGUNTLA FEE	Mixed	AMR	0.712	0.622	0.712	12.621	89.537	100%	
2599	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV NALLAGUNTLA SS	303241240601	11KV KATHULAVANIPAL	Rural	AMR	0.111	0.039	0.111	64.903	79.698	100%	
2600	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV NALLAGUNTLA SS	303241240602	11KV BONTHAPALLI FEE	Mixed	AMR	0.977	0.923	0.977	5.551	46.493	100%	
2601	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Racherla Sub Sta	303241340101	11KV ANUMALAVEEDU	Mixed	AMR	1.739	1.663	1.739	4.333	42.847	100%	
2602	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Racherla Sub Sta	303241340102	11KV J P CHERUVU+ANU	Mixed	AMR	1.131	1.035	1.131	8.440	26.342	100%	
2603	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Racherla Sub Sta	303241340103	11KV RACHARLA TOWN	Rural	AMR	1.582	1.526	1.582	3.516	27.835	100%	
2604	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Racherla Sub Sta	303241340104	11KV ANUMALAPALLE R	Mixed	AMR	0.748	0.733	0.748	2.050	29.404	100%	
2605	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Akaveedu Sub St	303241340201	11KV AKAVEEDUTOWN+	Mixed	AMR	2.533	2.472	2.533	2.395	23.271	100%	
2606	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Akaveedu Sub St	303241340202	11KV CHOLAVEEDU	Mixed	AMR	2.584	2.425	2.584	6.162	30.230	100%	
2607	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Akaveedu Sub St	303241340203	11KV ARAVEETI KOTA	Mixed	AMR	1.040	0.985	1.040	5.275	25.167	100%	
2608	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Anumalaveedu S	303241340301	11KV ANUMALAVEEDU	Mixed	AMR	1.306	1.177	1.306	9.818	36.612	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2609	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Anumalaveedu S	303241340302	11KV VODDULAVAGUPA	Mixed	AMR	1.239	1.176	1.239	5.124	28.406	100%	
2610	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Anumalaveedu S	303241340303	11KV RAMAPURAM FEE	Mixed	AMR	1.364	0.996	1.364	26.988	41.435	100%	
2611	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV J.P.CHERUVU SS	303241340401	11KV J P CHERUVU	Mixed	AMR	2.097	1.923	2.097	8.299	22.104	100%	
2612	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV J.P.CHERUVU SS	303241340402	11KV Chinagani Palli Ch	Mixed	AMR	2.383	2.220	2.383	6.857	54.042	100%	
2613	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV Yadavalli SS	303241340501	11KV YADAVALLI FEEDEF	Mixed	AMR	0.878	0.772	0.878	12.081	32.933	100%	
2614	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV Yadavalli SS	303241340502	11KV G KOTHAPALLI FEE	Mixed	AMR	1.163	1.066	1.163	8.328	44.376	100%	
2615	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV Yadavalli SS	303241340503	11KV RANGA REDDYPAL	Mixed	AMR	0.937	0.793	0.937	15.316	54.587	100%	
2616	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Mundlapadu Sub	303241440101	11KV BURUJUPALLI	Mixed	AMR	0.719	0.665	0.719	7.598	57.403	100%	
2617	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Mundlapadu Sub	303241440102	11KV KOTHA KOTA FEED	Mixed	AMR	0.561	0.520	0.561	7.313	34.458	100%	
2618	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Mundlapadu Sub	303241440103	11KV MUNDLAPADU RU	Mixed	AMR	0.962	0.886	0.962	7.894	44.630	100%	
2619	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Mundlapadu Sub	303241440104	11KV MUNDLAPADU TO	Rural	AMR	1.647	1.628	1.647	1.153	23.721	100%	
2620	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV SR Peta Sub Stati	303241440201	11KV KOMMUNOOR DO	Mixed	AMR	1.910	1.826	1.910	4.418	44.151	100%	
2621	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV SR Peta Sub Stati	303241440202	11KV PRASADSEEDS PVT	INDL	AMR	0.344	0.338	0.344	1.727	1.951	100%	
2622	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV SR Peta Sub Stati	303241440203	11KV SRPETA RURAL GA	Mixed	AMR	1.887	1.725	1.887	8.574	32.314	100%	
2623	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV KS Palli Sub Stati	303241440301	11KV KANCHIPALLI FEED	Mixed	AMR	1.448	1.381	1.448	4.568	54.201	100%	
2624	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV KS Palli Sub Stati	303241440302	11KV K S PALLI TOWN	Rural	AMR	1.596	1.567	1.596	1.811	33.746	100%	
2625	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV KS Palli Sub Stati	303241440303	11KV PAMULAPALLI	Mixed	AMR	0.853	0.788	0.853	7.616	70.831	100%	
2626	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV KS Palli Sub Stati	303241440304	11KV DIGUVAMETTA FE	Mixed	AMR	1.230	1.142	1.230	7.198	35.935	100%	
2627	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Uyyalawada Sub	303241440401	11KV AUDIMURTHYPALL	Mixed	AMR	2.506	2.236	2.506	10.775	49.643	100%	
2628	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Uyyalawada Sub	303241440402	11KV UYYALAWADA TO\	Mixed	AMR	0.863	0.775	0.863	10.165	26.642	100%	
2629	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Kunchepalli Sub S	303241440501	11KV VENKATAPURAM F	Mixed	AMR	1.975	1.800	1.975	8.867	45.762	100%	
2630	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Kunchepalli Sub S	303241440502	11KV KANCHIPALLI TOW	Rural	AMR	0.768	0.715	0.768	6.881	57.304	100%	
2631	ONGOLE	MARKAPURAM	GIDDALUR	33/11 KV Kunchepalli Sub S	303241440503	11KV RAJUPETA	Mixed	AMR	7.670	5.461	7.670	28.793	51.513	100%	
2632	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV BURUJU PALLI SS	303241440601	11KV BURUJU PALLI FEE	Rural	AMR	0.378	0.356	0.378	5.874	38.107	100%	
2633	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV BURUJU PALLI SS	303241440602	11KV BURUJU PALLI THA	Mixed	AMR	0.097	0.176	0.097	-80.369	72.392	100%	
2634	ONGOLE	MARKAPURAM	GIDDALUR	33/11KV BURUJU PALLI SS	303241440603	11KV KOTHAKOTA FEED	Rural	AMR	0.208	0.198	0.208	4.761	36.279	100%	
2635	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Hospital SS Sub S	303311140101	11KV KALAKSHETRAM	Urban	AMR	0.837	0.811	0.837	3.113	16.291	100%	
2636	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Hospital SS Sub S	303311140102	11KV TRUNK ROAD	Urban	AMR	3.181	3.104	3.181	2.432	4.128	100%	
2637	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Hospital SS Sub S	303311140103	11KV MUNICIPAL	Urban	AMR	7.288	7.043	7.288	3.355	7.273	100%	
2638	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Hospital SS Sub S	303311140104	11KV PRAKASAM BHAVA	Urban	AMR	0.526	0.509	0.526	3.266	81.902	100%	
2639	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Hospital SS Sub S	303311140105	11KV ENUGUCHETTU	Urban	AMR	5.525	5.345	5.525	3.270	4.091	100%	
2640	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Market Yard Sub	303311140201	11KV 60 FEET ROAD	Urban	AMR	4.817	4.689	4.817	2.647	3.425	100%	
2641	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Market Yard Sub	303311140202	11KV ADDANKI BUS STA	Urban	AMR	6.298	6.089	6.298	3.330	3.378	100%	
2642	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Market Yard Sub	303311140203	11KV LAWERPET	Urban	AMR	4.578	4.380	4.578	4.331	5.454	100%	
2643	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Market Yard Sub	303311140204	11KV VIP ROAD	Urban	AMR	5.877	5.596	5.877	4.795	5.683	100%	
2644	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Market Yard Sub	303311140205	11KV SRIGIRI	Urban	AMR	7.361	7.103	7.361	3.504	5.556	100%	
2645	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Market Yard Sub	303311140206	11KV FILTERBED	Urban	AMR	1.296	1.232	1.296	4.970	19.379	100%	
2646	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Ram Nagar Sub S	303311240201	11KV BALAJI NAGAR	Urban	AMR	6.293	6.067	6.293	3.588	6.976	100%	
2647	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Ram Nagar Sub S	303311240202	11KV BHAGYA NAGAR	Urban	AMR	3.447	3.301	3.447	4.218	5.283	100%	
2648	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Ram Nagar Sub S	303311240203	11KV KMS	Urban	AMR	2.644	2.581	2.644	2.384	4.685	100%	
2649	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Ram Nagar Sub S	303311240204	11KV RAM NAGAR	Urban	AMR	3.023	2.945	3.023	2.599	8.769	100%	
2650	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Ram Nagar Sub S	303311240205	11KV SANTHAPETA	Urban	AMR	6.476	6.333	6.476	2.204	2.006	100%	
2651	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV RIMS SS	303311240301	11KV Ambedkar Nagar	Urban	AMR	4.394	4.195	4.394	4.514	3.307	100%	
2652	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV RIMS SS	303311240302	11KV NAVODAYA	Urban	AMR	0.326	0.311	0.326	4.404	4.715	100%	
2653	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV RIMS SS	303311240303	11KV RIMS	Urban	AMR	3.082	2.984	3.082	3.173	20.680	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2654	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV RIMS SS	303311240304	11KV Sangamitra	Urban	AMR	3.618	3.492	3.618	3.467	6.642	100%	
2655	ONGOLE	ONGOLE	ONGOLETOWN	33/11KV Govt Office Comp	303311240501	11KV Seetharamapuram	Urban	AMR	1.783	1.705	1.783	4.360	6.154	100%	
2656	ONGOLE	ONGOLE	ONGOLETOWN	33/11KV Govt Office Comp	303311240502	11KV CRP FEEDER	Urban	AMR	5.139	4.948	5.139	3.721	5.589	100%	
2657	ONGOLE	ONGOLE	ONGOLETOWN	33/11KV Govt Office Comp	303311240503	11KV LIC FEEDER	Urban	AMR	4.929	4.746	4.929	3.726	3.879	100%	
2658	ONGOLE	ONGOLE	ONGOLETOWN	33/11KV Govt Office Comp	303311240504	11KV CLOUGHPET FEEDE	Urban	AMR	5.386	5.228	5.386	2.940	5.212	100%	
2659	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Balaji nagar(Rajiv	303311240601	11KV FCI FEEDER	Urban	AMR	5.105	4.706	5.105	7.817	8.853	100%	
2660	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Balaji nagar(Rajiv	303311240602	11KV N S AGRAHARAM F	Urban	AMR	0.349	0.330	0.349	5.586	9.076	100%	
2661	ONGOLE	ONGOLE	ONGOLETOWN	33/11KV GADDALAGUNTA	303311240701	11KV HOUSING BOARD	Urban	AMR	3.010	2.941	3.010	2.298	4.999	100%	
2662	ONGOLE	ONGOLE	ONGOLETOWN	33/11KV GADDALAGUNTA	303311240702	11KV MODEL TOWN	Urban	AMR	2.471	2.394	2.471	3.117	3.687	100%	
2663	ONGOLE	ONGOLE	ONGOLETOWN	33/11KV GADDALAGUNTA	303311240703	11KV SS TANK-1	Urban	AMR	0.219	0.211	0.219	3.553	20.983	100%	
2664	ONGOLE	ONGOLE	ONGOLETOWN	33/11KV GADDALAGUNTA	303311240704	11KV MAMIDIPALEM	Urban	AMR	2.209	2.103	2.209	4.780	5.245	100%	
2665	ONGOLE	ONGOLE	ONGOLETOWN	33/11KV GADDALAGUNTA	303311240705	11KV GADDALAGUNTA	Urban	AMR	4.719	4.564	4.719	3.291	5.026	100%	
2666	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Pernamitta Sub S	303311340101	11KV INDUSTRIAL	Urban	AMR	7.438	7.124	7.438	4.223	4.581	100%	
2667	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Pernamitta Sub S	303311340102	11KV Prathibha College	Urban	AMR	1.710	1.670	1.710	2.342	3.919	100%	
2668	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Pernamitta Sub S	303311340103	11KV EENADU	Urban	AMR	4.101	3.642	4.101	11.195	12.116	100%	
2669	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Pernamitta Sub S	303311340104	11KV PERNAMITTA TOW	Urban	AMR	3.332	3.107	3.332	6.770	3.856	100%	
2670	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV District Stores Su	303311340201	11KV KURNOOL ROAD	Urban	AMR	4.681	4.544	4.681	2.929	4.314	100%	
2671	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV District Stores Su	303311340202	11KV LAMBADIDONKA	Urban	AMR	1.439	1.406	1.439	2.248	3.421	100%	
2672	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV District Stores Su	303311340203	11KV NIRMAL NAGAR	Urban	AMR	3.642	3.442	3.642	5.475	5.994	100%	
2673	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV District Stores Su	303311340204	11KV BRUNDAVAN NAG	Urban	AMR	5.914	5.600	5.914	5.304	5.602	100%	
2674	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV District Stores Su	303311340205	11KV RTC	Urban	AMR	1.862	1.795	1.862	3.557	3.936	100%	
2675	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV District Stores Su	303311340206	11KV SATYANARAYANA	Urban	AMR	7.294	7.079	7.294	2.948	4.119	100%	
2676	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV District Stores Su	303311340207	11KV SUNDARAIAHBHAV	Urban	AMR	3.498	3.394	3.498	2.985	4.714	100%	
2677	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV District Stores Su	303311340208	11KV WOOD COMPLEX	Urban	AMR	6.193	5.993	6.193	3.228	4.562	100%	
2678	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Police Quarters S	303311340301	11KV SONIAGANDHI NA	Urban	AMR	3.136	3.015	3.136	3.874	4.174	100%	
2679	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Police Quarters S	303311340302	11KV POLICE QUARTERS	Urban	AMR	0.509	0.494	0.509	2.903	15.503	100%	
2680	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Police Quarters S	303311340303	11KV SRINAGAR	Urban	AMR	8.757	8.419	8.757	3.867	4.057	100%	
2681	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Police Quarters S	303311340304	11KV SUJATHA NAGAR	Urban	AMR	4.033	3.901	4.033	3.272	4.731	100%	
2682	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Gaddalakunta SS	303311340401	11KV ZP colony	Urban	AMR	6.555	6.343	6.555	3.225	3.625	100%	
2683	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Gaddalakunta SS	303311340402	11KV SIVAJINAGAR	Urban	AMR	4.373	4.297	4.373	1.744	2.283	100%	
2684	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Gaddalakunta SS	303311340403	11KV SOUTH BYPASS	Urban	AMR	2.845	2.770	2.845	2.635	9.193	100%	
2685	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Gaddalakunta SS	303311340404	11KV RAJIVNAGAR	Urban	AMR	6.462	6.251	6.462	3.260	3.616	100%	
2686	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV SS MILK DAIRY	303311340501	11KV DWARAKA NAGAR	Urban	AMR	3.238	3.119	3.238	3.661	5.714	100%	
2687	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV SS MILK DAIRY	303311340503	11KV PEERLAMANYAM	Urban	AMR	5.983	5.756	5.983	3.807	5.218	100%	
2688	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV SS MILK DAIRY	303311340504	11KV SAMATHA NAGAR	Urban	AMR	3.407	3.273	3.407	3.939	4.606	100%	
2689	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV North SS Sub Sta	303311440101	11KV BAPUJI MARKET C	Urban	AMR	6.281	6.229	6.281	0.817	1.816	100%	
2690	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV North SS Sub Sta	303311440102	11KV GOPAL NAGAR	Urban	AMR	5.494	5.383	5.494	2.028	2.765	100%	
2691	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV North SS Sub Sta	303311440103	11KV ISLAMPET	Urban	AMR	6.751	6.467	6.751	4.207	4.207	100%	
2692	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV North SS Sub Sta	303311440104	11KV KP BUS STAND	Urban	AMR	5.417	5.305	5.417	2.073	2.757	100%	
2693	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV North SS Sub Sta	303311440105	11KV KAMMAPALEM	Urban	AMR	0.529	0.516	0.529	2.514	2.485	100%	
2694	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV North SS Sub Sta	303311440106	11KV STORE BAZAR	Urban	AMR	2.152	2.040	2.152	5.203	6.395	100%	
2695	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV North SS Sub Sta	303311440107	11KV AMC FEEDER	Urban	AMR	5.619	5.617	5.619	0.047	0.442	100%	
2696	ONGOLE	ONGOLE	ONGOLETOWN	33/11KV Karavadi Donka(K	303311440201	11KV NTR STATUE	Urban	AMR	1.677	1.619	1.677	3.465	2.778	100%	
2697	ONGOLE	ONGOLE	ONGOLETOWN	33/11KV Karavadi Donka(K	303311440202	11KV INDURTHI NAGAR	Urban	AMR	5.052	4.978	5.052	1.445	2.585	100%	
2698	ONGOLE	ONGOLE	ONGOLERURAL II	33/11KV Karavadi Donka(K	303311440203	11KV KOPPOLU	Urban	AMR	0.132	0.120	0.132	9.200	17.428	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2699	ONGOLE	ONGOLE	ONGOLETOWN	33/11KV Karavadi Donka(K	303311440204	11KV KESAVARAJU KUNT	Urban	AMR	3.453	3.375	3.453	2.261	4.178	100%	
2700	ONGOLE	ONGOLE	ONGOLETOWN	33/11KV Karavadi Donka(K	303311440205	11KV RANGUTHOTA	Urban	AMR	2.732	2.658	2.732	2.737	3.439	100%	
2701	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV SN Padu Sub Stat	303321140101	11KV INDUSTRIAL	INDL	AMR	7.652	7.150	7.652	6.566	7.316	100%	
2702	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV SN Padu Sub Stat	303321140102	11KV P GUDIPADU	Mixed	AMR	4.437	4.065	4.437	8.368	9.250	100%	
2703	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV SN Padu Sub Stat	303321140103	11KV S N PADU TOWN	Rural	AMR	5.465	5.219	5.465	4.505	12.146	100%	
2704	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Endluru Donka Su	303321140201	11KV ENDLURU TOWN	Rural	AMR	0.798	0.731	0.798	8.433	15.195	100%	
2705	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Endluru Donka Su	303321140202	11KV AMBEDKAR NAGAI	Rural	AMR	1.721	1.490	1.721	13.407	18.147	100%	
2706	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Endluru Donka Su	303321140203	11KV ENDLURU INDL	Rural	AMR	2.634	2.439	2.634	7.403	9.954	100%	
2707	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Endluru Donka Su	303321140204	11KV MYNAMPADU	Mixed	AMR	2.488	2.212	2.488	11.077	16.331	100%	
2708	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Mungamur Sub S	303321140301	11KV Asramam	Rural	AMR	1.594	1.486	1.594	6.786	8.457	100%	
2709	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Mungamur Sub S	303321140302	11KV MANGAMUR TOW	Rural	AMR	1.689	1.753	1.689	-3.781	15.674	100%	
2710	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Chilakapadu SS	303321140401	11KV CHILAKAPADU	Mixed	AMR	1.057	0.888	1.057	16.045	11.737	100%	
2711	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Chilakapadu SS	303321140402	11KV P THAKKELLAPADU	Mixed	AMR	2.522	2.301	2.522	8.757	13.143	100%	
2712	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Chilakapadu SS	303321140403	11KV MADDULURU	Mixed	AMR	2.160	1.942	2.160	10.094	16.210	100%	
2713	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Chilakapadu SS	303321140404	11KV ENIKAPADU	Rural	AMR	0.037	0.031	0.037	15.528	92.433	100%	
2714	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Chimakurthy Sub	303321240101	11KV GONUGUNTA	Mixed	AMR	3.956	3.541	3.956	10.498	12.891	100%	
2715	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Chimakurthy Sub	303321240102	11KV INDUSTRIAL	Urban	AMR	16.111	15.705	16.111	2.521	4.938	100%	
2716	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Chimakurthy Sub	303321240103	11KV NSP	Urban	AMR	8.651	8.394	8.651	2.967	0.758	100%	
2717	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Chimakurthy Sub	303321240104	11KV SURYA NAGAR	Urban	AMR	11.014	10.559	11.014	4.134	5.227	100%	
2718	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Pallamalli Sub Sta	303321240201	11KV Nekunambad	Mixed	AMR	1.019	0.957	1.019	6.138	23.154	100%	
2719	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Pallamalli Sub Sta	303321240202	11KV PALLAMALLI TOWI	Rural	AMR	1.821	1.628	1.821	10.559	8.130	100%	
2720	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Pallamalli Sub Sta	303321240203	11KV PALLAMALLI AGL	Mixed	AMR	0.856	0.754	0.856	11.970	27.290	100%	
2721	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Pallamalli Sub Sta	303321240204	11KV Gadipathrivaripale	Mixed	AMR	2.450	2.078	2.450	15.171	11.384	100%	
2722	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Pallamalli Sub Sta	303321240205	11KV PATIMEEDIPALEM	Mixed	AMR	1.888	1.669	1.888	11.576	16.628	100%	
2723	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV P.NAIDUPALEM S	303321240301	11KV P N PALEM	Mixed	AMR	4.138	3.373	4.138	18.467	18.428	100%	
2724	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV P.NAIDUPALEM S	303321240302	11KV Pallamalli Indl	INDL	AMR	1.061	0.841	1.061	20.756	15.783	100%	
2725	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV P.NAIDUPALEM S	303321240303	11KV BANDLAMUDI	Mixed	AMR	3.817	3.288	3.817	13.871	22.295	100%	
2726	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV CHIMAKURTHY N	303321240401	11KV CHIMAKURTHY TO	Urban	AMR	8.770	8.551	8.770	2.493	5.342	100%	
2727	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV CHIMAKURTHY N	303321240402	11KV CHIMKURTHY INDI	INDL	AMR	16.628	16.858	16.628	-1.383	1.052	100%	
2728	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV CHIMAKURTHY N	303321240403	11KV CHIMAKURTHY AG	Mixed	AMR	0.674	0.632	0.674	6.292	34.682	100%	
2729	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV CHIMAKURTHY N	303321240404	11KV GLOBAL INDUSTRI/	INDL	AMR	15.195	14.479	15.195	4.718	4.556	100%	
2730	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Maddipadu Sub S	303321340101	11KV INAMANAMELLUR	Mixed	AMR	2.973	2.784	2.973	6.381	8.844	100%	
2731	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Maddipadu Sub S	303321340102	11KV INDUSTRIAL	Rural	AMR	6.200	6.003	6.200	3.170	5.086	100%	
2732	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Maddipadu Sub S	303321340103	11KV MADDIPADU TOW	Rural	AMR	5.211	4.896	5.211	6.045	13.071	100%	
2733	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Maddipadu Sub S	303321340104	11KV PEDAKOTHAPALLI	Mixed	AMR	4.449	4.198	4.449	5.641	16.881	100%	
2734	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Maddipadu Sub S	303321340105	11KV VELLAMPALLI	Mixed	AMR	3.830	3.587	3.830	6.324	11.117	100%	
2735	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Doddavaram Sub	303321340201	11KV DODDAVARAMTO'	Rural	AMR	1.875	2.020	1.875	-7.684	-6.036	100%	
2736	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Doddavaram Sub	303321340202	11KV ILAPAVULURU	Mixed	AMR	1.198	1.186	1.198	0.949	7.230	100%	
2737	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Doddavaram Sub	303321340203	11KV GADIAPUDI	Mixed	AMR	0.904	0.904	0.904	-0.001	-0.001	100%	
2738	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Doddavaram Sub	303321340204	11KV T SANDRAPADU	Mixed	AMR	0.783	0.833	0.783	-6.360	0.789	100%	
2739	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV MADDIPADU NO	303321340301	11KV INDL FEEDER II	INDL	AMR	6.493	8.936	6.493	-37.636	-36.592	100%	
2740	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV MADDIPADU NO	303321340302	11KV INDL FEEDER III	INDL	AMR	4.057	4.303	4.057	-6.053	-6.053	100%	
2741	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV MADDIPADU NO	303321340303	11KV INDL FEEDER IV	INDL	AMR	7.835	9.297	7.835	-18.668	-18.668	100%	
2742	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV MADDIPADU NO	303321340304	11KV INDL FEEDER VI	Rural	AMR	1.296	1.991	1.296	-53.690	90.079	100%	
2743	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV SS Gullapalli Grov	303321340401	11KV STAR GALAXY FEEI	INDL	AMR	3.947	3.628	3.947	8.073	8.091	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2744	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV SS Gullapalli Grov	303321340402	11KV PRIYANKA FEEDER	INDL	AMR	2.957	3.127	2.957	-5.725	-5.725	100%	
2745	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV SS Gullapalli Grov	303321340403	11KV HARICHARAN FEEI	INDL	AMR	10.719	10.871	10.719	-1.422	-1.392	100%	
2746	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV SS Gullapalli Grov	303321340404	11KV BP SEZ FEEDER	INDL	AMR	9.239	9.192	9.239	0.507	0.507	100%	
2747	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Marrichetla Pale	303321440101	11KV BUDHAVADA INDU	Rural	AMR	11.491	18.478	11.491	-60.799	-60.799	100%	
2748	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Marrichetla Pale	303321440102	11KV BUSARAPALLI	Mixed	AMR	5.907	4.944	5.907	16.313	16.818	100%	
2749	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Marrichetla Pale	303321440103	11KV M CH PALEMINDU	Rural	AMR	12.683	16.179	12.683	-27.568	-27.568	100%	
2750	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Marrichetla Pale	303321440104	11KV INDUSTRIAL EXPRI	INDL	AMR	13.001	15.073	13.001	-15.936	-15.936	100%	
2751	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Marrichetla Pale	303321440105	11KV VENTURE FEEDER	INDL	AMR	14.009	16.049	14.009	-14.558	-14.558	100%	
2752	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Marrichetla Pale	303321440106	11KV YELLAIAH NAGAR	INDL	AMR	11.683	9.805	11.683	16.072	15.203	100%	
2753	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Nippatlapadu SS	303321440201	11KV NIPPATLAPADU	Mixed	AMR	1.999	1.751	1.999	12.394	13.207	100%	
2754	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Nippatlapadu SS	303321440202	11KV DEVARAPALEM	Mixed	AMR	3.481	3.624	3.481	-4.127	1.899	100%	
2755	ONGOLE	DARSI	CHIMAKURTHY	33/11 KV Nippatlapadu SS	303321440203	11KV RAMATHIRDHAM I	Rural	AMR	3.089	3.070	3.089	0.625	99.926	100%	
2756	ONGOLE	DARSI	CHIMAKURTHY	33/11KV R.L.Puram SS(Chi	303321440301	11KV RAMATHEERDHAN	INDL	AMR	6.474	5.230	6.474	19.202	19.060	100%	
2757	ONGOLE	DARSI	CHIMAKURTHY	33/11KV R.L.Puram SS(Chi	303321440302	11KV PEARL INDUSTRIAL	Rural	AMR	3.907	4.260	3.907	-9.037	-9.037	100%	
2758	ONGOLE	DARSI	CHIMAKURTHY	33/11KV R.L.Puram SS(Chi	303321440303	11KV R LPURAM	Rural	AMR	5.962	5.319	5.962	10.778	6.934	100%	
2759	ONGOLE	DARSI	CHIMAKURTHY	33/11KV R.L.Puram SS(Chi	303321440304	11KV VENKATESWARA G	Rural	AMR	1.491	0.851	1.491	42.917	41.244	100%	
2760	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Kothapatnam Sul	303322140101	11KV ALLURU	Rural	AMR	3.660	3.527	3.660	3.655	4.952	100%	
2761	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Kothapatnam Sul	303322140102	11KV KOTHAPATNAM	Rural	AMR	5.936	5.836	5.936	1.689	13.898	100%	
2762	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Kothapatnam Sul	303322140103	11KV RANGAYAPALEM A	Agricultura	AMR	0.429	0.390	0.429	9.078	70.589	100%	
2763	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Kothapatnam Sul	303322140104	11KV KOTHAPATNAM A(	Agricultura	AMR	2.276	2.135	2.276	6.216	6.216	100%	
2764	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Kothapatnam Sul	303322140105	11KV VAJJIREDDYPALEM	Agricultura	AMR	1.060	0.992	1.060	6.353	32.699	100%	
2765	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Beeramgunta Sul	303322140201	11KV BEERAMGUNTA+G	Rural	AMR	2.706	2.587	2.706	4.367	7.690	100%	
2766	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Beeramgunta Sul	303322140202	11KV SANDHYA AQUA	Rural	AMR	0.693	0.709	0.693	-2.222	-1.780	100%	
2767	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Beeramgunta Sul	303322140203	11KV PRIYA INDUSTRIAL	Rural	AMR	2.543	2.254	2.543	11.385	12.821	100%	
2768	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Beeramgunta Sul	303322140204	11KV GOLDEN AQUA	Rural	AMR	6.224	6.335	6.224	-1.782	1.875	100%	
2769	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Ethamukkala Sub	303322140301	11KV ETHAMUKKALA AC	Rural	AMR	10.292	12.794	10.292	-24.312	-17.313	100%	
2770	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Ethamukkala Sub	303322140302	11KV E MUKKALA TOWN	Rural	AMR	5.206	5.296	5.206	-1.721	-1.484	100%	
2771	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Ethamukkala Sub	303322140303	11KV MADANURU AGL	Mixed	AMR	0.857	0.848	0.857	1.073	31.071	100%	
2772	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Ethamukkala Sub	303322140304	11KV ETHAMUKKALA AG	Mixed	AMR	1.660	1.557	1.660	6.182	28.158	100%	
2773	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Rajupalem Sub st	303322140401	11KV RAJUPALEM AGL	Agricultura	AMR	1.097	1.076	1.097	1.922	28.701	100%	
2774	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Rajupalem Sub st	303322140402	11KV GAMMALAPALEM	Mixed	AMR	2.511	2.617	2.511	-4.207	-4.207	100%	
2775	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Rajupalem Sub st	303322140403	11KV RAJUPALEM AQUA	Rural	AMR	3.474	3.565	3.474	-2.615	0.539	100%	
2776	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Rajupalem Sub st	303322140404	11KV HATCHERY	INDL	AMR	5.621	6.285	5.621	-11.809	-9.493	100%	
2777	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Motumala SS	303322140501	11KV Motumala Town F	Rural	AMR	2.315	2.600	2.315	-12.277	-2.251	100%	
2778	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Motumala SS	303322140502	11KV GUNDAMALA AGL	Agricultura	AMR	0.899	0.841	0.899	6.367	43.796	100%	
2779	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Motumala SS	303322140503	11KV PADARTHY AGL	Agricultura	AMR	1.365	1.297	1.365	5.041	23.433	100%	
2780	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Motumala SS	303322140504	11KV Motumala Aua Fee	Rural	AMR	2.302	2.248	2.302	2.329	15.060	100%	
2781	ONGOLE	ONGOLE	ONGOLERURAL II	33/11KV MADANUR SS	303322140701	11KV MADANURU TOWI	Rural	AMR	0.818	0.149	0.818	81.843	83.993	100%	
2782	ONGOLE	ONGOLE	ONGOLERURAL II	33/11KV MADANUR SS	303322140702	11KV MADANURU AQUA	Rural	AMR	0.976	0.095	0.976	90.245	90.102	100%	
2783	ONGOLE	ONGOLE	ONGOLERURAL II	33/11KV MADANUR SS	303322140703	11KV MADANURU AGL	Mixed	AMR	1.711	1.572	1.711	8.152	9.940	100%	
2784	ONGOLE	ONGOLE	ONGOLERURAL II	33/11KV MADANUR SS	303322140704	11KV TETUPURAM AQU	Rural	AMR	1.368	0.073	1.368	94.649	95.175	100%	
2785	ONGOLE	ONGOLE	ONGOLERURAL II	33/11KV RANGARAYAPALE	303322140802	11KV RANGAYAPALEM A	Agricultura	AMR	0.025	0.024	0.025	2.465	2.465	100%	
2786	ONGOLE	ONGOLE	ONGOLERURAL II	33/11KV RANGARAYAPALE	303322140803	11KV PADARTHI Agl	Agricultura	AMR	0.814	0.838	0.814	-2.984	-2.984	100%	
2787	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Uppugundur Sub	303322240101	11KV RAPARLA AGL	Mixed	AMR	1.573	1.558	1.573	0.953	18.177	100%	
2788	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Uppugundur Sub	303322240102	11KV KANDLAGUNTA	Mixed	AMR	0.927	1.171	0.927	-26.347	-3.318	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2789	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Uppugundur Sub	303322240103	11KV MATTIGUNTA (CO	Rural	AMR	1.517	1.330	1.517	12.280	11.418	100%	
2790	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Uppugundur Sub	303322240104	11KV UPPUGUNDURTOV	Rural	AMR	3.726	3.753	3.726	-0.727	7.209	100%	
2791	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Thimmasamudra	303322240201	11KV SANTHARAVURU	Mixed	AMR	1.445	1.310	1.445	9.356	17.024	100%	
2792	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Thimmasamudra	303322240202	11KV THIMMASAMUDR/	Rural	AMR	2.311	2.151	2.311	6.932	15.199	100%	
2793	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV VR Palem Sub Sta	303322240301	11KV AMMANABROLU	Rural	AMR	3.541	3.194	3.541	9.817	12.507	100%	
2794	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV VR Palem Sub Sta	303322240302	11KV KANAPARTHY	Rural	AMR	1.943	2.445	1.943	-25.804	-23.198	100%	
2795	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV VR Palem Sub Sta	303322240303	11KV KANAPARTHY LIS	Rural	AMR	1.490	0.910	1.490	38.941	95.728	100%	
2796	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV VR Palem Sub Sta	303322240304	11KV VR Palem INDUSTF	Rural	AMR	0.691	0.268	0.691	61.228	62.797	100%	
2797	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV NGL Padu Sub Sta	303322240401	11KV CHADALAWADA	Rural	AMR	1.674	1.515	1.674	9.472	32.761	100%	
2798	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV NGL Padu Sub Sta	303322240402	11KV CH UPPALAPADU L	Rural	AMR	0.442	0.436	0.442	1.426	9.175	100%	
2799	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV NGL Padu Sub Sta	303322240403	11KV NGLPADU	Rural	AMR	2.667	2.484	2.667	6.881	11.455	100%	
2800	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV NGL Padu Sub Sta	303322240404	11KV T AGRAHARAM	Mixed	AMR	1.884	2.587	1.884	-37.342	-24.475	100%	
2801	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Mattigunta Sub S	303322240501	11KV L I SCHEME	Rural	AMR	0.146	0.137	0.146	6.138	99.591	100%	
2802	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Mattigunta Sub S	303322240502	11KV MATTIGUNTA TOV	Rural	AMR	1.137	1.115	1.137	1.950	5.995	100%	
2803	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Mattigunta Sub S	303322240503	11KV EDUMUDI	Mixed	AMR	1.540	1.441	1.540	6.435	18.502	100%	
2804	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV B.NIDAMANURU	303322240601	11KV B NIDAMANURU	Rural	AMR	1.841	1.964	1.841	-6.691	-3.409	100%	
2805	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV B.NIDAMANURU	303322240602	11KV PATHAVARAM+PR	Mixed	AMR	1.943	1.815	1.943	6.574	24.715	100%	
2806	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV TANGUTURU(N)	303322340101	11KV JAMMULAPALEM	Rural	AMR	2.835	2.693	2.835	4.986	5.281	100%	
2807	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV TANGUTURU(N)	303322340102	11KV TANGUTUR	Rural	AMR	4.263	3.981	4.263	6.614	9.978	100%	
2808	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Throvagunta Sub	303322440101	11KV AUTONAGAR	Rural	AMR	3.965	4.535	3.965	-14.388	-7.847	100%	
2809	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Throvagunta Sub	303322440103	11KV M NUTHALAPADU	Rural	AMR	8.431	8.252	8.431	2.120	3.165	100%	
2810	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Throvagunta Sub	303322440104	11KV MADDIRALAPADU	Mixed	AMR	1.654	1.509	1.654	8.743	30.033	100%	
2811	ONGOLE	ONGOLE	ONGOLERURAL I	33/11 KV Throvagunta Sub	303322440105	11KV EDUGUNDLAPADU	Rural	AMR	3.771	3.582	3.771	5.014	8.534	100%	
2812	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Devarapadu Sub	303322440201	11KV BODDULURIVARIP/	Mixed	AMR	0.588	0.809	0.588	-37.640	-25.778	100%	
2813	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Devarapadu Sub	303322440202	11KV DEVARAMPADU T(	Rural	AMR	1.553	2.079	1.553	-33.884	-25.465	100%	
2814	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Devarapadu Sub	303322440203	11KV Gundayapalem	Mixed	AMR	0.438	0.413	0.438	5.588	9.039	100%	
2815	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Devarapadu Sub	303322440204	11KV pathapadu	Rural	AMR	5.130	6.365	5.130	-24.075	-23.262	100%	
2816	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Devarapadu Sub	303322440205	11KV CHINTHAYAGARIP/	Rural	AMR	0.928	0.151	0.928	83.715	82.634	100%	
2817	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Mamidipalem Su	303322440301	11KV MUNICIPAL WATE	Rural	AMR	1.950	1.939	1.950	0.547	12.386	100%	
2818	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Mamidipalem Su	303322440302	11KV KOTTAMAMIDIPAL	Rural	AMR	1.738	1.929	1.738	-10.943	-9.989	100%	
2819	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Mamidipalem Su	303322440303	11KV SURAKSHA	Rural	AMR	1.096	1.088	1.096	0.696	2.080	100%	
2820	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Mamidipalem Su	303322440304	11KV VENGAMUKKAPAL	Rural	AMR	3.790	3.739	3.790	1.334	2.419	100%	
2821	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Mamidipalem Su	303322440305	11KV YARAJERLA	Mixed	AMR	1.536	1.561	1.536	-1.584	4.265	100%	
2822	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 kV Cheruvukommup	303322440401	11KV CH K PALEM INDU	INDL	AMR	1.329	1.268	1.329	4.587	5.366	100%	
2823	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 kV Cheruvukommup	303322440402	11KV CH K PALEM TOW	Rural	AMR	1.182	1.226	1.182	-3.743	5.954	100%	
2824	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 kV Cheruvukommup	303322440403	11KV PELLURU INDUSTR	Rural	AMR	3.852	3.606	3.852	6.398	6.891	100%	
2825	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 kV Cheruvukommup	303322440404	11KV SOUTHERNROCKS	INDL	AMR	0.678	0.654	0.678	3.527	3.527	100%	
2826	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 kV Cheruvukommup	303322440405	11KV CHERUVUKOMMU	Agricultura	AMR	0.110	0.112	0.110	-1.731	6.974	100%	
2827	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV KOPPOLU SS	303322440501	11KV Guttikondavaripale	Rural	AMR	7.011	6.830	7.011	2.594	8.393	100%	
2828	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV KOPPOLU SS	303322440502	11KV Koppolu Town	Rural	AMR	2.963	2.849	2.963	3.862	4.965	100%	
2829	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV KOPPOLU SS	303322440503	11KV Chinthala Aqua fee	Rural	AMR	3.772	4.490	3.772	-19.011	-6.404	100%	
2830	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV KOPPOLU SS	303322440504	11KV Alluru Feeder	Rural	AMR	2.141	1.676	2.141	21.728	25.410	100%	
2831	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Karavadi SS	303322440601	11KV KARAVADI TOWN	Rural	AMR	3.494	3.572	3.494	-2.250	5.239	100%	
2832	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Karavadi SS	303322440602	11KV CHEJERLA	Mixed	AMR	0.467	0.393	0.467	15.813	19.021	100%	
2833	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Karavadi SS	303322440603	11KV RAILWAY	Rural	AMR	0.283	0.166	0.283	41.220	39.435	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2834	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Tangutur Sub Sta	303322540101	11KV ALAKURAPADU AG	Agricultura	AMR	0.060	0.056	0.060	7.741	26.257	100%	
2835	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Tangutur Sub Sta	303322540102	11KV BVL GRANITES	INDL	AMR	0.517	0.515	0.517	0.382	5.419	100%	
2836	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Tangutur Sub Sta	303322540103	11KV IOC	Rural	AMR	6.351	6.273	6.351	1.227	4.072	100%	
2837	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Tangutur Sub Sta	303322540105	11KV KARUMANCHI(MA	Agricultura	AMR	0.008	0.008	0.008	2.383	2.755	100%	
2838	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Tangutur Sub Sta	303322540106	11KV TOLL PLAZA	Rural	AMR	0.662	0.589	0.662	11.046	11.462	100%	
2839	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Velagapudi Sub S	303322540201	11KV ANANTHAVARAM-	Rural	AMR	3.385	3.526	3.385	-4.164	-0.294	100%	
2840	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Velagapudi Sub S	303322540202	11KV ANANTHAVARAM-	Rural	AMR	0.200	0.224	0.200	-12.270	-0.031	100%	
2841	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Velagapudi Sub S	303322540203	11KV VELAGAPUDI	Rural	AMR	4.160	3.435	4.160	17.441	19.233	100%	
2842	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Velagapudi Sub S	303322540204	11KV TALLAPALEM FEED	Rural	AMR	2.871	3.754	2.871	-30.774	-30.774	100%	
2843	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Velagapudi Sub S	303322540205	11KV ALAKURAPADU	Rural	AMR	5.310	5.279	5.310	0.594	0.437	100%	
2844	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV M Nidamanur Su	303322540301	11KV MARLAPADU AGL	Agricultura	AMR	0.252	0.228	0.252	9.504	54.803	100%	
2845	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV M Nidamanur Su	303322540302	11KV MARLAPADU TOW	Rural	AMR	1.208	1.246	1.208	-3.177	8.149	100%	
2846	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV M Nidamanur Su	303322540303	11KV NIDAMANURU TO	Rural	AMR	3.097	3.191	3.097	-3.037	7.249	100%	
2847	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV M Nidamanur Su	303322540304	11KV PONDURU TOWN	Rural	AMR	1.043	0.973	1.043	6.784	23.290	100%	
2848	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV M Nidamanur Su	303322540305	11KV PONDURU AGL	Agricultura	AMR	0.112	0.106	0.112	5.113	89.300	100%	
2849	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Rayavaripalem Su	303322540401	11KV RAYAVARIPALEM	Rural	AMR	5.242	6.014	5.242	-14.727	-10.494	100%	
2850	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Rayavaripalem Su	303322540402	11KV PURAM CENTRE	Rural	AMR	7.112	6.861	7.112	3.528	10.258	100%	
2851	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Rayavaripalem Su	303322540403	11KV PASUPUKUDURU	Rural	AMR	10.479	10.399	10.479	0.769	5.153	100%	
2852	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Rayavaripalem Su	303322540404	11KV Rayavaripalem Agr	Agricultura	AMR	0.057	0.050	0.057	11.924	100.000	100%	
2853	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Konijedu Sub Sta	303322540601	11KV Konizedu Town Fe	Rural	AMR	1.653	1.435	1.653	13.172	16.215	100%	
2854	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Konijedu Sub Sta	303322540602	11KV Kandulur Town	Rural	AMR	1.467	1.218	1.467	16.923	28.793	100%	
2855	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Konijedu Sub Sta	303322540603	11KV Konizedu Agl feede	Agricultura	AMR	0.228	0.210	0.228	7.781	58.960	100%	
2856	ONGOLE	ONGOLE	ONGOLERURAL II	33/11 KV Konijedu Sub Sta	303322540604	11KV Kandulur Agl feede	Agricultura	AMR	0.279	0.252	0.279	9.367	89.178	100%	
2857	ONGOLE	ADDANKI	MARTUR	33/11 KV Marturu Sub Stat	303411140101	11KV JONNATHALI	Rural	AMR	4.916	4.706	4.916	4.268	7.701	100%	
2858	ONGOLE	ADDANKI	MARTUR	33/11 KV Marturu Sub Stat	303411140102	11KV MARTURNORTH	Rural	AMR	7.800	7.615	7.800	2.366	5.191	100%	
2859	ONGOLE	ADDANKI	MARTUR	33/11 KV Marturu Sub Stat	303411140103	11KV MARTURSOUTH	Rural	AMR	6.395	7.466	6.395	-16.737	-16.665	100%	
2860	ONGOLE	ADDANKI	MARTUR	33/11 KV Marturu Sub Stat	303411140104	11KV MLAP	INDL	AMR	19.015	19.082	19.015	-0.348	-0.089	100%	
2861	ONGOLE	ADDANKI	MARTUR	33/11 KV Marturu Sub Stat	303411140105	11KV NAGARAJUPALLI	Mixed	AMR	0.252	0.331	0.252	-31.543	-22.527	100%	
2862	ONGOLE	ADDANKI	MARTUR	33/11 KV Marturu Sub Stat	303411140106	11KV YADDANAPUDI	Agricultura	AMR	0.351	0.351	0.351	-0.136	22.045	100%	
2863	ONGOLE	ADDANKI	MARTUR	33/11 KV Konanki Sub Stat	303411140201	11KV KOLALAPUDI	Mixed	AMR	0.268	0.258	0.268	3.990	20.650	100%	
2864	ONGOLE	ADDANKI	MARTUR	33/11 KV Konanki Sub Stat	303411140202	11KV KONANKI_TOWN	Rural	AMR	7.065	6.903	7.065	2.298	7.851	100%	
2865	ONGOLE	ADDANKI	MARTUR	33/11 KV Konanki Sub Stat	303411140203	11KV KONANKI INDUSTR	INDL	AMR	9.443	8.518	9.443	9.802	10.238	100%	
2866	ONGOLE	ADDANKI	MARTUR	33/11 KV Konanki Sub Stat	303411140204	11KV ISUKA DARSI	Mixed	AMR	4.377	3.903	4.377	10.835	18.499	100%	
2867	ONGOLE	ADDANKI	MARTUR	33/11 KV Dronadula Sub St	303411140301	11KV BOBBEPALLI	Mixed	AMR	1.528	1.367	1.528	10.546	13.586	100%	
2868	ONGOLE	ADDANKI	MARTUR	33/11 KV Dronadula Sub St	303411140302	11KV KOLALAPUDI	Agricultura	AMR	3.839	3.046	3.839	20.639	24.939	100%	
2869	ONGOLE	ADDANKI	MARTUR	33/11 KV Dronadula Sub St	303411140303	11KV DRONADULA	Rural	AMR	3.372	3.186	3.372	5.520	11.136	100%	
2870	ONGOLE	ADDANKI	MARTUR	33/11 KV Santhamaguluru	303411240101	11KV ELCHURU	Mixed	AMR	0.335	0.457	0.335	-36.280	-36.280	100%	
2871	ONGOLE	ADDANKI	MARTUR	33/11 KV Santhamaguluru	303411240102	11KV GURIJEPALLI	Mixed	AMR	2.494	2.850	2.494	-14.289	0.797	100%	
2872	ONGOLE	ADDANKI	MARTUR	33/11 KV Santhamaguluru	303411240103	11KV KAMEPALLI LISCHE	Rural	AMR	0.829	0.792	0.829	4.479	99.323	100%	
2873	ONGOLE	ADDANKI	MARTUR	33/11 KV Santhamaguluru	303411240104	11KV SANTHMAGULURU	Rural	AMR	9.265	8.613	9.265	7.039	11.774	100%	
2874	ONGOLE	ADDANKI	MARTUR	33/11 KV Kommalapadu Su	303411240201	11KV KOMMALAPADU T	Rural	AMR	2.566	2.320	2.566	9.599	15.920	100%	
2875	ONGOLE	ADDANKI	MARTUR	33/11 KV Kommalapadu Su	303411240202	11KV KUNDURU	Mixed	AMR	3.984	3.050	3.984	23.442	29.383	100%	
2876	ONGOLE	ADDANKI	MARTUR	33/11 KV Kommalapadu Su	303411240203	11KV MAKKINENIVARIPA	Mixed	AMR	1.814	1.708	1.814	5.857	13.618	100%	
2877	ONGOLE	ADDANKI	MARTUR	33/11 KV Kommalapadu Su	303411240204	11KV KARUMANCHI FEE	Mixed	AMR	2.901	2.991	2.901	-3.129	34.070	100%	
2878	ONGOLE	ADDANKI	MARTUR	33/11 KV Ballikurava Sub S	303411340101	11KV BALLIKURAVA_RU	Mixed	AMR	0.996	1.098	0.996	-10.235	-6.474	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2879	ONGOLE	ADDANKI	MARTUR	33/11 KV Ballikurava Sub S	303411340102	11KV BALLIKURAVA_TO	Rural	AMR	12.903	12.600	12.903	2.349	9.129	100%	
2880	ONGOLE	ADDANKI	MARTUR	33/11 KV Ballikurava Sub S	303411340103	11KV CHENNUPALLI	Mixed	AMR	2.828	2.539	2.828	10.208	19.244	100%	
2881	ONGOLE	ADDANKI	MARTUR	33/11 KV Ballikurava Sub S	303411340104	11 KV NBK Padu	Mixed	AMR	2.483	2.009	2.483	19.069	17.582	100%	
2882	ONGOLE	ADDANKI	MARTUR	33/11 KV Ballikurava Sub S	303411340105	11KV KONIDENA LIS	Rural	AMR	0.629	0.074	0.629	88.188	99.810	100%	
2883	ONGOLE	ADDANKI	MARTUR	33/11 KV Kopperapadu Sul	303411340201	11KV KUKATLAPALLY	Mixed	AMR	2.683	2.291	2.683	14.578	22.983	100%	
2884	ONGOLE	ADDANKI	MARTUR	33/11 KV Kopperapadu Sul	303411340202	11KV KOPPERAPADU_TO	Rural	AMR	1.236	1.091	1.236	11.711	11.827	100%	
2885	ONGOLE	ADDANKI	MARTUR	33/11 KV Kopperapadu Sul	303411340203	11 KV Kopperapadu Rura	Mixed	AMR	0.926	1.014	0.926	-9.564	24.182	100%	
2886	ONGOLE	ADDANKI	MARTUR	33/11 KV Kopperapadu Sul	303411340204	11KV VAIDANA	Mixed	AMR	3.119	2.589	3.119	17.009	19.117	100%	
2887	ONGOLE	ADDANKI	MARTUR	33/11 KV Yaddanapudi Sut	303411440101	11KV GANNAVARAM	Mixed	AMR	0.955	0.821	0.955	14.032	25.336	100%	
2888	ONGOLE	ADDANKI	MARTUR	33/11 KV Yaddanapudi Sut	303411440102	11KV YEDDANAPUDI TO	Rural	AMR	1.519	1.375	1.519	9.517	22.988	100%	
2889	ONGOLE	ADDANKI	MARTUR	33/11 KV Yaddanapudi Sut	303411440103	11KV YANAMADALA	Mixed	AMR	3.351	2.933	3.351	12.474	20.466	100%	
2890	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Parchuru Sub Sta	303421140101	11KV ABV PALEM	Rural	AMR	2.251	2.344	2.251	-4.152	6.840	100%	
2891	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Parchuru Sub Sta	303421140102	11KV JLPLIS	Rural	AMR	0.265	0.182	0.265	31.276	98.876	100%	
2892	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Parchuru Sub Sta	303421140103	11KV NUTHALAPADU	Rural	AMR	2.780	3.776	2.780	-35.848	-15.401	100%	
2893	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Parchuru Sub Sta	303421140104	11KV PURCHURU	Rural	AMR	6.023	5.786	6.023	3.942	10.299	100%	
2894	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Parchuru Sub Sta	303421140105	11KV VEERANNAPALEM	Rural	AMR	2.243	1.584	2.243	29.388	34.708	100%	
2895	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Parchuru Sub Sta	303421140106	11KV NAP	Rural	AMR	2.987	2.573	2.987	13.854	17.594	100%	
2896	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Cherukuru Sub S	303421140201	11KV CHERUKURUAGL	Mixed	AMR	1.295	1.849	1.295	-42.833	-20.045	100%	
2897	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Cherukuru Sub S	303421140202	11KV NAP	Rural	AMR	0.369	0.224	0.369	39.223	89.614	100%	
2898	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Cherukuru Sub S	303421140203	11KV CHERUKURU TOW	Rural	AMR	2.659	2.498	2.659	6.041	12.685	100%	
2899	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Cherukuru Sub S	303421140204	11KV 16HRS	Rural	AMR	0.374	0.367	0.374	1.707	99.261	100%	
2900	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Adusumalli Sub S	303421140301	11KV ADUSUMALLI SPIN	Rural	AMR	0.340	0.424	0.340	-24.966	-20.900	100%	
2901	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Adusumalli Sub S	303421140302	11KV INAGALLU	Rural	AMR	3.922	4.108	3.922	-4.736	15.231	100%	
2902	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Karamchedu Sub	303421240101	11KV KUNKALAMARRU A	Rural	AMR	0.918	1.005	0.918	-9.389	68.471	100%	
2903	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Karamchedu Sub	303421240102	11KV THIMIRDHIPADU	Rural	AMR	0.948	1.124	0.948	-18.625	2.461	100%	
2904	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Karamchedu Sub	303421240103	11KV KARAMCHEDU TO	Rural	AMR	5.559	5.458	5.559	1.823	8.790	100%	
2905	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Karamchedu Sub	303421240104	11KV KUNKALAMARRU T	Rural	AMR	1.781	1.792	1.781	-0.642	21.594	100%	
2906	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Swarna Sub Stati	303421240201	11KV SWARNATOWN	Rural	AMR	2.603	2.823	2.603	-8.440	3.529	100%	
2907	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Swarna Sub Stati	303421240202	11KV TARAKARAMA LI	Rural	AMR	0.272	0.265	0.272	2.654	99.350	100%	
2908	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Swarna Sub Stati	303421240203	11KV 24 HRS	Rural	AMR	0.018	0.018	0.018	-1.086	36.551	100%	
2909	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Swarna Sub Stati	303421240204	11KV KODAVALIVARIPAL	Mixed	AMR	1.702	1.604	1.702	5.768	25.269	100%	
2910	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Inkollu Sub Statio	303421340101	11KV EMILARE	Rural	AMR	0.350	0.342	0.350	2.320	99.135	100%	
2911	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Inkollu Sub Statio	303421340102	11KV GANGAVARAM	Rural	AMR	2.938	3.043	2.938	-3.554	9.755	100%	
2912	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Inkollu Sub Statio	303421340103	11KV INKOLLU TOWN 1	Rural	AMR	12.181	11.986	12.181	1.604	3.229	100%	
2913	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Inkollu Sub Statio	303421340104	11KV PAVULURU	Rural	AMR	1.944	1.884	1.944	3.085	17.444	100%	
2914	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Inkollu Sub Statio	303421340105	11KV INKOLLU TOWN-II	Rural	AMR	0.533	0.531	0.533	0.318	6.481	100%	
2915	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Idupulapadu Sub	303421340201	11KV DAGGUBADU	Rural	AMR	2.121	2.016	2.121	4.975	14.586	100%	
2916	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Idupulapadu Sub	303421340202	11KV IDUPULAPADU	Rural	AMR	3.632	3.517	3.632	3.150	17.423	100%	
2917	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Idupulapadu Sub	303421340203	11KV VANKAYALAPADU	Rural	AMR	2.207	2.129	2.207	3.503	20.113	100%	
2918	ONGOLE	CHIRALA	PARCHOOR	33/11 KV Idupulapadu Sub	303421340204	11KV NAGANDLA	Mixed	AMR	1.414	1.387	1.414	1.878	8.978	100%	
2919	ONGOLE	CHIRALA	VETAPALEM	33/11 KV PANDILLAPALLI S	303431140101	11KV MOTUPALLI1+AGL	Rural	AMR	0.002	0.003	0.002	-42.528	-41.712	100%	
2920	ONGOLE	CHIRALA	VETAPALEM	33/11 KV PANDILLAPALLI S	303431140103	11KV PANDILLAPALLI	Rural	AMR	2.918	2.515	2.918	13.830	19.215	100%	
2921	ONGOLE	CHIRALA	VETAPALEM	33/11 KV PANDILLAPALLI S	303431140104	11KV PULLARIPALEM	Rural	AMR	10.612	10.391	10.612	2.081	10.514	100%	
2922	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Chinnaganjam Su	303431240101	11KV APSIDC	Rural	AMR	0.176	0.133	0.176	24.857	99.508	100%	
2923	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Chinnaganjam Su	303431240102	11KV SOPIRALA TOWN	Rural	AMR	2.132	2.054	2.132	3.658	7.479	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2924	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Chinnaganjam Su	303431240103	11KV MUNNAMVARIPAL	Rural	AMR	6.214	5.887	6.214	5.258	19.017	100%	
2925	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Chinnaganjam Su	303431240104	11KV KADAVAKUDURUA	Mixed	AMR	2.472	2.327	2.472	5.867	19.802	100%	
2926	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Chinnaganjam Su	303431240105	11KV CHINAGANJAM IN	Aqua	AMR	2.921	3.575	2.921	-22.404	-2.333	100%	
2927	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Pedaganjam Sub	303431240201	11KV INDUSTRIAL I II	Rural	AMR	11.352	10.976	11.352	3.318	7.519	100%	
2928	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Pedaganjam Sub	303431240202	11KV PEDAGANJAM NEE	Rural	AMR	5.827	5.303	5.827	9.005	15.383	100%	
2929	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Kothapalem Sub	303431240301	11KV CHINAGANJAM TO	Rural	AMR	8.032	7.596	8.032	5.434	13.287	100%	
2930	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Kothapalem Sub	303431240302	11KV ADIVEEDIPALEM	Rural	AMR	0.985	0.945	0.985	4.033	11.549	100%	
2931	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Kothapalem Sub	303431240303	11KV KOTHAPALEM	Rural	AMR	1.339	1.261	1.339	5.764	13.376	100%	
2932	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Kothapalem Sub	303431240304	11KV MOTUPALLI AGL	Mixed	AMR	0.334	0.329	0.334	1.542	29.097	100%	
2933	ONGOLE	CHIRALA	VETAPALEM	33/11KV MOTUPALLI SS	303431240501	11KV MOTUPALLI TOWN	Rural	AMR	4.732	4.400	4.732	7.026	17.419	100%	
2934	ONGOLE	CHIRALA	VETAPALEM	33/11KV MOTUPALLI SS	303431240502	11KV MOTUPALLI INDUS	INDL	AMR	4.113	3.834	4.113	6.792	13.431	100%	
2935	ONGOLE	CHIRALA	VETAPALEM	33/11KV MOTUPALLI SS	303431240503	11KV RUDRAMAMBAPU	Mixed	AMR	1.349	1.299	1.349	3.655	10.894	100%	
2936	ONGOLE	CHIRALA	VETAPALEM	33/11KV MOTUPALLI SS	303431240504	11KV AQUA FEEDER	INDL	AMR	2.410	2.266	2.410	5.982	15.744	100%	
2937	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Vetapalem Sub S	303431340101	11KV SANTHARAVURU	Mixed	AMR	0.167	0.229	0.167	-36.690	#DIV/0!	100%	
2938	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Vetapalem Sub S	303431340102	11KV SPINNINGMILL(VE	INDL	AMR	0.083	0.041	0.083	51.078	50.068	100%	
2939	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Vetapalem Sub S	303431340103	11KV VETAPALEM2	Rural	AMR	6.132	5.751	6.132	6.213	9.213	100%	
2940	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Vetapalem Sub S	303431340104	11KV VETAPALEM TOWI	Rural	AMR	5.432	5.098	5.432	6.151	8.944	100%	
2941	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Chellareddypaler	303431340301	11KV APSIDC (CHALLARE	Rural	AMR	0.448	0.431	0.448	3.854	99.703	100%	
2942	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Chellareddypaler	303431340302	11KV CHALLAREDDYPAL	Agricultura	AMR	0.718	0.658	0.718	8.399	28.488	100%	
2943	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Chellareddypaler	303431340303	11KV CHALLAREDDYPAL	Rural	AMR	4.807	4.480	4.807	6.793	9.983	100%	
2944	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Chellareddypaler	303431340304	11KV RAMAPURAM	Rural	AMR	4.230	4.041	4.230	4.469	6.379	100%	
2945	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Chellareddypaler	303431340305	11KV ST ANN S ENGINEE	Rural	AMR	0.677	0.662	0.677	2.158	1.434	100%	
2946	ONGOLE	CHIRALA	VETAPALEM	33/11 KV RamannapetaSul	303431340401	11KV NAYANAPALLI	Rural	AMR	6.273	6.987	6.273	-11.390	-5.218	100%	
2947	ONGOLE	CHIRALA	VETAPALEM	33/11 KV RamannapetaSul	303431340402	11KV AQUA	INDL	AMR	6.330	6.306	6.330	0.381	10.437	100%	
2948	ONGOLE	CHIRALA	VETAPALEM	33/11 KV RamannapetaSul	303431340403	11KV RAMANNAPETA	Rural	AMR	1.792	1.717	1.792	4.149	9.053	100%	
2949	ONGOLE	CHIRALA	CHIRALA	33/11 KV Chirala Town Sub	303441140101	11KV RAILWAYSTATION	Urban	AMR	4.694	4.487	4.694	4.411	5.174	100%	
2950	ONGOLE	CHIRALA	CHIRALA	33/11 KV Chirala Town Sub	303441140102	11KV BOSENAGAR	Urban	AMR	2.592	2.531	2.592	2.337	0.464	100%	
2951	ONGOLE	CHIRALA	CHIRALA	33/11 KV Chirala Town Sub	303441140103	11KV VYKUNTAPURAM	Urban	AMR	2.843	2.736	2.843	3.775	4.120	100%	
2952	ONGOLE	CHIRALA	CHIRALA	33/11 KV Chirala Town Sub	303441140104	11KV MARKET	Urban	AMR	7.438	7.316	7.438	1.644	2.020	100%	
2953	ONGOLE	CHIRALA	CHIRALA	33/11KV Chirala Governme	303441140201	11KV MASJID CENTRE FE	Urban	AMR	1.839	1.772	1.839	3.612	22.445	100%	
2954	ONGOLE	CHIRALA	CHIRALA	33/11KV Chirala Governme	303441140202	11KV PERALA FEEDER	Urban	AMR	3.805	3.732	3.805	1.899	2.310	100%	
2955	ONGOLE	CHIRALA	CHIRALA	33/11KV Chirala Governme	303441140203	11KV BUS STAND	Urban	AMR	4.029	3.964	4.029	1.609	2.729	100%	
2956	ONGOLE	CHIRALA	CHIRALA	33/11KV Chirala Governme	303441140204	11KV GOVT HOSPITAL FE	Urban	AMR	3.272	3.208	3.272	1.953	0.420	100%	
2957	ONGOLE	CHIRALA	CHIRALA	33/11 KV Chirala Sub Stati	303441240101	11KV LOCAL1	Urban	AMR	3.888	3.807	3.888	2.084	1.202	100%	
2958	ONGOLE	CHIRALA	CHIRALA	33/11 KV Chirala Sub Stati	303441240102	11KV LOCAL2	Urban	AMR	2.313	2.264	2.313	2.121	1.451	100%	
2959	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Chirala Sub Stati	303441240103	11KV DIVISIONOFFICE	Rural	AMR	2.013	1.914	2.013	4.906	7.911	100%	
2960	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Chirala Sub Stati	303441240104	11KV KOTHAPETA	Rural	AMR	7.721	7.497	7.721	2.897	4.451	100%	
2961	ONGOLE	CHIRALA	CHIRALA	33/11 KV Chirala Sub Stati	303441240105	11KV ODAREVU	Rural	AMR	8.776	7.877	8.776	10.249	14.837	100%	
2962	ONGOLE	CHIRALA	CHIRALA	33/11 KV Chirala Sub Stati	303441240106	11KV RAMNAGAR	Rural	AMR	1.952	1.783	1.952	8.680	20.716	100%	
2963	ONGOLE	CHIRALA	CHIRALA	33/11 KV Eepurupalem Sul	303441240201	11KV APSIDC (EPURUPA	Rural	AMR	0.528	0.538	0.528	-1.864	90.396	100%	
2964	ONGOLE	CHIRALA	CHIRALA	33/11 KV Eepurupalem Sul	303441240202	11KV EPURUPALEM	Rural	AMR	7.302	7.041	7.302	3.563	5.854	100%	
2965	ONGOLE	CHIRALA	CHIRALA	33/11 KV Eepurupalem Sul	303441240203	11KV GAVINIVARIPALEM	Mixed	AMR	3.834	3.224	3.834	15.923	19.860	100%	
2966	ONGOLE	CHIRALA	CHIRALA	33/11 KV Eepurupalem Sul	303441240204	11KV THOTAVARIPALEM	Rural	AMR	5.919	5.445	5.919	7.997	12.718	100%	
2967	ONGOLE	CHIRALA	CHIRALA	33/11 KV Jandrapeta Sub S	303441340101	11KV DEVANGAPURI	Rural	AMR	3.980	3.916	3.980	1.623	6.022	100%	
2968	ONGOLE	CHIRALA	CHIRALA	33/11 KV Jandrapeta Sub S	303441340102	11KV PATHACHIRALA	Rural	AMR	4.897	4.567	4.897	6.747	10.843	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
2969	ONGOLE	CHIRALA	CHIRALA	33/11 KV Jandrapeta Sub S	303441340103	11KV RAMAKRISHNAPUI	Rural	AMR	6.432	6.101	6.432	5.143	8.035	100%	
2970	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Jandrapeta Sub S	303441340104	11KV SPINNINGMILL(JAI	INDL	AMR	0.007	0.007	0.007	7.705	18.343	100%	
2971	ONGOLE	CHIRALA	CHIRALA	33/11 KV Ganjipalem Sub S	303441340201	11KV GANJIPALEM	Urban	AMR	6.203	6.059	6.203	2.331	2.144	100%	
2972	ONGOLE	CHIRALA	CHIRALA	33/11 KV Ganjipalem Sub S	303441340202	11KV WOODNAGAR	Urban	AMR	0.542	0.516	0.542	4.716	4.427	100%	
2973	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Ganjipalem Sub S	303441340203	11KV BHAVANARUSHIPE	Rural	AMR	4.234	4.131	4.234	2.444	2.444	100%	
2974	ONGOLE	CHIRALA	VETAPALEM	33/11 KV Ganjipalem Sub S	303441340204	11KV RTC COLONY	Rural	AMR	0.519	0.476	0.519	8.294	7.889	100%	
2975	ONGOLE	CHIRALA	CHIRALA	33/11 KV Dandubata Sub S	303441340301	11KV DANDUBATA	Urban	AMR	4.728	4.591	4.728	2.907	2.523	100%	
2976	ONGOLE	CHIRALA	CHIRALA	33/11 KV Dandubata Sub S	303441340302	11KV VITALNAGAR	Urban	AMR	6.663	6.514	6.663	2.246	1.340	100%	
2977	ONGOLE	CHIRALA	CHIRALA	33/11 KV Dandubata Sub S	303441340303	11KV JAYANTIPETA	Urban	AMR	4.131	4.024	4.131	2.587	3.479	100%	
2978	ONGOLE	ADDANKI	ADDANKI	33/11 KV Addanki Sub Stat	303451140101	11KV ADDANKIRURAL	Agricultura	AMR	0.190	0.169	0.190	11.137	23.516	100%	
2979	ONGOLE	ADDANKI	ADDANKI	33/11 KV Addanki Sub Stat	303451140102	11KV ADDANKI_TOWN 1	Urban	AMR	6.677	6.594	6.677	1.235	3.883	100%	
2980	ONGOLE	ADDANKI	ADDANKI	33/11 KV Addanki Sub Stat	303451140103	11KV ADDANKI_TOWN2	Urban	AMR	7.708	7.605	7.708	1.342	10.825	100%	
2981	ONGOLE	ADDANKI	ADDANKI	33/11 KV Addanki Sub Stat	303451140104	11KV BHAVANASI	Mixed	AMR	1.038	0.918	1.038	11.514	23.721	100%	
2982	ONGOLE	ADDANKI	ADDANKI	33/11 KV Addanki Sub Stat	303451140105	11KV GOPALAPURAM	Mixed	AMR	2.115	2.147	2.115	-1.497	12.166	100%	
2983	ONGOLE	ADDANKI	ADDANKI	33/11 KV Addanki Sub Stat	303451140106	11KV LI_SCHEME	Rural	AMR	0.178	0.173	0.178	2.598	98.440	100%	
2984	ONGOLE	ADDANKI	ADDANKI	33/11 KV Addanki Sub Stat	303451140107	11KV SINGARAKONDA	Urban	AMR	2.443	2.350	2.443	3.810	11.060	100%	
2985	ONGOLE	ADDANKI	ADDANKI	33/11 KV Dharmavaram Su	303451140201	11KV CHINAKOTHAPALL	Mixed	AMR	1.864	1.743	1.864	6.516	60.860	100%	
2986	ONGOLE	ADDANKI	ADDANKI	33/11 KV Dharmavaram Su	303451140202	11KV DHARMAVARAM I	INDL	AMR	0.522	0.501	0.522	4.048	8.149	100%	
2987	ONGOLE	ADDANKI	ADDANKI	33/11 KV Dharmavaram Su	303451140203	11KV SANKAVARAPPADU	Mixed	AMR	0.380	0.365	0.380	3.895	27.849	100%	
2988	ONGOLE	ADDANKI	ADDANKI	33/11 KV Dharmavaram Su	303451140204	11KV DHARMAVARAM T	Rural	AMR	0.695	0.663	0.695	4.617	9.054	100%	
2989	ONGOLE	ADDANKI	ADDANKI	33/11 KV Addanki South Su	303451140301	11KV RAMNAGAR	Urban	AMR	6.054	5.955	6.054	1.639	5.650	100%	
2990	ONGOLE	ADDANKI	ADDANKI	33/11 KV Addanki South Su	303451140302	11KV VASAVINAGAR	Urban	AMR	6.158	6.097	6.158	0.979	4.056	100%	
2991	ONGOLE	ADDANKI	ADDANKI	33/11 KV Addanki South Su	303451140303	11KV VELAMURIPADU	Mixed	AMR	0.554	0.478	0.554	13.655	29.658	100%	
2992	ONGOLE	ADDANKI	ADDANKI	33/11 KV Addanki South Su	303451140304	11KV NAGULAPADU	Mixed	AMR	1.309	1.222	1.309	6.651	9.347	100%	
2993	ONGOLE	ADDANKI	ADDANKI	33/11 KV KUNKUPADU SS	303451240101	11KV KUNKUPADU_TOV	Rural	AMR	0.627	0.577	0.627	7.961	3.649	100%	
2994	ONGOLE	ADDANKI	ADDANKI	33/11 KV KUNKUPADU SS	303451240102	11KV KOTIKALAPUDI	Mixed	AMR	2.735	2.456	2.735	10.189	21.052	100%	
2995	ONGOLE	ADDANKI	ADDANKI	33/11 KV KUNKUPADU SS	303451240103	11KV KUNKUPADU INDU	INDL	AMR	0.523	0.493	0.523	5.604	5.139	100%	
2996	ONGOLE	ADDANKI	ADDANKI	33/11 KV KUNKUPADU SS	303451240104	11KV MODEPALLI	Mixed	AMR	2.841	2.426	2.841	14.610	43.388	100%	
2997	ONGOLE	ADDANKI	ADDANKI	33/11 KV Medarametla Sul	303451340101	11KV BODDUVANIPALEN	Mixed	AMR	2.248	2.242	2.248	0.258	1.736	100%	
2998	ONGOLE	ADDANKI	ADDANKI	33/11 KV Medarametla Sul	303451340102	11KV ANAMANAMURU	Mixed	AMR	1.202	1.188	1.202	1.155	15.490	100%	
2999	ONGOLE	ADDANKI	ADDANKI	33/11 KV Medarametla Sul	303451340104	11KV MEDARMETLA SOU	Rural	AMR	3.971	3.981	3.971	-0.263	3.667	100%	
3000	ONGOLE	ADDANKI	ADDANKI	33/11 KV Medarametla Sul	303451340105	11KV MEDARMETLA NO	Rural	AMR	4.306	4.240	4.306	1.547	6.889	100%	
3001	ONGOLE	ADDANKI	ADDANKI	33/11 KV Medarametla Sul	303451340106	11KV THAMMAVARAM	Mixed	AMR	1.358	1.298	1.358	4.396	9.210	100%	
3002	ONGOLE	ADDANKI	ADDANKI	33/11 KV Medarametla Sul	303451340107	11KV THAMMAVARAM I	Rural	AMR	1.556	1.553	1.556	0.218	14.921	100%	
3003	ONGOLE	ADDANKI	ADDANKI	33/11 KV Medarametla Sul	303451340108	11KV THIMMANAPALEM	Mixed	AMR	1.738	1.741	1.738	-0.158	6.018	100%	
3004	ONGOLE	ADDANKI	ADDANKI	33/11 KV Ravinuthala Sub	303451340201	11KV DAIVALARAVURU	Mixed	AMR	1.272	1.247	1.272	1.938	6.496	100%	
3005	ONGOLE	ADDANKI	ADDANKI	33/11 KV Ravinuthala Sub	303451340202	11KV KURRAVANIPALEM	Mixed	AMR	2.374	2.334	2.374	1.704	23.259	100%	
3006	ONGOLE	ADDANKI	ADDANKI	33/11 KV Ravinuthala Sub	303451340203	11KV PAMIDIPADU	Mixed	AMR	0.192	0.188	0.192	2.150	16.621	100%	
3007	ONGOLE	ADDANKI	ADDANKI	33/11 KV Ravinuthala Sub	303451340204	11KV RAVINUTHALA_TO	Rural	AMR	2.153	2.295	2.153	-6.562	-4.960	100%	
3008	ONGOLE	ADDANKI	ADDANKI	33/11 KV J Pangulur Sub St	303451440101	11KV J PANGULURU_TO	Rural	AMR	2.642	2.495	2.642	5.543	15.672	100%	
3009	ONGOLE	ADDANKI	ADDANKI	33/11 KV J Pangulur Sub St	303451440102	11KV CHANDALURU	Mixed	AMR	3.751	3.590	3.751	4.279	20.076	100%	
3010	ONGOLE	ADDANKI	ADDANKI	33/11 KV J Pangulur Sub St	303451440103	11KV KONDAMANJULUR	Mixed	AMR	2.378	2.205	2.378	7.286	21.264	100%	
3011	ONGOLE	ADDANKI	ADDANKI	33/11 KV Muppavaram Sul	303451440201	11KV ALAVALAPADU	Mixed	AMR	3.030	3.105	3.030	-2.492	4.097	100%	
3012	ONGOLE	ADDANKI	ADDANKI	33/11 KV Muppavaram Sul	303451440202	11KV BITAMANJULURU	Mixed	AMR	1.136	1.141	1.136	-0.426	4.937	100%	
3013	ONGOLE	ADDANKI	ADDANKI	33/11 KV Muppavaram Sul	303451440203	11KV Kondamuru	Mixed	AMR	0.616	0.540	0.616	12.357	49.057	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
3014	ONGOLE	ADDANKI	ADDANKI	33/11 KV Muppavaram Sul	303451440204	11KV BOMMANAMPADU	Mixed	AMR	0.002	0.002	0.002	10.000	#N/A	100%	
3015	ONGOLE	ADDANKI	ADDANKI	33/11 KV Muppavaram Sul	303451440205	11KV MUPPAVARAM_TO	Rural	AMR	1.346	1.385	1.346	-2.886	4.180	100%	
3016	ONGOLE	ADDANKI	ADDANKI	33/11 KV Muppavaram Sul	303451440206	11KV MUPPAVARAM IN	INDL	AMR	4.748	4.388	4.748	7.579	7.311	100%	
3017	ONGOLE	ADDANKI	ADDANKI	33/11 KV Muppavaram Sul	303451440207	11KV SRIBHA	INDL	AMR	0.091	0.090	0.091	0.321	98.190	100%	
3018	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Kandukur Town S	303511140101	11KV PAMUR ROAD	Urban	AMR	4.671	4.521	4.671	3.215	6.359	100%	
3019	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Kandukur Town S	303511140102	11KV SIVALAYAM	Urban	AMR	0.000	0.000	0.000	2.708	2.708	100%	
3020	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Kandukur Town S	303511140103	11KV LIC	Urban	AMR	7.467	7.155	7.467	4.174	5.946	100%	
3021	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Kandukur Town S	303511140104	11KV SBI	Urban	AMR	6.259	5.947	6.259	4.984	15.971	100%	
3022	ONGOLE	KANDUKUR	KANDUKUR	33/11KV EAST KANDUKUR	303511140201	11KV CTRI	Urban	AMR	2.831	2.676	2.831	5.493	7.205	100%	
3023	ONGOLE	KANDUKUR	KANDUKUR	33/11KV EAST KANDUKUR	303511140202	11KV MRO_OFFICE	Urban	AMR	3.796	3.594	3.796	5.327	7.937	100%	
3024	ONGOLE	KANDUKUR	KANDUKUR	33/11KV EAST KANDUKUR	303511140203	11KV MAHADEVAPURAM	Mixed	AMR	0.949	0.860	0.949	9.344	19.710	100%	
3025	ONGOLE	KANDUKUR	KANDUKUR	33/11KV PAMUR ROAD SS	303511140301	11KV SRINAGAR COLONY	Urban	AMR	1.044	0.992	1.044	4.969	7.629	100%	
3026	ONGOLE	KANDUKUR	KANDUKUR	33/11KV PAMUR ROAD SS	303511140302	11KV VENKATADRI PALE	Urban	AMR	1.713	1.601	1.713	6.516	10.187	100%	
3027	ONGOLE	KANDUKUR	KANDUKUR	33/11KV PAMUR ROAD SS	303511140303	11KV INDUSTRIAL (PAM	Rural	AMR	0.281	0.267	0.281	4.869	11.887	100%	
3028	ONGOLE	KANDUKUR	KANDUKUR	33/11KV PAMUR ROAD SS	303511140304	11KV KANCHARAGUNTA	Mixed	AMR	0.323	0.297	0.323	7.938	28.917	100%	
3029	ONGOLE	KANDUKUR	KANDUKUR	33/11KV CHUTTUGUNTA R	303511140401	11KV GURRAMVARI PAL	Urban	AMR	2.060	1.921	2.060	6.732	11.128	100%	
3030	ONGOLE	KANDUKUR	KANDUKUR	33/11KV CHUTTUGUNTA R	303511140402	11KV VIP FEEDER	Urban	AMR	6.170	5.923	6.170	4.004	9.291	100%	
3031	ONGOLE	KANDUKUR	KANDUKUR	33/11KV CHUTTUGUNTA R	303511140403	11KV CHUTTUGUNTA FE	Rural	AMR	0.575	0.504	0.575	12.268	17.450	100%	
3032	ONGOLE	KANDUKUR	KANDUKUR	33/11KV CHUTTUGUNTA R	303511140404	11KV ANANDA PURAM F	Mixed	AMR	0.065	0.060	0.065	8.719	33.016	100%	
3033	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Kandukur Rurals	303511240101	11KV UPPUCHERUVU	Urban	AMR	2.201	2.082	2.201	5.413	9.662	100%	
3034	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Kandukur Rurals	303511240102	11KV JANARDHANCOLO	Urban	AMR	2.246	2.153	2.246	4.133	6.851	100%	
3035	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Kandukur Rurals	303511240103	11KV SS TANK	Urban	AMR	0.595	0.564	0.595	5.255	23.727	100%	
3036	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Kandukur Rurals	303511240104	11KV KOVURU	Mixed	AMR	2.351	2.055	2.351	12.566	13.385	100%	
3037	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Machavaram Sub	303511240201	11KV MACHAVARAM TO	Rural	AMR	1.827	1.619	1.827	11.394	33.248	100%	
3038	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Machavaram Sub	303511240202	11KV PARAKONDAPADU	Mixed	AMR	0.623	0.575	0.623	7.684	34.404	100%	
3039	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Machavaram Sub	303511240203	11KV MACHAVARAM AG	Agricultura	AMR	0.286	0.267	0.286	6.755	36.849	100%	
3040	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Machavaram Sub	303511240204	11KV DONDAPADU	Agricultura	AMR	0.108	0.099	0.108	8.305	19.214	100%	
3041	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Machavaram Sub	303511240205	11KV KM PALEM	Mixed	AMR	1.744	1.568	1.744	10.109	16.204	100%	
3042	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Oguru Sub Statio	303511240301	11KV OGURU TOWN	Rural	AMR	1.094	1.009	1.094	7.790	19.767	100%	
3043	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Oguru Sub Statio	303511240302	11KV PALUKURU GANIG	Mixed	AMR	2.541	2.225	2.541	12.442	27.203	100%	
3044	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Oguru Sub Statio	303511240303	11KV INDUSTRIAL	Rural	AMR	1.077	0.911	1.077	15.366	15.244	100%	
3045	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Paluru SS	303511240401	11KV PALURU TOWN	Rural	AMR	0.477	0.430	0.477	9.957	42.842	100%	
3046	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Paluru SS	303511240402	11KV SRR PURAM	Mixed	AMR	0.770	0.666	0.770	13.577	50.523	100%	
3047	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Paluru SS	303511240403	11KV DONDAPADU AGL	Mixed	AMR	0.426	0.377	0.426	11.449	47.493	100%	
3048	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Ponnalur Sub Sta	303511340101	11KV N PONNALUR TOW	Rural	AMR	1.647	1.550	1.647	5.869	17.609	100%	
3049	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Ponnalur Sub Sta	303511340102	11KV PONNALUR RURAL	Mixed	AMR	0.978	0.977	0.978	0.159	7.725	100%	
3050	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Ponnalur Sub Sta	303511340103	11KV PAIREDDY PALEM	Mixed	AMR	0.197	0.156	0.197	20.576	44.224	100%	
3051	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Ponnalur Sub Sta	303511340104	11KV MUPPALLA	Mixed	AMR	1.981	1.981	1.981	0.006	23.609	100%	
3052	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV Ponnalur Sub Sta	303511340105	11KV INDUSTRIAL	INDL	AMR	0.542	0.523	0.542	3.614	2.875	100%	
3053	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV K Agraharam Sub	303511340201	11KV K AGRAHARAM TO	Rural	AMR	0.705	0.822	0.705	-16.529	1.560	100%	
3054	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV K Agraharam Sub	303511340202	11KV BOGANAMPADU	Mixed	AMR	0.819	0.806	0.819	1.522	15.841	100%	
3055	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV K Agraharam Sub	303511340203	11KV BALI REDDYPALEM	Mixed	AMR	0.983	0.996	0.983	-1.374	22.641	100%	
3056	ONGOLE	KANDUKUR	KANDUKUR	33/11 KV K Agraharam Sub	303511340204	11KV KOTHAPALEM RW	Rural	AMR	0.034	0.036	0.034	-6.355	80.551	100%	
3057	ONGOLE	KANDUKUR	KANDUKUR	33/11KV SS Choutapalem	303511340301	11KV11KV CHOWTAPAL	Mixed	AMR	1.482	1.421	1.482	4.119	12.692	100%	
3058	ONGOLE	KANDUKUR	KANDUKUR	33/11KV SS Choutapalem	303511340302	11KV LINGAM GUNTA CI	Mixed	AMR	1.199	1.149	1.199	4.124	20.840	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
3059	ONGOLE	KANDUKUR	KANDUKUR	33/11KV MALAPADU SS	303511340401	11KV MALAPDU TOWN	Rural	AMR	0.302	0.261	0.302	13.730	23.864	100%	
3060	ONGOLE	KANDUKUR	KANDUKUR	33/11KV MALAPADU SS	303511340402	11KV MALAPADU AGL	Agricultura	AMR	0.207	0.199	0.207	3.798	21.464	100%	
3061	ONGOLE	KANDUKUR	KANDUKUR	33/11KV MALAPADU SS	303511340403	11KV THIMMAPALEM	Mixed	AMR	0.501	0.460	0.501	8.117	33.775	100%	
3062	ONGOLE	KANDUKUR	KANDUKUR	33/11KV MALAPADU SS	303511340404	11KV MULEVARIPALEM	Mixed	AMR	0.162	0.146	0.162	9.938	14.227	100%	
3063	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Gudlur Sub Statio	303512140101	11KV GUDLUR TOWN	Rural	AMR	3.777	3.772	3.777	0.123	17.518	100%	
3064	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Gudlur Sub Statio	303512140102	11KV BASIREDDYPALEM	Mixed	AMR	0.616	0.586	0.616	4.759	15.399	100%	
3065	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Gudlur Sub Statio	303512140103	11KV GULLAPALEM	Mixed	AMR	1.124	0.966	1.124	14.044	50.219	100%	
3066	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Gudlur Sub Statio	303512140104	11KV POTLURU	Mixed	AMR	2.852	2.579	2.852	9.564	29.303	100%	
3067	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Gudlur Sub Statio	303512140105	11KV VENKAMPETA	Mixed	AMR	0.976	0.854	0.976	12.514	52.622	100%	
3068	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Tettu Sub Station	303512140201	11KV THETTU TOWN	Rural	AMR	1.298	1.184	1.298	8.769	13.464	100%	
3069	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Tettu Sub Station	303512140202	11KV MOCHERLA	Mixed	AMR	2.413	2.132	2.413	11.639	16.877	100%	
3070	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Tettu Sub Station	303512140203	11KV CHEVUR	Mixed	AMR	2.862	2.514	2.862	12.151	21.323	100%	
3071	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Chinalatrapi Subs	303512140301	11KV CHINALATRAPI TO	Rural	AMR	0.395	0.366	0.395	7.342	33.111	100%	
3072	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Chinalatrapi Subs	303512140302	11KV NARASAPURAM	Mixed	AMR	0.983	0.908	0.983	7.672	27.155	100%	
3073	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Chinalatrapi Subs	303512140303	11KV PEDALATRAPI	Mixed	AMR	0.611	0.543	0.611	11.131	41.064	100%	
3074	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Darakanipadu Su	303512140401	11KV DARAKANIPADU 1	Mixed	AMR	1.334	1.185	1.334	11.184	20.186	100%	
3075	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Darakanipadu Su	303512140402	11KV DOPPALAMPADU	Mixed	AMR	0.616	0.570	0.616	7.402	28.356	100%	
3076	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Darakanipadu Su	303512140403	11KV PURETIPALLI	Mixed	AMR	1.144	1.011	1.144	11.612	17.107	100%	
3077	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Lingasamudram S	303512240101	11KV LINGASAMUDRAM	Rural	AMR	2.451	2.261	2.451	7.775	8.287	100%	
3078	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Lingasamudram S	303512240102	11KV MOGILICHERLA	Mixed	AMR	0.581	0.717	0.581	-23.510	-23.510	100%	
3079	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Lingasamudram S	303512240103	11KV AGPADU	Mixed	AMR	0.991	0.944	0.991	4.776	18.788	100%	
3080	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Lingasamudram S	303512240104	11KV VENGALAPURAM	Mixed	AMR	2.030	1.839	2.030	9.449	19.523	100%	
3081	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Lingasamudram S	303512240105	11KV RWS	Rural	AMR	1.852	1.737	1.852	6.198	99.553	100%	
3082	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Chinapavani Sub	303512240201	11KV CHINAPAVANI TOV	Rural	AMR	2.216	2.226	2.216	-0.481	3.533	100%	
3083	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Chinapavani Sub	303512240202	11KV MUTHAVARIPALEN	Mixed	AMR	1.353	1.124	1.353	16.924	29.787	100%	
3084	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Chinapavani Sub	303512240203	11KV ANNEBOINAPALLI	Mixed	AMR	0.580	0.569	0.580	1.942	17.531	100%	
3085	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV VRkota Sub Statio	303512240301	11KV V R KOTA TOWN M	Mixed	AMR	1.266	1.187	1.266	6.246	28.582	100%	
3086	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV VRkota Sub Statio	303512240302	11KV V R KOTA RURAL	Mixed	AMR	0.599	0.579	0.599	3.324	0.606	100%	
3087	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV VRkota Sub Statio	303512240305	11KV TUNUGUNTA	Mixed	AMR	1.517	1.285	1.517	15.341	25.119	100%	
3088	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Mogilicherla Sub	303512240601	11KV Mogilicherla Town	Rural	AMR	0.166	0.010	0.166	93.899	93.958	100%	
3089	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Mogilicherla Sub	303512240602	11KV Mogilicherla Agl	Mixed	AMR	0.829	0.723	0.829	12.853	19.604	100%	
3090	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Mogilicherla Sub	303512240603	11KV R R Palem	Agricultura	AMR	1.103	0.937	1.103	15.095	15.095	100%	
3091	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Pokuru Sub Statio	303512340101	11KV POKUR TOWN	Rural	AMR	1.272	1.130	1.272	11.122	26.380	100%	
3092	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Pokuru Sub Statio	303512340102	11KV BADEVARIPALEM	Mixed	AMR	1.334	1.179	1.334	11.594	21.007	100%	
3093	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Pokuru Sub Statio	303512340103	11KV KONDASAMUDRAI	Mixed	AMR	0.939	0.817	0.939	12.960	45.821	100%	
3094	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Pokuru Sub Statio	303512340104	11KV SAKHAVARAM	Mixed	AMR	1.001	0.917	1.001	8.406	21.788	100%	
3095	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV VV Palem Sub Sta	303512340201	11KV V V PALEM TOWN	Rural	AMR	1.293	1.237	1.293	4.342	20.054	100%	
3096	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV VV Palem Sub Sta	303512340202	11KV ANKABHUPALAPU	Mixed	AMR	0.477	0.428	0.477	10.273	25.077	100%	
3097	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV VV Palem Sub Sta	303512340203	11KV ROLLAPADU	Mixed	AMR	1.915	1.648	1.915	13.938	20.607	100%	
3098	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV VV Palem Sub Sta	303512340204	11KV T P PALEM	Mixed	AMR	0.821	0.741	0.821	9.737	17.632	100%	
3099	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Naladalapur Sub	303512340301	11KV NALADALPUR TOW	Rural	AMR	0.496	0.441	0.496	11.201	36.727	100%	
3100	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Naladalapur Sub	303512340302	11KV SINGAMNENIPALL	Mixed	AMR	0.486	0.436	0.486	10.309	16.791	100%	
3101	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Naladalapur Sub	303512340303	11KV KALAVALLA	Mixed	AMR	1.155	1.009	1.155	12.643	29.380	100%	
3102	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Chundi Sub Statio	303512340401	11KV CHUNDI TOWN	Mixed	AMR	0.584	0.510	0.584	12.732	27.623	100%	
3103	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Chundi Sub Statio	303512340402	11KV MALAKONDA	Rural	AMR	0.270	0.242	0.270	10.360	9.549	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
3104	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Chundi Sub Stati	303512340403	11KV AYYAVARIPALLI	Mixed	AMR	0.589	0.514	0.589	12.689	20.647	100%	
3105	ONGOLE	KANDUKUR	KANDUKUR RURALS	33/11 KV Chundi Sub Stati	303512340404	11KV POLINENICHERUVI	Mixed	AMR	1.565	1.349	1.565	13.815	34.278	100%	
3106	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Singarayakonda S	303521140101	11KV RAILWAY ROAD	Rural	AMR	5.603	5.445	5.603	2.820	4.924	100%	
3107	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Singarayakonda S	303521140102	11KV MULAGUNTAPADU	Rural	AMR	9.584	9.278	9.584	3.198	7.109	100%	
3108	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Singarayakonda S	303521140103	11KV M R O OFFICE	Rural	AMR	5.208	4.974	5.208	4.495	11.282	100%	
3109	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Singarayakonda S	303521140104	11KV INDUSTRIAL(APIIC)	INDL	AMR	0.941	0.910	0.941	3.249	3.666	100%	
3110	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Singarayakonda S	303521140105	11KV INDUSTRIAL (PTP)	INDL	AMR	7.859	7.838	7.859	0.265	0.162	100%	
3111	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Singarayakonda S	303521140106	11KV INDUSTRIAL (KAN	INDL	AMR	1.128	1.143	1.128	-1.310	4.596	100%	
3112	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Pakala Sub Static	303521140201	11KV PAKALA TOWN	Rural	AMR	3.108	2.914	3.108	6.238	9.101	100%	
3113	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Pakala Sub Static	303521140202	11KV WOOLLAPALEM	Mixed	AMR	2.577	2.383	2.577	7.544	17.310	100%	
3114	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Pakala Sub Static	303521140203	11KV PAKALA AGL	Mixed	AMR	0.188	0.172	0.188	8.327	8.327	100%	
3115	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Pakala Sub Static	303521140204	11KV KESUPALEM AQUA	Rural	AMR	6.168	5.485	6.168	11.067	8.916	100%	
3116	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV SANAMPUDI SS	303521140301	11KV SANAMPUDI TOW	Mixed	AMR	0.618	0.576	0.618	6.678	23.528	100%	
3117	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV SANAMPUDI SS	303521140302	11KV INDUSTRIAL (SANA	INDL	AMR	0.293	0.278	0.293	5.289	16.693	100%	
3118	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV SANAMPUDI SS	303521140303	11KV SANAMPUDI TOW	Rural	AMR	0.413	0.358	0.413	13.174	19.062	100%	
3119	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV SOMARAJUPALLI	303521140501	11KV S R PALLI TOWN	Rural	AMR	4.374	4.534	4.374	-3.659	-3.659	100%	
3120	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV SOMARAJUPALLI	303521140502	11KV INDUSTRIAL (P S K	Rural	AMR	3.822	3.673	3.822	3.882	2.992	100%	
3121	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV SOMARAJUPALLI	303521140503	11KV P S KONDA AGL	Mixed	AMR	0.558	0.532	0.558	4.686	10.114	100%	
3122	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Zarugumalli Sub	303521240101	11KV ZARUGUMALLI TO	Rural	AMR	3.886	3.700	3.886	4.796	14.524	100%	
3123	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Zarugumalli Sub	303521240102	11KV DAVAGUDUR	Mixed	AMR	1.619	1.452	1.619	10.309	11.800	100%	
3124	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Zarugumalli Sub	303521240103	11KV NANADANAVANAI	Mixed	AMR	1.807	1.648	1.807	8.840	18.096	100%	
3125	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Zarugumalli Sub	303521240104	11KV VAVILETIPADU	Mixed	AMR	2.518	2.270	2.518	9.865	12.113	100%	
3126	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Narisingolu Sub S	303521240201	11KV NARSINGOLE TOW	Rural	AMR	0.802	0.765	0.802	4.541	26.120	100%	
3127	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Narisingolu Sub S	303521240202	11KV CHIRUKURPDU	Mixed	AMR	1.694	1.560	1.694	7.934	15.195	100%	
3128	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Narisingolu Sub S	303521240203	11KV PAIDIPADU	Mixed	AMR	1.249	1.132	1.249	9.398	24.166	100%	
3129	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Kamepalli Substa	303521240301	11KV KAMEPALLI	Rural	AMR	1.616	1.523	1.616	5.807	4.157	100%	
3130	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Kamepalli Substa	303521240302	11KV CHATUKUPADU	Mixed	AMR	2.027	1.787	2.027	11.836	37.284	100%	
3131	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Kamepalli Substa	303521240303	11KV PATCHAVA	Mixed	AMR	1.657	1.470	1.657	11.293	19.400	100%	
3132	ONGOLE	KANDUKUR	SINGARAYAKONDA	AE JARUGUMALLI	303521240304	11KV	Mixed	AMR	1.926	1.748	1.926	9.241	18.116	100%	
3133	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Ulavapadu Sub S	303521340101	11KV ULAVAPADU TOW	Rural	AMR	6.413	6.147	6.413	4.145	7.041	100%	
3134	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Ulavapadu Sub S	303521340102	11KV ATMAKUR	Mixed	AMR	2.276	2.065	2.276	9.271	25.306	100%	
3135	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Ulavapadu Sub S	303521340104	11KV S R SATRAM AQUA	Rural	AMR	0.423	0.399	0.423	5.678	4.422	100%	
3136	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Ulavapadu Sub S	303521340105	11KV K RAJUPALEM	Mixed	AMR	0.446	0.413	0.446	7.439	13.798	100%	
3137	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Ulavapadu Sub S	303521340106	11KV HIGHWAY EXPRES	Rural	AMR	0.062	0.058	0.062	5.548	7.310	100%	
3138	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Karedu Sub Stati	303521340201	11KV KAREDU TOWN	Rural	AMR	2.966	2.750	2.966	7.274	17.936	100%	
3139	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Karedu Sub Stati	303521340202	11KV INDUSTRIAL	Rural	AMR	2.029	1.867	2.029	7.963	5.055	100%	
3140	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Karedu Sub Stati	303521340203	11KV KOTHAPALLIPALEN	Mixed	AMR	1.374	1.231	1.374	10.423	28.613	100%	
3141	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Karedu Sub Stati	303521340204	11KV RAMAKRISHNAPU	Mixed	AMR	0.282	0.256	0.282	9.116	29.586	100%	
3142	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KVChakicherla Sub S	303521340301	11KV CHAKICHERLA	Mixed	AMR	1.404	1.281	1.404	8.765	11.600	100%	
3143	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KVChakicherla Sub S	303521340302	11 KV PEDDAPATTAPUP	Mixed	AMR	1.226	1.097	1.226	10.525	13.683	100%	
3144	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KVChakicherla Sub S	303521340305	11KV Pedapathapupalen	Rural	AMR	7.511	7.010	7.511	6.674	7.563	100%	
3145	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Alagayapalem Su	303521340401	11KV ALAGAYAPALEM	Rural	AMR	5.731	5.428	5.731	5.289	4.439	100%	
3146	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Alagayapalem Su	303521340402	11KV VAKA	Mixed	AMR	0.940	0.844	0.940	10.272	54.978	100%	
3147	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Alagayapalem Su	303521340403	11KV T CH PALEM	Mixed	AMR	1.551	1.372	1.551	11.549	12.839	100%	
3148	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Alagayapalem Su	303521340404	11KV ANKAMMAPALEM	Mixed	AMR	0.841	0.747	0.841	11.150	30.759	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
3149	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Bhimavaram SS	303521340501	11KV Bhimavaram Town	Rural	AMR	1.066	0.993	1.066	6.794	12.413	100%	
3150	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Bhimavaram SS	303521340502	11KV Bhimavaram Wate	Rural	AMR	0.147	0.139	0.147	5.834	72.094	100%	
3151	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Bhimavaram SS	303521340503	11KV Baddipudi Krishna	Mixed	AMR	0.946	0.868	0.946	8.246	21.753	100%	
3152	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11KV Ramayapatnam S	303521340601	11KV Ramayapatnam Ag	Mixed	AMR	0.186	0.169	0.186	8.856	15.426	100%	
3153	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11KV Ramayapatnam S	303521340602	11 KV RAMAYAPATNAM	Rural	AMR	0.715	0.650	0.715	9.113	5.909	100%	
3154	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11KV Ramayapatnam S	303521340603	11 KV INDUSTRIAL (LIGH	INDL	AMR	0.180	0.168	0.180	6.556	7.976	100%	
3155	ONGOLE	KANDUKUR	KANDUKUR	33/11KV Ramayapatnam S	303521340604	11 KV MONDEVARIPALE	Rural	AMR	5.197	4.285	5.197	17.539	29.046	100%	
3156	ONGOLE	KANDUKUR	KANDUKUR	33/11KV Ramayapatnam S	303521340605	11 KV KARLAPALEM AQU	Rural	AMR	5.825	5.262	5.825	9.658	12.601	100%	
3157	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Kondepi Sub Stat	303521440101	11KV KONDEPI TOWN	Rural	AMR	7.309	7.017	7.309	3.998	21.498	100%	
3158	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Kondepi Sub Stat	303521440102	11KV NENNURUPADU	Mixed	AMR	0.952	0.837	0.952	12.005	11.236	100%	
3159	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Kondepi Sub Stat	303521440103	11KV PERIDEPI	Mixed	AMR	1.112	0.931	1.112	16.275	23.639	100%	
3160	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Kondepi Sub Stat	303521440104	11KV JALLAPALEM	Mixed	AMR	1.218	1.071	1.218	12.071	18.339	100%	
3161	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Kondepi Sub Stat	303521440105	11KV ILLAVARA	Mixed	AMR	2.239	1.926	2.239	13.969	14.522	100%	
3162	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV Kondepi Sub Stat	303521440106	11KV GURRAPADIYA LI S	Rural	AMR	0.142	0.132	0.142	6.993	98.085	100%	
3163	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV K Uppalapadu Su	303521440201	11KV K UPPALAPADU_T	Rural	AMR	1.431	1.289	1.431	9.891	9.728	100%	
3164	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV K Uppalapadu Su	303521440202	11KV THUMADU	Mixed	AMR	1.481	1.305	1.481	11.854	8.945	100%	
3165	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV K Uppalapadu Su	303521440203	11KV MUPPAVARAM	Mixed	AMR	2.358	2.047	2.358	13.186	15.104	100%	
3166	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV K Uppalapadu Su	303521440204	11KV THUMADU LIFT IRI	Rural	AMR	0.022	0.021	0.022	7.589	95.693	100%	
3167	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV PETLURU SS	303521440301	11KV PETLURU TOWN 1	Mixed	AMR	2.515	2.146	2.515	14.647	15.681	100%	
3168	ONGOLE	KANDUKUR	SINGARAYAKONDA	33/11 KV PETLURU SS	303521440302	11KV PETLURU RURAL 1	Mixed	AMR	3.316	2.878	3.316	13.217	18.473	100%	
3169	ONGOLE	ADDANKI	ADDANKI	33/11 KV SADHUNAGAR SS	303611240101	11KV Vemparala	Mixed	AMR	2.753	2.541	2.753	7.684	25.176	100%	
3170	ONGOLE	ADDANKI	ADDANKI	33/11 KV SADHUNAGAR SS	303611240102	11KV Srinivasa Nagar	Mixed	AMR	2.470	2.358	2.470	4.503	13.249	100%	
3171	ONGOLE	ADDANKI	ADDANKI	33/11 KV SADHUNAGAR SS	303611240103	11KV Sadhu Nagar	Mixed	AMR	3.312	3.095	3.312	6.577	14.182	100%	
3172	ONGOLE	ADDANKI	ADDANKI	33/11KV Sankavarappadu	303611240201	11KV KALAVAKURU	Mixed	AMR	1.444	1.358	1.444	5.965	10.325	100%	
3173	ONGOLE	ADDANKI	ADDANKI	33/11KV Sankavarappadu	303611240202	11KV GOVINDAPURAM	Mixed	AMR	3.450	3.151	3.450	8.663	12.247	100%	
3174	ONGOLE	ADDANKI	ADDANKI	33/11KV Sankavarappadu	303611240203	11KV SANKAVARAPADU	Rural	AMR	0.004	0.003	0.004	26.262	26.249	100%	
3175	ONGOLE	ADDANKI	ADDANKI	33/11KV Sankavarappadu	303611240204	11KV GURAMVARPALEM	Mixed	AMR	1.647	1.602	1.647	2.737	10.674	100%	
3176	ONGOLE	ADDANKI	ADDANKI	33/11 KV KORISAPADU SS	303611340101	11KV KORISAPADU	Rural	AMR	1.436	1.400	1.436	2.469	3.945	100%	
3177	ONGOLE	ADDANKI	ADDANKI	33/11 KV KORISAPADU SS	303611340102	11KV P G PADU	Mixed	AMR	0.872	0.840	0.872	3.709	50.275	100%	
3178	ONGOLE	ADDANKI	ADDANKI	33/11KV Pamidipadu SS	303611340201	11KV PAMIDIPADU TOW	Rural	AMR	1.675	1.644	1.675	1.877	6.004	100%	
3179	ONGOLE	ADDANKI	ADDANKI	33/11KV Pamidipadu SS	303611340202	11KV PAMIDIPADU RUR	Mixed	AMR	0.003	0.003	0.003	0.000	2.609	100%	
3180	ONGOLE	ADDANKI	ADDANKI	33/11KV Pamidipadu SS	303611340203	11KV PRASAGULAPADU	Mixed	AMR	0.984	0.954	0.984	3.033	15.423	100%	
3181	ONGOLE	ADDANKI	ADDANKI	33/11KV Pamidipadu SS	303611340204	11KV RACHAPUDI	Mixed	AMR	1.921	1.856	1.921	3.387	12.507	100%	
3182	ONGOLE	ADDANKI	ADDANKI	33/11 KV Ramkuru Sub Sta	303611440101	11KV Ramakur Town	Rural	AMR	2.292	2.039	2.292	11.043	13.185	100%	
3183	ONGOLE	ADDANKI	ADDANKI	33/11 KV Ramkuru Sub Sta	303611440102	11KV B Rajupalem	Mixed	AMR	0.645	0.631	0.645	2.047	81.988	100%	
3184	ONGOLE	ADDANKI	ADDANKI	33/11 KV Ramkuru Sub Sta	303611440103	11KV Dwarakapadu	Agricultura	AMR	0.156	0.140	0.156	10.115	86.253	100%	
3185	ONGOLE	ADDANKI	MARTUR	33/11 KV MARTURU NORT	303621140101	11KV RAJUPALEM INDUS	INDL	AMR	11.691	11.843	11.691	-1.297	-0.222	100%	
3186	ONGOLE	ADDANKI	MARTUR	33/11 KV MARTURU NORT	303621140102	11KV RAJUPALEM	Rural	AMR	9.841	8.525	9.841	13.366	14.013	100%	
3187	ONGOLE	ADDANKI	MARTUR	33/11 KV MARTURU NORT	303621140103	11KV DEGARAMUDI	Rural	AMR	7.985	7.340	7.985	8.078	10.392	100%	
3188	ONGOLE	ADDANKI	MARTUR	33/11 KV Nagarajupalli SS	303621140201	11KVDwarakapadu	Mixed	AMR	0.940	0.866	0.940	7.879	27.500	100%	
3189	ONGOLE	ADDANKI	MARTUR	33/11 KV Nagarajupalli SS	303621140202	11KV Nagarajupalli	Mixed	AMR	2.250	1.909	2.250	15.137	33.443	100%	
3190	ONGOLE	ADDANKI	MARTUR	33/11 KV Nagarajupalli SS	303621140203	11KV Nagarajupali INDL	INDL	AMR	12.305	12.586	12.305	-2.283	0.267	100%	
3191	ONGOLE	ADDANKI	MARTUR	33/11KV Gurijepalli SS	303621240101	11KV Taghedimali	Agricultura	AMR	3.246	2.440	3.246	24.824	31.722	100%	
3192	ONGOLE	ADDANKI	MARTUR	33/11KV Gurijepalli SS	303621240102	11KV Gurijepalli Town	Rural	AMR	3.074	4.318	3.074	-40.450	-31.415	100%	
3193	ONGOLE	ADDANKI	MARTUR	33/11KV Gurijepalli SS	303621240103	11KV INDL Dedicted	INDL	AMR	8.166	6.956	8.166	14.815	12.557	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
3194	ONGOLE	ADDANKI	MARTUR	33/11KV PUTTAVARIPALEM	303621240201	11KV PUTTAVARIPALEM	Rural	AMR	4.013	3.143	4.013	21.698	23.560	100%	
3195	ONGOLE	ADDANKI	MARTUR	33/11KV PUTTAVARIPALEM	303621240202	11KV RAMIREDDY PALEM	Mixed	AMR	2.094	1.593	2.094	23.919	27.868	100%	
3196	ONGOLE	ADDANKI	MARTUR	33/11KV PUTTAVARIPALEM	303621240203	11KV YELLACHERUVU	Mixed	AMR	3.808	3.030	3.808	20.442	24.597	100%	
3197	ONGOLE	ADDANKI	MARTUR	33/11 KV VALLAPALLI SS	303621340201	11KV GUNTUPALLI	Mixed	AMR	2.681	2.327	2.681	13.214	21.613	100%	
3198	ONGOLE	ADDANKI	MARTUR	33/11 KV VALLAPALLI SS	303621340202	11KV VALLAPALI RURAL	Mixed	AMR	0.608	1.070	0.608	-76.135	-72.267	100%	
3199	ONGOLE	ADDANKI	MARTUR	33/11 KV VALLAPALLI SS	303621340203	11KV VALLAPALLI	Rural	AMR	0.505	0.491	0.505	2.784	6.995	100%	
3200	ONGOLE	ADDANKI	MARTUR	33/11 KV UPPUMAGULURU	303621340301	11KV UPPUMAGULURU	Rural	AMR	2.341	1.885	2.341	19.472	21.875	100%	
3201	ONGOLE	ADDANKI	MARTUR	33/11 KV UPPUMAGULURU	303621340302	11KV KOPPERAPALEM	Mixed	AMR	1.992	1.743	1.992	12.534	23.859	100%	
3202	ONGOLE	ADDANKI	MARTUR	33/11 KV UPPUMAGULURU	303621340303	11KV GSR ECO BRICKS	INDL	AMR	0.235	0.228	0.235	2.793	3.237	100%	
3203	ONGOLE	ADDANKI	MARTUR	33/11KV Vemavaram SS	303621340401	11 KV VEMAVARAM IND	INDL	AMR	23.688	32.560	23.688	-37.454	-35.140	100%	
3204	ONGOLE	ADDANKI	MARTUR	33/11KV Vemavaram SS	303621340402	11KVVEMAVARAM	Rural	AMR	5.515	1.427	5.515	74.118	74.142	100%	
3205	ONGOLE	ADDANKI	MARTUR	33/11KV Vemavaram SS	303621340403	11kv Mallayapalem	Mixed	AMR	1.673	1.671	1.673	0.090	8.258	100%	
3206	ONGOLE	ADDANKI	MARTUR	33/11KV Vemavaram SS	303621340404	11KV Vemavaram INDL-I	INDL	AMR	3.871	1.892	3.871	51.120	53.120	100%	
3207	ONGOLE	ADDANKI	MARTUR	33/11KV Velamavaripalem	303621340501	11 KV Kothur	Mixed	AMR	0.957	0.733	0.957	23.373	78.499	100%	
3208	ONGOLE	ADDANKI	MARTUR	33/11KV Velamavaripalem	303621340502	11 KV Sangam	Mixed	AMR	1.083	0.950	1.083	12.296	22.863	100%	
3209	ONGOLE	ADDANKI	MARTUR	33/11KV Velamavaripalem	303621340503	11 KV Velamavaripalem	Rural	AMR	0.586	0.651	0.586	-11.252	49.168	100%	
3210	ONGOLE	ADDANKI	MARTUR	33/11KV Velamavaripalem	303621340504	11 KV Jammalamadaka	Mixed	AMR	0.987	0.830	0.987	15.851	66.781	100%	
3211	ONGOLE	ADDANKI	MARTUR	33/11KV Komminenivaripa	303621340601	11KV KOMMINENIVARIP	Rural	AMR	0.798	0.201	0.798	74.784	78.812	100%	
3212	ONGOLE	ADDANKI	MARTUR	33/11KV Komminenivaripa	303621340602	11KV KOMMINENIVARIP	Mixed	AMR	0.279	0.256	0.279	8.098	50.834	100%	
3213	ONGOLE	ADDANKI	MARTUR	33/11KV Komminenivaripa	303621340603	11KV J M P AGHRAHARA	Mixed	AMR	0.674	0.615	0.674	8.717	98.115	100%	
3214	ONGOLE	ADDANKI	MARTUR	33/11KV Komminenivaripa	303621340604	11KV CHAVATAMADIGA	Mixed	AMR	0.975	0.820	0.975	15.929	99.175	100%	
3215	ONGOLE	ADDANKI	MARTUR	33/11KV PUNURU SS	303621440101	11KV PUNURU (SSHQ)	Rural	AMR	2.083	1.774	2.083	14.840	19.725	100%	
3216	ONGOLE	ADDANKI	MARTUR	33/11KV PUNURU SS	303621440102	11KV INDUSTRIAL DAND	INDL	AMR	1.818	1.731	1.818	4.776	7.102	100%	
3217	ONGOLE	ADDANKI	MARTUR	33/11KV PUNURU SS	303621440103	11KV MUNNAIANGIVARI	Mixed	AMR	2.285	1.948	2.285	14.750	24.371	100%	
3218	ONGOLE	ADDANKI	MARTUR	33/11KV PUNURU SS	303621440104	11KV GANAVARAM_DAI	Mixed	AMR	0.535	0.415	0.535	22.480	26.212	100%	
3219	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Amaravathi Sub-S	309131140101	11KV Amaravath town	Rural	AMR	9.580	9.043	9.580	5.610	13.930	100%	
3220	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Amaravathi Sub-S	309131140102	11KV Jupudi	Mixed	AMR	1.970	1.704	1.970	13.529	30.780	100%	
3221	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Amaravathi Sub-S	309131140103	11KV Ravela	Mixed	AMR	3.393	2.901	3.393	14.501	28.922	100%	
3222	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Amaravathi Sub-S	309131140104	11KV Pedakurapadu LI S	Mixed	AMR	4.500	3.974	4.500	11.689	51.115	100%	
3223	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Amaravathi Sub-S	309131140105	11KV EXPRESS FEEDER	Rural	AMR	0.860	0.778	0.860	9.584	9.584	100%	
3224	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Amaravathi Sub-S	309131140106	11KV Dharanikota	Rural	AMR	5.076	4.589	5.076	9.600	23.425	100%	
3225	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Malladi Sub-Stati	309131140201	11KV Malladi	Rural	AMR	1.123	0.968	1.123	13.790	34.540	100%	
3226	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Malladi Sub-Stati	309131140202	11KV Pondugala	Mixed	AMR	3.253	2.858	3.253	12.147	18.261	100%	
3227	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Malladi Sub-Stati	309131140203	11KV L I Scheme	Rural	AMR	1.797	1.656	1.797	7.848	95.240	100%	
3228	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Malladi Sub-Stati	309131140204	11KV ATTULURU	Mixed	AMR	1.413	1.212	1.413	14.219	15.901	100%	
3229	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11 KV Unguturu SS	309131140301	11KV UNGUTURU Indust	Rural	AMR	1.314	1.192	1.314	9.319	28.278	100%	
3230	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11 KV Unguturu SS	309131140302	11KV Karlapudi	Mixed	AMR	4.877	4.173	4.877	14.435	25.910	100%	
3231	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11 KV Unguturu SS	309131140303	11KV MANDEPUDI	Mixed	AMR	1.057	0.934	1.057	11.608	28.579	100%	
3232	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11 KV Unguturu SS	309131140304	11KV LI SCHEME	Rural	AMR	0.053	0.049	0.053	7.087	54.942	100%	
3233	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Tadikonda Sub-St	309131240101	11KV Tadikonda	Rural	AMR	7.275	6.716	7.275	7.683	14.277	100%	
3234	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Tadikonda Sub-St	309131240102	11KV Ponekallu	Rural	AMR	8.946	8.022	8.946	10.331	17.033	100%	
3235	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Tadikonda Sub-St	309131240103	11KV Nidumukalla	Rural	AMR	8.406	7.829	8.406	6.855	12.202	100%	
3236	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11 KV MOTHADAKA SU	309131240201	11KV Mothadaka AGL	Agricultura	AMR	1.438	1.389	1.438	3.411	7.978	100%	
3237	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11 KV MOTHADAKA SU	309131240202	11KV MOTHADAKA	Rural	AMR	4.423	4.136	4.423	6.506	10.113	100%	
3238	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11 KV MOTHADAKA SU	309131240203	11KV MUKKAMALA	Rural	AMR	4.875	4.404	4.875	9.666	21.951	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
3239	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11 KV Kantheru SS	309131240301	11KV KANTHERU VILLAG	Rural	AMR	2.971	2.704	2.971	8.996	22.548	100%	
3240	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11 KV Kantheru SS	309131240302	11KV KANTHERU AGL	Agricultura	AMR	0.157	0.146	0.157	6.641	30.454	100%	
3241	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Pedakurapadu Su	309131340101	11KV Pedakurapadu	Rural	AMR	5.738	5.208	5.738	9.245	12.138	100%	
3242	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Pedakurapadu Su	309131340102	11KV Thalluru	Mixed	AMR	1.148	1.071	1.148	6.698	13.204	100%	
3243	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Pedakurapadu Su	309131340103	11KV Lagadapadu	Mixed	AMR	4.666	4.240	4.666	9.126	16.198	100%	
3244	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Pedakurapadu Su	309131340104	11KV Lingampguntala	Mixed	AMR	4.948	4.447	4.948	10.119	16.008	100%	
3245	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Pedakurapadu Su	309131340105	11KV LI Scheme	Rural	AMR	0.069	0.065	0.069	5.918	86.145	100%	
3246	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV THALLURU Sub-St	309131340201	11KV Kambhampadu	Mixed	AMR	2.967	2.714	2.967	8.542	17.458	100%	
3247	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV THALLURU Sub-St	309131340202	11KV Thalluru SS HQ	Rural	AMR	2.033	1.862	2.033	8.376	18.767	100%	
3248	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV THALLURU Sub-St	309131340203	11KV L I Scheme	Rural	AMR	0.125	0.120	0.125	4.001	90.060	100%	
3249	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Ananthavaram Su	309131440101	11KV Ananthavarm	Rural	AMR	2.892	2.622	2.892	9.331	21.250	100%	
3250	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Ananthavaram Su	309131440102	11KV Vaddamanu	Mixed	AMR	0.134	0.122	0.134	8.886	9.481	100%	
3251	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Ananthavaram Su	309131440103	11KV LI Scheme Water w	Rural	AMR	4.097	3.790	4.097	7.483	62.575	100%	
3252	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Rayapudi Sub-Sta	309131440201	11KV water works	Rural	AMR	0.671	0.623	0.671	7.157	3.647	100%	
3253	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Rayapudi Sub-Sta	309131440202	11KV Vykuntapuram	Mixed	AMR	1.079	0.993	1.079	8.021	31.639	100%	
3254	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Rayapudi Sub-Sta	309131440203	11KV Mandadam	Mixed	AMR	0.455	0.424	0.455	6.751	24.841	100%	
3255	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Rayapudi Sub-Sta	309131440204	11KV LIFT	Rural	AMR	0.982	0.902	0.982	8.134	8.134	100%	
3256	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Rayapudi Sub-Sta	309131440205	11KV Rayapudi Town	Rural	AMR	5.454	4.986	5.454	8.575	8.575	100%	
3257	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Rayapudi Sub-Sta	309131440206	11KV THULLUR MHQ	Rural	AMR	6.619	6.170	6.619	6.785	17.203	100%	
3258	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Mandadam Sub-S	309131440301	11KV Mandadam Town	Rural	AMR	12.770	12.202	12.770	4.450	14.396	100%	
3259	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Mandadam Sub-S	309131440302	11KV Venkatapalem	Mixed	AMR	0.549	0.519	0.549	5.459	17.192	100%	
3260	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Mandadam Sub-S	309131440303	11KV Velagapudi	Rural	AMR	0.501	0.455	0.501	9.094	13.859	100%	
3261	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Mandadam Sub-S	309131440304	11KV LIFT	Rural	AMR	0.442	0.355	0.442	19.594	48.223	100%	
3262	CRDA	AMARAVATHI	GUNTUR RURAL 2	33/11KV Mandadam Sub-S	309131440305	11KV Sachivalayam	Rural	AMR	1.986	1.845	1.986	7.103	17.250	100%	
3263	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mangalagiri SS-1	309141140101	11KV P V PUDI	Rural	AMR	8.172	7.805	8.172	4.492	5.173	100%	
3264	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mangalagiri SS-1	309141140102	11KV CH V PUDI	Mixed	AMR	0.559	0.523	0.559	6.410	31.657	100%	
3265	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mangalagiri SS-1	309141140103	11KV Bypass	Urban	AMR	11.317	10.886	11.317	3.807	3.451	100%	
3266	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mangalagiri SS-1	309141140104	11KV MGL TOWN	Urban	AMR	4.904	4.753	4.904	3.079	5.071	100%	
3267	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mangalagiri SS-1	309141140105	11KV SAKSHI	Urban	AMR	5.860	5.730	5.860	2.231	2.231	100%	
3268	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mangalagiri SS-1	309141140106	11KV Water works feede	Urban	AMR	2.488	2.392	2.488	3.878	5.665	100%	
3269	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mangalagiri SS-2	309141140201	11KV TOWN - 1	Urban	AMR	4.901	4.722	4.901	3.661	4.142	100%	
3270	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mangalagiri SS-2	309141140202	11KV TOWN - 2	Urban	AMR	9.743	9.232	9.743	5.242	5.992	100%	
3271	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mangalagiri SS-2	309141140203	11KV TOWN-3	Urban	AMR	8.450	8.119	8.450	3.921	4.768	100%	
3272	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mangalagiri SS-2	309141140204	11KV TOWN-4	Urban	AMR	5.611	5.435	5.611	3.138	3.902	100%	
3273	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mangalagiri SS-2	309141140205	11KV CAMP	Urban	AMR	4.046	3.867	4.046	4.427	6.593	100%	
3274	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV MANGALAGIRI AP	309141140301	11KV INDIRANAGAR	Urban	AMR	2.584	2.494	2.584	3.456	4.434	100%	
3275	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV MANGALAGIRI AP	309141140302	11 KV ATMAKURU	Rural	AMR	5.609	5.370	5.609	4.261	2.246	100%	
3276	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV MANGALAGIRI AP	309141140303	11 KV JAGUAR	Rural	AMR	5.960	5.768	5.960	3.227	5.636	100%	
3277	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV MANGALAGIRI AP	309141140304	11KV DGP OFFICE	Urban	AMR	2.450	2.333	2.450	4.787	4.787	100%	
3278	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mangalagiri SS-IV	309141140401	11KV Tenali Road	Urban	AMR	6.165	5.938	6.165	3.681	4.281	100%	
3279	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mangalagiri SS-IV	309141140402	11KV Koppurao Colony	Urban	AMR	2.566	2.479	2.566	3.394	4.628	100%	
3280	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mangalagiri SS-IV	309141140403	11KV Anjaneya Colony	Urban	AMR	2.289	2.213	2.289	3.330	1.067	100%	
3281	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mangalagiri SS-IV	309141140404	11KV Old Mangalagiri	Urban	AMR	1.887	1.779	1.887	5.705	6.484	100%	
3282	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Yerrabalem SS	309141240101	11KV Industrial	INDL	AMR	7.647	7.276	7.647	4.861	6.526	100%	
3283	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Yerrabalem SS	309141240102	11KV YARRABALEM	Rural	AMR	10.393	9.892	10.393	4.820	6.021	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
3284	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Yerrabalem SS	309141240103	11KV Rural	Mixed	AMR	1.281	1.096	1.281	14.437	30.059	100%	
3285	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Yerrabalem SS	309141240104	11KV LIFT IRRIGATION	Rural	AMR	0.649	0.581	0.649	10.408	71.679	100%	
3286	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Yerrabalem SS	309141240105	11KV Navluru	Rural	AMR	10.694	9.915	10.694	7.284	4.876	100%	
3287	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV MANGALAGIRI IN	309141240201	11KV Auto Nagar	INDL	AMR	3.154	2.932	3.154	7.028	5.399	100%	
3288	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV MANGALAGIRI IN	309141240202	11KV IT Park	Urban	AMR	1.302	1.235	1.302	5.130	5.856	100%	
3289	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV MANGALAGIRI IN	309141240203	11KV RR Towers	Urban	AMR	3.339	3.081	3.339	7.731	9.427	100%	
3290	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV MANGALAGIRI IN	309141240204	11KV Town 5	Urban	AMR	0.471	0.449	0.471	4.694	4.932	100%	
3291	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Chinakakani Sub-	309141340101	11KV NIDAMARRU	Mixed	AMR	3.673	3.398	3.673	7.489	9.341	100%	
3292	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Chinakakani Sub-	309141340102	11KV CHINAKAKANI	Rural	AMR	6.500	6.238	6.500	4.028	3.298	100%	
3293	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Chinakakani Sub-	309141340103	11KV CHINAKAKANI EXP	Rural	AMR	2.188	2.073	2.188	5.243	4.943	100%	
3294	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Chinakakani Sub-	309141340104	11KV KAZA	Rural	AMR	7.255	7.051	7.255	2.813	4.837	100%	
3295	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Nutakki Sub-Stati	309141340201	11KV NUTAKKI	Rural	AMR	7.339	7.071	7.339	3.642	3.720	100%	
3296	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Nutakki Sub-Stati	309141340202	11KV NUTAKKI AGL	Mixed	AMR	0.555	0.529	0.555	4.780	4.780	100%	
3297	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Nutakki Sub-Stati	309141340203	11KV GODAVARRU	Mixed	AMR	0.720	0.687	0.720	4.682	14.624	100%	
3298	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Nutakki Sub-Stati	309141340204	11KV R C PURAM	Mixed	AMR	0.828	0.802	0.828	3.156	43.009	100%	
3299	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Nutakki Sub-Stati	309141340205	11KV CHIRRAVURU	Mixed	AMR	0.200	0.193	0.200	3.415	4.895	100%	
3300	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Nidamarru New	309141340301	11KV Nidamarru-2	Rural	AMR	3.062	2.864	3.062	6.467	8.185	100%	
3301	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Nidamarru New	309141340302	11KV BETHAPUDI	Rural	AMR	1.108	1.022	1.108	7.808	11.182	100%	
3302	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Nidamarru New	309141340303	11KV KAZA INDUSTRIAL	INDL	AMR	0.164	0.152	0.164	7.362	9.585	100%	
3303	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Nidamarru New	309141340304	11KV KURAGALLU AGL	Agricultura	AMR	0.036	0.033	0.036	7.722	7.722	100%	
3304	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Nidamarru New	309141340305	11KV APTIDCO	Urban	AMR	0.001	0.001	0.001	6.680	8.734	100%	
3305	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Kunchanapalli Sul	309141440101	11KV Kolanukonda	Urban	AMR	6.421	6.063	6.421	5.581	5.982	100%	
3306	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Kunchanapalli Sul	309141440102	11KV Kunchanapalli	Urban	AMR	12.302	11.848	12.302	3.689	3.189	100%	
3307	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Kunchanapalli Sul	309141440103	11KV PRATHURU	Mixed	AMR	1.145	1.090	1.145	4.836	5.021	100%	
3308	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Kunchanapalli Sul	309141440104	11KV VADDESWARAM	Mixed	AMR	3.014	2.881	3.014	4.406	4.406	100%	
3309	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Mahanadu Semi	309141440201	11KV Navodayacolony fe	Urban	AMR	10.010	9.575	10.010	4.338	4.788	100%	
3310	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Mahanadu Semi	309141440202	11KV Christianpeta feed	Urban	AMR	6.620	6.247	6.620	5.641	3.967	100%	
3311	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Mahanadu Semi	309141440203	11KV KOTHURU FEEDER	Urban	AMR	3.225	2.890	3.225	10.381	10.057	100%	
3312	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Mahanadu Semi	309141440204	11KV CM House	Urban	AMR	0.704	0.684	0.704	2.807	43.618	100%	
3313	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Mahanadu Semi	309141440205	11KV MAHANADU FEED	Urban	AMR	9.683	9.243	9.683	4.542	4.315	100%	
3314	CRDA	AMARAVATHI	MANGALAGIRI	33/11 KV Mahanadu Semi	309141440206	11KV AR Pumping Schen	Urban	AMR	2.742	2.602	2.742	5.111	3.812	100%	
3315	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mallempudi SS	309141440301	11KV MELLEMPUDI TOW	Urban	AMR	1.732	1.646	1.732	4.961	6.328	100%	
3316	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mallempudi SS	309141440302	11KV MELLEMPUDI AGL	Agricultura	AMR	1.807	1.665	1.807	7.860	52.232	100%	
3317	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mallempudi SS	309141440303	11KV KLU Road feeder	Urban	AMR	5.956	5.671	5.956	4.796	4.796	100%	
3318	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Mallempudi SS	309141440304	11KV Kothapalem	Urban	AMR	2.094	2.011	2.094	3.975	5.178	100%	
3319	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Tadepalli ss-I Sub	309141540101	11KV UNDAVALLI	Urban	AMR	6.880	6.501	6.880	5.502	5.502	100%	
3320	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Tadepalli ss-I Sub	309141540102	11KV KRISHNA NAGAR	Urban	AMR	5.418	5.137	5.418	5.174	5.783	100%	
3321	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Tadepalli ss-I Sub	309141540103	11KV SITHANAGARAM	Urban	AMR	9.350	8.937	9.350	4.418	6.938	100%	
3322	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Tadepalli ss-I Sub	309141540104	11KV DOLAS NAGAR	Urban	AMR	5.397	5.176	5.397	4.090	8.527	100%	
3323	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Tadepalli ss-II Sub	309141540201	11KV BH PURAM	Urban	AMR	3.756	3.618	3.756	3.665	5.563	100%	
3324	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Tadepalli ss-II Sub	309141540202	11KV RURAL	Agricultura	AMR	0.001	0.001	0.001	4.218	46.610	100%	
3325	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Tadepalli ss-II Sub	309141540203	11KV TADEPALLI -3	Urban	AMR	6.622	6.324	6.622	4.502	4.297	100%	
3326	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Tadepalli ss-II Sub	309141540204	11KV ROYAL FIRM	Urban	AMR	0.119	0.113	0.119	5.080	7.673	100%	
3327	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV UNDAVALLI Sub S	309141540301	11KV Prakasam barrage	Urban	AMR	5.795	5.333	5.795	7.977	7.977	100%	
3328	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV UNDAVALLI Sub S	309141540302	11KV CM feeder	Urban	AMR	0.242	0.235	0.242	2.661	2.661	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
3329	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV UNDAVALLI Sub S	309141540303	11KV MSR feeder	Urban	AMR	7.945	7.567	7.945	4.750	3.360	100%	
3330	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV UNDAVALLI Sub S	309141540304	11KV PENUMAKA	Urban	AMR	5.162	4.939	5.162	4.307	3.596	100%	
3331	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Tadepalli SS-III Su	309141540401	11KV Asramam Feeder	Urban	AMR	1.028	0.943	1.028	8.240	10.832	100%	
3332	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Tadepalli SS-III Su	309141540402	11KV HI Way feeder	Urban	AMR	5.200	4.957	5.200	4.676	5.213	100%	
3333	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Tadepalli SS-III Su	309141540403	11KV Vijayawada Club fe	Urban	AMR	0.699	0.641	0.699	8.327	8.587	100%	
3334	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Tadepalli SS-III Su	309141540405	11KV Tadepalli central fe	Urban	AMR	0.085	0.082	0.085	3.848	#DIV/0!	100%	
3335	CRDA	AMARAVATHI	MANGALAGIRI	33/11KV Tadepalli SS-III Su	309141540406	11KV Tadepalli AGL feed	Agricultura	AMR	0.078	0.071	0.078	10.040	53.856	100%	
3336	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Boppudi Sub-Stat	309231140101	11KV Murikipudi	Mixed	AMR	0.304	0.260	0.304	14.617	18.096	100%	
3337	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Boppudi Sub-Stat	309231140102	11KV Boppudi	Rural	AMR	3.340	3.190	3.340	4.489	9.070	100%	
3338	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Boppudi Sub-Stat	309231140103	11KV Pasumarru Indl	Rural	AMR	0.908	0.831	0.908	8.475	8.807	100%	
3339	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Boppudi Sub-Stat	309231140104	11KV Highway Industrial	Rural	AMR	9.856	9.378	9.856	4.851	5.631	100%	
3340	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Maddirala Sub-St	309231140201	11KV Maddirala	Rural	AMR	0.136	0.126	0.136	7.026	9.351	100%	
3341	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Maddirala Sub-St	309231140202	11KV Lift Feeder	Rural	AMR	0.863	0.815	0.863	5.564	99.444	100%	
3342	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Maddirala Sub-St	309231140203	11KV Gopalamvaripalem	Rural	AMR	3.665	3.547	3.665	3.229	1.927	100%	
3343	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Maddirala Sub-St	309231140204	11KV POTHAVARAM	Rural	AMR	1.263	1.184	1.263	6.298	19.454	100%	
3344	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Maddirala Sub-St	309231140205	11KV VijayaLakshmi	INDL	AMR	0.537	0.502	0.537	6.509	19.402	100%	
3345	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Maddirala Sub-St	309231140206	11KV Navodaya	Rural	AMR	14.131	13.768	14.131	2.566	1.675	100%	
3346	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Pasumarru Sub-S	309231140301	11KV Pasumarru	Rural	AMR	4.304	4.105	4.304	4.623	11.872	100%	
3347	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Pasumarru Sub-S	309231140302	11KV Gottipadu	Rural	AMR	3.683	3.279	3.683	10.956	23.796	100%	
3348	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Pasumarru Sub-S	309231140303	11KV Yeddanapudi	Rural	AMR	0.003	0.003	0.003	5.047	5.126	100%	
3349	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Pasumarru Sub-S	309231140304	11KV Annambotlavaripa	Rural	AMR	0.326	0.311	0.326	4.456	98.712	100%	
3350	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Murikipudi Sub-S	309231140401	11KV Tatapudi	Mixed	AMR	0.166	0.157	0.166	5.372	36.127	100%	
3351	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Murikipudi Sub-S	309231140402	11KV Industrial	INDL	AMR	0.094	0.091	0.094	3.147	18.128	100%	
3352	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Murikipudi Sub-S	309231140403	11KV Agricultural	Mixed	AMR	1.202	1.123	1.202	6.572	52.338	100%	
3353	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Murikipudi Sub-S	309231140404	11KV Murikipudi	Rural	AMR	2.465	2.368	2.465	3.928	8.499	100%	
3354	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Chilakaluripeta Su	309231240101	11KV Chilakaluripet A2	Urban	AMR	6.615	6.352	6.615	3.984	3.927	100%	
3355	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Chilakaluripeta Su	309231240102	11KV Chilakaluripet B	Urban	AMR	3.214	3.115	3.214	3.067	3.291	100%	
3356	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Chilakaluripeta Su	309231240103	11KV Chilakaluripet C	Urban	AMR	1.787	1.782	1.787	0.264	0.550	100%	
3357	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Chilakaluripeta Su	309231240104	11KV Highway	Urban	AMR	4.561	4.395	4.561	3.628	5.117	100%	
3358	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Chilakaluripeta Su	309231240105	11KV Chilakaluripet A1	Urban	AMR	6.392	6.183	6.392	3.277	3.905	100%	
3359	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11 KV RUTH DICHMEN	309231240201	11KV C R Colony	Urban	AMR	3.710	3.442	3.710	7.231	6.917	100%	
3360	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11 KV RUTH DICHMEN	309231240202	11KV Maddinagar	Urban	AMR	5.343	5.019	5.343	6.057	9.872	100%	
3361	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11 KV RUTH DICHMEN	309231240203	11KV Police Station	Urban	AMR	4.658	4.359	4.658	6.427	6.577	100%	
3362	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11 KV RUTH DICHMEN	309231240204	11KV Rural Industrial	Rural	AMR	3.613	3.469	3.613	3.993	4.794	100%	
3363	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV CHILAKALURIPET(	309231240301	11KV SUBBAIAH THOTA	Urban	AMR	3.190	3.032	3.190	4.974	5.714	100%	
3364	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV CHILAKALURIPET(	309231240302	11KV KALA MANDIR FEE	Urban	AMR	3.542	3.443	3.542	2.795	5.580	100%	
3365	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV CHILAKALURIPET(	309231240303	11KV MARKET FEEDER	Urban	AMR	1.677	1.611	1.677	3.907	11.030	100%	
3366	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV CHILAKALURIPET(	309231240304	11KV VIJAYA BANK FEED	Urban	AMR	1.651	1.546	1.651	6.344	8.744	100%	
3367	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV CHILAKALURIPET(	309231240305	11KV SUBHANI NAGAR F	Urban	AMR	3.846	3.676	3.846	4.417	5.284	100%	
3368	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV CHILAKALURIPET(	309231240306	11KV BONDALAPALEM F	Urban	AMR	6.470	6.067	6.470	6.222	7.088	100%	
3369	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Subhani Nagar Su	309231340101	11KV KB road	Urban	AMR	3.772	3.669	3.772	2.730	1.465	100%	
3370	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Subhani Nagar Su	309231340102	11KV Purushotthapatna	Urban	AMR	2.370	2.235	2.370	5.690	4.868	100%	
3371	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Subhani Nagar Su	309231340103	11KV Pandaripuram	Urban	AMR	3.425	3.265	3.425	4.655	7.583	100%	
3372	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Polireddy Palem S	309231340201	11KV Polireddy Palem	Urban	AMR	1.236	1.185	1.236	4.081	5.205	100%	
3373	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Polireddy Palem S	309231340202	11KV Polireddy Palem In	Rural	AMR	3.514	3.372	3.514	4.037	7.459	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
3374	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Polireddy Palem S	309231340203	11KV Kavuru	Rural	AMR	3.207	3.030	3.207	5.535	5.393	100%	
3375	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Polireddy Palem S	309231340204	11KV Gangannapalem LI	Mixed	AMR	4.199	4.024	4.199	4.177	45.237	100%	
3376	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Pandaripuram SS	309231340301	11KV Singu Nagar	Urban	AMR	1.171	1.107	1.171	5.488	5.488	100%	
3377	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Pandaripuram SS	309231340302	11KV Bank Colony	Urban	AMR	1.364	1.283	1.364	5.917	7.332	100%	
3378	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Pandaripuram SS	309231340303	11KV Sugali Colony	Urban	AMR	3.373	3.260	3.373	3.336	3.336	100%	
3379	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Pandaripuram SS	309231340304	11KV Krishna Nagar	Urban	AMR	1.870	1.804	1.870	3.501	4.775	100%	
3380	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Pandaripuram SS	309231340305	11KV NTR Colony	Urban	AMR	3.079	2.889	3.079	6.163	9.490	100%	
3381	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Pandaripuram SS	309231340306	11KV ITC Colony	Urban	AMR	1.451	1.415	1.451	2.478	3.404	100%	
3382	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Chilakaluripet (TI	309231340401	11KV TIDCO-1	Urban	AMR	0.001	0.001	0.001	0.404	0.404	100%	
3383	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Chilakaluripet (TI	309231340405	11KV Cheruvu	Urban	AMR	0.027	0.026	0.027	3.487	79.341	100%	
3384	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Chilakaluripet (TI	309231340406	11KV Gangammatalli	Urban	AMR	0.279	0.268	0.279	4.014	20.075	100%	
3385	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Edlapadu Sub-Sta	309231440101	11KV Edlapadu MHQ	Rural	AMR	4.810	4.631	4.810	3.706	6.727	100%	
3386	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Edlapadu Sub-Sta	309231440102	11KV Lift Feeder	Rural	AMR	0.052	0.046	0.052	11.562	#N/A	100%	
3387	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Edlapadu Sub-Sta	309231440103	11KV Rural (Nadendla)	Rural	AMR	2.693	2.578	2.693	4.265	12.903	100%	
3388	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Edlapadu Sub-Sta	309231440104	11KV Karuchola	Rural	AMR	0.993	0.944	0.993	4.869	24.987	100%	
3389	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Edlapadu Sub-Sta	309231440105	11KV Industrial Feeder	Rural	AMR	2.214	2.149	2.214	2.946	0.174	100%	
3390	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Boyapalem Sub-S	309231440201	11KV Boyapalem Rural	Rural	AMR	2.711	2.639	2.711	2.678	29.570	100%	
3391	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Boyapalem Sub-S	309231440202	11KV Boyapalem Indl	Rural	AMR	2.297	2.274	2.297	0.985	5.496	100%	
3392	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Boyapalem Sub-S	309231440203	11KV Pepsi	INDL	AMR	0.365	0.358	0.365	1.965	10.144	100%	
3393	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Kondaveedu Sub-	309231440301	11KV Kondaveedu	Mixed	AMR	1.177	1.135	1.177	3.547	29.611	100%	
3394	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Kondaveedu Sub-	309231440302	11KV Puttakotakothapal	Mixed	AMR	1.860	1.823	1.860	1.975	10.311	100%	
3395	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Kondaveedu Sub-	309231440303	11KV Changiskhanpet	Mixed	AMR	4.461	4.368	4.461	2.088	15.420	100%	
3396	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Spices Park Vanka	309231440401	11KV Vankayalapadu	Rural	AMR	4.980	4.899	4.980	1.637	4.166	100%	
3397	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Spices Park Vanka	309231440402	11KV Feeder Ring 1B	INDL	AMR	0.722	0.705	0.722	2.400	2.400	100%	
3398	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Spices Park Vanka	309231440403	11KV RING 2A	Rural	AMR	0.422	0.410	0.422	2.735	12.652	100%	
3399	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV THIMMAPURAM	309231440501	11KV Thimmapuram	Rural	AMR	2.537	2.406	2.537	5.182	20.527	100%	
3400	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV THIMMAPURAM	309231440502	11KV Thimmapuram Lift	Rural	AMR	0.479	0.460	0.479	3.974	99.645	100%	
3401	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11 KV NADENDLA SS	309231540101	11KV Nadendla Town	Rural	AMR	4.515	4.260	4.515	5.652	19.744	100%	
3402	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11 KV NADENDLA SS	309231540102	11KV Tubadu	Mixed	AMR	4.583	4.024	4.583	12.201	18.899	100%	
3403	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11 KV NADENDLA SS	309231540103	11KV Lift Feeder	Rural	AMR	0.323	0.311	0.323	3.717	99.315	100%	
3404	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Ganapavaram Sul	309231540201	11KV Ganapavaram A	Rural	AMR	1.298	1.096	1.298	15.588	31.547	100%	
3405	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Ganapavaram Sul	309231540202	11KV Ganapavaram B	Rural	AMR	4.512	3.955	4.512	12.358	18.667	100%	
3406	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Ganapavaram Sul	309231540203	11KV Ganapavaram C	Rural	AMR	1.778	1.593	1.778	10.357	12.398	100%	
3407	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Ganapavaram Sul	309231540204	11KV HT	Rural	AMR	4.133	3.660	4.133	11.458	19.117	100%	
3408	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Ganapavaram Sul	309231540205	11KV Veluru	Rural	AMR	2.592	2.392	2.592	7.701	14.719	100%	
3409	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Ganapavaram Sul	309231540206	11KV Rural (Kavuru)	Mixed	AMR	0.004	0.003	0.004	15.603	73.263	100%	
3410	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Ganapavaram Sul	309231540207	11KV Lift Feeder	Rural	AMR	0.135	0.125	0.135	7.424	99.949	100%	
3411	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Satuluru Sub-Stat	309231540301	11KV Satuluru	Rural	AMR	8.486	8.001	8.486	5.718	5.755	100%	
3412	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Satuluru Sub-Stat	309231540302	11KV Gorijavolu	Rural	AMR	3.093	2.976	3.093	3.781	8.755	100%	
3413	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Satuluru Sub-Stat	309231540303	11KV DAIRY FEEDER	INDL	AMR	0.070	0.067	0.070	4.423	3.127	100%	
3414	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Ameenasahebpal	309231540401	11KV Erlapadu	Mixed	AMR	2.219	1.910	2.219	13.895	22.803	100%	
3415	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Ameenasahebpal	309231540402	11KV Industrial Feeder	Rural	AMR	2.363	1.987	2.363	15.926	13.793	100%	
3416	CRDA	GUNTUR-TOWN2	CHILAKALURI PET	33/11KV Ameenasahebpal	309231540403	11KV Kanaparru	Rural	AMR	2.562	2.314	2.562	9.669	50.081	100%	
3417	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Prathipadu Sub-S	309241140101	11KV Prathipadu M H Q	Rural	AMR	7.232	6.813	7.232	5.799	14.994	100%	
3418	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Prathipadu Sub-S	309241140102	11KV Prathipadu Rural	Rural	AMR	3.505	3.091	3.505	11.819	43.883	100%	

Sl No.	Received at Circle (In MU)	Received at Division (In MU)	Received at Sub-division (In MU)	Name of the Station	Feeder Code/ID	Feeder Name	Type of Feeder (Urban/Mixed/Industrial/Agricultural/ Rural)	Type of feeder meter (AMI/AMR /Other)	Received at Feeder (Final in MU)	Feeder Consumption (In MU)	Final Net Export at Feeder Level (In MU)	T&D losses	AT&C losses	% Data Received through Automatically (if feeder AMR/AMI)	Remarks
3419	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Prathipadu Sub-S	309241140103	11KV GOTTIPADU FEEDE	Rural	AMR	3.469	2.938	3.469	15.300	25.753	100%	
3420	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Prathipadu Sub-S	309241140104	11KV Kornepadu	Rural	AMR	6.389	5.930	6.389	7.180	17.742	100%	
3421	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Edulapalem Sub-S	309241140201	11KV Edulapalem Rural	Rural	AMR	5.323	4.757	5.323	10.633	17.463	100%	
3422	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Edulapalem Sub-S	309241140202	11KV Industrial	Rural	AMR	3.547	3.193	3.547	9.981	11.444	100%	
3423	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Edulapalem Sub-S	309241140203	11KV KMC	Rural	AMR	1.845	1.757	1.845	4.770	4.320	100%	
3424	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Edulapalem Sub-S	309241140204	11KV Edulalpalem AGL	Agricultura	AMR	0.119	0.108	0.119	8.781	50.982	100%	
3425	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Dokiparru Sub-Sta	309241240101	11KV Ameenabad	Mixed	AMR	4.347	3.802	4.347	12.523	16.858	100%	
3426	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Dokiparru Sub-Sta	309241240102	11KV Perecherla D-1	Rural	AMR	3.801	3.733	3.801	1.795	1.263	100%	
3427	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Dokiparru Sub-Sta	309241240103	11KV Perecherla D-2	Rural	AMR	5.655	5.425	5.655	4.070	4.995	100%	
3428	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Dokiparru Sub-Sta	309241240104	11KV Kallam	Rural	AMR	4.721	4.433	4.721	6.094	9.548	100%	
3429	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Dokiparru Sub-Sta	309241240105	11KV TULASI	INDL	AMR	1.929	1.902	1.929	1.426	1.426	100%	
3430	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Dokiparru Sub-Sta	309241240106	11KV Dokiparru	Rural	AMR	0.062	0.058	0.062	5.588	33.205	100%	
3431	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Medikonduru Sub	309241240201	11KV Medikonduru	Rural	AMR	5.904	5.770	5.904	2.273	0.496	100%	
3432	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Medikonduru Sub	309241240202	11KV Korrapadu	Rural	AMR	3.492	3.298	3.492	5.544	11.678	100%	
3433	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Medikonduru Sub	309241240203	11KV Siripuram	Rural	AMR	7.749	7.296	7.749	5.837	19.070	100%	
3434	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11 KV Perecherla SS	309241240301	11KV KAILASGIRI	Rural	AMR	4.452	4.245	4.452	4.639	7.498	100%	
3435	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11 KV Perecherla SS	309241240302	11KV PERECHERLA TELL/	Rural	AMR	17.010	16.669	17.010	2.004	5.474	100%	
3436	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Pulladigunta Sub-	309241340101	11KV Pulladigunta	Rural	AMR	9.449	9.018	9.449	4.560	11.271	100%	
3437	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Pulladigunta Sub-	309241340102	11KV Pulladigunta Indl	Rural	AMR	6.114	5.832	6.114	4.620	6.218	100%	
3438	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Pulladigunta Sub-	309241340103	11KV Srinivasa Agros	INDL	AMR	1.837	1.803	1.837	1.819	0.850	100%	
3439	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Pulladigunta Sub-	309241340104	11KV Chinthapallipadu	Rural	AMR	2.994	2.841	2.994	5.101	11.029	100%	
3440	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Vatticherukuru Su	309241340201	11KV Vatticherukuru	Rural	AMR	1.643	1.586	1.643	3.516	13.200	100%	
3441	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Vatticherukuru Su	309241340202	11KV Mutluru	Rural	AMR	4.925	4.472	4.925	9.208	18.177	100%	
3442	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Vatticherukuru Su	309241340203	11KV SOWPADU KATRAI	Rural	AMR	7.270	6.521	7.270	10.294	23.578	100%	
3443	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Phirangipuram Su	309241440101	11KV Phirangipuram	Rural	AMR	10.907	10.292	10.907	5.635	10.126	100%	
3444	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Phirangipuram Su	309241440102	11KV Nudurupadu	Mixed	AMR	1.365	1.227	1.365	10.118	12.567	100%	
3445	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11KV Phirangipuram Su	309241440103	11KV Takkellapadu	Mixed	AMR	3.533	3.030	3.533	14.222	15.600	100%	
3446	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11 KV Nudurupadu SS	309241440201	11KV Y G PADU	Mixed	AMR	5.847	4.955	5.847	15.252	15.890	100%	
3447	CRDA	GUNTUR-TOWN2	GUNTUR RURAL 1	33/11 KV Nudurupadu SS	309241440202	11KV NUDURUPADU ME	Rural	AMR	1.420	1.264	1.420	11.013	18.031	100%	
3448	VIJAYAWADA	GUDIVADA	GUDIVADA RURALS	33/11KV Jameegollepalli S	301231140104	11KV YELAMARRU RWS	Rural	AMR	2.114	1.943	2.114	8.090	9.244	100%	
3449	ONGOLE	KANIGIRI	DARSI	33/11 KV AVULAMANDA S	303121440204	11KV WEST NAIDUPALEI	Rural	AMR	1.530	0.978	1.530	36.091	70.025	100%	
3450	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV TREND SET MEAD	301421640303	11 KV TRENDSET CLUB	Urban	AMR	0.000	0.000	0.000	100.000	#N/A	100%	
3451	ONGOLE	ONGOLE	ONGOLETOWN	33/11 KV Balaji nagar(Rajiv	303311240604	11KV RAILWAY TRACK FI	Urban	AMR	0.001	0.000	0.001	100.000	#N/A	100%	
3452	VIJAYAWADA	VIJAYAWADA TOWN	D1OLD TOWN	33/11KV Container semi In	301411640204	11KV PANTAKALAVA RO	Rural	AMR	0.001	0.000	0.001	100.000	100.000	100%	
3453	VIJAYAWADA	VIJAYAWADA TOWN	DISTRIBUTION II	33/11KV Ayodhyanagar SS	301421340205	11KV Budamerukatta	Urban	AMR	0.000	0.000	0.000	100.000	#N/A	100%	
3454	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV MARUTHI COOPE	301522240401	11 KV Karanam gari Baza	Urban	AMR	0.000	0.000	0.000	#DIV/0!	#DIV/0!	100%	
3455	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV MARUTHI COOPE	301522240402	11 KV New P T Colony	Urban	AMR	0.000	0.000	0.000	#DIV/0!	#DIV/0!	100%	
3456	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV MARUTHI COOPE	301522240403	11 KV RTC Colony	Urban	AMR	0.046	0.000	0.046	100.000	#N/A	100%	
3457	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV MARUTHI COOPE	301522240404	11KV Teachers Colony	Urban	AMR	0.019	0.000	0.019	100.000	#N/A	100%	
3458	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV MARUTHI COOPE	301522240405	11 KV Maruti cooparativ	Urban	AMR	0.015	0.000	0.015	100.000	#N/A	100%	
3459	VIJAYAWADA	GUNADALA	PATAMATA	33/11KV MARUTHI COOPE	301522240406	11KV Kanakadurga Gaze	Urban	AMR	0.058	0.000	0.058	100.000	#N/A	100%	
3460	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV KANAKADURGA M	301511240304	11KV CHINMAYI	Urban	AMR	0.000	0.000	0.000	#DIV/0!	#DIV/0!	100%	
3461	VIJAYAWADA	GUNADALA	GUNADALA	33/11KV KANAKADURGA M	301511240305	11KV INDRA KILADRI	Urban	AMR	0.000	0.000	0.000	#DIV/0!	#DIV/0!	100%	
3462	VIJAYAWADA	GUNADALA	KANURU	33/11KV Sri Ram Nagar SS	301521140802	11KV KCP COLONY	Urban	AMR	0.000	0.000	0.000	#DIV/0!	#DIV/0!	100%	

Annexure-14

(APCPDCL Drawl at Transco-Discom boundary points)

(Based on Manual readings)

ABSTRACT OF ENERGY EXCHANGES IN MU
BETWEEN APTRANSCO & THE THREE DISTRIBUTION COMPANIES
FOR THE MONTH OF APRIL 2022

S.No	Name of the DISCOM	Energy received at 33 kV or 11 kV Bulk Supply Point in EHT SS	Energy received at 220 / 132 kV feeder points at SS	Energy Export(+) / Import(-) at interface points of private developers at 33 / 11 kV	Energy received(+) / sent out(-) at interface point of other DISCOMS	Total Energy Received by DISCOM	Net Energy delivered to EHT consumers as 3rd party sale	Net Energy delivered as 3rd party sale at 33 kV and 11 kV	Auxillary Sub-Stn Consmp	75% of Wheeling charge for 3rd party sale at 33 kV and 11 kV	Total outflow not chargeable to DISCOM	Net Energy Chargeable to DISCOM in MU
1	2	3	4	5	6	7=(3+4+5+6)	8	9	10	11	12=sum (8 to 11)	13=(7-12)
1	APCPDCL	1305.919900	75.518600	24.355680	3.287907	1409.082087	0.000000	0.000000	0.533089	0.000000	0.533089	1408.548998
2	APEPDCL	1773.561750	488.865500	18.186940	0.928837	2281.543027	0.973636	0.000000	0.720771	0.000000	1.694407	2279.848620
3	APSPDCL	1959.557560	335.562900	100.741610	0.000000	2395.862070	13.290430	2.532662	1.139883	0.122966	17.085941	2378.776129
	Total	5039.039210	899.947000	143.284230	4.216744	6086.487184	14.264066	2.532662	2.393743	0.122966	19.313437	6067.173747

NOTE:-

1) The energy chargeable to Discoms as shown in the abstract are calculated as per the existing procedure invogue.
2) The energies shown in the column 8, 9 and 11 pertains to the 3rd party wheeling energy of generators supplied to the consumers spread over in A.P. Discoms and for which the data is arranged by respective Discoms. In this regard Discoms need to take necessary action on the energies shown in the columns 8, 9 and 11 in view of state reorganisation w.e.f. 02.06.2014.
3) All the 33kV feeders connected to 132kv Badhrachalam (Yetapaka) SS and 11kV feeders of Badhrachalam operation Division/TSNPDCL handedover to APEPDCL by TSNPDCL. Energy drawn between APEPDCL and TSNPDCL is accounted from April 2015.
3) Splitup for Column-6 (Inter discom)

i) APEPDCL:- TO APCPDCL =3.296176 M.U.,TO TSNPDCL =0M.U.

ii) APCPDCL :TO APEPDCL= 0.008269 M.U. TO TSSPDCL=0M.U.

iii)NET TSNPDCL TO APEPDCL= 4.216744 MU (APEPDCL TO TSNPDCL =0 M.U.,TSNPDCL TO APEPDCL = 4.216744 M.U.)

APTRANSCO CE(COMML./APPCC) CE (SLDC) CE(TRANSMISSION) CE(POWER SYSTEMS & IPC) ED (FINANCE) GM(PP&S / APPCC

DISCOMS

CGM(OCS, EA, Civil & CGRF works)
APEPDCL

CGM(IPC)
APCPDCL

CGM(IPC)
APSPDCL

17-05-2022

Scanned with CamScanner

ABSTRACT OF ENERGY EXCHANGES IN MU
BETWEEN APTRANSCO & THE THREE DISTRIBUTION COMPANIES
FOR THE MONTH OF MAY 2022

S.No	Name of the DISCOM	Energy received at 33 kV or 11 kV Bulk Supply Point in EHT SS	Energy received at 220 / 132 kV feeder points at SS	Energy Export(+) / Import(-) at interface points of private developers at 33 / 11 kV	Energy received(+) / sent out(-) at interface point of other DISCOMS	Total Energy Received by DISCOM	Net Energy delivered to EHT consumers as 3rd party sale	Net Energy delivered as 3rd party sale at 33 kV and 11 kV	Auxillary Sub-Stn Consmp	75% of Wheeling charge for 3rd party sale at 33 kV and 11 kV	Total outflow not chargeable to DISCOM	Net Energy Chargeable to DISCOM in MU
1	2	3	4	5	6	7=(3+4+5+6)	8	9	10	11	12=sum (8 to 11)	13=(7-12)
1	APCPDCL	1332.538850	80.639870	18.949710	5.189346	1437.317776	0.000000	0.000000	0.541431	0.000000	0.541431	1436.776345
2	APEPDCL	1768.083100	571.560030	13.214650	-1.139866	2351.717914	1.046970	0.000000	0.707513	0.000000	1.754483	2349.963431
3	APSPDCL	1567.818460	397.882720	170.885410	0.000000	2136.586590	12.756765	2.602182	1.100523	0.126334	16.585804	2120.000786
	Total	4668.440410	1050.082620	203.049770	4.049480	5925.622280	13.803735	2.602182	2.349467	0.126334	18.881718	5906.740562

NOTE:-

1) The energy chargeable to Discoms as shown in the abstract are calculated as per the existing procedure invogue.

2) The energies shown in the column 8, 9 and 11 pertains to the 3rd party wheeling energy of generators supplied to the consumers spread over in A.P. Discoms and for which the data is arranged by respective Discoms. In this regard Discoms need to take necessary action on the energies shown in the columns 8, 9 and 11 in view of state reorganisation w.e.f. 02.06.2014.

3) All the 33kV feeders connected to 132kv Badhrachalam (Yetapaka) SS and 11kV feeders of Badhrachalam operation Division/TSNPDCL handedover to APEPDCL by TSNPDCL. Energy drawn between APEPDCL and TSNPDCL is accounted from April 2015.

3) Splitup for Column-6 (Inter discom)

i) APEPDCL:- TO APCPDCL =5.195912 M.U.,TO TSNPDCL =0M.U.

ii) APCPDCL :TO APEPDCL=0.006566 M.U. TO TSSPDCL=0M.U.

iii)NET TSNPDCL TO APEPDCL= 4.049480MU (APEPDCL TO TSNPDCL =0 M.U.,TSNPDCL TO APEPDCL = 4.049480 M.U.)

APTRANSCO CE(COMML./APPCC) CE (SLDC) CE(TRANSMISSION) CE(POWER SYSTEMS & IPC) ED (FINANCE) GM(PP&S / APPCC

DISCOMS CGM(OCS, EA, Civil & CGRF Works) APEPDCL CGM(IPC) APCPDCL CGM(EA) APSPDCL

04-07-2022

Scanned with CamScanner

ABSTRACT OF ENERGY EXCHANGES IN MU
BETWEEN APTRANSCO & THE THREE DISTRIBUTION COMPANIES
FOR THE MONTH OF JUNE 2022

S.No	Name of the DISCOM	Energy received at 33 kV or 11 kV Bulk Supply Point in EHT SS	Energy received at 220 / 132 kV feeder points at SS	Energy Export(+) / Import(-) at interface points of private developers at 33 / 11 kV	Energy received(+) / sent out(-) at interface point of other DISCOMS	Total Energy Received by DISCOM	Net Energy delivered to EHT consumers as 3rd party sale	Net Energy delivered as 3rd party sale at 33 kV and 11 kV	Auxiliary Sub-Stn Consmp	75% of Wheeling charge for 3rd party sale at 33 kV and 11 kV	Total outflow not chargeable to DISCOM	Net Energy Chargeable to DISCOM in MU
1	2	3	4	5	6	7=(3+4+5+6)	8	9	10	11	12=sum (8 to 11)	13=(7-12)
1	APCPDCL	1321.687380	81.511820	16.405040	2.435246	1422.039486	0.000000	0.000000	0.515898	0.000000	0.515898	1421.523588
2	APEPDCL	1742.361300	672.284230	11.564520	1.342108	2427.552158	1.099272	0.000000	0.710211	0.000000	1.809483	2425.742675
3	APSPDCL	1600.245550	414.575870	174.569770	0.000000	2189.391190	12.359698	3.394359	1.039678	0.164795	16.958530	2172.432660
	Total	4664.294230	1168.371920	202.539330	3.777354	6038.982834	13.458970	3.394359	2.265787	0.164795	19.283911	6019.698923

NOTE:-

1) The energy chargeable to Discoms as shown in the abstract are calculated as per the existing procedure invogue.

2) The energies shown in the column 8, 9 and 11 pertains to the 3rd party wheeling energy of generators supplied to the consumers spread over in A.P. Discoms and for which the data is arranged by respective Discoms. In this regard Discoms need to take necessary action on the energies shown in the columns 8, 9 and 11 in view of state reorganisation w.e.f. 02.06.2014.

3) All the 33kV feeders connected to 132kv Badhrachalam (Yetapaka) SS and 11kV feeders of Badhrachalam operation Division/TSNPDCL handedover to APEPDCL by TSNPDCL. Energy drawn between APEPDCL and TSNPDCL is accounted from April 2015.

3) Splitup for Column-6 (Inter discom)

i) APEPDCL:- TO APCPDCL =2.440820 M.U.,TO TSNPDCL =0M.U.

ii) APCPDCL :TO APEPDCL=0.005574 M.U. TO TSSPDCL=0M.U.

iii)NET TSNPDCL TO APEPDCL= 3.777354 MU (APEPDCL TO TSNPDCL =0 M.U.,TSNPDCL TO APEPDCL = 3.777354 M.U.)

APTRANSCO CE(COMML./APPCC) CE (SLDC) CE(TRANSMISSION) CE(POWER SYSTEMS & IPC) ED (FINANCE) GM(PP&S / APPCC

DISCOMS

CGM(OCS, EA, Civil & CGRF works)
APEPDCL

CGM(IPC)
APCPDCL

CGM(EA)
APSPDCL

25-07-2022

Scanned with CamScanner

ABSTRACT OF ENERGY EXCHANGES IN MU
BETWEEN APTRANSCO & THE THREE DISTRIBUTION COMPANIES
FOR THE MONTH OF JULY 2022

S.No	Name of the DISCOM	Energy received at 33 kV or 11 kV Bulk Supply Point in EHT SS	Energy received at 220 / 132 kV feeder points at SS	Energy Export(+) / Import(-) at interface points of private developers at 33 / 11 kV	Energy received(+) / sent out(-) at interface point of other DISCOMS	Total Energy Received by DISCOM	Net Energy delivered to EHT consumers as 3rd party sale	Net Energy delivered as 3rd party sale at 33 kV and 11 kV	Auxillary Sub-Stn Consmp	75% of Wheeling charge for 3rd party sale at 33 kV and 11 kV	Total outflow not chargeable to DISCOM	Net Energy Chargeable to DISCOM in MU
1	2	3	4	5	6	7=(3+4+5+6)	8	9	10	11	12=sum (8 to 11)	13=(7-12)
1	APCPDCL	1096.399180	76.643710	17.580140	2.064019	1192.687049	0.000000	0.000000	0.444324	0.000000	0.444324	1192.242725
2	APEPDCL	1486.623660	693.100340	13.279950	-0.207233	2192.796717	1.043077	0.000000	0.657665	0.000000	1.700742	2191.095975
3	APSPDCL	1541.229280	467.726550	223.570460	0.000000	2232.526290	11.554547	2.742350	0.995479	0.133144	15.425520	2217.100770
	Total	4124.252120	1237.470600	254.430550	1.856786	5618.010056	12.597624	2.742350	2.097468	0.133144	17.570586	5600.439470

NOTE:-

1) The energy chargeable to Discoms as shown in the abstract are calculated as per the existing procedure invogue.

2) The energies shown in the column 8, 9 and 11 pertains to the 3rd party wheeling energy of generators supplied to the consumers spread over in A.P. Discoms and for which the data is arranged by respective Discoms. In this regard Discoms need to take necessary action on the energies shown in the columns 8, 9 and 11 in view of state reorganisation w.e.f. 02.06.2014.

3) All the 33kV feeders connected to 132kv Badhrachalam (Yetapaka) SS and 11kV feeders of Badhrachalam operation Division/TSNPDCL handedover to APEPDCL by TSNPDCL. Energy drawn between APEPDCL and TSNPDCL is accounted from April 2015.

3) Splitup for Column-6 (Inter discom)

i) APEPDCL:- TO APCPDCL =2.065810 M.U.,TO TSNPDCL =0M.U.

ii) APCPDCL :TO APEPDCL=0.0017910 M.U. TO TSSPDCL=0M.U.

iii)NET TSNPDCL TO APEPDCL= 1.856786 MU (APEPDCL TO TSNPDCL =0 M.U.,TSNPDCL TO APEPDCL = 1.856786 M.U.)

APTRANSCO CE(COMML./APPCC) CE (SLDC) CE(TRANSMISSION) CE(POWER SYSTEMS & IPC) ED (FINANCE) GM(PP&S / APPCC

DISCOMS CGM(OCS, EA, Civil & CGRF works) APEPDCL CGM(IPC) APCPDCL CGM(EA) APSPDCL

16-08-2022

Scanned with CamScanner

ABSTRACT OF ENERGY EXCHANGES IN MU
BETWEEN APTRANSCO & THE THREE DISTRIBUTION COMPANIES
FOR THE MONTH OF AUGUST 2022

S.No	Name of the DISCOM	Energy received at 33 kV or 11 kV Bulk Supply Point in EHT SS	Energy received at 220 / 132 kV feeder points at SS	Energy Export(+) / Import(-) at interface points of private developers at 33/11kV	Energy received(+) / sent out (-) at interface point of other DISCOMS	Total Energy Received by DISCOM	Net Energy delivered to EHT consumers as 3rd party sale	Net Energy delivered as 3rd party sale at 33 kV and 11 kV	Auxillary Sub-Stn Consmp	75% of Wheeling charge for 3rd party sale at 33 kV and 11kV	Total outflow not chargeable to DISCOM	Net Energy Chargeable to DISCOM in MU
1	2	3	4	5	6	7=(3+4+5+6)	8	9	10	11	12=sum (8 to 11)	13=(7-12)
1	APCPDCL	1192.131110	82.075430	25.695270	2.046367	1301.948177	0.000000	0.000000	0.456796	0.000000	0.456796	1301.491381
2	APEPDCL	1624.667300	672.378850	15.971790	-0.543937	2312.474003	1.048387	0.000000	0.655341	0.000000	1.703728	2310.770275
3	APSPDCL	1610.783490	565.588330	197.023590	0.000000	2373.395410	9.907793	2.387874	0.996670	0.115929	13.408266	2359.987144
	Total	4427.581900	1320.042610	238.690650	1.502430	5987.817590	10.956180	2.387874	2.108807	0.115929	15.568790	5972.248800

NOTE:-

1) The energy chargeable to Discoms as shown in the abstract are calculated as per the existing procedure invogue.
2) The energies shown in the column 8, 9 and 11 pertains to the 3rd party wheeling energy of generators supplied to the consumers spread over in A.P. Discoms and for which the data is arranged by respective Discoms. In this regard Discoms need to take necessary action on the energies shown in the columns 8, 9 and 11 in view of state reorganisation w.e.f. 02.06.2014.
3) All the 33kV feeders connected to 132kv Badhrachalam (Yetapaka) SS and 11kV feeders of Badhrachalam operation Division/TSNPDCL handedover to APEPDCL by TSNPDCL. Energy drawn between APEPDCL and TSNPDCL is accounted from April 2015.
3) Splitup for Column-6 (Inter discom)

i) APEPDCL:- TO APCPDCL =2.049632 M.U.,TO TSNPDCL =0M.U.

ii) APCPDCL :TO APEPDCL=0.003265 M.U. TO TSSPDCL=0M.U.

iii)NET TSNPDCL TO APEPDCL= 1.502430 MU (APEPDCL TO TSNPDCL =0 M.U.,TSNPDCL TO APEPDCL = 1.502430 M.U.)

APTRANSCO	CE(COMML./APPCC)	CE (SLDC)	CE(TRANSMISSION)	CE(POWER SYSTEMS & IPC)	ED (FINANCE)	GM(PP&S / APPCC
DISCOMS	CGM(OCS, EA, Civil & CGRF works) APEPDCL		CGM(IPC) APCPDCL	CGM(EA) APSPDCL		

21-09-2022

Scanned with CamScanner

ABSTRACT OF ENERGY EXCHANGES IN MU
BETWEEN APTRANSCO & THE THREE DISTRIBUTION COMPANIES
FOR THE MONTH OF SEPTEMBER 2022

S.No	Name of the DISCOM	Energy received at 33 kV or 11 kV Bulk Supply Point in EHT SS	Energy received at 220 / 132 kV feeder points at SS	Energy Export(+) / Import(-) at interface points of private developers at 33/11kV	Energy received(+) / sent out (-) at interface point of other DISCOMS	Total Energy Received by DISCOM	Net Energy delivered to EHT consumers as 3rd party sale	Net Energy delivered as 3rd party sale at 33 kV and 11 kV	Auxiliary Sub-Stn Consmp	75% of Wheeling charge for 3rd party sale at 33 kV and 11kV	Total outflow not chargeable to DISCOM	Net Energy Chargeable to DISCOM in MU
1	2	3	4	5	6	7=(3+4+5+6)	8	9	10	11	12=sum (8 to 11)	13=(7-12)
1	APCPDCL	1189.499740	79.526400	34.117860	1.990265	1305.134265	0.000000	0.000000	0.526903	0.000000	0.526903	1304.607362
2	APEPDCL	1572.591730	674.499620	16.727420	0.055003	2263.873773	1.033074	0.000000	0.645763	0.000000	1.678837	2262.194936
3	APSPDCL	1590.993100	558.141040	167.180170	0.000000	2316.314310	8.827091	2.484851	0.954106	0.120644	12.386692	2303.927618
	Total	4353.084570	1312.167060	218.025450	2.045268	5885.322348	9.860165	2.484851	2.126772	0.120644	14.592432	5870.729916

NOTE:-

1) The energy chargeable to Discoms as shown in the abstract are calculated as per the existing procedure invogue.
2) The energies shown in the column 8, 9 and 11 pertains to the 3rd party wheeling energy of generators supplied to the consumers spread over in A.P. Discoms and for which the data is arranged by respective Discoms. In this regard Discoms need to take necessary action on the energies shown in the columns 8, 9 and 11 in view of state reorganisation w.e.f. 02.06.2014.
3) All the 33kV feeders connected to 132kv Badhrachalam (Yetapaka) SS and 11kV feeders of Badhrachalam operation Division/TSNPDCL handedover to APEPDCL by TSNPDCL. Energy drawn between APEPDCL and TSNPDCL is accounted from April 2015.
3) Splitup for Column-6 (Inter discom)

i) APEPDCL:- TO APCPDCL =1.994039 M.U.,TO TSNPDCL =0M.U.

ii) APCPDCL :TO APEPDCL=0.003774 M.U. TO TSSPDCL=0M.U.

iii)NET TSNPDCL TO APEPDCL= 2.045268 MU (APEPDCL TO TSNPDCL =0 M.U.,TSNPDCL TO APEPDCL = 2.045268 M.U.)

APTRANSCO CE(COMML./APPCC) CE (SLDC) CE(TRANSMISSION) CE(POWER SYSTEMS & IPC) ED (FINANCE) GM(PP&S / APPCC

DISCOMS

CGM(OCS, EA, Civil & CGRF works)
APEPDCL

CGM(IPC)
APCPDCL

CGM(EA)
APSPDCL

14-10-2022

Scanned with CamScanner

ABSTRACT OF ENERGY EXCHANGES IN MU
BETWEEN APTRANSCO & THE THREE DISTRIBUTION COMPANIES
FOR THE MONTH OF OCTOBER 2022

S.No	Name of the DISCOM	Energy received at 33 kV or 11 kV Bulk Supply Point in EHT SS	Energy received at 220 / 132 kV feeder points at SS	Energy Export(+) / Import(-) at interface points of private developers at 33/11kV	Energy received(+) / sent out (-) at interface point of other DISCOMS	Total Energy Received by DISCOM	Net Energy delivered to EHT consumers as 3rd party sale	Net Energy delivered as 3rd party sale at 33 kV and 11 kV	Auxillary Sub-Stn Consmp	75% of Wheeling charge for 3rd party sale at 33 kV and 11kV	Total outflow not chargeable to DISCOM	Net Energy Chargeable to DISCOM in MU
1	2	3	4	5	6	7=(3+4+5+6)	8	9	10	11	12=sum (8 to 11)	13=(7-12)
1	APCPDCL	1077.695190	83.850690	33.139120	1.889059	1196.574059	0.000000	0.000000	0.409180	0.000000	0.409180	1196.164879
2	APEPDCL	1497.239310	692.146080	17.180110	0.441276	2207.006776	1.493806	0.000000	0.639965	0.000000	2.133771	2204.873005
3	APSPDCL	1428.817050	471.176650	115.521670	0.000000	2015.515370	3.346686	2.840947	0.916231	0.137933	7.241797	2008.273573
	Total	4003.751550	1247.173420	165.840900	2.330335	5419.096205	4.840492	2.840947	1.965376	0.137933	9.784748	5409.311457

NOTE:-

1) The energy chargeable to Discoms as shown in the abstract are calculated as per the existing procedure invogue.

2) The energies shown in the column 8, 9 and 11 pertains to the 3rd party wheeling energy of generators supplied to the consumers spread over in A.P. Discoms and for which the data is arranged by respective Discoms. In this regard Discoms need to take necessary action on the energies shown in the columns 8, 9 and 11 in view of state reorganisation w.e.f. 02.06.2014.

3) All the 33kV feeders connected to 132kv Badhrachalam (Yetapaka) SS and 11kV feeders of Badhrachalam operation Division/TSNPDCL handedover to APEPDCL by TSNPDCL. Energy drawn between APEPDCL and TSNPDCL is accounted from April 2015.

3) Splitup for Column-6 (Inter discom)

i) APEPDCL:- TO APCPDCL =1.892060 M.U.,TO TSNPDCL =0M.U.

ii) APCPDCL :TO APEPDCL=0.003002 M.U. TO TSSPDCL=0M.U.

iii)NET TSNPDCL TO APEPDCL= 2.330335 MU (APEPDCL TO TSNPDCL =0 M.U.,TSNPDCL TO APEPDCL = 2.330335 M.U.)

APTRANSCO CE(COMML./APPCC) CE(SLDC) CE(TRANSMISSION) CE(POWER SYSTEMS & IPC) ED (FINANCE) GM(PP&S / APPCC

DISCOMS CGM(OCS, EA, Civil & CGRF works) **APEPDCL** CGM(IPC) **APCPDCL** CGM(EA) **APSPDCL**

ABSTRACT OF ENERGY EXCHANGES IN MU
BETWEEN APTRANSCO & THE THREE DISTRIBUTION COMPANIES
FOR THE MONTH OF NOVEMBER 2022

S.No	Name of the DISCOM	Energy received at 33 kV or 11 kV Bulk Supply Point in EHT SS	Energy received at 220 / 132 kV feeder points at SS	Energy Export(+) / Import(-) at interface points of private developers at 33/11kV	Energy received(+) / sent out (-) at interface point of other DISCOMS	Total Energy Received by DISCOM	Net Energy delivered to EHT consumers as 3rd party sale	Net Energy delivered as 3rd party sale at 33 kV and 11 kV	Auxillary Sub-Stn Consmp	75% of Wheeling charge for 3rd party sale at 33 kV and 11kV	Total outflow not chargeable to DISCOM	Net Energy Chargeable to DISCOM in MU
1	2	3	4	5	6	7=(3+4+5+6)	8	9	10	11	12=sum (8 to 11)	13=(7-12)
1	APCPDCL	1086.620720	79.313730	33.672480	1.999683	1201.606613	0.000000	0.000000	0.402979	0.000000	0.402979	1201.203634
2	APEPDCL	1487.125610	661.180730	11.995350	0.092738	2160.394428	1.548818	0.000000	0.598019	0.000000	2.146837	2158.247591
3	APSPDCL	1399.056830	537.400910	98.272520	0.000000	2034.730260	4.931249	3.722381	0.834278	0.180728	9.668636	2025.061624
	Total	3972.803160	1277.895370	143.940350	2.092421	5396.731301	6.480067	3.722381	1.835276	0.180728	12.218452	5384.512849

NOTE:-

1) The energy chargeable to Discoms as shown in the abstract are calculated as per the existing procedure invogue.
2) The energies shown in the column 8, 9 and 11 pertains to the 3rd party wheeling energy of generators supplied to the consumers spread over in A.P. Discoms and for which the data is arranged by respective Discoms. In this regard Discoms need to take necessary action on the energies shown in the columns 8, 9 and 11 in view of state reorganisation w.e.f. 02.06.2014.
3) All the 33kV feeders connected to 132kv Badhrachalam (Yetapaka) SS and 11kV feeders of Badhrachalam operation Division/TSNPDCL handedover to APEPDCL by TSNPDCL. Energy drawn between APEPDCL and TSNPDCL is accounted from April 2015.
3) Splitup for Column-6 (Inter discom)

i) APEPDCL:- TO APCPDCL = 2.009023 M.U.,TO TSNPDCL =0M.U.

ii) APCPDCL :TO APEPDCL= 0.0093400 M.U. TO TSSPDCL=0M.U.

iii)NET TSNPDCL TO APEPDCL= 2.092421 MU (APEPDCL TO TSNPDCL =0 M.U.,TSNPDCL TO APEPDCL = 2.092421 M.U.)

APTRANSCO CE(COMML./APPCC) CE (SLDC) CE(TRANSMISSION) CE(POWER SYSTEMS & IPC) ED (FINANCE) GM(PP&S / APPCC

DISCOMS

CGM(OCS, EA, Civil & CGRF works)
APEPDCL

CGM(Projects)
APCPDCL

CGM(EA)
APSPDCL

ABSTRACT OF ENERGY EXCHANGES IN MU
BETWEEN APTRANSCO & THE THREE DISTRIBUTION COMPANIES
FOR THE MONTH OF DECEMBER 2022

S.No	Name of the DISCOM	Energy received at 33 kV or 11 kV Bulk Supply Point in EHT SS	Energy received at 220 / 132 kV feeder points at SS	Energy Export(+) / Import(-) at interface points of private developers at 33/11kV	Energy received(+) / sent out (-) at interface point of other DISCOMS	Total Energy Received by DISCOM	Net Energy delivered to EHT consumers as 3rd party sale	Net Energy delivered as 3rd party sale at 33 kV and 11 kV	Auxillary Sub-Stn Consmp	75% of Wheeling charge for 3rd party sale at 33 kV and 11kV	Total outflow not chargeable to DISCOM	Net Energy Chargeable to DISCOM in MU
1	2	3	4	5	6	7=(3+4+5+6)	8	9	10	11	12=sum (8 to 11)	13=(7-12)
1	APCPDCL	1051.265630	84.443090	36.252770	1.770989	1173.732479	0.000000	0.000000	0.399284	0.000000	0.399284	1173.333195
2	APEPDCL	1480.953790	695.427400	12.730840	0.388823	2189.500853	2.075503	0.000000	0.589092	0.000000	2.664595	2186.836258
3	APSPDCL	1438.115620	554.686710	113.960550	0.000000	2106.762880	5.313663	4.178077	0.939410	0.202852	10.634002	2096.128878
	Total	3970.335040	1334.557200	162.944160	2.159812	5469.996212	7.389166	4.178077	1.927786	0.202852	13.697881	5456.298331

NOTE:-

1) The energy chargeable to Discoms as shown in the abstract are calculated as per the existing procedure invogue.
2) The energies shown in the column 8, 9 and 11 pertains to the 3rd party wheeling energy of generators supplied to the consumers spread over in A.P. Discoms and for which the data is arranged by respective Discoms. In this regard Discoms need to take necessary action on the energies shown in the columns 8, 9 and 11 in view of state reorganisation w.e.f. 02.06.2014.
3) All the 33kV feeders connected to 132kv Badhrachalam (Yetapaka) SS and 11kV feeders of Badhrachalam operation Division/TSNPDCL handedover to APEPDCL by TSNPDCL. Energy drawn between APEPDCL and TSNPDCL is accounted from April 2015.
3) Splitup for Column-6 (Inter discom)

i) APEPDCL:- TO APCPDCL = 1.780522 M.U.,TO TSNPDCL =0M.U.

ii) APCPDCL :TO APEPDCL= 0.009533 M.U. TO TSSPDCL=0M.U.

iii)NET TSNPDCL TO APEPDCL= 2.159812 MU (APEPDCL TO TSNPDCL =0 M.U.,TSNPDCL TO APEPDCL = 2.159812 M.U.)

APTRANSCO CE(COMML./APPCC) CE (SLDC) CE(TRANSMISSION) CE(POWER SYSTEMS & IPC) ED (FINANCE) GM(PP&S / APPCC

DISCOMS

CGM(OCS, EA, Civil & CGRF works)
APEPDCL

CGM(Projects)
APCPDCL

CGM(EA)
APSPDCL

ABSTRACT OF ENERGY EXCHANGES IN MU
BETWEEN APTRANSCO & THE THREE DISTRIBUTION COMPANIES
FOR THE MONTH OF JANUARY 2023

S.No	Name of the DISCOM	Energy received at 33 kV or 11 kV Bulk Supply Point in EHT SS	Energy received at 220 / 132 kV feeder points at SS	Energy Export(+) / Import(-) at interface points of private developers at 220/132kV	Energy received(+) / sent out (-) at interface point of other DISCOMS	Total Energy Received by DISCOM	Net Energy delivered to EHT consumers as 3rd party sale	Net Energy delivered as 3rd party sale at 33 kV and 11 kV	Auxillary Sub-Stn Consmp	75% of Wheeling charge for 3rd party sale at 33 kV and 11kV	Total outflow not chargeable to DISCOM	Net Energy Chargeable to DISCOM in MU
1	2	3	4	5	6	7=(3+4+5+6)	8	9	10	11	12=sum (8 to 11)	13=(7-12)
1	APCPDCL	1112.960730	83.895520	41.954510	1.847282	1240.658042	0.000000	0.000000	0.387011	0.000000	0.387011	1240.271031
2	APEPDCL	1562.362300	678.265650	18.079440	0.180009	2258.887399	1.831756	0.000000	0.569007	0.000000	2.400763	2256.486636
3	APSPDCL	1809.978060	580.715640	135.437390	0.000000	2526.131090	3.948929	3.869493	1.036978	0.187871	9.043271	2517.087819
	Total	4485.301090	1342.876810	195.471340	2.027291	6025.676531	5.780685	3.869493	1.992996	0.187871	11.831045	6013.845486

NOTE:-

1) The energy chargeable to Discoms as shown in the abstract are calculated as per the existing procedure invogue.
2) The energies shown in the column 8, 9 and 11 pertains to the 3rd party wheeling energy of generators supplied to the consumers spread over in A.P. Discoms and for which the data is arranged by respective Discoms. In this regard Discoms need to take necessary action on the energies shown in the columns 8, 9 and 11 in view of state reorganisation w.e.f. 02.06.2014.
3) All the 33kV feeders connected to 132kv Badhrachalam (Yetapaka) SS and 11kV feeders of Badhrachalam operation Division/TSNPDCL handedover to APEPDCL by TSNPDCL. Energy drawn between APEPDCL and TSNPDCL is accounted from April 2015.
3) Splitup for Column-6 (Inter discom)

i) APEPDCL:- TO APCPDCL = 1.859360 M.U.,TO TSNPDCL =0M.U.

ii) APCPDCL :TO APEPDCL= 0.012078 M.U. TO TSSPDCL=0M.U.

iii)NET TSNPDCL TO APEPDCL= 2.027291 MU (APEPDCL TO TSNPDCL =0 M.U.,TSNPDCL TO APEPDCL = 2.027291 M.U.)

APTRANSCO CE(COMML./APPCC) CE (SLDC) CE(TRANSMISSION) CE(POWER SYSTEMS & IPC) ED (FINANCE) GM(PP&S / APPCC

DISCOMS

CGM(OCS, EA, Civil & CGRF works)
APEPDCL

CGM(~~Projects~~)
APCPDCL

CGM(EA)
APSPDCL

CHIEF GENERAL MANAGER, OSM
APCPDCL-VIJAYAWADA

ABSTRACT OF ENERGY EXCHANGES IN MU
BETWEEN APTRANSCO & THE THREE DISTRIBUTION COMPANIES
FOR THE MONTH OF FEBRUARY 2023

S.No	Name of the DISCOM	Energy received at 33 kV or 11 kV Bulk Supply Point in EHT SS	Energy received at 220 / 132 kV feeder points at SS	Energy Export(+) / Import(-) at interface points of private developers at 33/11kV	Energy received(+) / sent out (-) at interface point of other DISCOMS	Total Energy Received by DISCOM	Net Energy delivered to EHT consumers as 3rd party sale	Net Energy delivered as 3rd party sale at 33 kV and 11 kV	Auxillary Sub-Stn Consmp	75% of Wheeling charge for 3rd party sale at 33 kV and 11kV	Total outflow not chargeable to DISCOM	Net Energy Chargeable to DISCOM in MU
1	2	3	4	5	6	7=(3+4+5+6)	8	9	10	11	12=sum (8 to 11)	13=(7-12)
1	APCPDCL	1131.406630	81.234530	38.879990	1.778496	1253.299646	0.000000	0.000000	0.506915	0.000000	0.506915	1252.792731
2	APEPDCL	1590.929580	652.117240	15.793880	0.289899	2259.130599	1.024556	0.000000	0.586119	0.000000	1.610675	2257.519924
3	APSPDCL	1916.397060	524.993180	118.897160	0.000000	2560.287400	3.589703	3.621144	1.007568	0.175814	8.394229	2551.893171
	Total	4638.733270	1258.344950	173.571030	2.068395	6072.717645	4.614259	3.621144	2.100602	0.175814	10.511819	6062.205826

NOTE:-

1) The energy chargeable to Discoms as shown in the abstract are calculated as per the existing procedure invogue.
2) The energies shown in the column 8, 9 and 11 pertains to the 3rd party wheeling energy of generators supplied to the consumers spread over in A.P. Discoms and for which the data is arranged by respective Discoms. In this regard Discoms need to take necessary action on the energies shown in the columns 8, 9 and 11 in view of state reorganisation w.e.f. 02.06.2014.
3) All the 33kV feeders connected to 132kv Badhrachalam (Yetapaka) SS and 11kV feeders of Badhrachalam operation Division/TSNPDCL handedover to APEPDCL by TSNPDCL. Energy drawn between APEPDCL and TSNPDCL is accounted from April 2015.
3) Splitup for Column-6 (Inter discom)

i) APEPDCL:- TO APCPDCL = 1.789678 M.U.,TO TSNPDCL =0M.U.

ii) APCPDCL :TO APEPDCL= 0.011183 M.U. TO TSSPDCL=0M.U.

iii)NET TSNPDCL TO APEPDCL= 2.068395 MU (APEPDCL TO TSNPDCL =0 M.U.,TSNPDCL TO APEPDCL = 2.068395 M.U.)

APTRANSCO	CE(COMML./APPCC)	CE (SLDC)	CE(TRANSMISSION)	CE(POWER SYSTEMS & IPC)	ED (FINANCE)	GM(PP&S / APPCC
DISCOMS	CGM(OCS, EA, Civil & CGRF works) APEPDCL		CGM(Projects) APCPDCL	CGM(EA) APSPDCL		

CHIEF GENERAL MANAGER, O&M
APCPDCL-VIJAYAWADA

14-03-

ABSTRACT OF ENERGY EXCHANGES IN MU
BETWEEN APTRANSCO & THE THREE DISTRIBUTION COMPANIES
FOR THE MONTH OF MARCH 2023

S.No	Name of the DISCOM	Energy received at 33 kV or 11 kV Bulk Supply Point in EHT SS	Energy received at 220 / 132 kV feeder points at SS	Energy Export(+) / Import(-) at interface points of private developers at 33/11kV	Energy received(+) / sent out (-) at interface point of other DISCOMS	Total Energy Received by DISCOM	Net Energy delivered to EHT consumers as 3rd party sale	Net Energy delivered as 3rd party sale at 33 kV and 11 kV	Auxillary Sub-Stn Consmp	75% of Wheeling charge for 3rd party sale at 33 kV and 11kV	Total outflow not chargeable to DISCOM	Net Energy Chargeable to DISCOM in MU
1	2	3	4	5	6	7=(3+4+5+6)	8	9	10	11	12=sum (8 to 11)	13=(7-12)
1	APCPDCL	1278.546810	100.816970	36.703600	1.941147	1418.008527	0.000000	0.000000	0.517226	0.000000	0.517226	1417.491301
2	APEPDCL	1792.549070	720.014980	16.897540	0.248646	2529.710236	0.945053	0.000000	0.742366	0.000000	1.687419	2528.022817
3	APSPDCL	2083.651770	567.161090	136.546670	0.000000	2787.359530	3.463147	3.166098	1.244528	0.153720	8.027493	2779.332037
	Total	5154.747650	1387.993040	190.147810	2.189793	6735.078293	4.408200	3.166098	2.504120	0.153720	10.232138	6724.846155

NOTE:-

1) The energy chargeable to Discoms as shown in the abstract are calculated as per the existing procedure invogue.
2) The energies shown in the column 8, 9 and 11 pertains to the 3rd party wheeling energy of generators supplied to the consumers spread over in A.P. Discoms and for which the data is arranged by respective Discoms. In this regard Discoms need to take necessary action on the energies shown in the columns 8, 9 and 11 in view of state reorganisation w.e.f. 02.06.2014.
3) All the 33kV feeders connected to 132kv Badhrachalam (Yetapaka) SS and 11kV feeders of Badhrachalam operation Division/TSNPDCL handedover to APEPDCL by TSNPDCL. Energy drawn between APEPDCL and TSNPDCL is accounted from April 2015.
3) Splitup for Column-6 (Inter discom)

i) APEPDCL:- TO APCPDCL = 1.949442 M.U.,TO TSNPDCL =0M.U.

ii) APCPDCL :TO APEPDCL= 0.008295 M.U. TO TSSPDCL=0M.U.

iii)NET TSNPDCL TO APEPDCL= 2.189793 MU (APEPDCL TO TSNPDCL =0 M.U.,TSNPDCL TO APEPDCL = 2.189793 M.U.)

APTRANSCO CE(COMML./APPCC) CE (SLDC) CE(TRANSMISSION) CE(POWER SYSTEMS & IPC) ED (FINANCE) GM(PP&S / APPCC

DISCOMS

CGM(OCS, EA, Civil & CGRF works)
APEPDCL

CGM/O&M
APCPDCL

CGM(EA)
APSPDCL

ABSTRACT OF ENERGY EXCHANGES IN MU BETWEEN APTRANSCO& APCPDCL FOR THE FY 2022-23

Month	Power Drawls of APCPDCLas per SLDC data in (MU) as per manual data	Power Drawls of APCPDCL as per SLDC data in (MU) as per MRI data
Apr-22	1408.549	1434.56
May-22	1436.776	1437.48
Jun-22	1421.524	1417.72
Jul-22	1192.243	1192.08
Aug-22	1301.491	1301.60
Sep-22	1304.607	1303.07
Oct-22	1196.165	1198.69
Nov-22	1201.204	1200.15
Dec-22	1173.333	1174.74
Jan-23	1240.271	1240.92
Feb-23	1252.793	1255.29
Mar-23	1417.491	1394.26
Total	**15546.45**	**15550.57**

While calculating distribution losses power drawls from the Transco Discom boundary was taken as 15550.57, which is MRI based data.There will be a minute diff between MRI& Manual energy because of timing difference. APSLDC has certified Energybased on manual energy readings.

ANNEXURE – 15

(Pilferage of Energy cases booked in APCPDCL in FY 2022-23)

Details of Theft of Energy cases Booked in APCPDCL for the FY 22-23

S.No	CIRCLE	DIVISION	THEFT OF ENRGY - DIRECT TAPPING	THEFT OF ENRGY - METERED	Grand Total
1	GUNTUR	AMARAVATHI	20	38	58
2	GUNTUR	GUNTUR-TOWN2	65	125	190
3	GUNTUR	BAPATLA	80	55	135
4	GUNTUR	GUNTUR-TOWN1	13	26	39
5	GUNTUR	MACHERLA	740	390	1130
6	GUNTUR	NARASARAOPETA	667	418	1085
7	GUNTUR	TENALI	20	45	65
8	ONGOLE	ADDANKI	157	231	388
9	ONGOLE	CHIRALA	42	47	89
10	ONGOLE	DARSI	269	541	810
11	ONGOLE	KANDUKUR	78	93	171
12	ONGOLE	KANIGIRI	92	56	148
13	ONGOLE	MARKAPURAM	402	327	729
14	ONGOLE	ONGOLE-TOWN	31	29	60
15	VIJAYAWADA	GUDIVADA	59	75	134
16	VIJAYAWADA	GUNADALA	24	51	75
17	VIJAYAWADA	MACHILIPATNAM	31	36	67
18	VIJAYAWADA	NUZVID	318	214	532
19	VIJAYAWADA	VIJAYAWADA-RURAL	269	211	480
20	VIJAYAWADA	VIJAYAWADA-TOWN	7	29	36
21	VIJAYAWADA	VUYYURU	49	48	97
	APCPDCL Total		3433	3085	6518

Annexure-16

(Calibration certificates, HT Meter test reports)

SRI DAAKSHYAANI ENERGY SOLUTIONS

Reg Off : # 36-12-14A, 5A Classic Circle, Mogal Function Hall Road
Mogalrajpuram, VIJAYAWADA - 520 010. A.P.
Cell : 9030666639, 9052966639, 9052666639
E-mail : marketingsdes@gmail.com website : www.sdes.co.in

CC-2288

CALIBRATION CERTIFICATE

DUPLICATE COPY

ULR Number - CC228823000000627F

Calibration Certificate Number :- SDES / 2022 - 23 / 346 / CC / 8613 Calibration Certificate Issue Date :- 28-Mar-2023	Calibrated On :- 27-Mar-2023	Recommended Calibration Due :- 26-Mar-2024	Page 1	No. of Pages 3

(1). Customer Name & Address :-

M/s. P P Polymers,
R S No : 10/2, Tempalli Road, Peddavutapalli (V),
Unguturu (M), Krishna, A.P - 521 286.
HT Service No : VJA 3427.

(2). Customer's Reference :- SRF No. :- 2022 - 23 / 346 Date :- 27-Mar-2023

(3). Calibration Location :- AT Permanent Laboratory [√] AT Onsite [-]

Location Name :- Energy Meter Lab,
Sri Daakshyaani Energy Solutions,
Vijayawada.

(4). Details of Unit Under Calibration :-

Name	:-	**3-Ø Static Energy Meter**			
Make	:-	Schneider Electric India Pvt Ltd	UUC Received Date	:-	27-Mar-2023
Model	:-	ER 300P	UUC Condition on Receipt	:-	Satisfactory
Type	:-	M4XXXXXXXC5, 3 Phase 4 Wire	Calibration Procedure No.	:-	SDES / CP - 09
Sl.No.	:-	23005097	VTR	:-	11kV /√3 /110V /√3
Class	:-	0.2s	CTR	:-	10 A / 5 A
Voltage	:-	3*63.5 V (P-N)	Meter Constant	:-	50 Impulse / Unit
Current	:-	Ib 5A Imax 10A	Principal Unit	:-	(KWh, KVArh,KVAh,KVA)
Frequency	:-	50 Hz	SDES Seal No's	:-	007415, 007416

(5). Environmental Conditions :- Temperature :- 25 ± 4 °C Humidity :- 30 - 75 %

(6). Witnessed by :-

Department /Company	Name	Signature
EE / MBA - I / APCPDCL / Vijayawada	Mr. G. V. N. Pardhasaradhi	
Customer Representative	Mr. T.V. Mallikarjun	

This calibration certificate documents the traceability to national standards, which realize the unit of measurements according to the International System of Units(SI). This calibration certificate may not be reproduced other than in full except with the permission of the issuing laboratory. Calibration certificates without signature are not valid.

CC

Prepared by
D. Hima Teja
(Calibration Engineer)

Prepared by
P. Nokesh
(Sr. Calibration Engineer)

DAAKSHYAANI ENERGY SOLUTIONS SDES VJA.

Approved by
A.V. Sai Kumar
(Lab - Incharge)

SRI DAAKSHYAANI ENERGY SOLUTIONS

Reg Off : # 36-12-14A, 5A Classic Circle, Mogal Function Hall Road
Mogalrajpuram, VIJAYAWADA - 520 010. A.P.
Cell : 9030666639, 9052966639, 9052666639
E-mail : marketingsdes@gmail.com website : www.sdes.co.in

CC-2288

DUPLICATE COPY

ULR Number - CC228823000000627F			
Calibration Certificate Number :- SDES / 2022 - 23 / 346 / CC / 8613 Calibration Certificate Issue Date :- 28-Mar-2023	Calibrated On :- 27-Mar-2023	Recommended Calibration Due :- 26-Mar-2024	Page 2 / No. of Pages 3

(7). Details of Standard Equipments used :-

Sl. No.	Name	Make	Serial No.	Traceability	Certificate No.	Validity
(i)	Three Phase Power / Energy Comparator	MTE, Germany	54599	GCSPL	GCSPL/CAL/8369/16708	29-Sep-2023

Electro - Technical Calibration

(8). Results :-

Below Limits are according to IS 14697 : 2021 at various loads with different power factors

(a) 3 Phase 4 Wire Balance Mode Active / Reactive Energy Measurement at 50Hz:-
(3 Phase Voltage & 3 Phase Current Applied for Balance Mode)

Sl.No. :- ### **Current :-** **Ib** **5A** **Imax** **10A**

Applied Voltage (Volts)	Applied Current (Amps)	Applied P.F. CosØ / Sin Ø	IMPORT MODE Active % Error	IMPORT MODE Reactive % Error	EXPORT MODE Active % Error	EXPORT MODE Reactive % Error	Specified Error Limits In ± (%)
3*63.5	1 % Ib	1	0.070	-0.006	0.070	-0.003	0.40
3*63.5	2 % Ib		0.064	-0.007	0.068	-0.008	0.40
3*63.5	5 % Ib		0.048	-0.017	0.053	-0.020	0.20
3*63.5	10 % Ib		0.038	-0.031	0.039	-0.033	0.20
3*63.5	50 % Ib		0.013	-0.069	0.009	-0.068	0.20
3*63.5	100 % Ib		-0.020	-0.086	-0.001	-0.081	0.20
3*63.5	Imax		-0.013	-0.079	-0.010	-0.076	0.20
3*63.5	2 % Ib	0.5 Lag	-0.011	0.045	0.124	0.104	0.50
3*63.5	5 % Ib		-0.083	0.089	0.034	0.140	0.50
3*63.5	10 % Ib		-0.019	0.002	0.084	0.049	0.30
3*63.5	50 % Ib		-0.074	-0.117	0.019	0.017	0.30
3*63.5	100 % Ib		0.046	-0.270	0.030	-0.081	0.30
3*63.5	Imax		-0.112	-0.201	-0.003	0.015	0.30
3*63.5	2 % Ib	0.8 Lead	0.120	0.008	0.107	-0.049	0.50
3*63.5	5 % Ib		0.120	-0.037	0.112	-0.081	0.50
3*63.5	10 % Ib		0.074	-0.008	0.067	-0.061	0.30
3*63.5	50 % Ib		0.051	-0.055	0.067	-0.053	0.30
3*63.5	100 % Ib		0.019	-0.037	0.001	0.017	0.30
3*63.5	Imax		0.009	-0.095	-0.041	-0.056	0.30

CC

Prepared by
D. Hima Teja
(Calibration Engineer)

Prepared by
P. Nokesh
(Sr. Calibration Engineer)

Approved by
A.V. Sai Kumar
(Lab - Incharge)

SRI DAAKSHYAANI ENERGY SOLUTIONS

Reg Off : # 36-12-14A, 5A Classic Circle, Mogal Function Hall Road
Mogalrajpuram, VIJAYAWADA - 520 010. A.P.
Cell : 9030666639, 9052966639, 9052666639
E-mail : marketingsdes@gmail.com website : www.sdes.co.in

CC-2288

DUPLICATE COPY

ULR Number - CC228823000000627F				
Calibration Certificate Number :- SDES / 2022 - 23 / 346 / CC / 8613 Calibration Certificate Issue Date :- 28-Mar-2023	Calibrated On :- 27-Mar-2023	Recommended Calibration Due :- 26-Mar-2024	Page 3	No. of Pages 3

(b) 3 Phase 4 Wire Unbalance Mode Active / Reactive Energy Measurement at 50Hz:-
(3 Phase Voltage & 1 Phase Current Applied for Unbalance Mode)

Sl.No. :- 23005097 Current :- Ib 5A Imax 10A

Applied Voltage (Volts)	Phase	Applied Current (Amps)	Applied P.F. CosØ / Sin Ø	IMPORT MODE Active % Error	IMPORT MODE Reactive % Error	EXPORT MODE Active % Error	EXPORT MODE Reactive % Error	Specified Error Limits In ± (%)
3*63.5	R Phase	5 % Ib	1	0.014	-0.038	0.004	-0.037	0.30
3*63.5	Y Phase	5 % Ib		0.067	-0.019	0.050	-0.015	0.30
3*63.5	B Phase	5 % Ib		0.053	-0.009	0.057	-0.006	0.30
3*63.5	R Phase	100 % Ib		-0.065	-0.086	-0.049	-0.091	0.30
3*63.5	Y Phase	100 % Ib		-0.014	-0.068	-0.009	-0.069	0.30
3*63.5	B Phase	100 % Ib		-0.040	-0.072	-0.035	-0.056	0.30
3*63.5	R Phase	Imax		-0.037	-0.094	-0.034	-0.088	0.30
3*63.5	Y Phase	Imax		-0.008	-0.076	0.000	-0.076	0.30
3*63.5	B Phase	Imax		-0.035	-0.096	-0.019	-0.077	0.30
3*63.5	R Phase	10 % Ib	0.5 Lag	0.067	-0.033	0.000	0.015	0.40
3*63.5	Y Phase	10 % Ib		-0.111	0.130	-0.114	0.143	0.40
3*63.5	B Phase	10 % Ib		0.192	-0.147	-0.173	0.222	0.40
3*63.5	R Phase	100 % Ib		0.199	-0.146	0.102	-0.245	0.40
3*63.5	Y Phase	100 % Ib		-0.095	-0.083	-0.072	-0.044	0.40
3*63.5	B Phase	100 % Ib		-0.042	-0.109	-0.056	0.005	0.40
3*63.5	R Phase	Imax		0.071	-0.105	0.050	0.096	0.40
3*63.5	Y Phase	Imax		-0.197	0.093	-0.176	0.043	0.40
3*63.5	B Phase	Imax		-0.172	0.124	-0.234	0.093	0.40

(9). Remarks :-
(i). Expanded Measurement Uncertainity is ± 0.05 %
(ii). The reported expanded uncertainty in measurement is stated as the standard uncertainty in measurement multiplied by the coverage factor k =2, which for normal distribution corresponding to a coverage probability of approximately 95%.
(iii). UUC - Unit Under Calibration.
(iv). The calibration certificate relates only to the above UUC.
(v). The reported uncertainty applies only to the measured values and gives no indication of the long term stability of device.
(vi). Environmental and other conditions mentioned in this certificate.
(vii). Calibration points and other requirements mentioned as per customer's request.
(viii) Any error in this certificate should be brought to our knowledge within 45 days from the issue date of this certificate.

CC

Prepared by
D. Hima Teja
(Calibration Engineer)

Prepared by
P. Nokesh
(Sr. Calibration Engineer)

Approved by
A.V. Sai Kumar
(Lab - Incharge)

SRI DAAKSHYAANI ENERGY SOLUTIONS

Reg Off : # 36-12-14A, 5A Classic Circle, Mogal Function Hall Road
Mogalrajpuram, VIJAYAWADA - 520 010. A.P.
Cell : 9030666639, 9052966639, 9052666639
E-mail : marketingsdes@gmail.com website : www.sdes.co.in

CC-2288

CALIBRATION CERTIFICATE

DUPLICATE COPY

ULR Number - CC228823000000628F

Calibration Certificate Number :-	Calibrated On :-	Recommended Calibration Due :-	Page	No. of Pages
SDES / 2022 - 23 / 346 / CC / 8614 Calibration Certificate Issue Date :- 28-Mar-2023	27-Mar-2023	26-Mar-2024	1	3

(1). Customer Name & Address :-

M/s. P P Polymers,
R S No : 10/2, Tempalli Road, Peddavutapalli (V),
Unguturu (M), Krishna, A.P - 521 286.
HT Service No : VJA 3427.

(2). Customer's Reference :- SRF No. :- 2022 - 23 / 346 Date :- 27-Mar-2023

(3). Calibration Location :- AT Permanent Laboratory [√] AT Onsite [-]

Location Name :- Energy Meter Lab,
Sri Daakshyaani Energy Solutions,
Vijayawada.

(4). Details of Unit Under Calibration :-

Name	:-	**3-Ø Static Energy Meter**	UUC Received Date	:-	27-Mar-2023
Make	:-	Schneider Electric India Pvt Ltd	UUC Condition on Receipt	:-	Satisfactory
Model	:-	ER 300P	Calibration Procedure No.	:-	SDES / CP - 09
Type	:-	M4XXXXXXXC5, 3 Phase 4 Wire	VTR	:-	11kV /√3 /110V /√3
Sl.No.	:-	23005098	CTR	:-	10 A / 5 A
Class	:-	0.2s	Meter Constant	:-	50 Impulse / Unit
Voltage	:-	3*63.5 V (P-N)	Principal Unit	:-	(KWh, KVArh,KVAh,KVA)
Current	:-	Ib 5A Imax 10A	SDES Seal No's	:-	007411, 007420
Frequency	:-	50 Hz			

(5). Environmental Conditions :- Temperature :- 25 ± 4 °C Humidity :- 30 - 75 %

(6). Witnessed by :-

Department /Company	Name	Signature
EE / MBA - I / APCPDCL / Vijayawada	Mr. G. V. N. Pardhasaradhi	
Customer Representative	Mr. T.V. Mallikarjun	

This calibration certificate documents the traceability to national standards, which realize the unit of measurements according to the International System of Units(SI). This calibration certificate may not be reproduced other than in full except with the permission of the issuing laboratory. Calibration certificates without signature are not valid.

CC

Prepared by
D. Hima Teja
(Calibration Engineer)

Prepared by
P. Nokesh
(Sr. Calibration Engineer)

SRI DAAKSHYAANI ENERGY SOLUTIONS * VJA. *

Approved by
A.V. Sai Kumar
(Lab - Incharge)

SRI DAAKSHYAANI ENERGY SOLUTIONS

Reg Off : # 36-12-14A, 5A Classic Circle, Mogal Function Hall Road
Mogalrajpuram, VIJAYAWADA - 520 010. A.P.
Cell : 9030666639, 9052966639, 9052666639
E-mail : marketingsdes@gmail.com website : www.sdes.co.in

CC-2288

DUPLICATE COPY

ULR Number - CC228823000000628F				
Calibration Certificate Number :- SDES / 2022 - 23 / 346 / CC / 8614 Calibration Certificate Issue Date :- 28-Mar-2023	Calibrated On :- 27-Mar-2023	Recommended Calibration Due :- 26-Mar-2024	Page 2	No. of Pages 3

(7). Details of Standard Equipments used :-

Sl. No.	Name	Make	Serial No.	Traceability	Certificate No.	Validity
(i)	Three Phase Power / Energy Comparator	MTE, Germany	54599	GCSPL	GCSPL/CAL/8369/16708	29-Sep-2023

Electro - Technical Calibration

(8). Results :-

Below Limits are according to IS 14697 : 2021 at various loads with different power factors

(a) 3 Phase 4 Wire Balance Mode Active / Reactive Energy Measurement at 50Hz:-
(3 Phase Voltage & 3 Phase Current Applied for Balance Mode)

Sl.No. :- ### **Current :-** **Ib** **5A** **Imax** **10A**

Applied Voltage (Volts)	Applied Current (Amps)	Applied P.F. CosØ / Sin Ø	IMPORT MODE Active % Error	IMPORT MODE Reactive % Error	EXPORT MODE Active % Error	EXPORT MODE Reactive % Error	Specified Error Limits In ± (%)
3*63.5	1 % Ib	1	0.074	-0.004	0.081	-0.001	0.40
3*63.5	2 % Ib		0.067	-0.016	0.072	-0.008	0.40
3*63.5	5 % Ib		0.059	-0.023	0.056	-0.027	0.20
3*63.5	10 % Ib		0.042	-0.038	0.039	-0.042	0.20
3*63.5	50 % Ib		0.001	-0.080	0.009	-0.079	0.20
3*63.5	100 % Ib		-0.009	-0.086	-0.012	-0.092	0.20
3*63.5	Imax		-0.014	-0.101	-0.021	-0.087	0.20
3*63.5	2 % Ib	0.5 Lag	0.123	-0.052	0.174	-0.001	0.50
3*63.5	5 % Ib		0.038	0.000	0.081	0.032	0.50
3*63.5	10 % Ib		0.114	-0.095	0.148	-0.066	0.30
3*63.5	50 % Ib		0.014	-0.206	0.083	-0.050	0.30
3*63.5	100 % Ib		0.136	-0.292	0.108	-0.180	0.30
3*63.5	Imax		-0.025	-0.245	0.064	-0.074	0.30
3*63.5	2 % Ib	0.8 Lead	0.085	0.036	0.070	-0.009	0.50
3*63.5	5 % Ib		0.088	-0.008	0.082	-0.042	0.50
3*63.5	10 % Ib		0.036	0.024	0.026	-0.017	0.30
3*63.5	50 % Ib		0.025	-0.038	0.032	-0.010	0.30
3*63.5	100 % Ib		-0.022	-0.018	-0.029	0.058	0.30
3*63.5	Imax		-0.024	-0.073	-0.073	-0.045	0.30

CC

Prepared by
D. Hima Teja
(Calibration Engineer)

Prepared by
P. Nokesh
(Sr. Calibration Engineer)

SRI DAAKSHYAANI ENERGY SOLUTIONS VJA.

Approved by
A.V. Sai Kumar
(Lab - Incharge)

SRI DAAKSHYAANI ENERGY SOLUTIONS

Reg Off : # 36-12-14A, 5A Classic Circle, Mogal Function Hall Road
Mogalrajpuram, VIJAYAWADA - 520 010. A.P.
Cell : 9030666639, 9052966639, 9052666639
E-mail : marketingsdes@gmail.com website : www.sdes.co.in

CC-2288

DUPLICATE COPY

ULR Number - CC228823000000628F				
Calibration Certificate Number :- SDES / 2022 - 23 / 346 / CC / 8614 Calibration Certificate Issue Date :- 28-Mar-2023	Calibrated On :- 27-Mar-2023	Recommended Calibration Due :- 26-Mar-2024	Page 3	No. of Pages 3

(b) 3 Phase 4 Wire Unbalance Mode Active / Reactive Energy Measurement at 50Hz:-
(3 Phase Voltage & 1 Phase Current Applied for Unbalance Mode)

Sl.No. :- 23005098 Current :- Ib 5A Imax 10A

Applied Voltage (Volts)	Phase	Applied Current (Amps)	Applied P.F. CosØ / Sin Ø	IMPORT MODE Active % Error	IMPORT MODE Reactive % Error	EXPORT MODE Active % Error	EXPORT MODE Reactive % Error	Specified Error Limits In ± (%)
3*63.5	R Phase	5 % Ib	1	-0.025	-0.079	-0.045	-0.076	0.30
3*63.5	Y Phase	5 % Ib		0.096	0.004	0.078	0.008	0.30
3*63.5	B Phase	5 % Ib		0.064	0.000	0.068	0.001	0.30
3*63.5	R Phase	100 % Ib		-0.134	-0.145	-0.117	-0.140	0.30
3*63.5	Y Phase	100 % Ib		0.015	-0.069	0.011	-0.051	0.30
3*63.5	B Phase	100 % Ib		-0.009	-0.052	-0.015	-0.056	0.30
3*63.5	R Phase	Imax		-0.096	-0.134	-0.083	-0.146	0.30
3*63.5	Y Phase	Imax		0.014	-0.066	0.000	-0.065	0.30
3*63.5	B Phase	Imax		-0.015	-0.076	-0.008	-0.066	0.30
3*63.5	R Phase	10 % Ib	0.5 Lag	0.050	-0.141	-0.015	-0.048	0.40
3*63.5	Y Phase	10 % Ib		-0.005	0.101	0.056	0.127	0.40
3*63.5	B Phase	10 % Ib		0.257	-0.171	-0.042	0.130	0.40
3*63.5	R Phase	100 % Ib		0.288	-0.286	0.130	-0.383	0.40
3*63.5	Y Phase	100 % Ib		-0.021	-0.113	0.032	-0.095	0.40
3*63.5	B Phase	100 % Ib		0.046	-0.164	0.032	-0.076	0.40
3*63.5	R Phase	Imax		0.090	-0.249	0.059	-0.012	0.40
3*63.5	Y Phase	Imax		-0.129	0.080	-0.108	0.015	0.40
3*63.5	B Phase	Imax		-0.015	0.043	-0.129	0.025	0.40

(9). Remarks :-
(i). Expanded Measurement Uncertainity is ± 0.05 %
(ii). The reported expanded uncertainty in measurement is stated as the standard uncertainty in measurement multiplied by the coverage factor $k=2$, which for normal distribution corresponding to a coverage probability of approximately 95%.
(iii). UUC - Unit Under Calibration.
(iv). The calibration certificate relates only to the above UUC.
(v). The reported uncertainty applies only to the measured values and gives no indication of the long term stability of device.
(vi). Environmental and other conditions mentioned in this certificate.
(vii). Calibration points and other requirements mentioned as per customer's request.
(viii) Any error in this certificate should be brought to our knowledge within 45 days from the issue date of this certificate.

CC

Prepared by
D. Hima Teja
(Calibration Engineer)

Prepared by
P. Nokesh
(Sr. Calibration Engineer)

SRI DAAKSHYAANI ENERGY SOLUTIONS VJA.

Approved by
A.V. Sai Kumar
(Lab - Incharge)

28

6111426001030

HT Meter Test Report

2/11/8

CENTRAL POWER DISTRIBUTION CORPORATION OF A.P. LTD.,
OPERATION CIRCLE:

Endt No. / / **F.HT / D.No.** Comp 6 / 20 **Dt:** 25/5/2022.

1. Nature of Test: P.T

Date : 25/5/2022
S.C.No : 1030
CMD/CL : 90 H.P
Category : LT-IC
OPN/SD : Gudivada Town
Sec : Nandivada
Premises: Aquaculture

2. Name of HT Service:
M/s. Sapthaparnathanani Rupa Lavanya
polukonda (v)
Nandivada (m)

3. Existing Metering Equipment Particulars:

	Make	Type	Sl.No.	PTR	CTR	Class	MF
Meter	Secure	E3M024	X04198161	11KV/110V	10/5A	0.25	100
CT PT Set	VCS	S-0	11417	11KV/110V	10/1		

4. New Metering Equipment Particulars:

	Make	Type	Sl.No.	PTR	CTR	Class	MF
Meter							
CT PT Set							

5. Voltages:

	RY	YB	BR	RN	YN	BN
AT TTB	113.2	113.4	112.7	65.0	65.5	65.3
In Meter						

6. Currents:

	R ph	Y ph	B ph
AT TTB	0.24	0.25	0.23
In Meter			
LT currents			

	Load in KW
Calculated	
Recorded	Kw : 0.467 KVA : 9.626 PF : 0.049

7. CTs Ratio Test:

R-Ph: _____ _____ _____ _____ _____

Y-Ph: _____ _____ _____ _____ _____

B-Ph: _____ _____ _____ _____ _____

8. Seals Particulars:

LOCATION	Before Test	After test
METER :		
Meter Board to Box		
Meter Cover		
Meter Terminal Cover		
MRI		
TTB	BD0583645	BD0980336,37
MD Knob	—	—
Box Door	BC0610238	BD0980338
CT PT SET :		
Tank Cover		
Inspection Cover		
Incoming cable Box		
Outgoing Cable Box		
Secondary Cover		
AB Switch		

9. Test results with phantom load test kit / on load test at Load : PF :

	IR	FR	DIFF/ Pulses	ERS UNITS	% ERROR
KWH			2 Nr		+0.16%
KVARH			5P		+0.27%
KVAH					

10. Submitted to SAO/ the details of readings and MF before and after testing for further necessary action.

Parameter	Before Test / Old Meter FR	After Test/ New Meter IR
KWH		534167
KVAH		562629
KVARH Lag		136867
KVAH Lead		106623
KVA MD		5.13
Bills		48
CMD		2090.7
MF		1.0 for all

11. Remarks: The service has been attended for periodical testing. After testing the error found within the limits. MF is 1.0 for all

Consumer AEE/HT Meters DEE/HT Meters DEE/O/ EE/ /O/ EE/M&P

Copy submitted to the Superintending Engineer/ Operation/
Copy submitted to the Senior Accounts Officer/
Copy to the Executive Engineer/Operation/
Copy to the Deputy Executive Engineer /Operation/

P.I Nandivada-II

Scn. No. 1030

CMD: 9011p **SECURE METER DISPLAY FORMAT** VJA:

Display format of SECURE meter (Premiem 300) Sl No: X04/9816 Conected to

M/s. Smt P. Rupa Lavanya , While attended for polukonda(v)

Conducting Periodical Testing/Load Test on 25/5/22 Cat: - LT-C

M.NO	X04/9816	R3 KVA	52.3		
Date	25/5/2022	R4 KVA	51.1		
Time	14:11	R5 KVA	44.5		
R-N	6.50	R6 KVA	28.9		
Y-N	6.55	FREQ	49.93		
B-N	6.52	PWR KW	0.46		
Lr	0.46	PWR KVAR	9.05		
Ly	0.47	PWR KVA	9.06		
Lb	0.44	PF	0.055 lead		
KWH	534167	CTR	2.0		
KVARH lag	136865	PTR	100.0		
KVARH lead	106623	UH1	54.6	2/4/22	12:15
KVAH	562629	UH2	83.7	31/3/22	12:00
KVA	51.3	UH3	45.8	18/2/22	13:00
KVA DT	22/5/22	UH4	42.0	4/1/22	13:45
KVA TM	13:45	UH5	57.6	8/11/21	18:00
RST COUN	48	UH6	26.0	6/10/21	15:15
RST DT	4/5/22	UH7	19.32	5/9/21	10:20
RST TM	10:32	UH8	69.4	9/8/21	5:30
CMD	2590.2	UH9	21.2	6/7/21	10:30
R1 KWH	195956	UHA	28.8	16/1/21	15:45
R2 KWH	62244	UHB	61.3	18/5/21	19:00
R3 KWH	48843	UHC	55.0	5/4/21	9:45
R4 KWH	42800	CKT	CT		
R5 KWH	112423	TMC	03023		
R6 KWH	64837	LOO	- - - 1 - -		
R1 KVAH	20596	LO E	12:08		
R2 KVAH	69320	LO D	10/07/22		
R3 KVAH	54306	LR	- - - 1 - - 13:45, 14/5/22		
R4 KVAH	48532	CVR	00000		
R5 KVAH	122920	KWH	60.9443		
R6 KVAH	67644	KVARH lag	65.3937		
R1 KVA	26.2	KVARH lead	24.5928		
R2 KVA	24.9	KVAH	29.6878		

Sig.. of the Consumer | AE/OPERATION | ADE/OPERATION | AE/HT Meters-1/GDL | ADE/HT METER-1/GDL

HT Meter Test Report

CENTRAL POWER DISTRIBUTION CORPORATION OF A.P. LTD.
OPERATION CIRCLE:

(1795)

Endt No. / / F.HT / D.No. Campto / 20 Dt: 19/5/2022

1. Nature of Test: PT

Date : 18.5.22
S.C.No : VSA3201
CMD/CL : 250KVA
Category : HT I
OPN/SD : Nuzividu / R
Sec : Mylavaram
premises: poultry farm

2. Name of HT Service:
M/s Kanakadurga Enterprises
Katrenipadu (V)
Mylavaram (M)

3. Existing Metering Equipment Particulars:

	Make	Type	Sl.No.	PTR	CTR	Class	MF
Meter	Secure	Esmo3B	APE03668	11KV/110V	10/5A	0.5s	2.0
CT PT Set	VB	S-D	5235	11KV/110V	20/5	0.5s	

4. New Metering Equipment Particulars:

	Make	Type	Sl.No.	PTR	CTR	Class	MF
Meter							
CT PT Set							

5. Voltages:

	RY	YB	BR	RN	YN	BN
AT TTB	118.3	118.5	118.9	68.5	68.3	68.5
In Meter						

6. Currents:

	R ph	Y ph	B ph
AT TTB	0.80	0.56	0.85
In Meter			
LT currents			

	Load in KW
Calculated	KW: 0.129
Recorded	KVA: 0.132

PF: 0.97 Lagg

7. CTs Ratio Test:

R-Ph: ------ ------ ------ ------ ------
Y-Ph: ------ ------ ------ ------ ------
B-Ph: ------ ------ ------ ------ ------

8. Seals Particulars:

LOCATION	Before Test	After test
METER :		
Meter Board to Box		
Meter Cover		
Meter Terminal Cover		
MRI		
TTB	RB0669029,30	BB0977222,23
MD Knob		
Box Door	CPA462723	BB0977224
CT PT SET :		
Tank Cover		
Inspection Cover		
Incoming cable Box		
Outgoing Cable Box		
Secondary Cover		
AB Switch		

9. Test results with phantom load test kit / on load test at Load : PF :

	IR	FR	DIFF/ Pulses	ERS UNITS	% ERROR
KWH			10		+0.38%
KVARH			10		+0.33%
KVAH					

10. Submitted to SAO/ the details of readings and MF before and after testing for further necessary action.

Parameter	Before Test / Old Meter FR	After Test/ New Meter IR
KWH		1975474
KVAH		20869946
KVARH Lag		485022
KVAH Lead		425809
KVA MD		110.6
Bills		133
CMD		1027.6
MF		2.0

11. Remarks: The service has been attended for periodical testing. After testing the error found within the limits. MF is 2.0 final

Consumer AEE/HT Meters DEE/HT Meters DEE/O/ EE/ /O/ EE/M&P

Copy submitted to the Superintending Engineer/ Operation/
Copy submitted to the Senior Accounts Officer/
Copy to the Executive Engineer/Operation/
Copy to the Deputy Executive Engineer /Operation/

PT

Mylanthu -se

VJA: 3201

Display format of SECURE meter Sl No: APE03668 Conected to

Cat: HT-I M/S Kankadurga Enterprises

While attend for conducting periodical testing on 19/5/2022

CMD: 250 KVA

LCD	ok				KWH 1C	324793
Time	18 17 :				KWH 2C	256018
Date	19.5.22				KWH 3C	430001
KWH	197547				KWH 4C	462428
Lag	485522				KWH 5C	387007
Lead	425809				KWH 6C	115227
KVAH	2086946				KWH 7C	No data
KVA MD	110.6	22.6.90	18:14		KWH 8C	No data
RD	17.017				KVAH 1C	331796
Bills	133				KVAH 2C	263772
CMD	10274.6				KVAH 3C	467042
UH 1	130.0	06.06.90	17:14		KVAH4C	506914
UH 2	84.1	23.4.90	21:14		KVAH 5C	399328
UH 3	58.8	20.3.90	16:14		KVAH 6C	118829
UH 4	62.8	18.2.90	21:14		KVAH 7C	No data
UH 5	64.0	28.1.90	20:44		KVAH8C	No data
UH 6	56.7	1.1.90	20:44		1C	32.2
UH 7	58.8	10.11.89	19:14		2C	51.2
UH 8	59.0	1.11.89	20:44		3C	108.4
UH 9	55.3	15.9.89	21:14		4C	110.6
UH A	57.5	25.8.89	20:44		5C	40.9
UH B	75.7	9.7.89	18:14		6C	32.6
UH C		. .	:		7C	No data
PN 1	6.88				8C	No data
PN 2	6.84				1H1	38.6
PN 3	6.88				2H1	56.0
L 1	1.326				3H1	130.0
L 2	1.117				4H1	105.5
L 3	1.446				5H1	52.4
P f	0.974				6H1	37.1
Fr	50.065				7H1	No data
					8H1	No data

Tamper Data:-

000001	CNT Tr	— 0 — — —	OT Ir
— — —	PT Tr	15.11.12	DT Ir
— — — — —	CT Tr	12:15	Tm Ir
— —	OT Tr		
— 0 — — —	OT lo		
13.11.12	Dt lo		
18:07	Tm lo		
— 0 — — —	OT lo		
13.11.12	Dt lo		
18:07	Tm lo		

Dignos OK

Phase Sequeence

Consumer AE/ADE/OP/ AE/HT 1/GDL ADE/HT 1/GDL

CENTRAL POWER DISTRIBUTION CORPORATION OF A.P LIMITED

OPERATION CIRCLE: VIJAYAWADA

C.T.METER TEST REPORT

(10)

1. Nature of Test : PT

Last Tested Date :

Date of Testing : 27.2.23

2. S.C.No :

6	7	2	2	3	2	6	0	0	0	8	2	4

3. Name & Address of Consumer :

4. a)Distribution: Pittalanka b)Section : Kodur c) Sub-Division: AVR

5. a) Sanctioned Load : b) Connected Load : c) Category : V C

d) Purpose : Agri

6. Inspecting Officer : S.RAMMOHAN REDDY, AAE, CT METERS-II, VIJAYAWADA.

7. Existing Metering Equipment Particulars

	Make	C.T.R	Class	Sl No.	MF	DATE OF MFG	
Meter	Genus	125/5A	0.5S	7026943	1	3	17
CT's	Alpha						

8. New Metering Equipment Particulars

	Make	C.T.R	Class	Sl No.	MF	DATE OF MFG	
Meter							
CT's							

9. Seals Particulars

Before test		Location	After Test	Phase Association	
Opn	CTM			CT	Potential
		Meter Board		R	
		Meter Body			
		MRI Port		Y	
		Terminal Cover			
		TTB		B	
		CT BOX	09 CO		
CPH 3221660		Meter BOX	11	N	

10. Before test :

Paramater	U1	U2	U3	L1	L2	L3	PF	KW
Meter								
Accucheck								

RY:	YB:	BR:

11. After Test :

Paramater	U1	U2	U3	L1	L2	L3	PF	KW
Meter	223	212	223	3.9	3.7	3.8		
Accucheck	222	212	224	3.7	3.8	3.8	+0.99	3kw
	RY: 420		YB: 422		BR: 421			

12. ERS Meter Make:- Secure / ZERA Sl.No : 12) Capacitor Details :

13. Befor Test result at Load _____, PF _____

Element	Final Reading	Initial Reading	Diff	Accucheck units	Diff	%Error
KWH						
KVAH						

14. After Test result at Load _____, PF _____

Element	Final Reading	Initial Reading	Diff	Accucheck units	Diff	%Error
KWH					(+)	1.36%
KVAH						

15. Submitted to AAO/ERO/ the details of readings and MF before and after testing for further necessary action.

Parameter	Before Test / Old Meter FR	After Test/ New Meter IR
KWH	142257	
KVAH	146800	
KVARH Lag	13827	
KVAH Lead	441578	
KVA MD	0	
Bills	71	
CMD	770-1	
MF	1, TC: 1631	

Remarks: Tested and found the errors within limits in Limits

Sign of Consumer DEE/AEE Operation DEE/LT CT METERS-1/VJA AEE/CTM/ 27/2/23

Copy submitted to the Superintending Engineer/ Operation/
Copy submitted to the Assistant Accounts Officer/
Copy submitted to the Executive Engineer/Operation/
Copy submitted to the Deputy Executive Engineer /Operation/

CENTRAL POWER DISTRIBUTION CORPORATION OF A.P LIMITED

OPERATION CIRCLE: VIJAYAWADA

C.T.METER TEST REPORT

(11)

1. Nature of Test : R

Last Tested Date :

Date of Testing : 27.3.23

2. S.C.No :

6	7	2	2	3	2	6	0	0	0	8	5	2

3. Name & Address of Consumer :

4. a)Distribution: Pittalamka b)Section : Kodumu c) Sub-Division: AV4

5. a) Sanctioned Load : b) Connected Load : c) Category : VC

d) Purpose : Agri

6. Inspecting Officer : S.RAMMOHAN REDDY, AAE, CT METERS-II, VIJAYAWADA.

7. Existing Metering Equipment Particulars

	Make	C.T.R	Class	Sl No.	MF	DATE OF MFG	
Meter	L+G	75/5A	0.5S	A0024762	1	12	15
CT's	Achmore						

8. New Metering Equipment Particulars

	Make	C.T.R	Class	Sl No.	MF	DATE OF MFG	
Meter							
CT's							

9. Seals Particulars

Before test		Location	After Test	Phase Association	
Opn	CTM			CT	Potential
		Meter Board		R	
		Meter Body			
		MRI Port			
		Terminal Cover		Y	
		TTB			
	AB020862, 61	CT BOX	06, 07	B	
CPA2413928		Meter BOX	08		
				N	

10. Before test :

Paramater	U1	U2	U3	L1	L2	L3	PF	KW
Meter								
Accucheck								
	RY:		YB:		BR:			

11. After Test :

Paramater	U1	U2	U3	L1	L2	L3	PF	KW
Meter	219	222	215	3·9	3·9	3·8		
Accucheck								

RY:	YB:	BR:

12. ERS Meter Make:- Secure / ZERA Sl.No : 12) Capacitor Details :

13. Befor Test result at Load _____, PF _____

Element	Final Reading	Initial Reading	Diff	Accucheck units	Diff	%Error
KWH						
KVAH						

14. After Test result at Load _____, PF _____

Element	Final Reading	Initial Reading	Diff	Accucheck units	Diff	%Error
KWH						
KVAH						

15. Submitted to AAO/ERO/ the details of readings and MF before and after testing for further necessary action.

Parameter	Before Test / Old Meter FR	After Test/ New Meter IR
KWH	140116	
KVAH	166034	
KVARH Lag	71134	
KVAH Lead	95347	
KVA MD	0	
Bills	44	
CMD	705·5	
MF	1, TC-1275	

Remarks: No load
Tested and observed that the meter is working normally in 3 phases

Sign of Consumer DEE/AEE Operation DEE/LT CT METERS-1/VJA AEE/CTM

Copy submitted to the Superintending Engineer/ Operation/
Copy submitted to the Assistant Accounts Officer/
Copy submitted to the Executive Engineer/Operation/
Copy submitted to the Deputy Executive Engineer /Operation/

ANNEXURE – 17


(Computation of distribution losses for FY 2022-23)

Computation of distribution losses for the FY 2022-23

S.No.	Particulars	Units	Value
1	Input energy purchased	MU	15808.79
2	Energy sold to outside the periphery	MU	-300.73
3	Transmission losses	MU	-432.14
4	Net availability after transmission loss	MU	15075.92

Break-up of APCPDCL gross energy drawls

S.No.	Particulars	Units	Value
1	Gross input energy certified by SLDC	MU	15550.57
2	OA sales	MU	-474.65
3	Net DISCOM drawls	MU	15075.92
4	DISCOM Sales	MU	13866.41
5	Distribution loss	MU	1209.51
		%	8.02
6	Collection efficiency	%	95.95
7	AT&C Loss	%	11.75

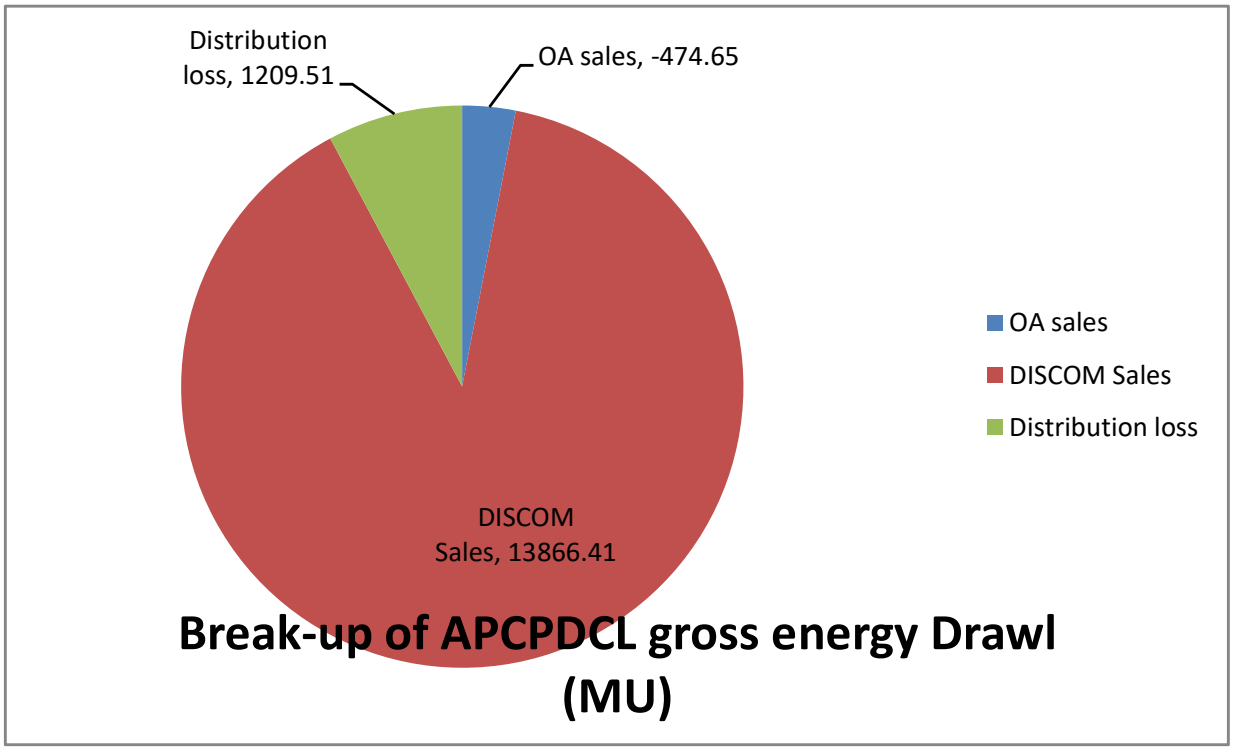

ANNEXURE – 18

(Progress of HVDS works in APCPDCL)

Progress of HVDS works in APCPDCL

GUNTUR:- PROGRESS OF HIGH VOLTAGE DISTRIBUTION SYSTEM (HVDS) AS ON 25.03.2023. (REC Funding) **Agreement Period : 2 Years**

Sl. No.	Name of the Package	Awarded Contractor	Agmt.No	Agrt. amount in Rs. Crores	No. of Agl. Services	Quantities as per Agreement			Progress achieved							No. of Agl. Serv covered	Exp. incurred in Rs. Crores	% of Expenditure	% of work done w.r.t DTRs
						3-Phase 16KVA	3-Phase 25KVA	Total DTRs	3-Phase 16KVA	3-Phase 25KVA	Total DTRs	LT AB cable in KM	LT to HT Conversion in KM	No. of mother DTRs dismantled	New 11KV line & 11KV Line lying under conversion in KM				
									Cum	Cum	Cum	Cum	Cum	Cum	Cum				
1	2	3	4	5	6	7	8	9	11	13	15	17	19	21	23	24	25	26	27
1	Guntur town-2, Guntur rural, Tenali & Bapatla	Shiridi Sai Electricals Ltd.,	12 /16-17 Dt: 29.08.2016	223.71	23578	2218	3499	5717	1558	1903	3461	596.570	510.386	492	0.00	10787	169.1	75.59	60.54
2	Narasaraopet-II & Macherla-III	B.Srinivasa Rao Power Constructions PVT LTd	24/16-17 Dt: 30.08. 2016	160.76	16420	413	7729	8142	366	6632	6998	614.957	689.376	826	67.80	13375	136.00	84.60	85.95
3	Narasaraopet-II & Macherla-III	Sangamaheswara Electricals Ltd, Kadapa	22/16-17 Dt: 30.08. 2016	29.08	3225	52	2156	2208	52	1380	1432	80.268	141.96	178	1.377	2488	28.61	98.38	64.86
	Total			**413.55**	**43223**	**2683**	**13384**	**16067**	**1976**	**9915**	**11891**	**1291.80**	**1341.72**	**1496**	**69.18**	**26650**	**333.71**	**80.69**	**74.01**

Vijayawada:- PROGRESS OF HIGH VOLTAGE DISTRIBUTION SYSTEM (HVDS) (REC Funding during 2016-17)

S. No.	Name of the package	Awarded Contractor	Agmt.No	Quantities as per Agreement											Progress achieved										
				Agrt. amount in Rs. Crores	No. of 11KV feeders covered	No. of Agl. Services	3-Phase 16KVA	3-Phase 25KVA	Total DTRs	LT AB cable in KM	LT to HT Conversion in KM	No. Of mother DTRs to be dismantled	11KV New line in KM	11KV 200A conv AB Switches	3-Phase 16KVA	3-Phase 25KVA	Total DTRs	LT AB cable in KM	LT to HT Conversion in KM	No. of mother DTRs dismantled	11KV New line in KM	No. of Agl. Services covered	Exp incurred in Rs. Crores	% of Expenditure	% of DTRs
				Total Qty	Total Qty	Total Qty	Total Qty	Total Qty		Total Qty	Total Qty	Total Qty	Total Qty		Cum	Cum	Cum	Cum	Cum	Cum	Cum				
1	Gunadala, Vijayawada Rurals & Nuzividu-IV	Sealwel Corporation Private Limited	26 /16-17 Dt: 09.09.2016	167.72	147	36284	683	8700	9383	1046.524	1652.83	1260	1885.76	176	683	8549	9232	1060.862	1112.833	859	214.75	41115	157.02	93.62	98.39
2	Gudivada, Vuyuru & Machili Patam	M/s Shiridi Sai Electricals	10 /16-17 Dt: 05.08.2016	183.83	79	18273	185	5708	5893	937.701	1350.261	735	422.38	273	172	5698	5870	877.91	934.082	654	0.00	31367	174.86	95.12	99.61
3	Gunadala, Vijayawada Rurals	M/s Sangamithra Constructions , Kadapa	21 /16-17 Dt: 29.08.2016	45.64	39	11176	0	2440	2440	377.138	282.227	301	728.5			2057	2057	341.03	277.783	298	0.00	12353	39.40	86.33	84.30
				397.19	**265**	**65733**	**868**	**16848**	**17716**	**2361.36**	**3285.32**	**2296**	**3036.64**	**449.00**	**855**	**16304**	**17159**	**2279.81**	**2324.70**	**1811**	**214.75**	**84835**	**371.27**	**93.48**	**96.86**

Ongole:- PROGRESS OF HIGH VOLTAGE DISTRIBUTION SYSTEM (HVDS) AS ON 31.03.2023 (REC Funding during 2015-16)

Sl. No.	Name of the package	Name of the Contractor	SIP.No.	Agt. No. dt.	Agrt. amount in Rs. Crores	No. of 11KV feeders covered	No. of Agl. Services	Quantities as per Agreement								Progress achieved							No. of Agl. Services covered	Exp incurred in Rs. Crores	% of Expenditure	% of work done w.r.t DTRs
								DTRs in Nos.			LT AB cable in KM	LT to HT Conversion in KM	No. Of mother DTRs to be dismantled	11 KV New line in KM	11KV 200Amps AB switch horizontal type	3-Phase 16KVA	3-Phase 25KVA	Total DTRs	LT AB cable in KM	LT to HT Conversion in KM	No. of mother DTRs dismantled	11KV New line in KM				
								3-Phase 16 KVA	3-Phase 25KVA	Total						Cum	Cum	Cum	Cum	Cum	Cum	Cum				
1	Ongole & Kandukur	M/s. Shirdi Sai Electricals Ltd., Kadapa	110/2015-16	13/16-17 Dt: 29.08.16 Agmt extended on 04.12.2020	59.47	95	15838	0	3960	3960	712.73	655.85	521	50	285	0	4812	6042	928.96	605.22	769	222.50	29216	134.90	120.21	
2	Addanki, Chirala & Kanigiri	M/s. Shirdi Sai Electricals Ltd., Kadapa	111/2015-16	14/16-17 Dt: 29.08.16	140.36	129	27104	0	6931	6931	####	766.25	813	150	387	0	11219	14274	2959.13	1358.60	2261	1271.37	53665	317.30	112.94	
3	Markapur-IV	M/s. Shirdi Sai Electricals Ltd., Kadapa	112/2015-16	15/16-17 Dt: 29.08.16 Agmt extended on 04.12.2020	68.32	48	9923	0	3675	3675	735.16	440.02	525	75	144	0	8614	8894	1644.99	798.98	1147	754.184	20064	166.14	121.78	
Total					**268.15**	**272**	**52865**	**0**	**14566**	**14566**	**2676**	**1862**	**1859**	**275**	**816**	**0.00**	**24645**	**29210**	**5533.08**	**2762.80**	**4177.00**	**2248.06**	**102945**	**618.34**	**116.76**	